

QPL QUALIFIED



MIL-DTL-38999 Series III, Triple-Start Thread

D38999/20 wall mount receptacle with rear release crimp contacts and accessory threads



SERIES III ENVIRONMENTAL

QPL Part Number Development						
Sample Part Number		D38999/20	W	A	35	P N
D38999 Series III	D38999/20 = Wall mount receptacle					
Class	W = Environmental, aluminum, cadmium O.D. over electroless nickel (500 hour salt spray), -65°C to +175°C, conductive plating F = Environmental, aluminum, electroless nickel (48 hour salt spray), -65°C to +200°C, conductive plating G = Environmental, aluminum, electroless nickel (48 hour salt spray), matte finish, space grade, -65°C to +200°C, conductive plating T = Environmental, aluminum, Nickel-PTFE, -65°C to +175°C, conductive plating J = Environmental, composite, Cadmium, Olive Drab (500 hour salt spray), -65 C to +175 C, conductive plating M = Environmental, composite, Electroless Nickel (500 hour salt spray), -65 C to +200 C, conductive plating					
Shell Size Code	A, B, C, D, E, F, G, H and J (per MIL-STD-1560)					
Insert Arrangement	Per MIL-STD-1560; See reference information section for details					
Contact Type	P = Pin, 500 cycles A = Pin insert, less standard contacts H = Pin, 1500 cycles S = Socket, 500 cycles B = Socket insert, less standard contacts J = Socket, 1500 cycles					
Alternate Polarization	A, B, C, D, E, N = Normal					

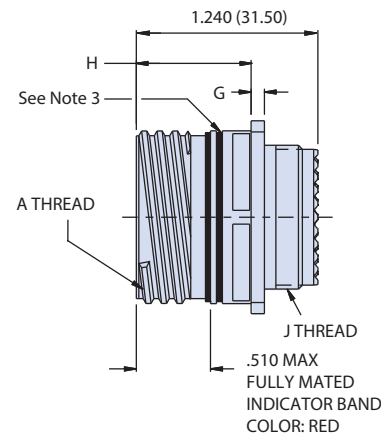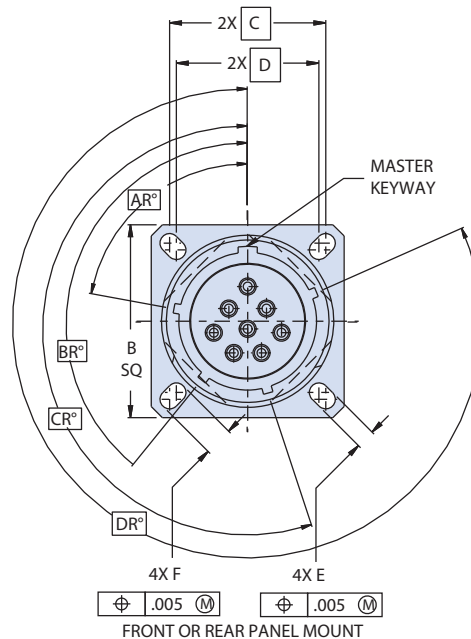

For recommended panel cut-out see reference information section

Series III Alternate Keyway Polarizations																				
Shell Size Code	Shell Size	Key and Keyway ID Letter	AR° BSC	BR° BSC	CR° BSC	DR° BSC	Shell Size Code	Shell Size	Key and Keyway Code	AR° BSC	BR° BSC	CR° BSC	DR° BSC	Shell Size Code	Shell Size	Key and Keyway ID Letter	AR° BSC	BR° BSC	CR° BSC	DR° BSC
A	9	N	105	140	215	265	B C D	11 13 15	N	95	141	208	236	E F G H J	17 19 21 23 25	N	80	142	196	293
		A	102	132	248	320			A	113	156	182	292			A	135	170	200	310
		B	80	118	230	312			B	90	145	195	252			B	49	169	200	244
		C	35	140	205	275			C	53	156	220	255			C	66	140	200	257
		D	64	155	234	304			D	119	146	176	298			D	62	145	180	280
		E	91	131	197	240			E	51	141	184	242			F	79	153	197	272

COTS EQUIVALENT MIL-DTL-38999 Series III, Triple-Start Thread 233-105-26 COTS-equivalent connectors



SERIES III ENVIRONMENTAL

How To Order - 233-105						
Sample Part Number	233-105	-G6	NF	17-8	P	N
Series / Basic Part No.	MIL-DTL-38999 Series III Environmental Connector					
Connector Style	G6 = Plug, EMI Spring 05 = Receptacle, In-Line 07 = Receptacle, Jam Nut 02 = Receptacle, Box Mount with Slotted Holes 00 = Receptacle, Wall Mount with Slotted Holes D0 = Receptacle, Wall Mount with Round Holes CS = Receptacle, Wall Mount with Standard Clinch Nuts HS = Receptacle, Wall Mount with Standard Helicoils					
Material and Finish	See Table I					
Shell Size-Insert Arrangement	Per MIL-STD-1560					
Contact Type	P = Pin, 500 Cycles A = Pin Insert, Less Contacts H = Pin, 1500 Cycles S = Socket, 500 Cycles B = Socket Insert, Less Contacts J = Socket, 1500 Cycles					
Alternate Polarization	A, B, C, D, E, N = Normal U =Universal					

Dimensions										
Shell Size Code	Shell Size	A Thread .1P-.3L-TS-2A	B Sq	C BSC	D BSC	E	F	G	H	J Thread 1.0-6g 0.100R
A	09	.6250	.949 (24.10) .925 (23.50)	.719 (18.26)	.594 (15.09)	.136 (3.45) .120 (3.05)	.224 (5.69) .208 (5.28)	.098 (2.49) .083 (2.11)	.820 (20.83) .771 (19.58)	M12
B	11	.7500	1.043 (26.49) 1.019 (25.88)	.812 (20.62)	.719 (18.26)		.202 (5.13) .186 (4.72)			M15
C	13	.8750	1.138 (28.91) 1.114 (28.30)	.906 (23.01)	.812 (20.62)		.181 (4.60) .165 (4.19)			M18
D	15	1.0000	1.232 (31.29) 1.208 (30.68)	.969 (24.61)	.906 (23.01)					M22
E	17	1.1875	1.323 (33.60) 1.299 (32.99)	1.062 (26.97)	.969 (24.61)		.202 (5.13) .186 (4.72)			M25
F	19	1.2500	1.449 (36.80) 1.425 (36.20)	1.156 (29.36)	1.062 (26.97)					M28
G	21	1.3750	1.575 (40.00) 1.551 (39.40)	1.250 (31.75)	1.156 (29.36)	.162 (4.11) .146 (3.71)	.250 (6.35) .234 (5.94)	.126 (3.20) .083 (2.11)	.790 (20.07) .741 (18.82)	M31
H	23	1.5000	1.701 (43.21) 1.677 (42.60)	1.375 (34.92)	1.250 (31.75)					M34
J	25	1.6250	1.823 (46.30) 1.799 (45.69)	1.500 (38.10)	1.375 (34.92)					M37

Table I: Material and Finish				
38999	233-105	Material	Finish Description	RoHS
F	ME	Aluminum	Electroless Nickel	☑
G	MA		Electroless Nickel	☑
T	MT		Ni-PTFE (Nickel Fluorocarbon Polymer)	☑
V	TZ		Tin-Zinc (SnZn) Over Electroless Nickel Over Suitable Underplate	☑
W	NF		Cadmium Plate Olive Drab Over Electroless Nickel	☒
Z	ZR		Zinc Nickel, Black Over Suitable Underplate	☑
AA	MN		Tri-Nickel Alloy	☑
J	XW	Composite	Cadmium Olive Drab over Electroless Nickel	☒
M	XM		Electroless Nickel	☑
K	Z1	Stainless Steel	Passivate	☑
S	ZL	Steel	Electrodeposited Nickel	☑
-	AB	Marine Bronze	None (Clean Only)	☑

NOTES

1. Insert arrangements per MIL-STD-1560,
2. Connector is supplied with contacts (including spares), insertion/removal tool and sealing plugs unless otherwise specified.
3. Blue color band indicates rear release retention system.