

QPL QUALIFIED



## MIL-DTL-38999 Series III, Triple-Start Thread

D38999/26 plug with crimp rear release contacts and rear accessory threads



SERIES III ENVIRONMENTAL

| QPL Part Number Development |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |           |   |   |    |     |
|-----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|---|---|----|-----|
| Sample Part Number          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | D38999/26 | W | A | 35 | P N |
| D38999 Series III           | D38999/26 = Plug with accessory threads                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |           |   |   |    |     |
| Class                       | <b>W</b> = Environmental, aluminum, cadmium O.D. over electroless nickel (500 hour salt spray), -65°C to +175°C, conductive plating<br><b>F</b> = Environmental, aluminum, electroless nickel (48 hour salt spray), -65°C to +200°C, conductive plating<br><b>G</b> = Environmental, aluminum, electroless nickel (48 hour salt spray), matte finish, space grade, -65°C to +200°C, conductive plating<br><b>T</b> = Environmental, aluminum, Nickel-PTFE, -65°C to +175°C, conductive plating<br><b>J</b> = Environmental, composite, Cadmium, Olive Drab (500 hour salt spray), -65 C to +175 C, conductive plating<br><b>M</b> = Environmental, composite, Electroless Nickel (500 hour salt spray), -65 C to +200 C, conductive plating |           |   |   |    |     |
| Shell Size Code             | A, B, C, D, E, F, G, H and J (per MIL-STD-1560)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |           |   |   |    |     |
| Insert Arrangement          | Per MIL-STD-1560; See reference information information section for details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |           |   |   |    |     |
| Contact Type                | <b>P</b> = Pin, 500 cycles <b>A</b> = Pin insert, less standard contacts <b>H</b> = Pin, 1500 cycles<br><b>S</b> = Socket, 500 cycles <b>B</b> = Socket insert, less standard contacts <b>J</b> = Socket, 1500 cycles                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |           |   |   |    |     |
| Alternate Polarization      | N (Normal), A, B, C, D, E see polarization position table                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |           |   |   |    |     |

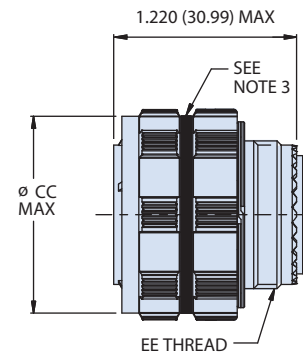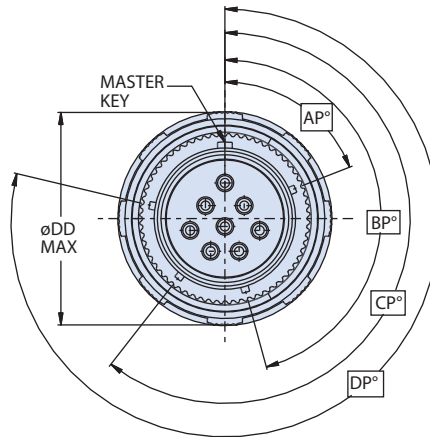

| Series III Alternate Key and Keyway Polarization |            |                        |         |         |         |         |                 |                |                        |         |         |         |         |                       |                            |                        |         |         |         |         |
|--------------------------------------------------|------------|------------------------|---------|---------|---------|---------|-----------------|----------------|------------------------|---------|---------|---------|---------|-----------------------|----------------------------|------------------------|---------|---------|---------|---------|
| Shell Size Code                                  | Shell Size | Key and Keyway ID Code | AP° BSC | BP° BSC | CP° BSC | DP° BSC | Shell Size Code | Shell Size     | Key and Keyway ID Code | AP° BSC | BP° BSC | CP° BSC | DP° BSC | Shell Size Code       | Shell Size                 | Key and Keyway ID Code | AP° BSC | BP° BSC | CP° BSC | DP° BSC |
| A                                                | 9          | N                      | 105     | 140     | 215     | 265     | B<br>C<br>D     | 11<br>13<br>15 | N                      | 95      | 141     | 208     | 236     | E<br>F<br>G<br>H<br>J | 17<br>19<br>21<br>23<br>25 | N                      | 80      | 142     | 196     | 293     |
|                                                  |            | A                      | 102     | 132     | 248     | 320     |                 |                | A                      | 113     | 156     | 182     | 292     |                       |                            | A                      | 135     | 170     | 200     | 310     |
|                                                  |            | B                      | 80      | 118     | 230     | 312     |                 |                | B                      | 90      | 145     | 195     | 252     |                       |                            | B                      | 49      | 169     | 200     | 244     |
|                                                  |            | C                      | 35      | 140     | 205     | 275     |                 |                | C                      | 53      | 156     | 220     | 255     |                       |                            | C                      | 66      | 140     | 200     | 257     |
|                                                  |            | D                      | 64      | 155     | 234     | 304     |                 |                | D                      | 119     | 146     | 176     | 298     |                       |                            | D                      | 62      | 145     | 180     | 280     |
|                                                  |            | E                      | 91      | 131     | 197     | 240     |                 |                | E                      | 51      | 141     | 184     | 242     |                       |                            | E                      | 79      | 153     | 197     | 272     |

# COTS EQUIVALENT MIL-DTL-38999 Series III, Triple-Start Thread

## 233-105-26 COTS-equivalent connectors



SERIES III ENVIRONMENTAL

| How To Order - 233-105        |                                                                                                                                                                                                                                                                                                                                                                                                       |     |    |      |   |   |
|-------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|----|------|---|---|
| Sample Part Number            | 233-105                                                                                                                                                                                                                                                                                                                                                                                               | -G6 | NF | 17-8 | P | N |
| Series / Basic Part No.       | MIL-DTL-38999 Series III Environmental Connector                                                                                                                                                                                                                                                                                                                                                      |     |    |      |   |   |
| Connector Style               | <b>G6</b> = Plug, EMI Spring <b>05</b> = Receptacle, In-Line<br><b>07</b> = Receptacle, Jam Nut<br><b>02</b> = Receptacle, Box Mount with Slotted Holes<br><b>00</b> = Receptacle, Wall Mount with Slotted Holes<br><b>D0</b> = Receptacle, Wall Mount with Round Holes<br><b>CS</b> = Receptacle, Wall Mount with Standard Clinch Nuts<br><b>HS</b> = Receptacle, Wall Mount with Standard Helicoils |     |    |      |   |   |
| Material and Finish           | See Table I                                                                                                                                                                                                                                                                                                                                                                                           |     |    |      |   |   |
| Shell Size-Insert Arrangement | Per MIL-STD-1560                                                                                                                                                                                                                                                                                                                                                                                      |     |    |      |   |   |
| Contact Type                  | <b>P</b> = Pin, 500 Cycles <b>A</b> = Pin Insert, Less Contacts <b>H</b> = Pin, 1500 Cycles<br><b>S</b> = Socket, 500 Cycles <b>B</b> = Socket Insert, Less Contacts <b>J</b> = Socket, 1500 Cycles                                                                                                                                                                                                   |     |    |      |   |   |
| Alternate Polarization        | <b>A, B, C, D, E, N</b> = Normal <b>U</b> =Universal                                                                                                                                                                                                                                                                                                                                                  |     |    |      |   |   |

| Wire Accommodation |            |
|--------------------|------------|
| Contact Size       | Wire Gauge |
| 23                 | #22 - #28  |
| 22D                | #22 - #28  |
| 20                 | #20 - #24  |
| 16                 | #16 - #20  |
| 12                 | #12 - #14  |

### NOTES

- 233-105 is designed to meet or exceed the mechanical, electrical, environmental and dimensional requirements of D38999/20, /24 & /26.
- Insert arrangements IAW MIL-STD-1560 and custom insert arrangements are available in COTS series.
- Size 8 contact arrangements are available in the 233-217 series.
- Blue color band indicates rear release retention system.
- Connector is supplied with contacts (including spares), insertion/removal tool and sealing plugs.
- Dimensions in inches (millimeters) are subject to change without notice
- Consult factory for additional information

| Table I: Material and Finish |         |               |                                                                  |      |  |
|------------------------------|---------|---------------|------------------------------------------------------------------|------|--|
| 38999                        | 233-105 | Material      | Finish Description                                               | RoHS |  |
| F                            | ME      | Aluminum      | Electroless Nickel                                               | ✓    |  |
| G                            | MA      |               | Electroless Nickel                                               | ✓    |  |
| T                            | MT      |               | Ni-PTFE (Nickel Fluorocarbon Polymer)                            | ✓    |  |
| V                            | TZ      |               | Tin-Zinc (SnZn) Over Electroless Nickel Over Suitable Underplate | ✓    |  |
| W                            | NF      |               | Cadmium Plate Olive Drab Over Electroless Nickel                 | ✗    |  |
| Z                            | ZR      |               | Zinc Nickel, Black Over Suitable Underplate                      | ✓    |  |
| AA                           | MN      |               | Tri-Nickel Alloy                                                 | ✓    |  |
| J                            | XW      |               | Cadmium Olive Drab over Electroless Nickel                       | ✗    |  |
| M                            | XM      | Composite     | Electroless Nickel                                               | ✓    |  |
| K                            | Z1      |               | Passivate                                                        | ✓    |  |
| S                            | ZL      |               | Electrodeposited Nickel                                          | ✓    |  |
| -                            | AB      | Marine Bronze | None (Clean Only)                                                | ✓    |  |

| Connector Mating and Accessory Thread Dimensions |            |                    |                     |
|--------------------------------------------------|------------|--------------------|---------------------|
| Shell Size Code                                  | Shell Size | A Thread           | J Thread            |
| A                                                | 9          | .6250-1P-3L-TS-2A  | M12 X 1.0-6g 0.100R |
| B                                                | 11         | .7500-1P-3L-TS-2A  | M15 X 1.0-6g 0.100R |
| C                                                | 13         | .8750-1P-3L-TS-2A  | M18 X 1.0-6g 0.100R |
| D                                                | 15         | 1.0000-1P-3L-TS-2A | M22 X 1.0-6g 0.100R |
| E                                                | 17         | 1.1875-1P-3L-TS-2A | M25 X 1.0-6g 0.100R |
| F                                                | 19         | 1.2500-1P-3L-TS-2A | M28 X 1.0-6g 0.100R |
| G                                                | 21         | 1.3750-1P-3L-TS-2A | M31 X 1.0-6g 0.100R |
| H                                                | 23         | 1.5000-1P-3L-TS-2A | M34 X 1.0-6g 0.100R |
| J                                                | 25         | 1.6250-1P-3L-TS-2A | M37 X 1.0-6g 0.100R |