



TOP SIDE (seen from above)

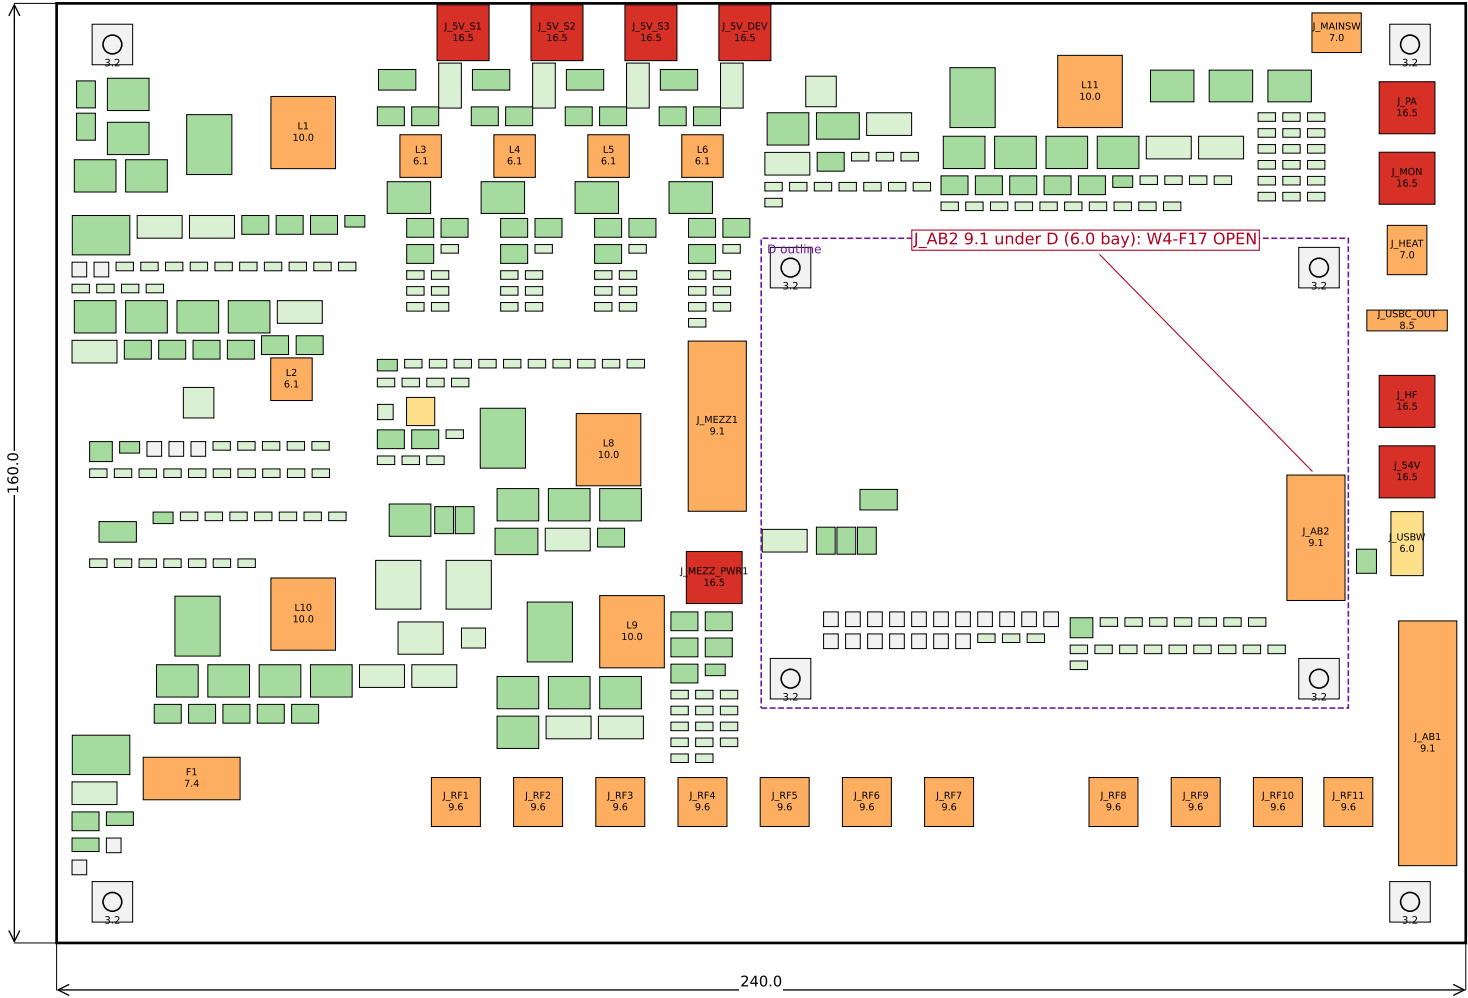

BOTTOM SIDE (seen from above, through the board: not mirrored)

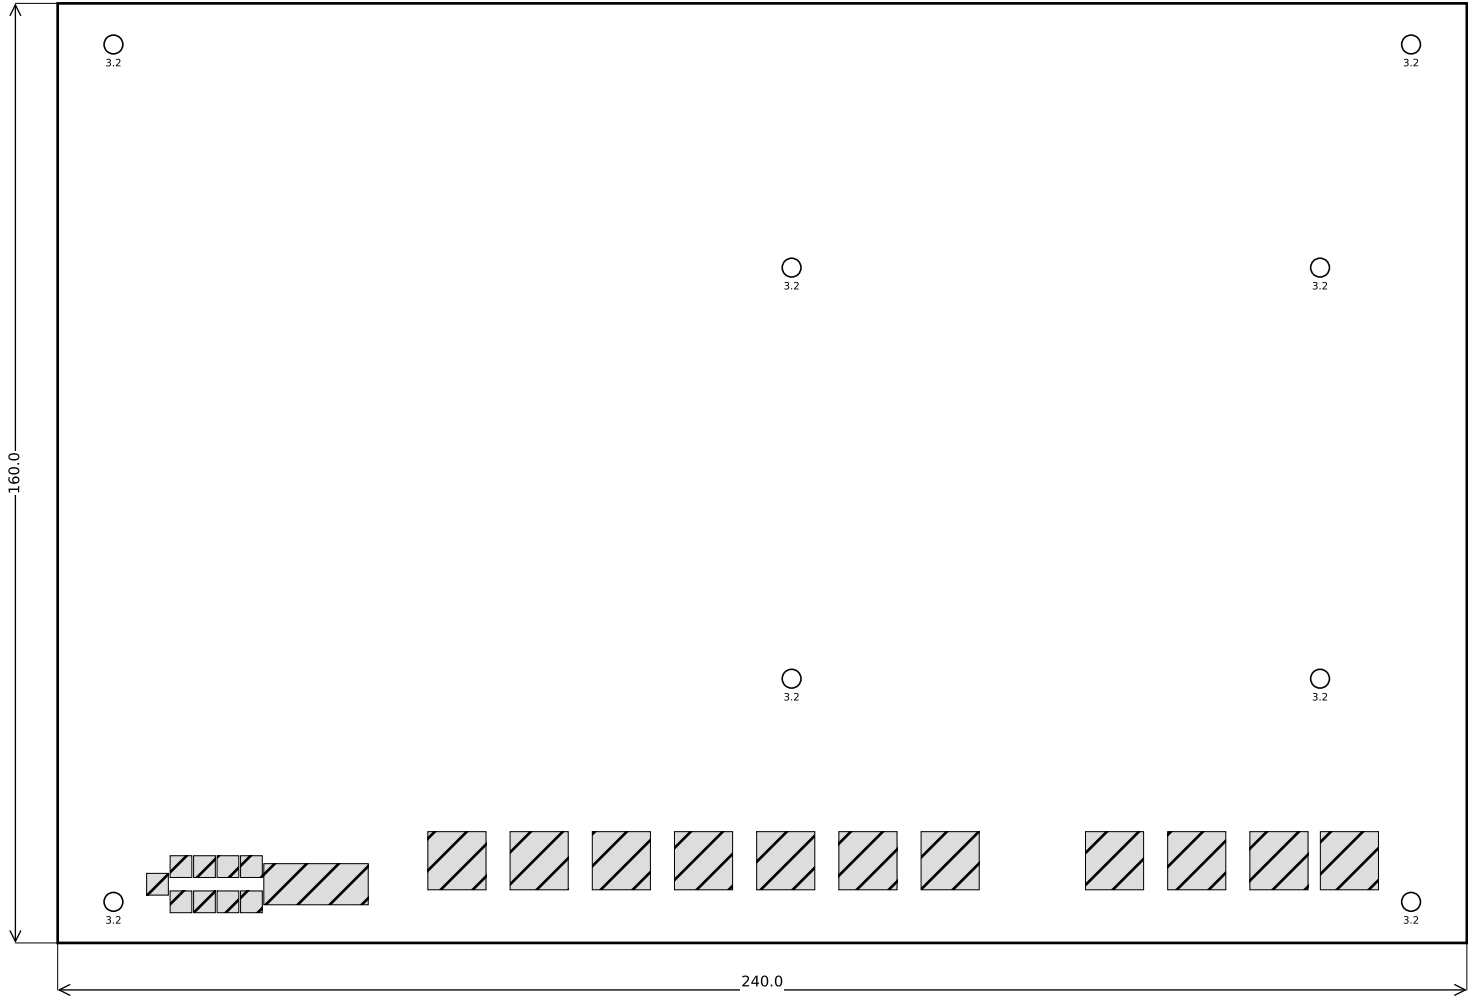

v2/ecad/pcb-a-power-a23/pcb-a-power.kicad_pcb sha256 58e26c67987b1daa (gen_pcb_a.py 0X, 0Y; on the blind-mate gap spacer)
outline X -120.00..120.00, Y -80.00..80.00 (case frame), thickness 1.60 (the file's), Z 16.10..17.70
tallest top: J_HF 16.50 (JST_VH_B2P-VH_1x02_P3.96mm Vertical); tallest bottom: none
parts 400 by height source: BODYLESS 33, CLASS 31, MAKER 9, MATES 21, MODEL 306
holes: H1 3.2, H3 3.2, H5 3.2, H7 3.2, H6 3.2, H8 3.2, H2 3.2, H4 3.2
colour by height above the board surface: no body, <=1, <=3, <=6, <=10, >10 mm (light grey, greens, yellow, orange, red); grey hatched: a height
another record owns (COVERED by a module envelope, a PANEL part hanging from the plate, a contact that MATES across a bay); magenta cross-hatched:
TBD; B's module envelopes dashed.

HOLES 8 of 8 (drill 2.0 or more), centre in the case frame, mm				
ref	X	Y	drill	what
H1	-110.50	-73.00	3.20	M3 rod R1
H3	-110.50	73.00	3.20	M3 rod R3
H5	5.00	-35.00	3.20	M3 standoff, mezzanine
H7	5.00	35.00	3.20	M3 standoff, mezzanine
H6	95.00	-35.00	3.20	M3 standoff, mezzanine
H8	95.00	35.00	3.20	M3 standoff, mezzanine
H2	110.50	-73.00	3.20	M3 rod R2
H4	110.50	73.00	3.20	M3 rod R4

TOLERANCES AND STATUS
Dimensions in mm. Kit parts (this sheet): machined positions and outlines ± 0.10 ; the 3.0 face plate ± 0.13 and the 6.0 entry plates ± 0.20 (EN 485-4 class, standard not held, INFERRED); the setting leg's pad height ± 0.10 ; rebate depth and line ± 0.10 ; spot-face floors ± 0.10 .
Peli: the 1450PF sheet 1453-314-000 rev A states ± 0.76 on one-decimal and ± 0.25 on two-decimal mm (VERIFIED); drawing 1451-931 states no tolerance ("typical industry-standard tolerances apply"), so every case allowance is the session's (INFERRED, UNSTATED).
Design basis only (v2/docs/CASE-MARGINS.md section 1, Verdicts): a MET row still meets its minimum with every unstated allowance taken twice, a sensitivity reading and not a bound on those allowances; an OPEN row rests on something no held source gives. Nominal CAD establishes no fit, seal or alignment; checks T1 to T11 (CASE-MARGINS.md section 5) do. Prototype: nothing on this sheet has been made, bought or fitted.
Heights are nominal library bodies at the committed placements; a board's plan tolerance is JLC's outline class (± 0.2 , not held) and the stack's placement ± 1.0 by hand (INFERRED).

MeshSat field kit V2, Peli 1450 case set

Board envelope A power and I/O: outline, holes and parts by height on both sides, read from the committed board

MESH SAT-1357. PROTOTYPE DESIGN: nothing made, bought or fitted.
Session choices under the owner's standing rule of 26 Sep 2026 (SC-07).

Source: tree a8652172 plus the case release's changes (fnd/hc7); inputs by sha256 (first 12):
b4fb79d98d2f v2/cad/zstack.json
1ba75de7ceef v2/cad/zstack.py
58e26c67987b v2/ecad/pcb-a-power-a23/pcb-a-power.kicad_pcb
3fad2fb95f58 v2/cad/zstack-models.json

Generated 2026-09-27 by v2/cad/case_drawings.py (sheet 7) from the files named left; regenerate with v2/cad/README.md. The editable sources govern; this sheet is a copy.

Sheet 7 of 14

A3, mm
not to scale for measurement:
dimensions govern; use the
1:1 templates for marking