



TOP SIDE (seen from above)

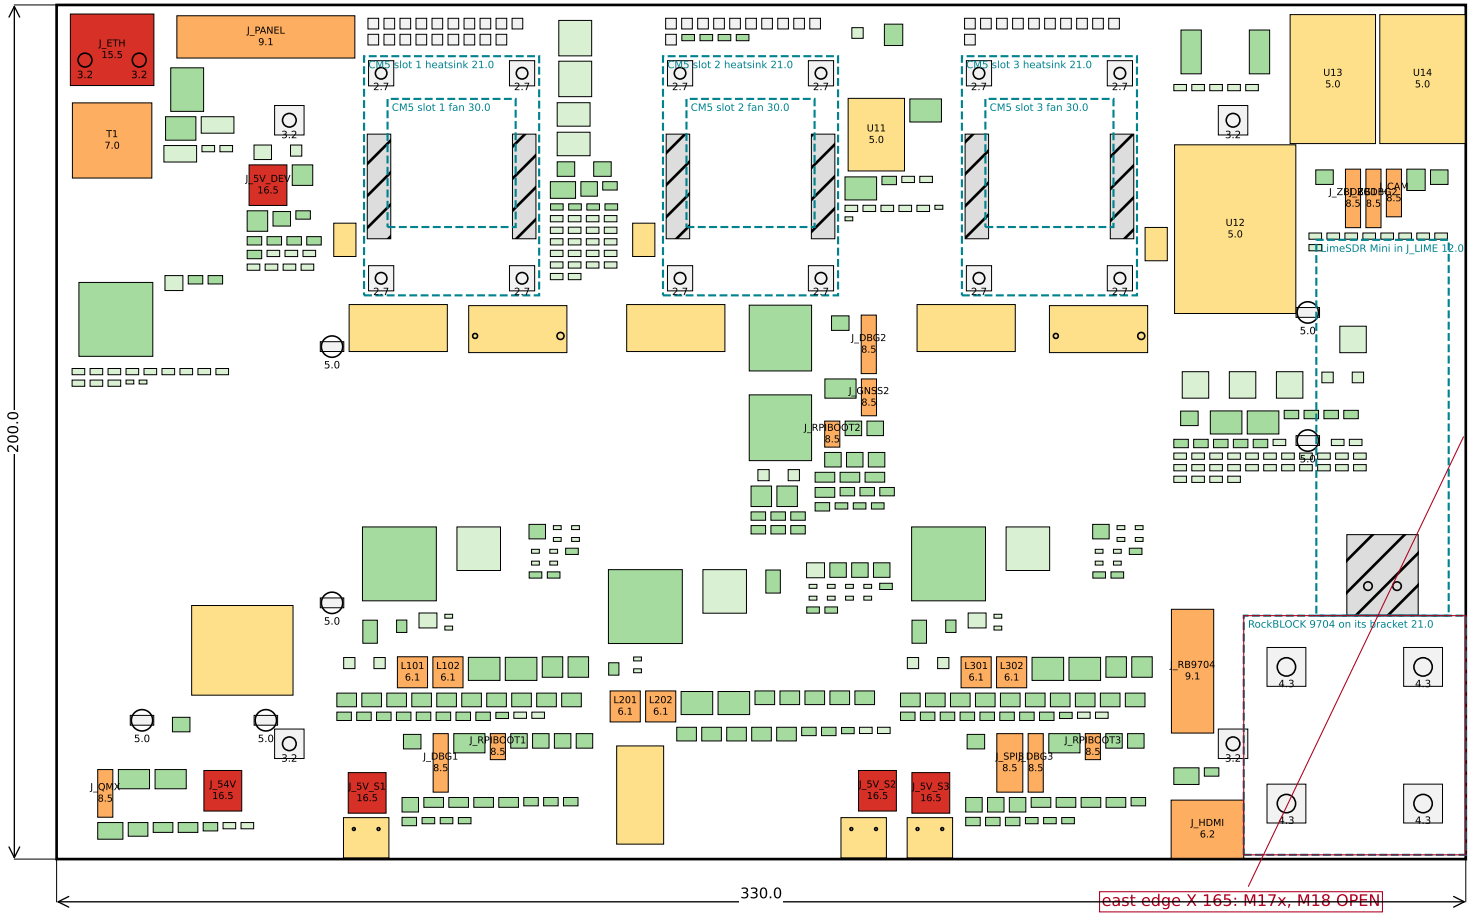

BOTTOM SIDE (seen from above, through the board: not mirrored)

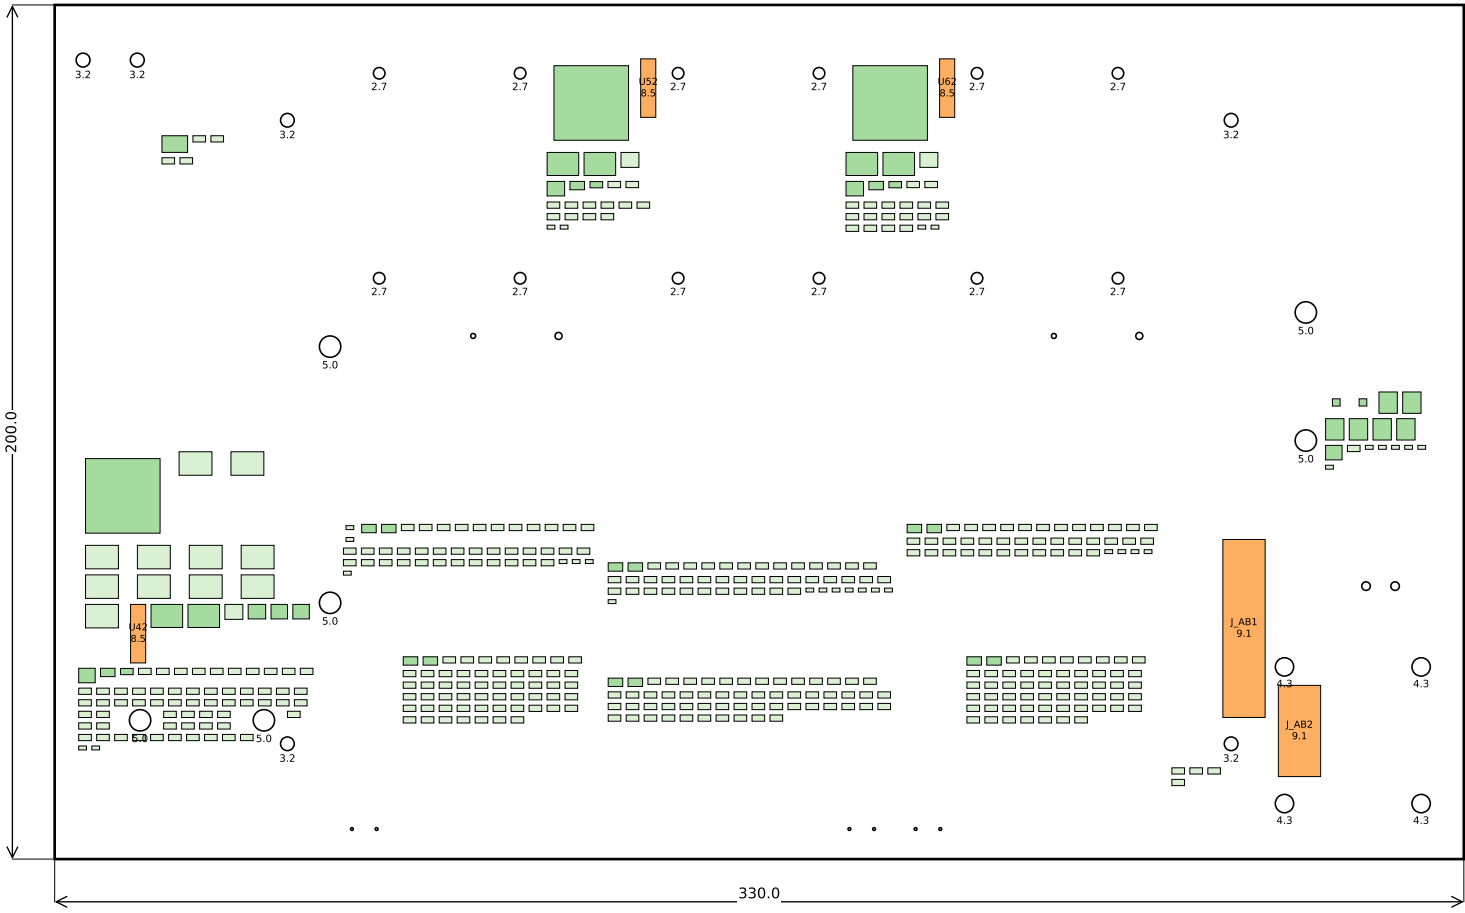

v2/ecad/pcb-b-compute-b19/pcb-b-compute.kicad_pcb sha256 2e64b5bf2d9cd3bc (gen_pcb_b.py OX, OY; on the A-to-B bay spacer)
outline X -165.00..165.00, Y -100.00..100.00 (case frame), thickness 1.60 (the file's), Z 49.00..50.60
tallest top: J_5V_DEV 16.50 (JST_VH_B2P-VH_1x02_P3.96mm_Vertical); tallest bottom: J_AB2 9.10 (IDC-Header_2x05_P2.54mm_Vertical_NarrowPad)
parts 957 by height source: BODYLESS 67, CLASS 27, COVERED 7, MAKER 8, MODEL 848
holes: J_ETH 3.2, J_ETH 3.2, S_QMX3 5.0, S_QMX4 5.0, H1 3.2, H3 3.2, S_QMX2 5.0, S_QMX1 5.0, H5 2.7, H6 2.7, H7 2.7, H8 2.7, H9 2.7, H10 2.7, H11 2.7, H12 2.7, H13 2.7, H14 2.7, H15 2.7, H16 2.7, H2 3.2, H4 3.2, H17 4.3, H18 4.3, S_LIME1 5.0, S_LIME2 5.0, J_LIME 2.0, J_LIME 2.0, H19 4.3, H20 4.3
colour by height above the board surface: no body, <=1, <=3, <=6, <=10, >10 mm (light grey, greens, yellow, orange, red); grey hatched: a height another record owns (COVERED by a module envelope, a PANEL part hanging from the plate, a contact that MATES across a bay); magenta cross-hatched: TBD; B's module envelopes dashed.

HOLES 30 of 40 (drill 2.0 or more), centre in the case frame, mm									
ref	X	Y	drill	what	ref	X	Y	drill	what
J_ETH	-158.35	87.00	3.25	RJ45 jack (Amphenol RJHSE5380): patch lead to the seale	H15	84.00	36.00	2.70	M2.5 standoff 4.0 mm, CM5 slot S3
J_ETH	-145.65	87.00	3.25	RJ45 jack (Amphenol RJHSE5380): patch lead to the seale	H16	84.00	84.00	2.70	M2.5 standoff 4.0 mm, CM5 slot S3
S_QMX3	-145.00	-67.50	5.00	tie slot	H2	110.50	-73.00	3.20	M3 rod R2
S_QMX4	-116.00	-67.50	5.00	tie slot	H4	110.50	73.00	3.20	M3 rod R4
H1	-110.50	-73.00	3.20	M3 rod R1	H17	123.00	-87.00	4.30	M4, GC 9704 bracket
H3	-110.50	73.00	3.20	M3 rod R3	H18	123.00	-55.00	4.30	M4, GC 9704 bracket
S_QMX2	-100.50	-40.00	5.00	tie slot	S_LIME1	128.00	-2.00	5.00	tie slot
S_QMX1	-100.50	20.00	5.00	tie slot	S_LIME2	128.00	28.00	5.00	tie slot
H5	-89.00	36.00	2.70	M2.5 standoff 4.0 mm, CM5 slot S1	J_LIME	142.10	-36.08	2.00	USB 3.0 type A receptacle (Wuerth 692122030100 land): t
H6	-89.00	84.00	2.70	M2.5 standoff 4.0 mm, CM5 slot S1	J_LIME	148.90	-36.08	2.00	USB 3.0 type A receptacle (Wuerth 692122030100 land): t
H7	-56.00	36.00	2.70	M2.5 standoff 4.0 mm, CM5 slot S1	H19	155.00	-87.00	4.30	M4, GC 9704 bracket
H8	-56.00	84.00	2.70	M2.5 standoff 4.0 mm, CM5 slot S1	H20	155.00	-55.00	4.30	M4, GC 9704 bracket
H9	-19.00	36.00	2.70	M2.5 standoff 4.0 mm, CM5 slot S2					
H10	-19.00	84.00	2.70	M2.5 standoff 4.0 mm, CM5 slot S2					
H11	14.00	36.00	2.70	M2.5 standoff 4.0 mm, CM5 slot S2					
H12	14.00	84.00	2.70	M2.5 standoff 4.0 mm, CM5 slot S2					
H13	51.00	36.00	2.70	M2.5 standoff 4.0 mm, CM5 slot S3					
H14	51.00	84.00	2.70	M2.5 standoff 4.0 mm, CM5 slot S3					

TOLERANCES AND STATUS
Dimensions in mm. Kit parts (this sheet): machined positions and outlines ± 0.10 ; the 3.0 face plate ± 0.13 and the 6.0 entry plates ± 0.20 (EN 485-4 class, standard not held, INFERRED); the setting leg's pad height ± 0.10 ; rebate depth and line ± 0.10 ; spot-face floors ± 0.10 .
Peli: the 1450PF sheet 1453-314-000 rev A states ± 0.76 on one-decimal and ± 0.25 on two-decimal mm (VERIFIED); drawing 1451-931 states no tolerance ("typical industry-standard tolerances apply"), so every case allowance is the session's (INFERRED, UNSTATED).
Design basis only (v2/docs/CASE-MARGINS.md section 1, Verdicts): a MET row still meets its minimum with every unstated allowance taken twice, a sensitivity reading and not a bound on those allowances; an OPEN row rests on something no held source gives. Nominal CAD establishes no fit, seal or alignment; checks T1 to T11 (CASE-MARGINS.md section 5) do. Prototype: nothing on this sheet has been made, bought or fitted.
Heights are nominal library bodies at the committed placements; a board's plan tolerance is JLC's outline class (± 0.2 , not held) and the stack's placement ± 1.0 by hand (INFERRED).

MeshSat field kit V2, Peli 1450 case set

Board envelope B compute: outline, holes and parts by height on both sides, read from the committed board

MESH SAT-1357. PROTOTYPE DESIGN: nothing made, bought or fitted.
Session choices under the owner's standing rule of 26 Sep 2026 (SC-07).

Source: tree a8652172 plus the case release's changes (fnd/hc7); inputs by sha256 (first 12):
b4fb79d90d2f v2/cad/zstack.json
1ba75de7ceef v2/cad/zstack.py
2e64b5bf2d9c v2/ecad/pcb-b-compute-b19/pcb-b-compute.kicad_pcb
3fad2fb95f58 v2/cad/zstack-models.json

Generated 2026-09-27 by v2/cad/case_drawings.py (sheet 8) from the files named left; regenerate with v2/cad/README.md. The editable sources govern; this sheet is a copy.

Sheet 8 of 14

A3, mm
not to scale for measurement:
dimensions govern; use the
1:1 templates for marking