


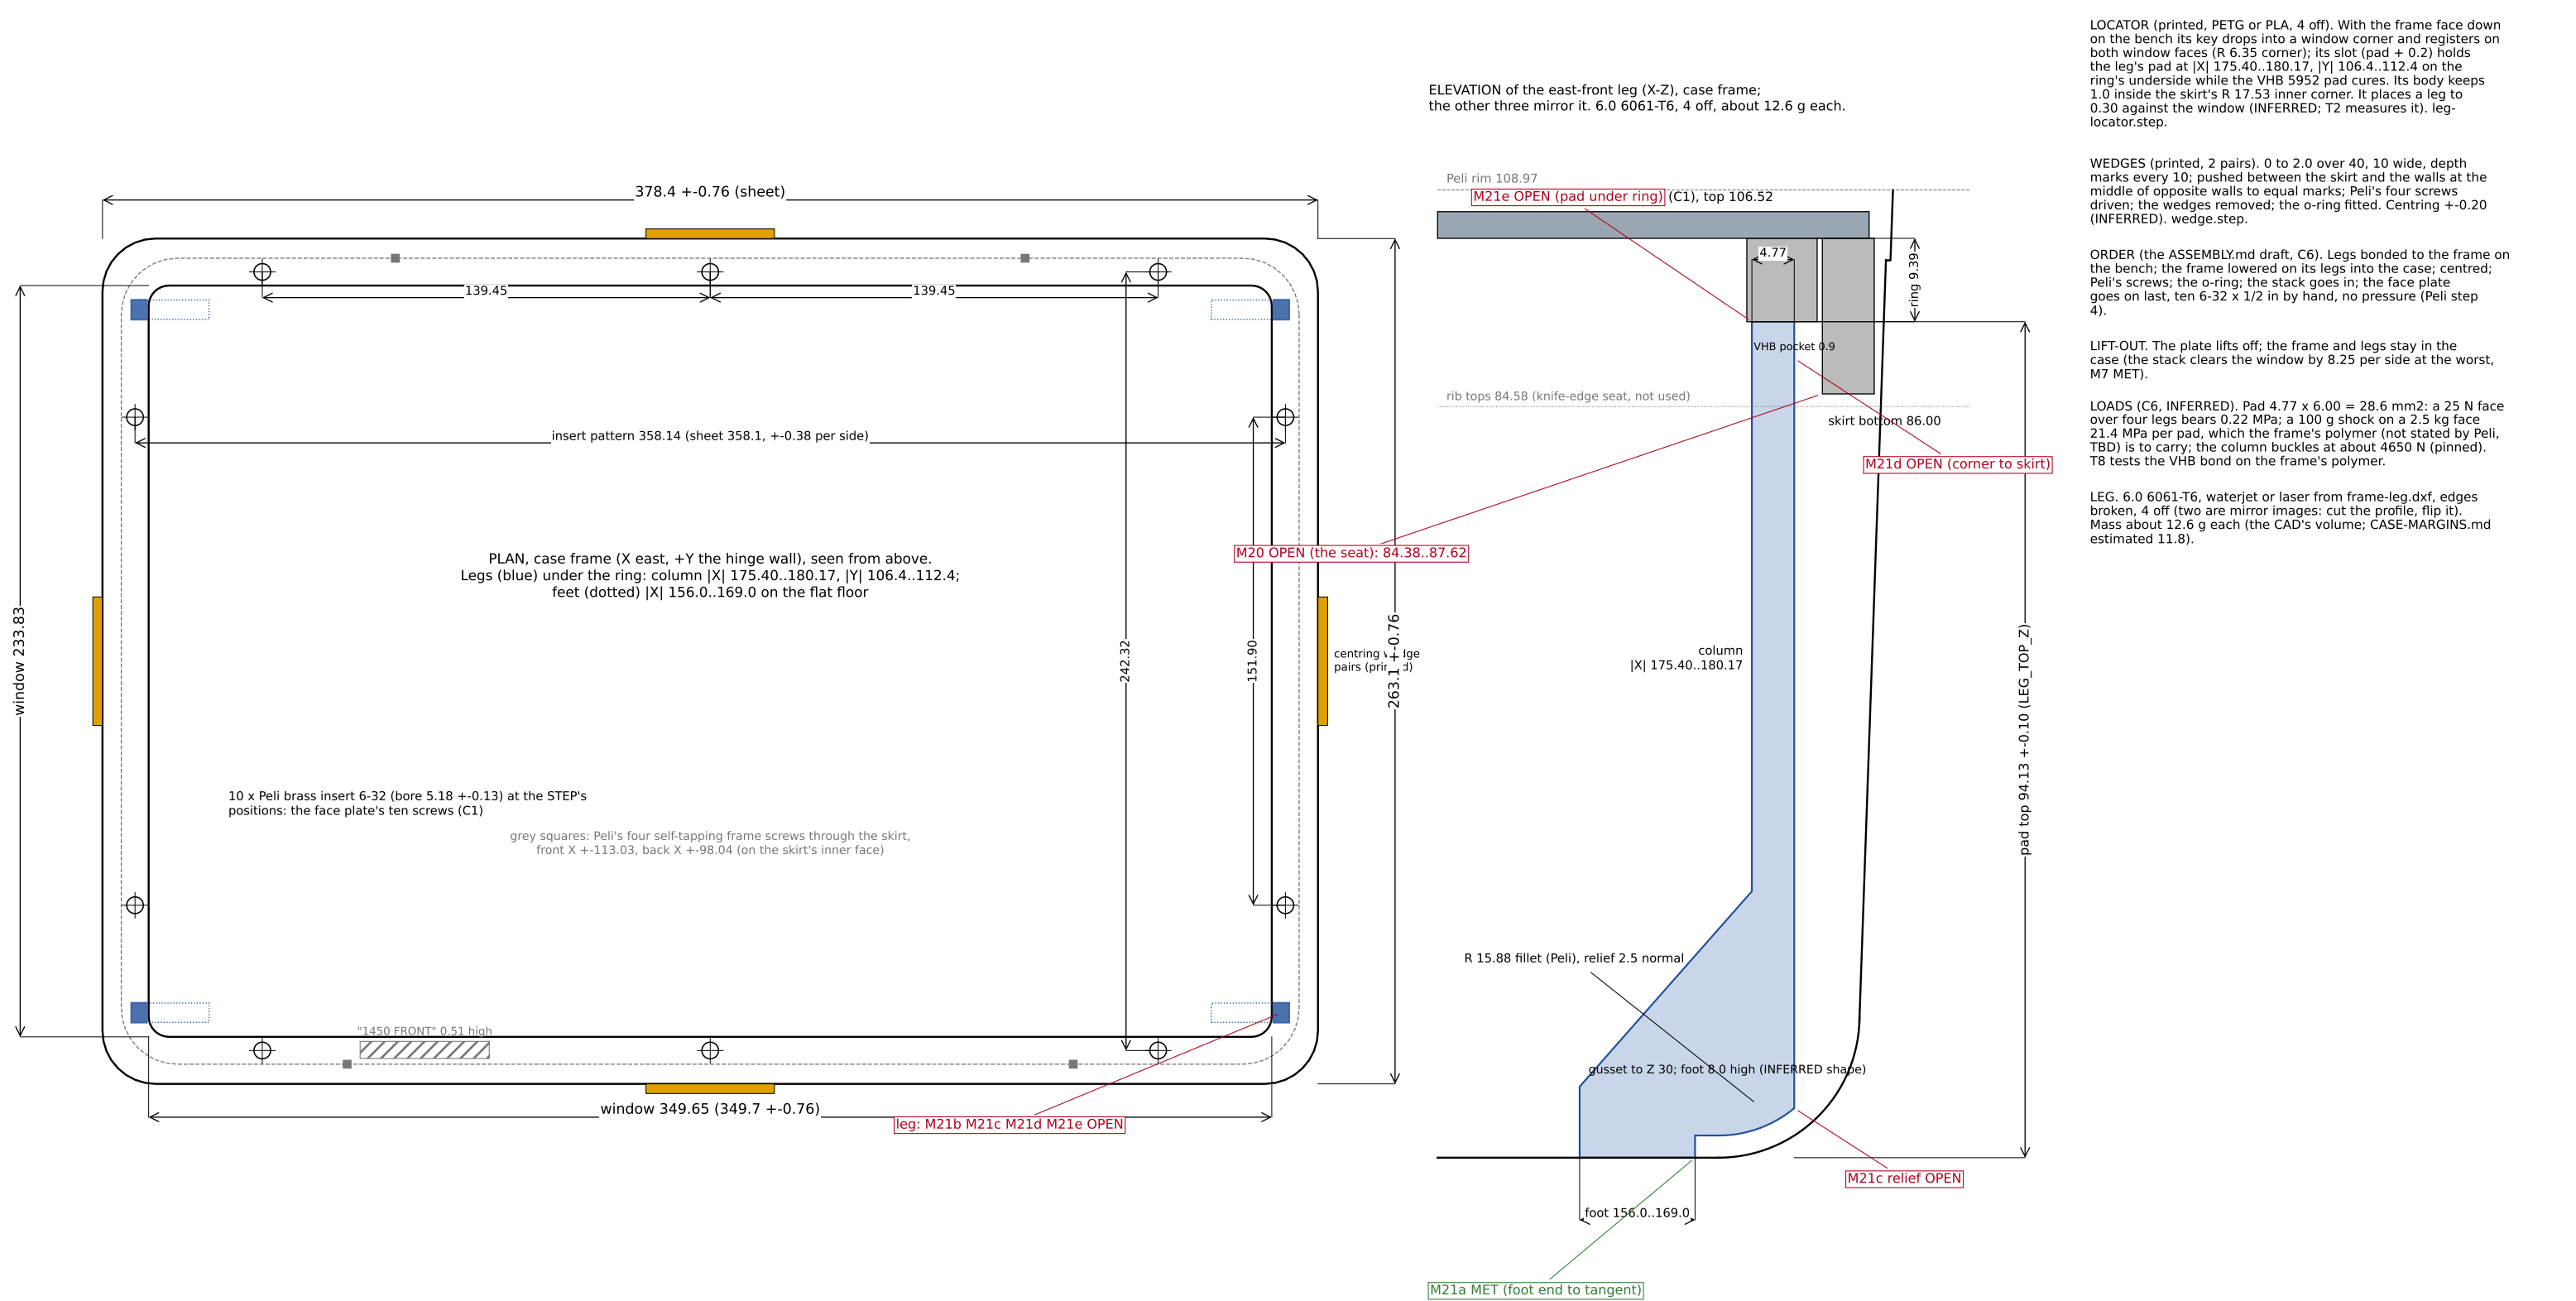

Margin rows this sheet's features enter (frame_seat.out): key, verdict, min, nominal, worst, worst with unstated x2					
M20	OPEN	the frame's seat: bottom Z 86.00 nominal, 84.38..87.62 on the legs (T2)			
M21a	MET	0.00	+2.64	+1.38	+0.50 leg foot on the flat floor: foot end X 169.0 to the fillet tangent
M21b	OPEN	0.00	+2.09	+0.83	-0.05 leg foot on the flat floor: foot [Y] 112.4 to the long-wall fillet tangent
M21c	OPEN	1.00	+2.50	+1.24	+0.36 leg relief to Peli's floor fillet (normal)
M21d	OPEN	1.00	+2.48	+1.14	+0.26 leg column to the frame skirt's inner face: Euclidean, the leg placed in X and Y (outer-back corner)
M21e	OPEN	0.00	+0.57	+0.27	-0.03 leg pad fully under the ring (pad inner edge to the window edge)
M21f	MET	1.00	+6.40	+4.52	+3.02 leg to B16's corner (165, 100) in Y
M21g	MET	1.00	+4.34	+3.08	+2.20 setting leg's column (X 180.17) to the entry plate's screw heads at [Y] 100 (X 184.51), in X
M21h	MET	1.00	+3.40	+1.51	+1.01 leg column to the backer ring's outer edge (X 172, panel1450.py:93-95)
M5	OPEN	1.00	+3.65	+1.77	+0.27 pack group (205.5 long, A06) to the east legs' inner faces at [Y] 106.4, per side
M8z	OPEN	0.00	+2.48	+0.10	-2.18 plate underside above the shoulder, so the plate edge faces the rim zone
M1	OPEN	2.00	+6.26	+3.62	+1.80 monitor body over the CM5 heatsinks
M7	MET	1.00	+9.83	+8.25	+7.05 stack lift-out through the frame window, per side in X (Y has 16.91)

ELEVATION of the east-front leg (X-Z), case frame;
the other three mirror it. 6.0 6061-T6, 4 off, about 12.6 g each.

LOCATOR (printed, PETG or PLA, 4 off). With the frame face down on the bench its key drops into a window corner and registers on both window faces (R 6.35 corner); its slot (pad + 0.2) holds the leg's pad at [X] 175.40..180.17, [Y] 106.4..112.4 on the ring's underside while the VHB 5952 pad cures. Its body keeps 1.0 inside the skirt's R 17.53 inner corner. It places a leg to 0.30 against the window (INFERRED; T2 measures it). leg-locator.step.

WEDGES (printed, 2 pairs). 0 to 2.0 over 40, 10 wide, depth marks every 10; pushed between the skirt and the walls at the middle of opposite walls to equal marks; Peli's four screws driven; the wedges removed; the o-ring fitted. Centring +0.20 (INFERRED). wedge.step.

ORDER (the ASSEMBLY.md draft, C6). Legs bonded to the frame on the bench; the frame lowered on its legs into the case; centred; Peli's screws; the o-ring; the stack goes in; the face plate goes on last, ten 6-32 x 1/2 in by hand, no pressure (Peli step 4).

LIFT-OUT. The plate lifts off; the frame and legs stay in the case (the stack clears the window by 8.25 per side at the worst, M7 MET).

LOADS (C6, INFERRED). Pad 4.77 x 6.00 = 28.6 mm2: a 25 N face over four legs bears 0.22 MPa; a 100 g shock on a 2.5 kg face 21.4 MPa per pad, which the frame's polymer (not stated by Peli, TBD) is to carry; the column buckles at about 4650 N (pinned). T8 tests the VHB bond on the frame's polymer.

LEG. 6.0 6061-T6, waterjet or laser from frame-leg.dxf, edges broken, 4 off (two are mirror images: cut the profile, flip it). Mass about 12.6 g each (the CAD's volume; CASE-MARGINS.md estimated 11.8).

TOLERANCES AND STATUS
Dimensions in mm. Kit parts (this sheet): machined positions and outlines +/-0.10; the 3.0 face plate +/-0.13 and the 6.0 entry plates +/-0.20 (EN 485-4 class, standard not held, INFERRED); the setting leg's pad height +/-0.10; rebate depth and line +/-0.10; spot-face floors +/-0.10.
Peli: the 1450PF sheet 1453-314-000 rev A states +/-0.76 on one-decimal and +/-0.25 on two-decimal mm (VERIFIED); drawing 1451-931 states no tolerance ("typical industry-standard tolerances apply"), so every case allowance is the session's (INFERRED, UNSTATED).
Design basis only (v2/docs/CASE-MARGINS.md section 1, Verdicts): a MET row still meets its minimum with every unstated allowance taken twice, a sensitivity reading and not a bound on those allowances; an OPEN row rests on something no held source gives. Nominal CAD establishes no fit, seal or alignment; checks T1 to T11 (CASE-MARGINS.md section 5) do. Prototype: nothing on this sheet has been made, bought or fitted.
The legs' zones ([X] 156.0..180.17, [Y] 106.4..112.4, floor to Z 94.2, each within 0.88 of its place) are theirs alone.

MeshSat field kit V2, Peli 1450 case set

1450PF frame with Peli's insert bores, the four setting legs (C6), locator and wedges

MESH SAT-1357. PROTOTYPE DESIGN: nothing made, bought or fitted.
Session choices under the owner's standing rule of 26 Sep 2026 (SC-07).

Source: tree a8652172 plus the case release's changes (fnd/hc7); inputs by sha256 (first 12):
3bdb88df9826 v2/ecad/tools/panel1450.py
214e915b9855 v2/vendor/peli/1450/frame_seat.out
28c5adc7166 v2/cad/frame_leg.py
f58e434c6105 v2/vendor/peli/1450/1450-panel-frame.STEP

Generated 2026-09-27 by v2/cad/case_drawings.py (sheet 2) from the files named left; regenerate with v2/cad/README.md. The editable sources govern; this sheet is a copy.

Sheet 2 of 14

A3, mm
not to scale for measurement:
dimensions govern; use the
1:1 templates for marking