


SECTION at Y 0, case frame, X east to the right. Each board is drawn at its committed Z with the tallest part of its top side that lies under the board above it (E under A, A and D under B, B under the backer ring) and the tallest of its underside.

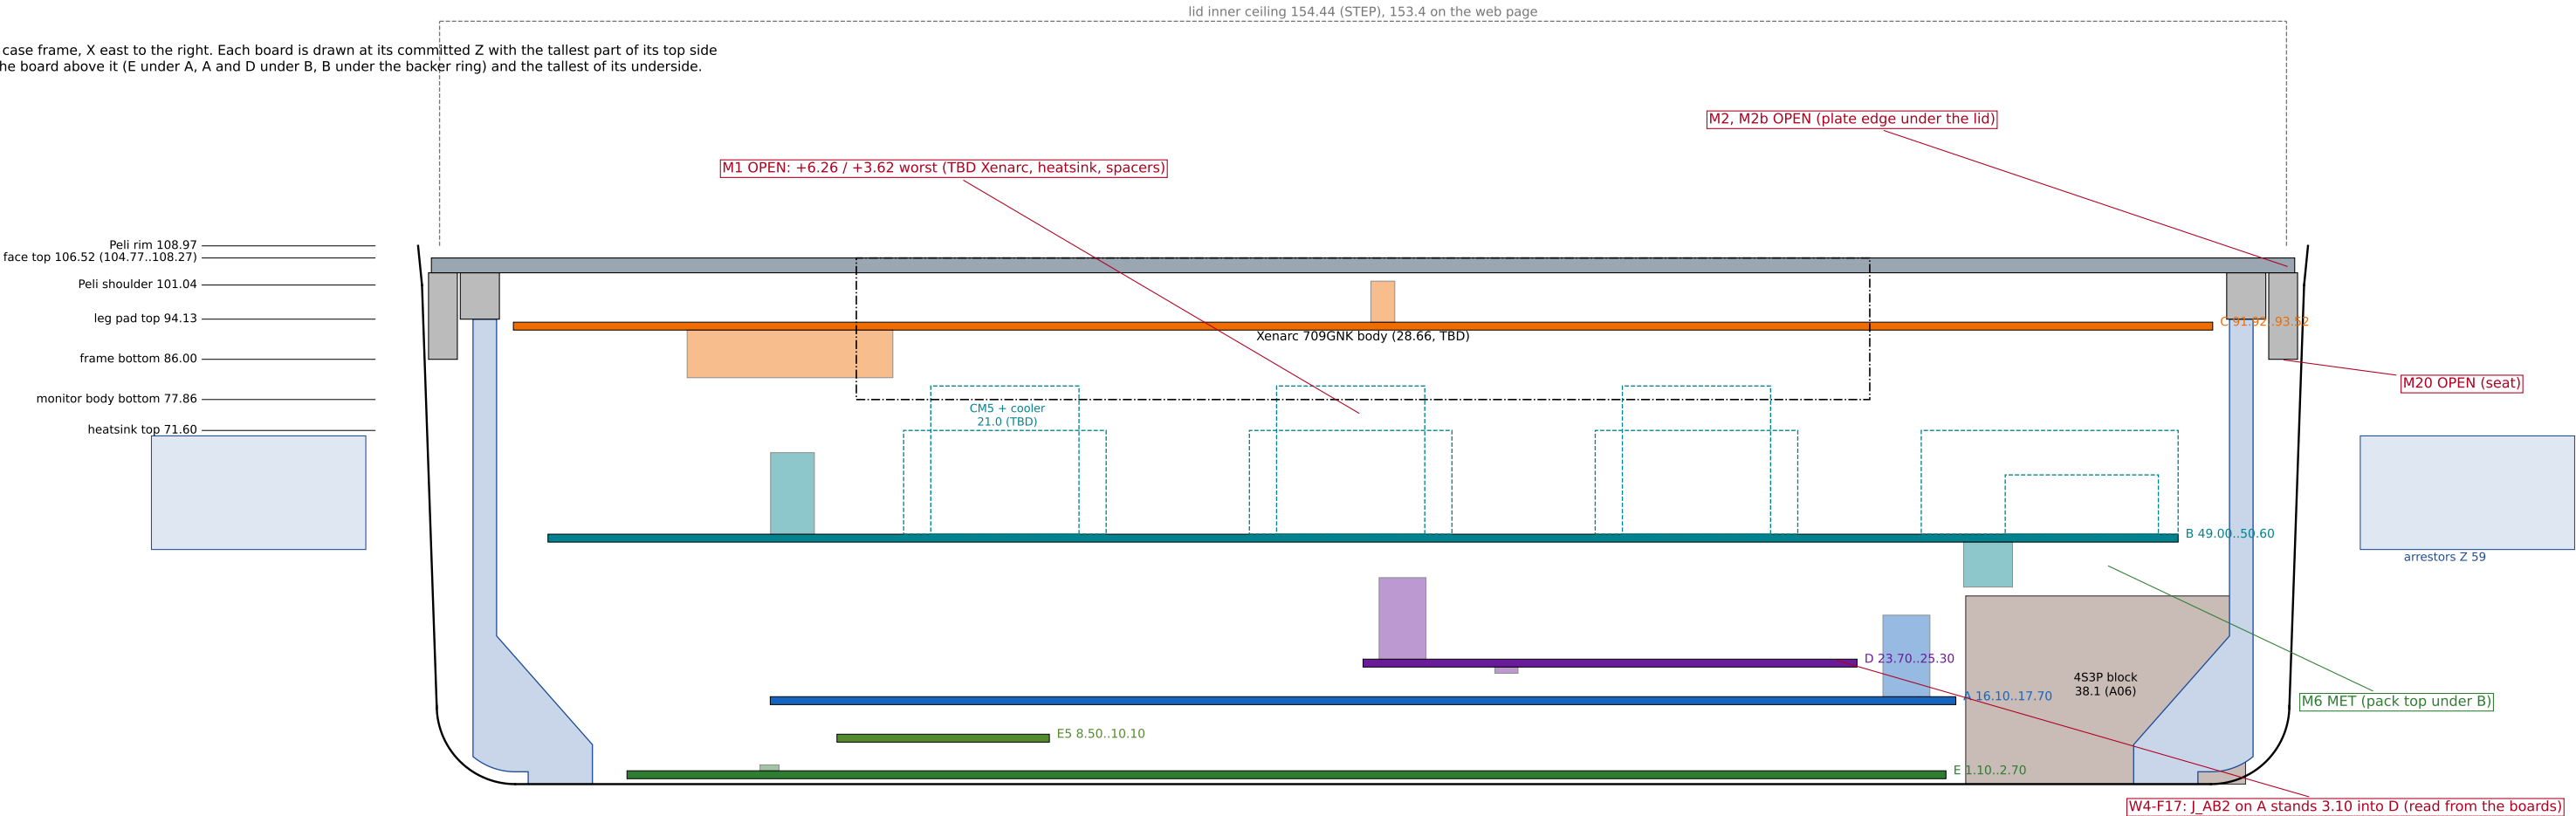

THE STACK FROM THE FLOOR (panel1450.STACK)
VHB 5952 pads under the dock strip 0.00 .. 1.10
board E dock strip 1.10 .. 2.70
blind-mate gap spacer 2.70 .. 16.10
board A 16.10 .. 17.70
A-to-B bay spacer 17.70 .. 49.00
board B 49.00 .. 50.60
B top copper (B_TOP_Z) 50.60
D on 6.0 standoffs 23.70 .. 25.30
E5 dock block (face 7.4 over E) 8.50 .. 10.10
C backer ring (10 under the plate) 91.92 .. 93.52
face plate on the frame ring 103.52 .. 106.52
P: Z not set until the pack hold-down (S-27)

BAYS READ FROM THE BOARDS (gap - lower part - upper part where they overlap in plan)
A to B outside D (bay): gap 31.30
pair J_AB1 9.10 under J_AB1 9.10: +13.10
tallest single J_54V 16.50 (lower top): leaves +14.80
A to D (mezzanine standoffs): gap 6.00
pair J_AB2 9.10 under C18 0.80: -3.90
tallest single J_AB2 9.10 (lower top): leaves -3.10
B to C backer ring: gap 41.32
pair J_PANEL 9.10 under J_PANEL 9.64: +22.58

tallest single J_54V 16.50 (lower top): leaves +24.82
D to B: gap 23.70
pair J_ANT 9.55 under C286 0.80: +13.35
tallest single J_PWR1 16.50 (lower top): leaves +7.20
E to A (blind-mate gap): gap 13.40
tallest single Q10 1.20 (lower top): leaves +12.20
E5 to A (dock contacts): gap 6.00
tallest single H1 0.00 (lower top): leaves +6.00
floor under E (E's underside parts on the VHB pads): gap 1.10

B's parts under the monitor (body bottom 77.86):
J_5V_S1 h 16.50 leaves +10.76
J_5V_S2 h 16.50 leaves +10.76
J_5V_S3 h 16.50 leaves +10.76
J_RB9704 h 9.10 leaves +18.16
B's underside over the pack pocket: J_AB2 9.10,
lowest Z 39.90

Heights: each footprint's own KiCad 9 library model (kicad-packages3D 9.0.9); SUBSTITUTE where the named model file is missing; CLASS or MAKER where the footprint names none (zstack.py HEIGHT_CLASSES).

Margin rows this sheet's features enter (frame_seat.out): key, verdict, min, nominal, worst, worst with unstated x2

M1	OPEN	2.00	+6.26	+3.62	+1.80	monitor body over the CM5 heatsinks
M2	OPEN	1.00	+4.45	+1.84	-0.44	rebated plate band below the rim, under the lid's wall
M2b	OPEN	1.00	+2.94	+1.25	+0.29	full-thickness face (368.0 x 253.0) inside the lid's opening, in X (Y: 3.29 nominal)
M3	OPEN	1.00	+19.92	+16.39	+14.11	space under the QMX tray for the face parts (lid STEP 45.47; web 44.45 in the worst)
M6	MET	1.00	+4.42	+3.66	+2.90	pack top under B16's underside (A06 3.32 at its pessimistic base, plus the 1.1 VHB lift)
M8z	OPEN	0.00	+2.48	+0.10	-2.18	plate underside above the shoulder, so the plate edge faces the rim zone
M20	OPEN					the frame's seat: bottom Z 86.00 nominal, 84.38..87.62 on the legs (T2)
M4a	OPEN	1.00	+3.71	+1.85	+0.85	pack block's east corner to Peli's R 15.88 floor fillet (west face X 122, A06)
M5	OPEN	1.00	+3.65	+1.77	+0.27	pack group (205.5 long, A06) to the east legs' inner faces at Y 106.4, per side
M15a	MET	1.00	+7.30	+5.92	+4.54	dock strip's underside (on 1.1 pads) to the front floor fillet (edge Y -113, gen_pcb_e.py:15)
M15b	OPEN	0.00	+1.49	+0.11	-1.27	dock strip's corner pads on the flat floor (edge to the tangent)

TOLERANCES AND STATUS

Dimensions in mm. Kit parts (this sheet): machined positions and outlines ± 0.10 ; the 3.0 face plate ± 0.13 and the 6.0 entry plates ± 0.20 (EN 485-4 class, standard not held, INFERRED); the setting leg's pad height ± 0.10 ; rebate depth and line ± 0.10 ; spot-face floors ± 0.10 . Peli: the 1450PF sheet 1453-314-000 rev A states ± 0.76 on one-decimal and ± 0.25 on two-decimal mm (VERIFIED); drawing 1451-931 states no tolerance ("typical industry-standard tolerances apply"), so every case allowance is the session's (INFERRED, UNSTATED). Design basis only (v2/docs/CASE-MARGINS.md section 1, Verdicts): a MET row still meets its minimum with every unstated allowance taken twice, a sensitivity reading and not a bound on those allowances; an OPEN row rests on something no held source gives. Nominal CAD establishes no fit, seal or alignment; checks T1 to T11 (CASE-MARGINS.md section 5) do. Prototype: nothing on this sheet has been made, bought or fitted. Stack: JLC 1.6 ± 0.16 per board and 3M VHB 5952 1.1 $\pm 10\%$ (VERIFIED); the gap and bay spacers are unnamed (TBD); B bow 0.3 (INFERRED). The section is at Y 0 with each board's tallest part drawn at its own X.

MeshSat field kit V2, Peli 1450 case set

The Z stack, floor to lid: boards at their committed Z, the face on the legs, the bays read from the boards

MESH SAT-1357. PROTOTYPE DESIGN: nothing made, bought or fitted. Session choices under the owner's standing rule of 26 Sep 2026 (SC-07).

Source: tree a8652172 plus the case release's changes (fnd/hc7); inputs by sha256 (first 12):
3bdb88df9826 v2/ecad/tools/panel1450.py
214e915b9855 v2/vendor/peli/1450/frame_seat.out
b4fb79d90d2f v2/cad/zstack.json
1ba75de7ceef v2/cad/zstack.py
58e26c67987b v2/ecad/pcb-a-power-a23/pcb-a-power.kicad_pcb
2e64b5bf2d9c v2/ecad/pcb-b-compute-b19/pcb-b-compute.kicad_pcb

Generated 2026-09-27 by v2/cad/case_drawings.py (sheet 5) from the files named left; regenerate with v2/cad/README.md. The editable sources govern; this sheet is a copy.

Sheet 5 of 14

A3, mm
not to scale for measurement:
dimensions govern; use the
1:1 templates for marking