




PACK NODE OVER THE DOCK BLOCK (32.56): 9 A PINS, PRE—CHARGE, 25 A BLADE, DOCK SIGNAL PINS

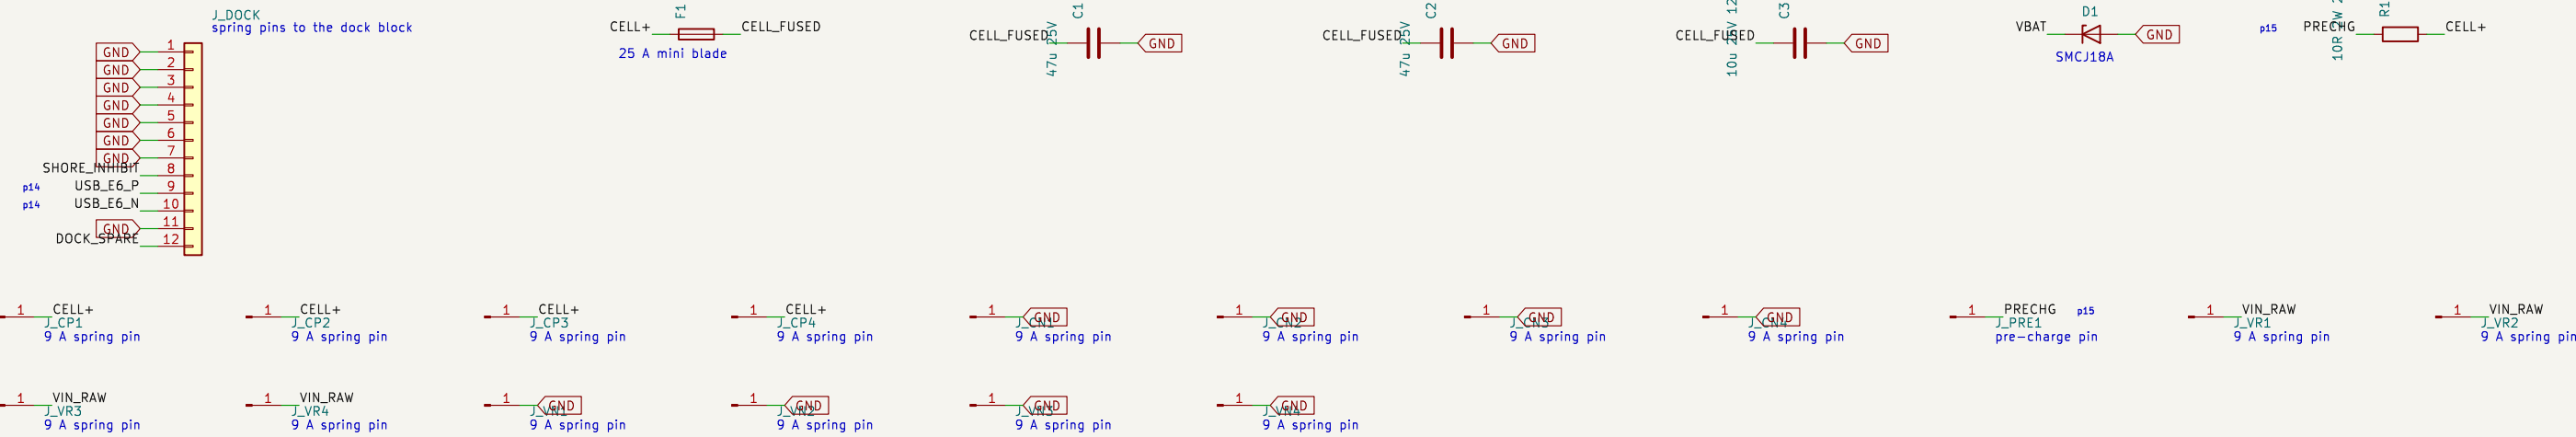


MAIN POWER CONTROL LTC2954

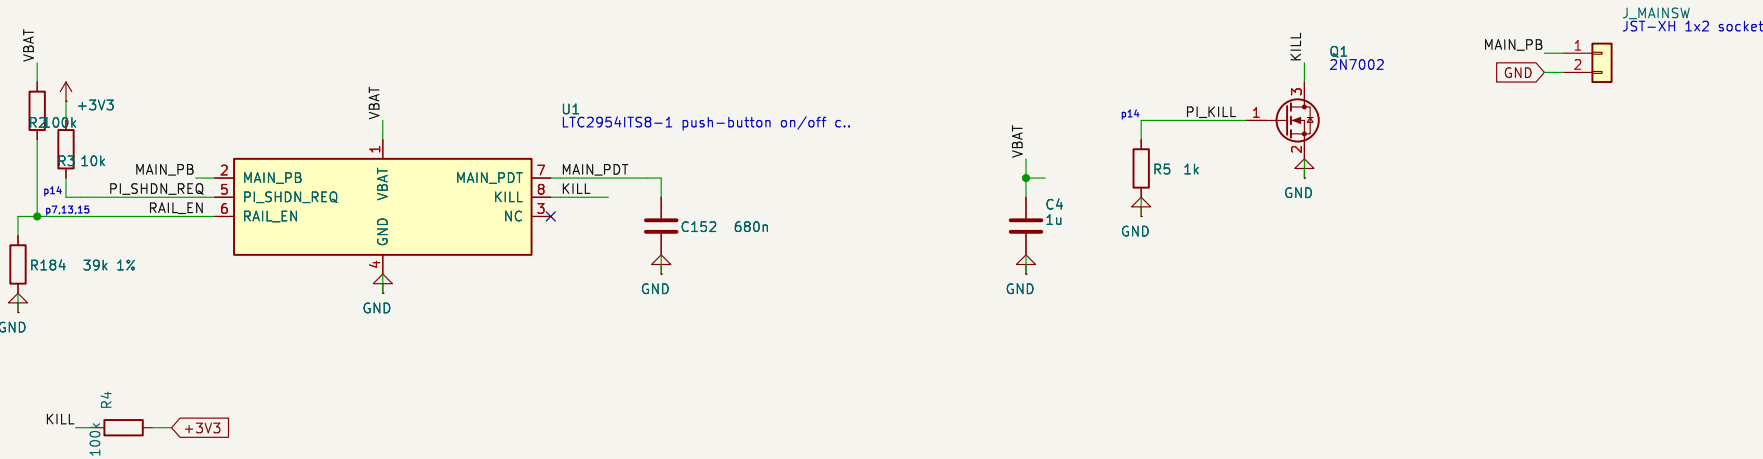


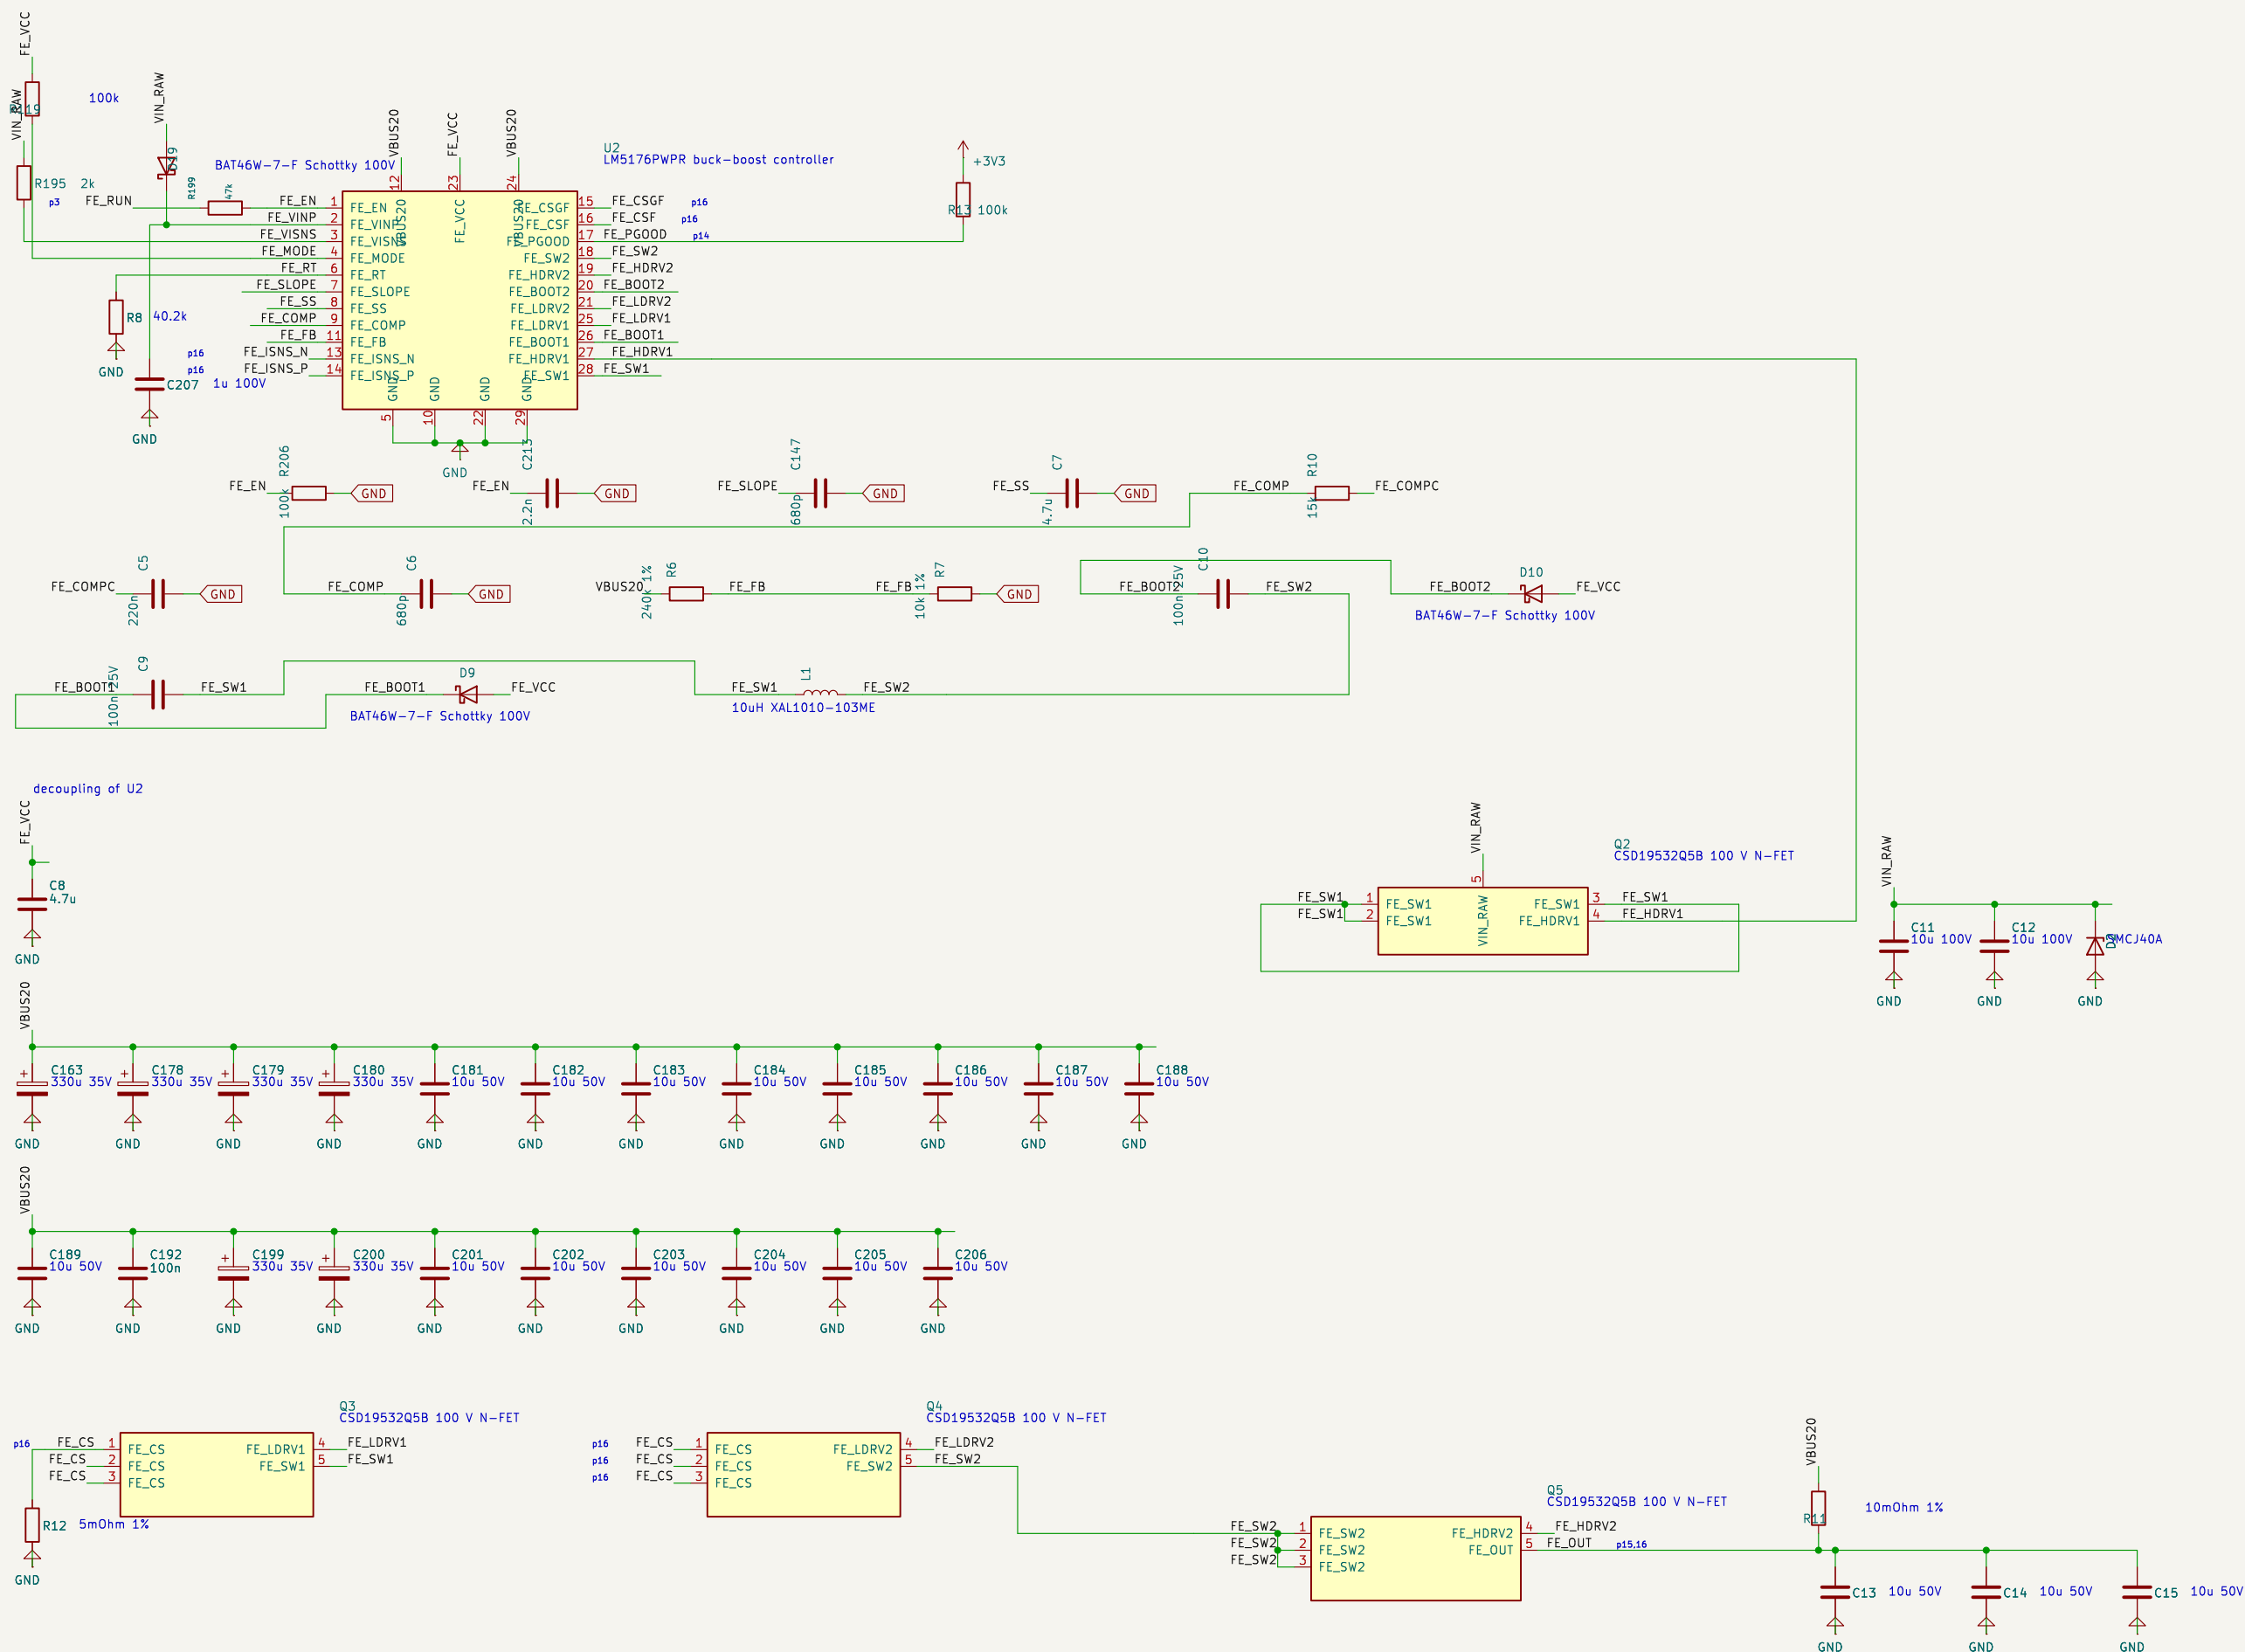


FRONT END: LM5176 FROM THE 9 TO 36 V INPUT TO THE 20 V CHARGE BUS (continued)

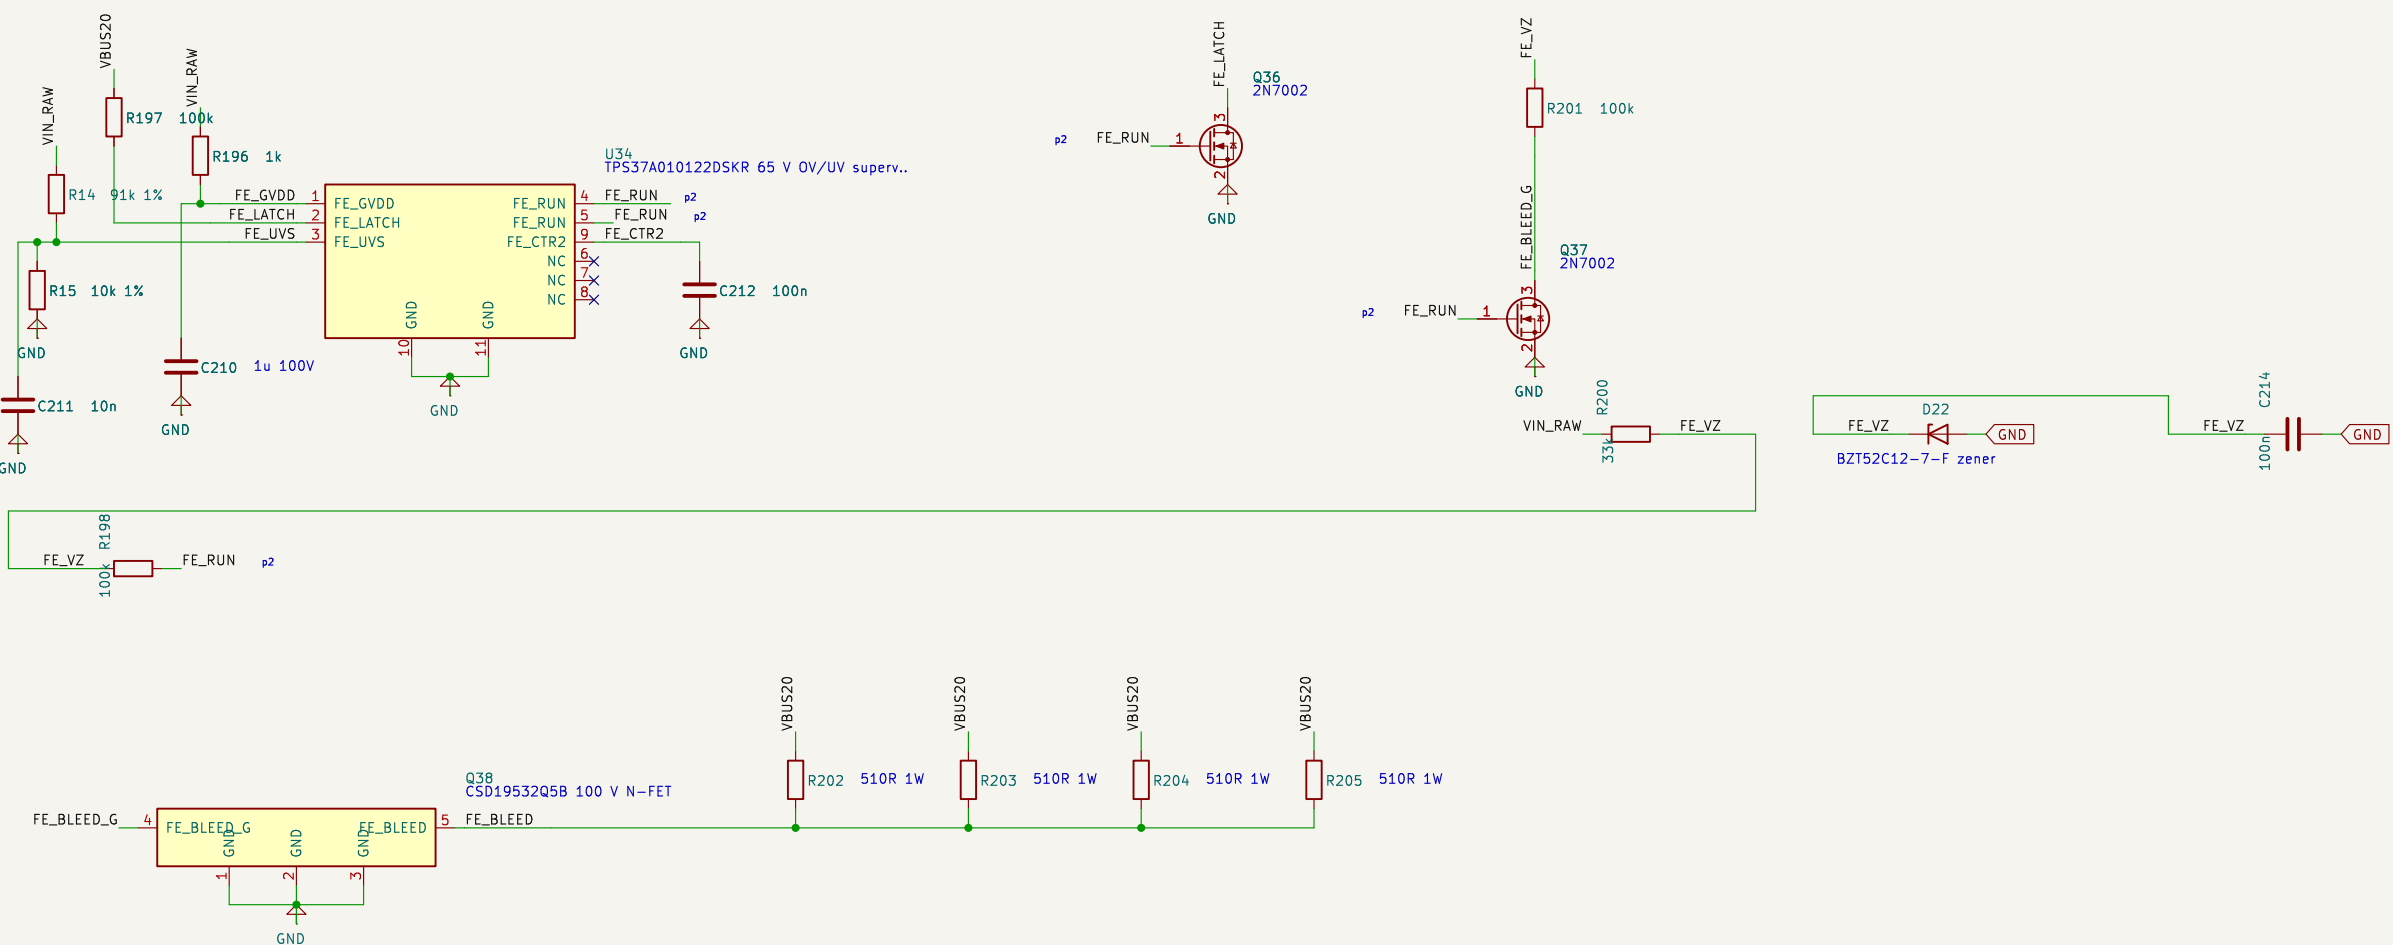


CHARGER BQ25731: 4S FROM THE 20 V BUS, SYSTEM ON VSYS (VBAT), PACK BEYOND RSR, I2C 0x6B

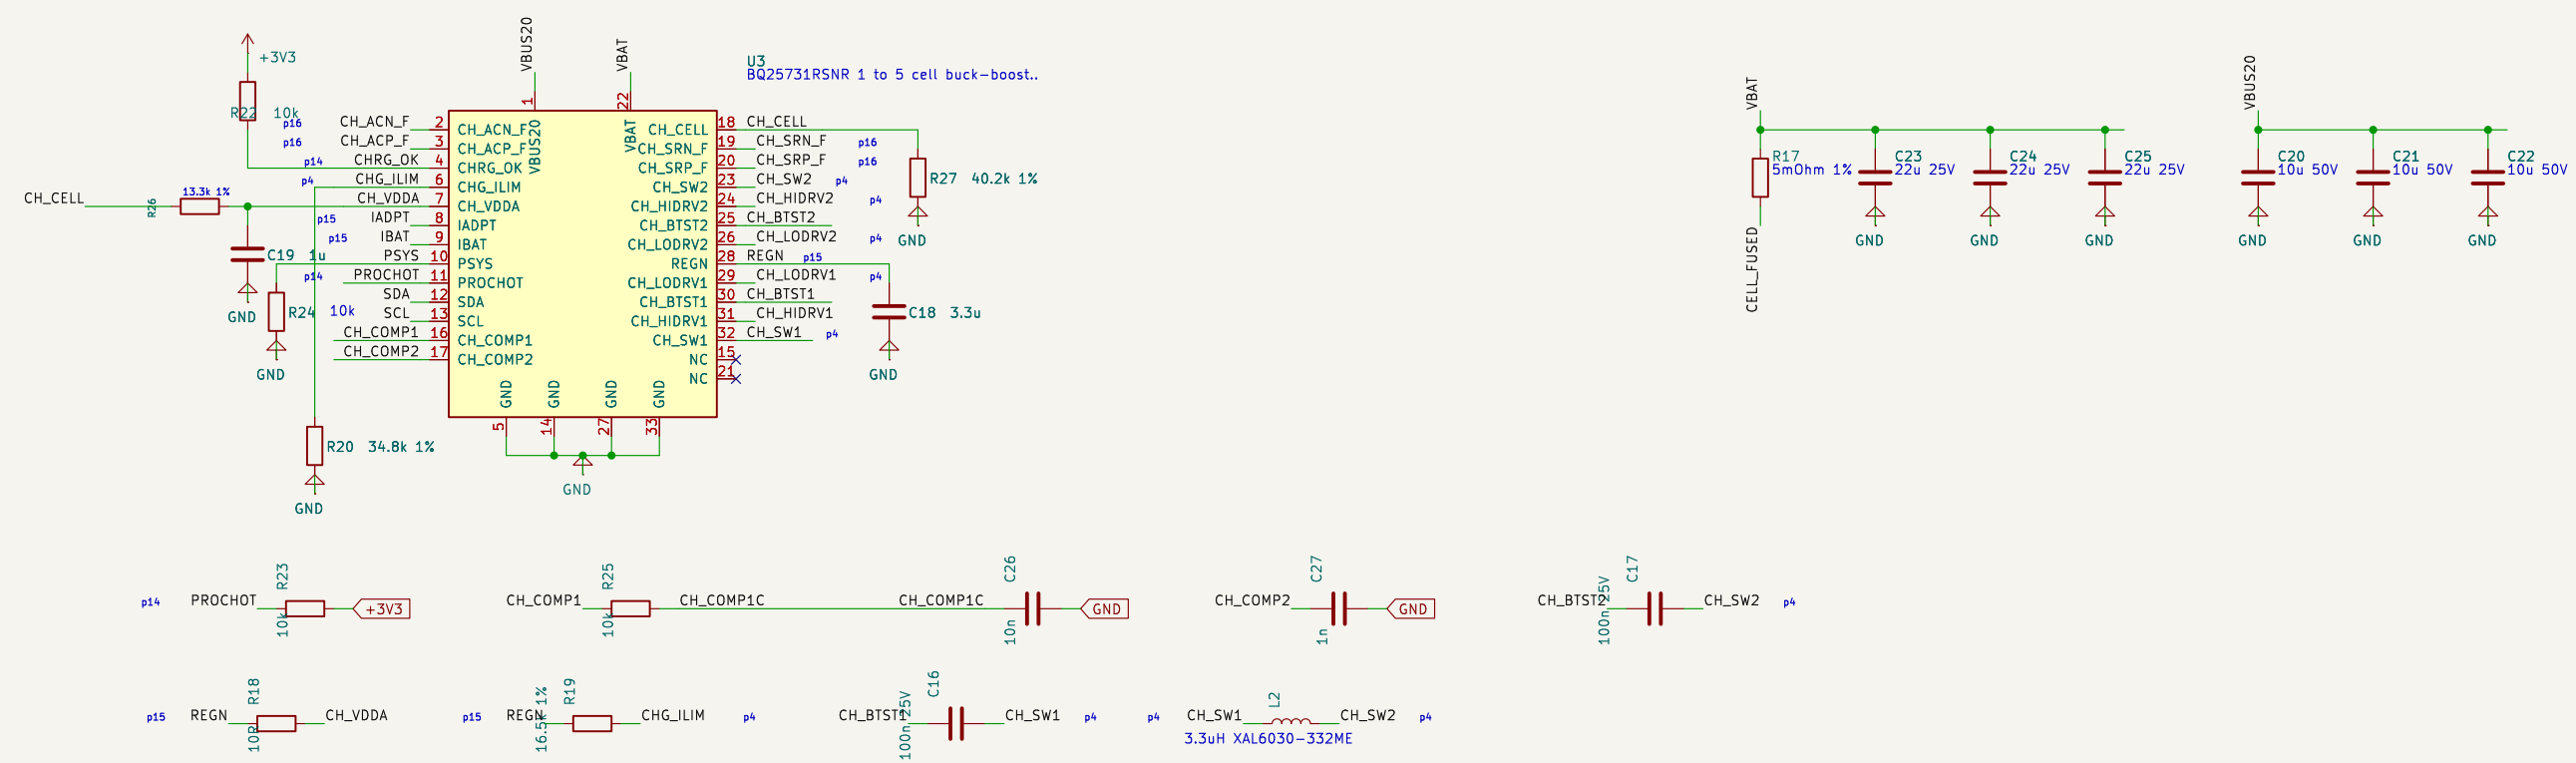

CHARGER BQ25731: 4S FROM THE 20 V BUS, SYSTEM ON VSYS (VBAT), PACK BEYOND RSR, I2C 0x6B (continued)

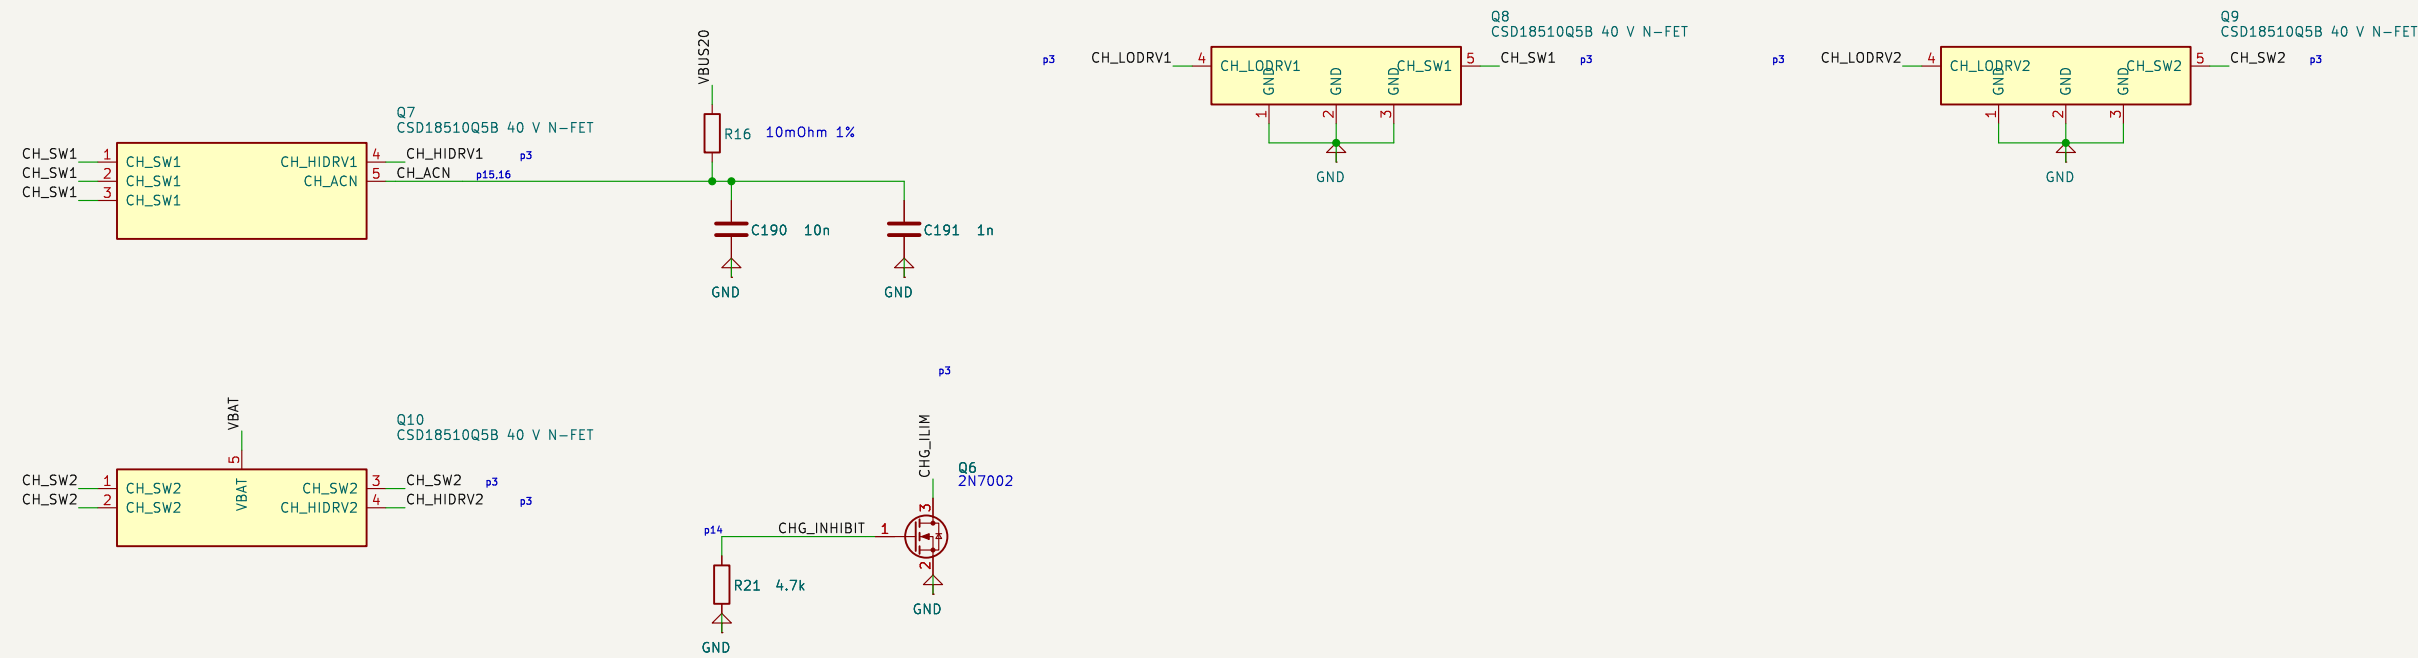


SLOT RAIL S1: AP64500 5.1 V + INA226 0x40

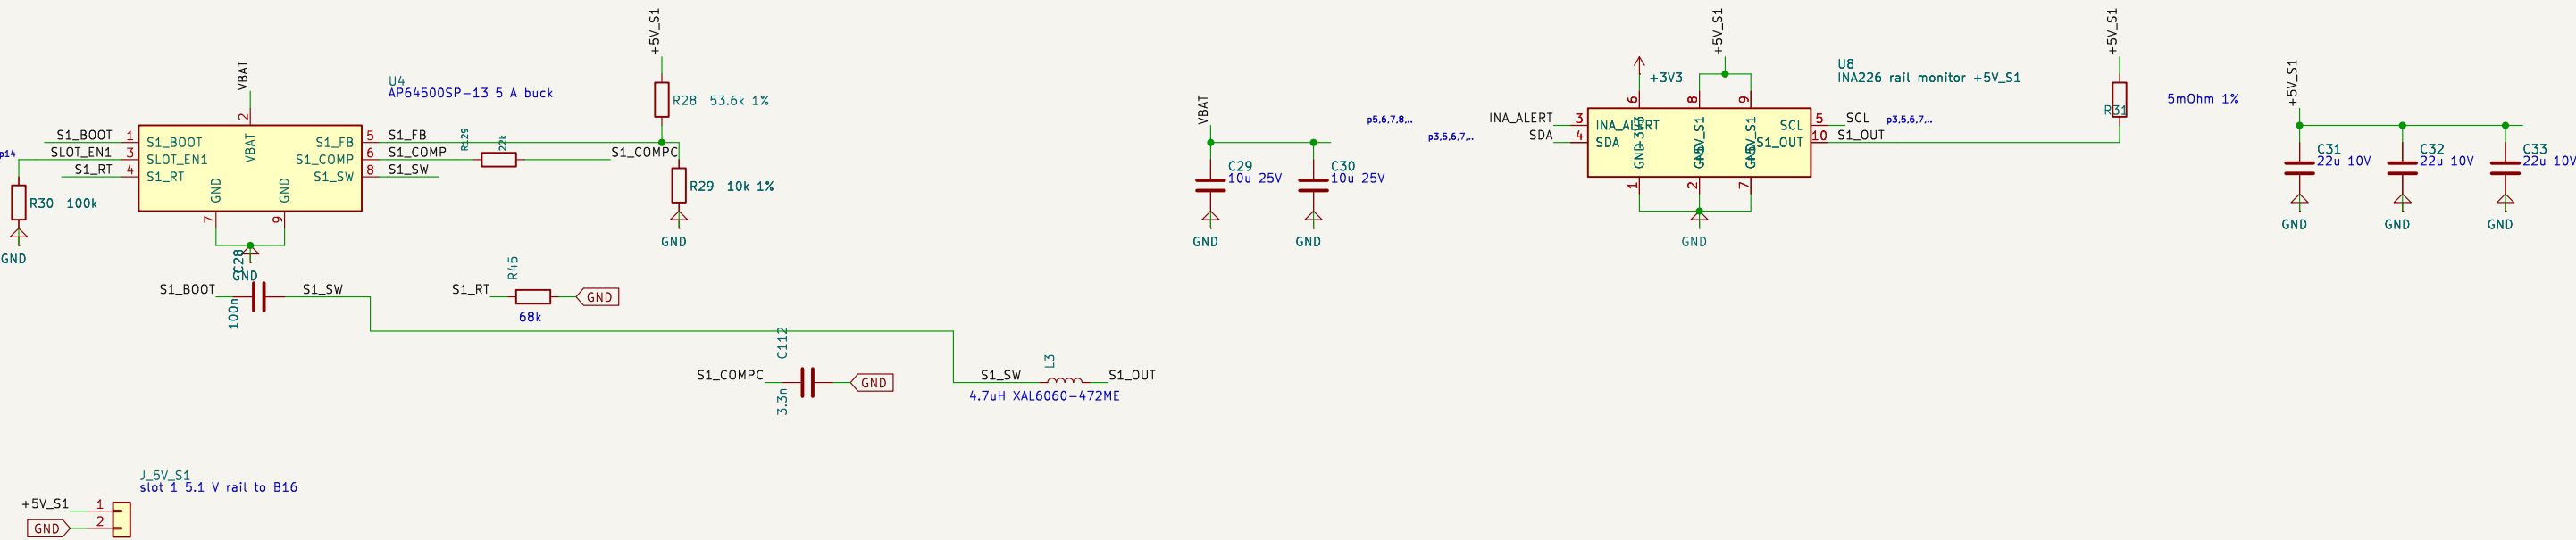


SLOT RAIL S2


SLOT RAIL S2: LM5176 5.1 V (7.2 A MINIMUM LIMIT) + INA226 0x41

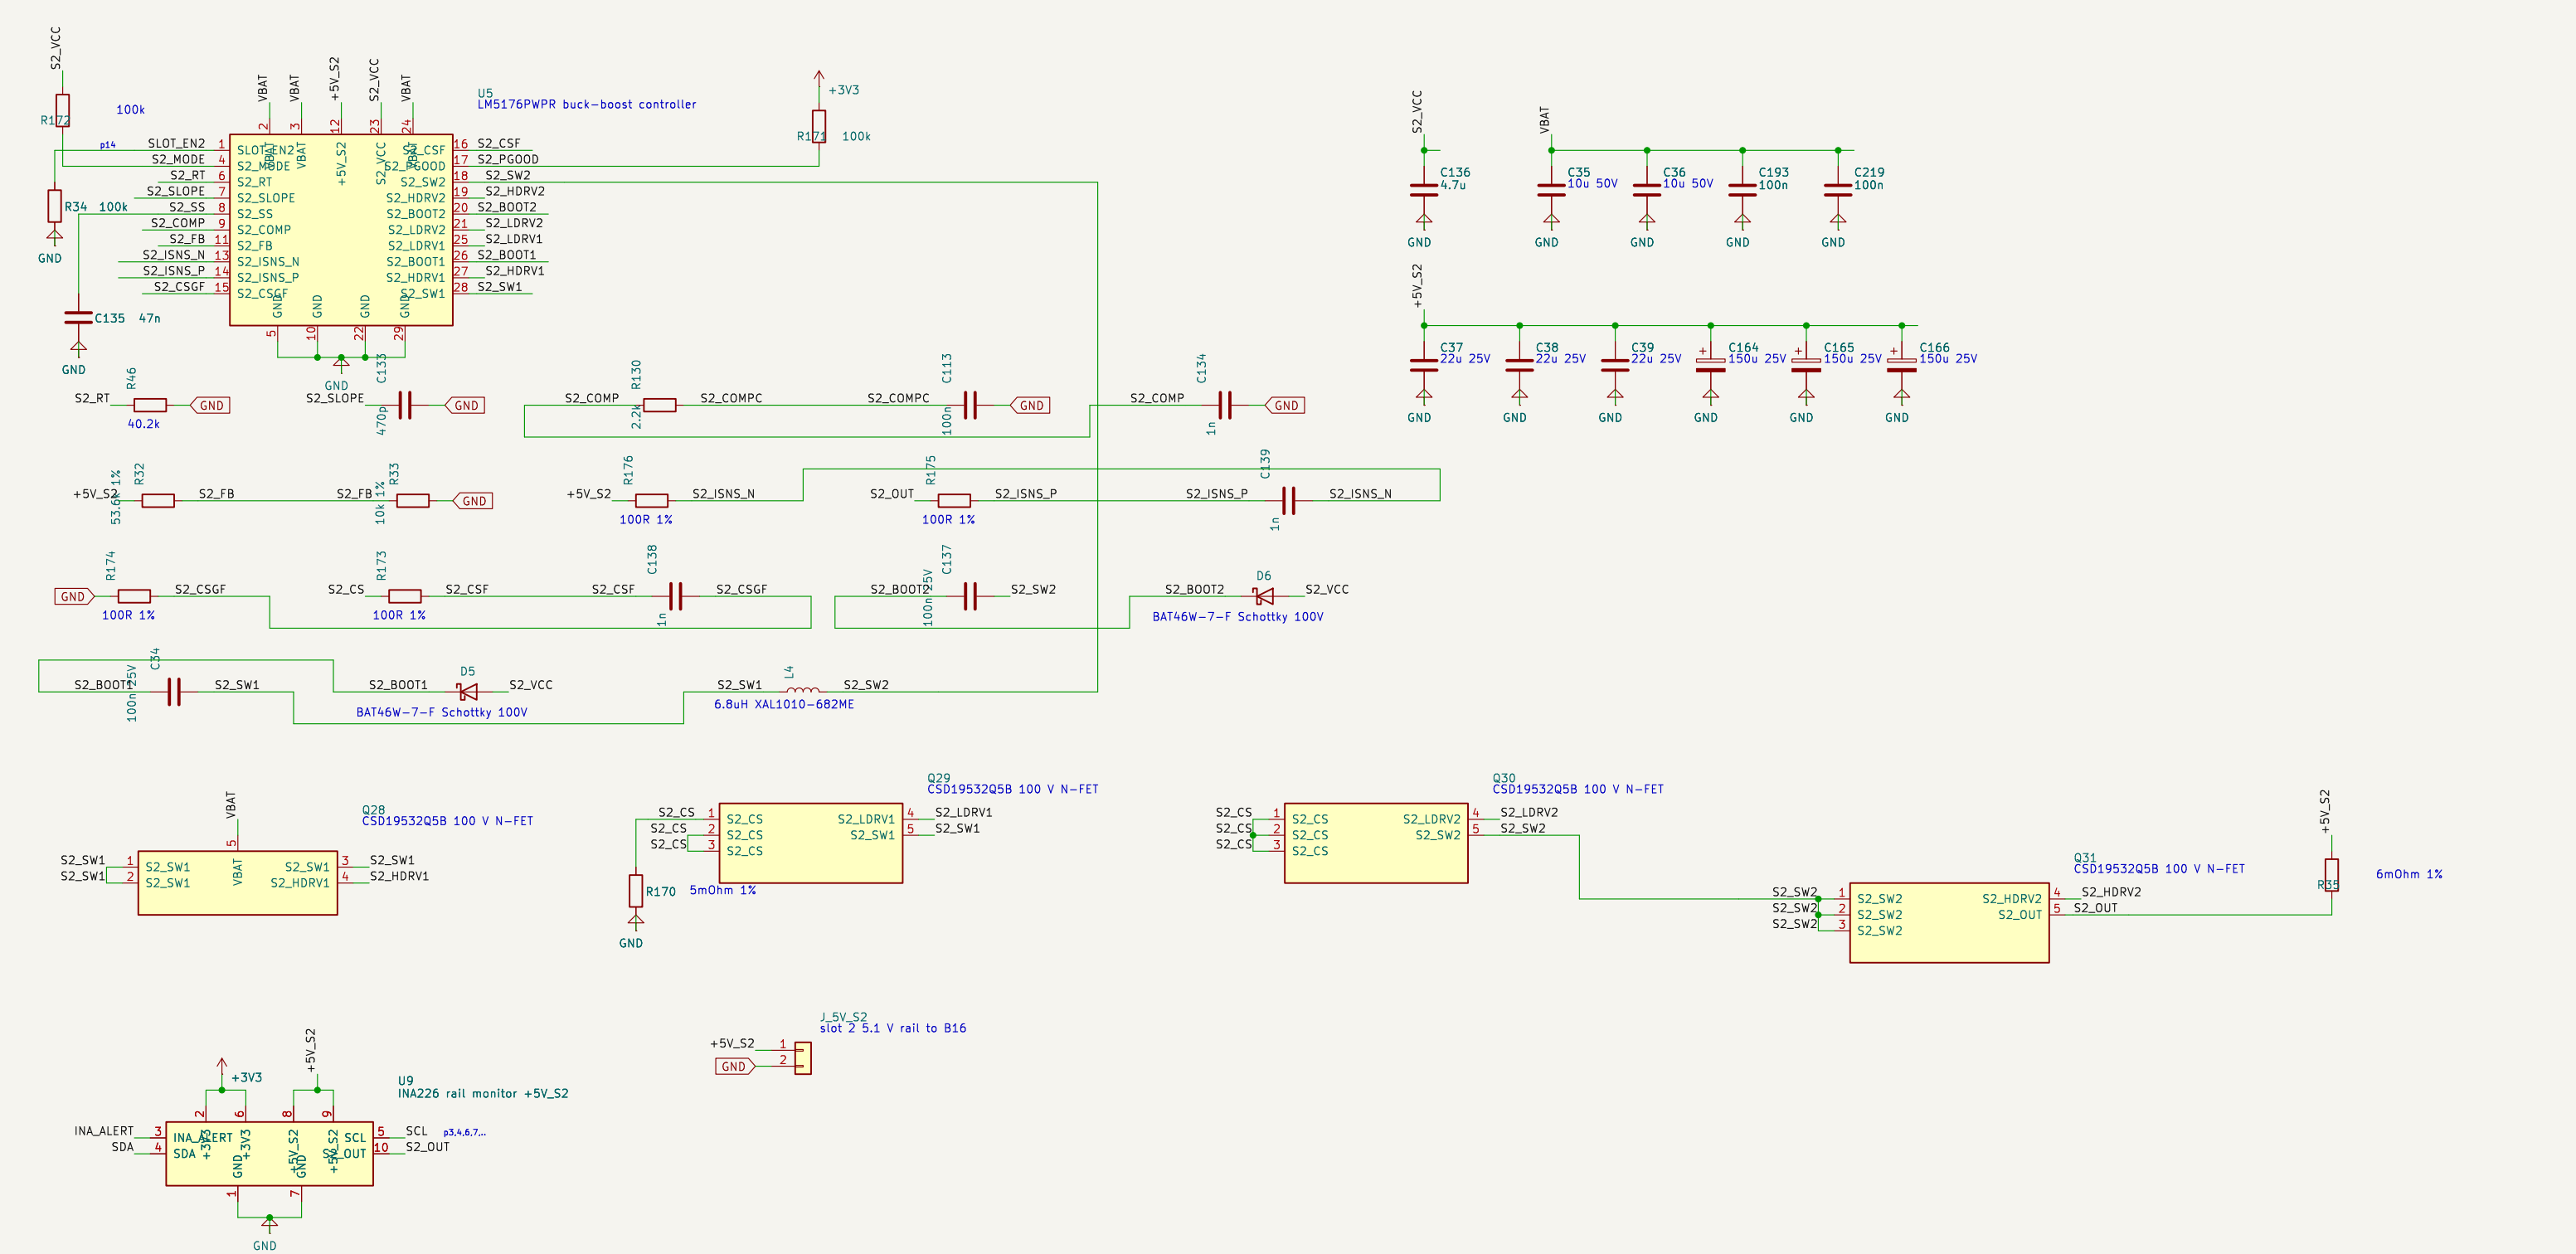


SLOT RAIL S3: AP64500 5.1 V + INA226 0x44

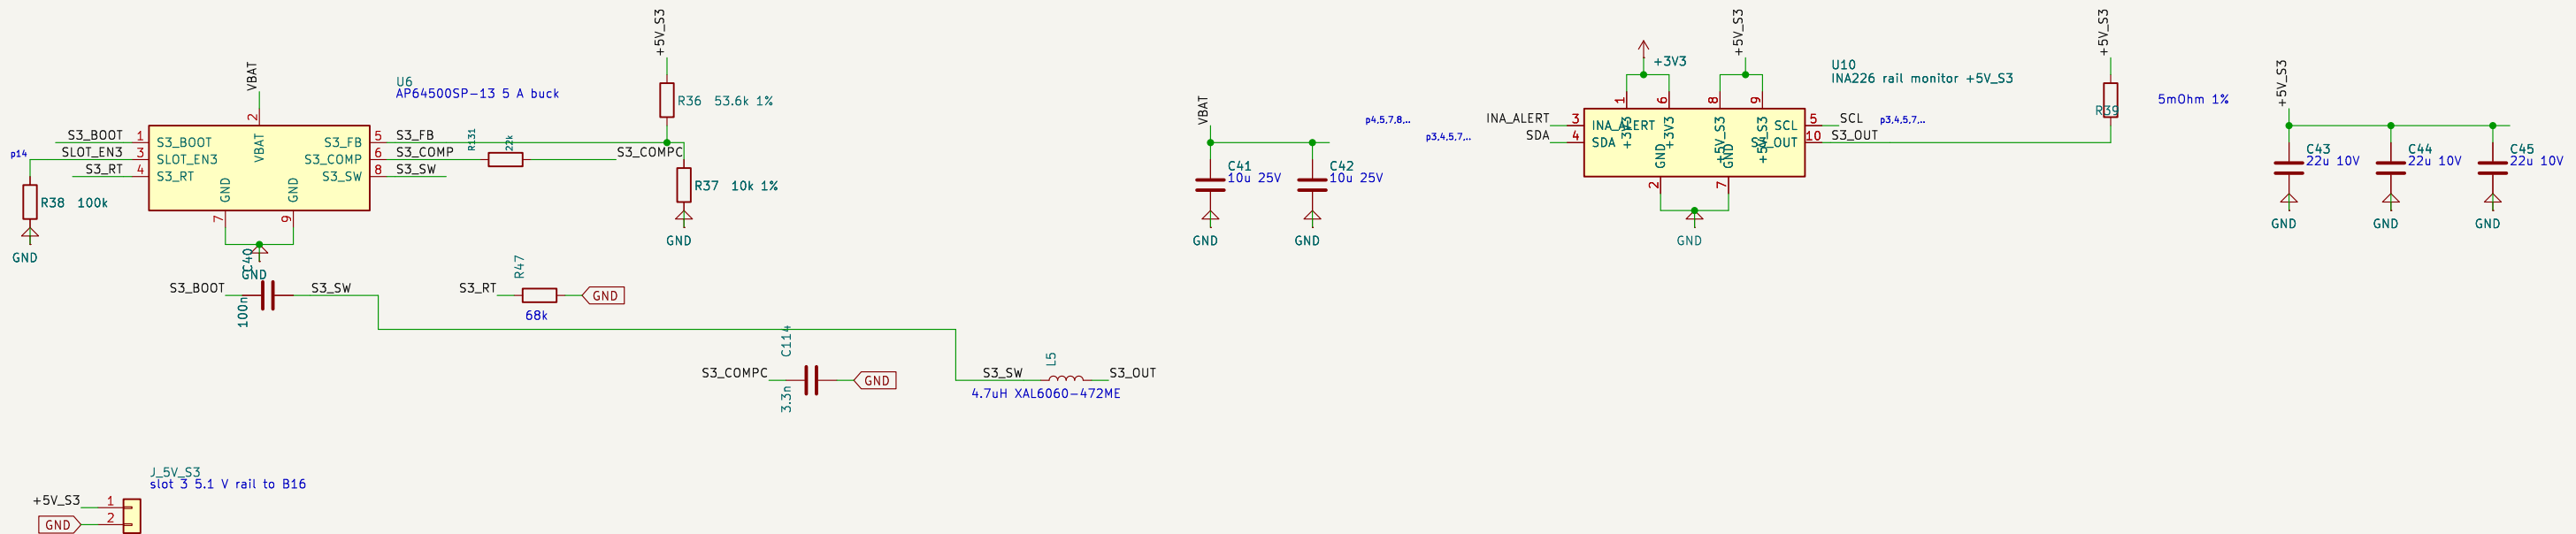


DEVICE RAIL: LM5176 5.1 V (7.2 A MINIMUM LIMIT) + INA226 0x45

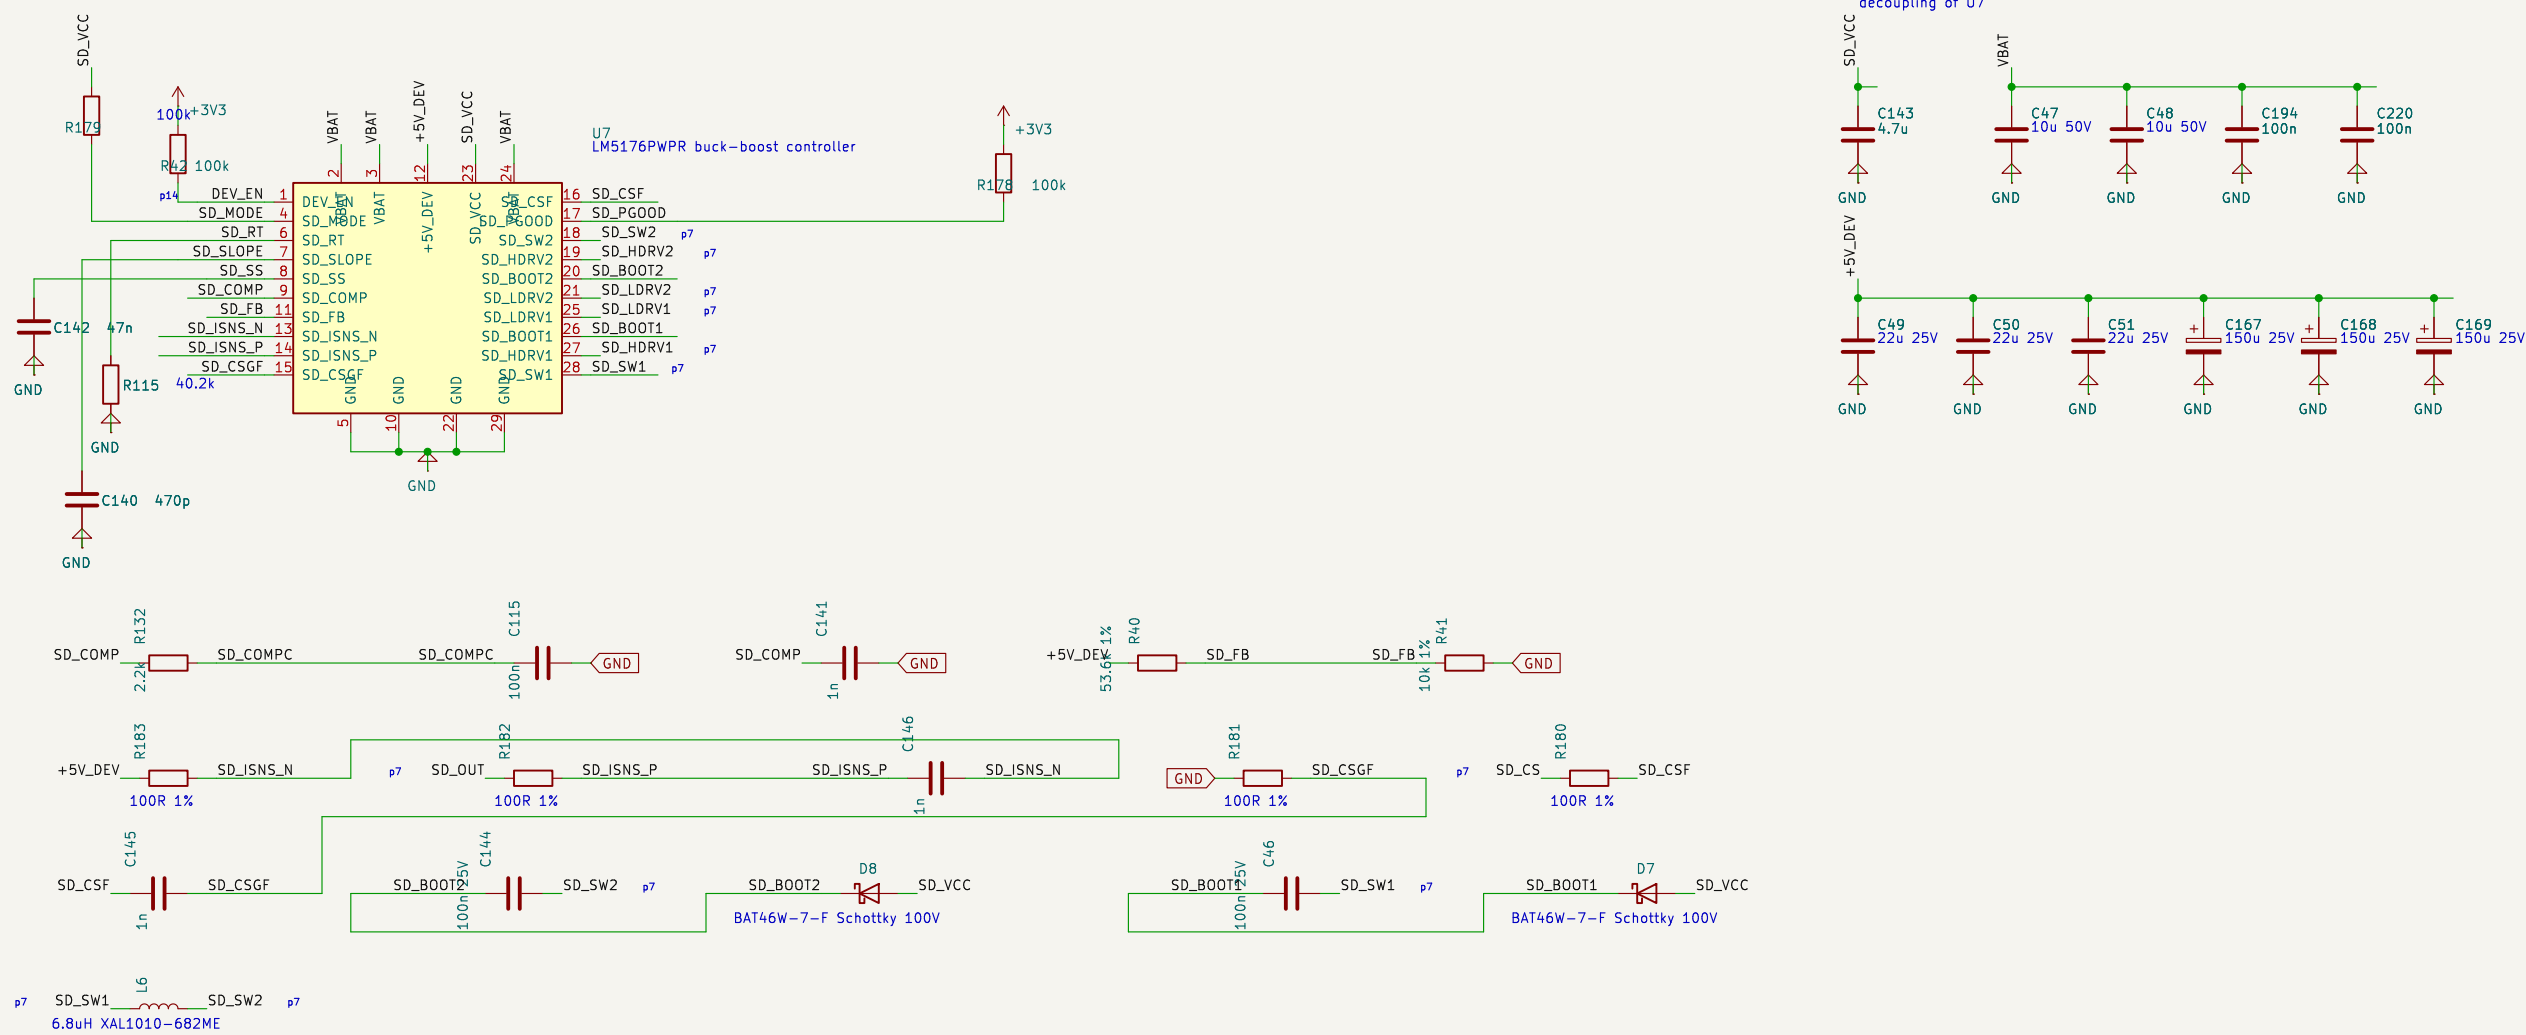


DEVICE RAIL: LM5176 5.1 V (7.2 A MINIMUM LIMIT) + INA226 0x45 (continued)

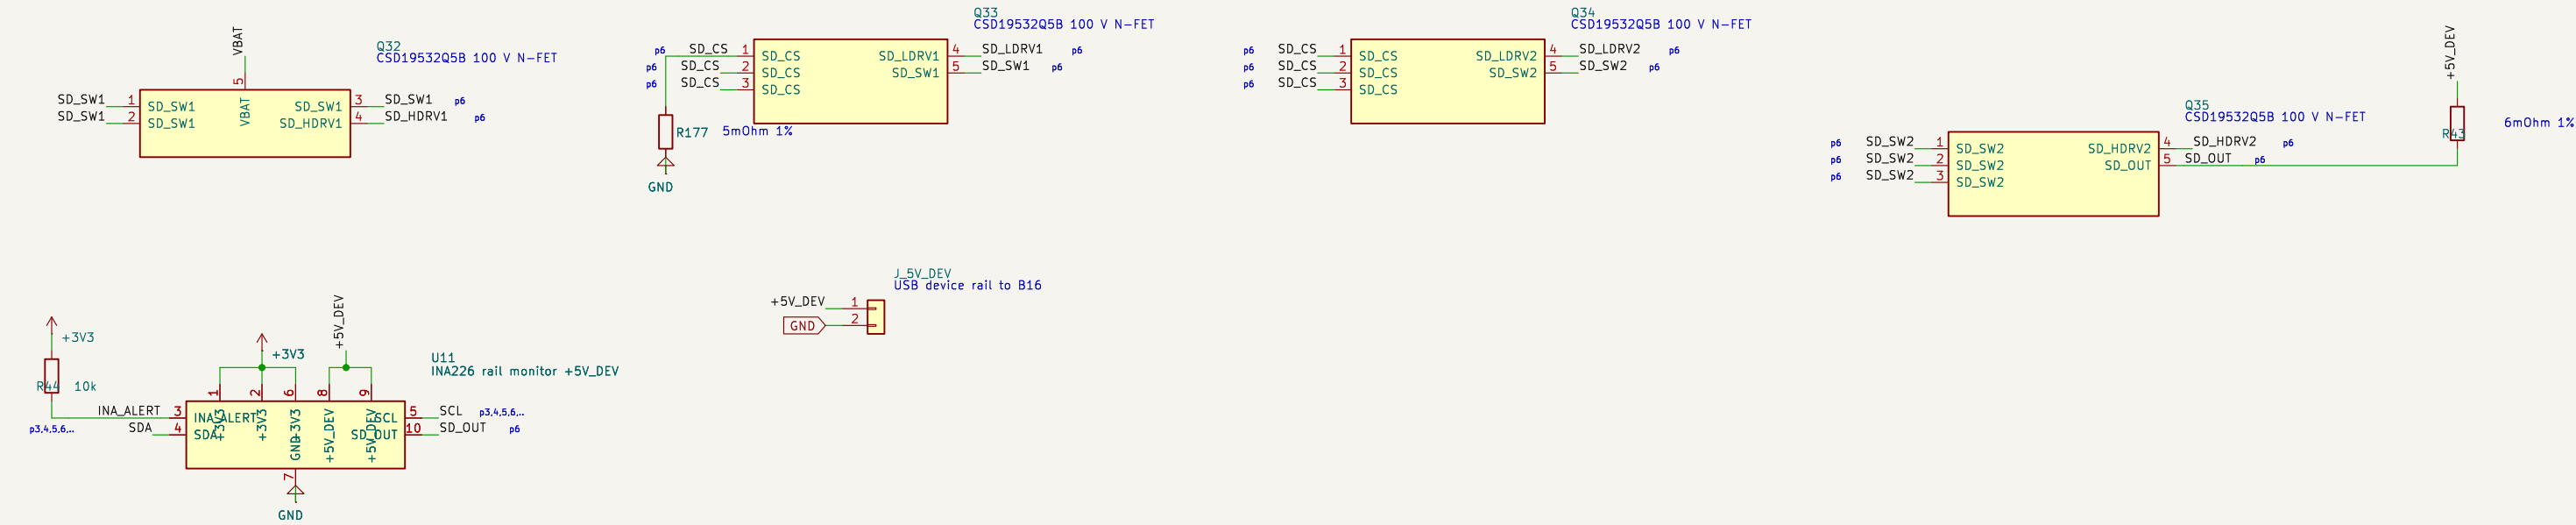


3.3 V LOGIC: TPS62933

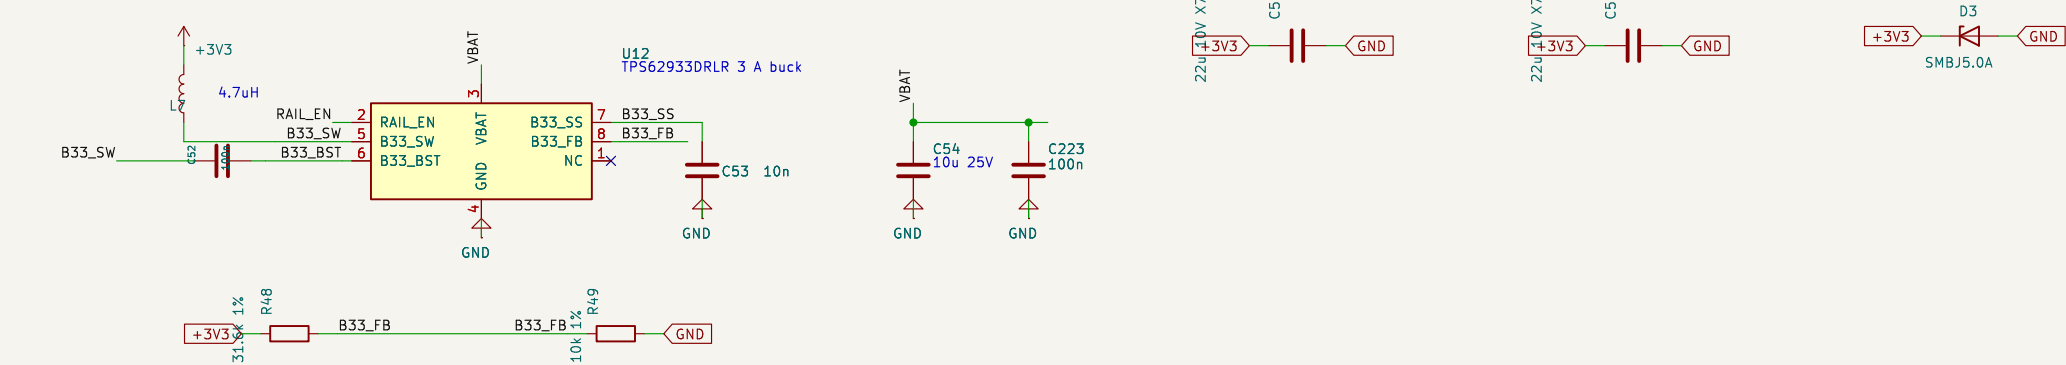


PA RAIL: LM5176 13.8 V 6 A, EMCON GATED, INA226 0x46

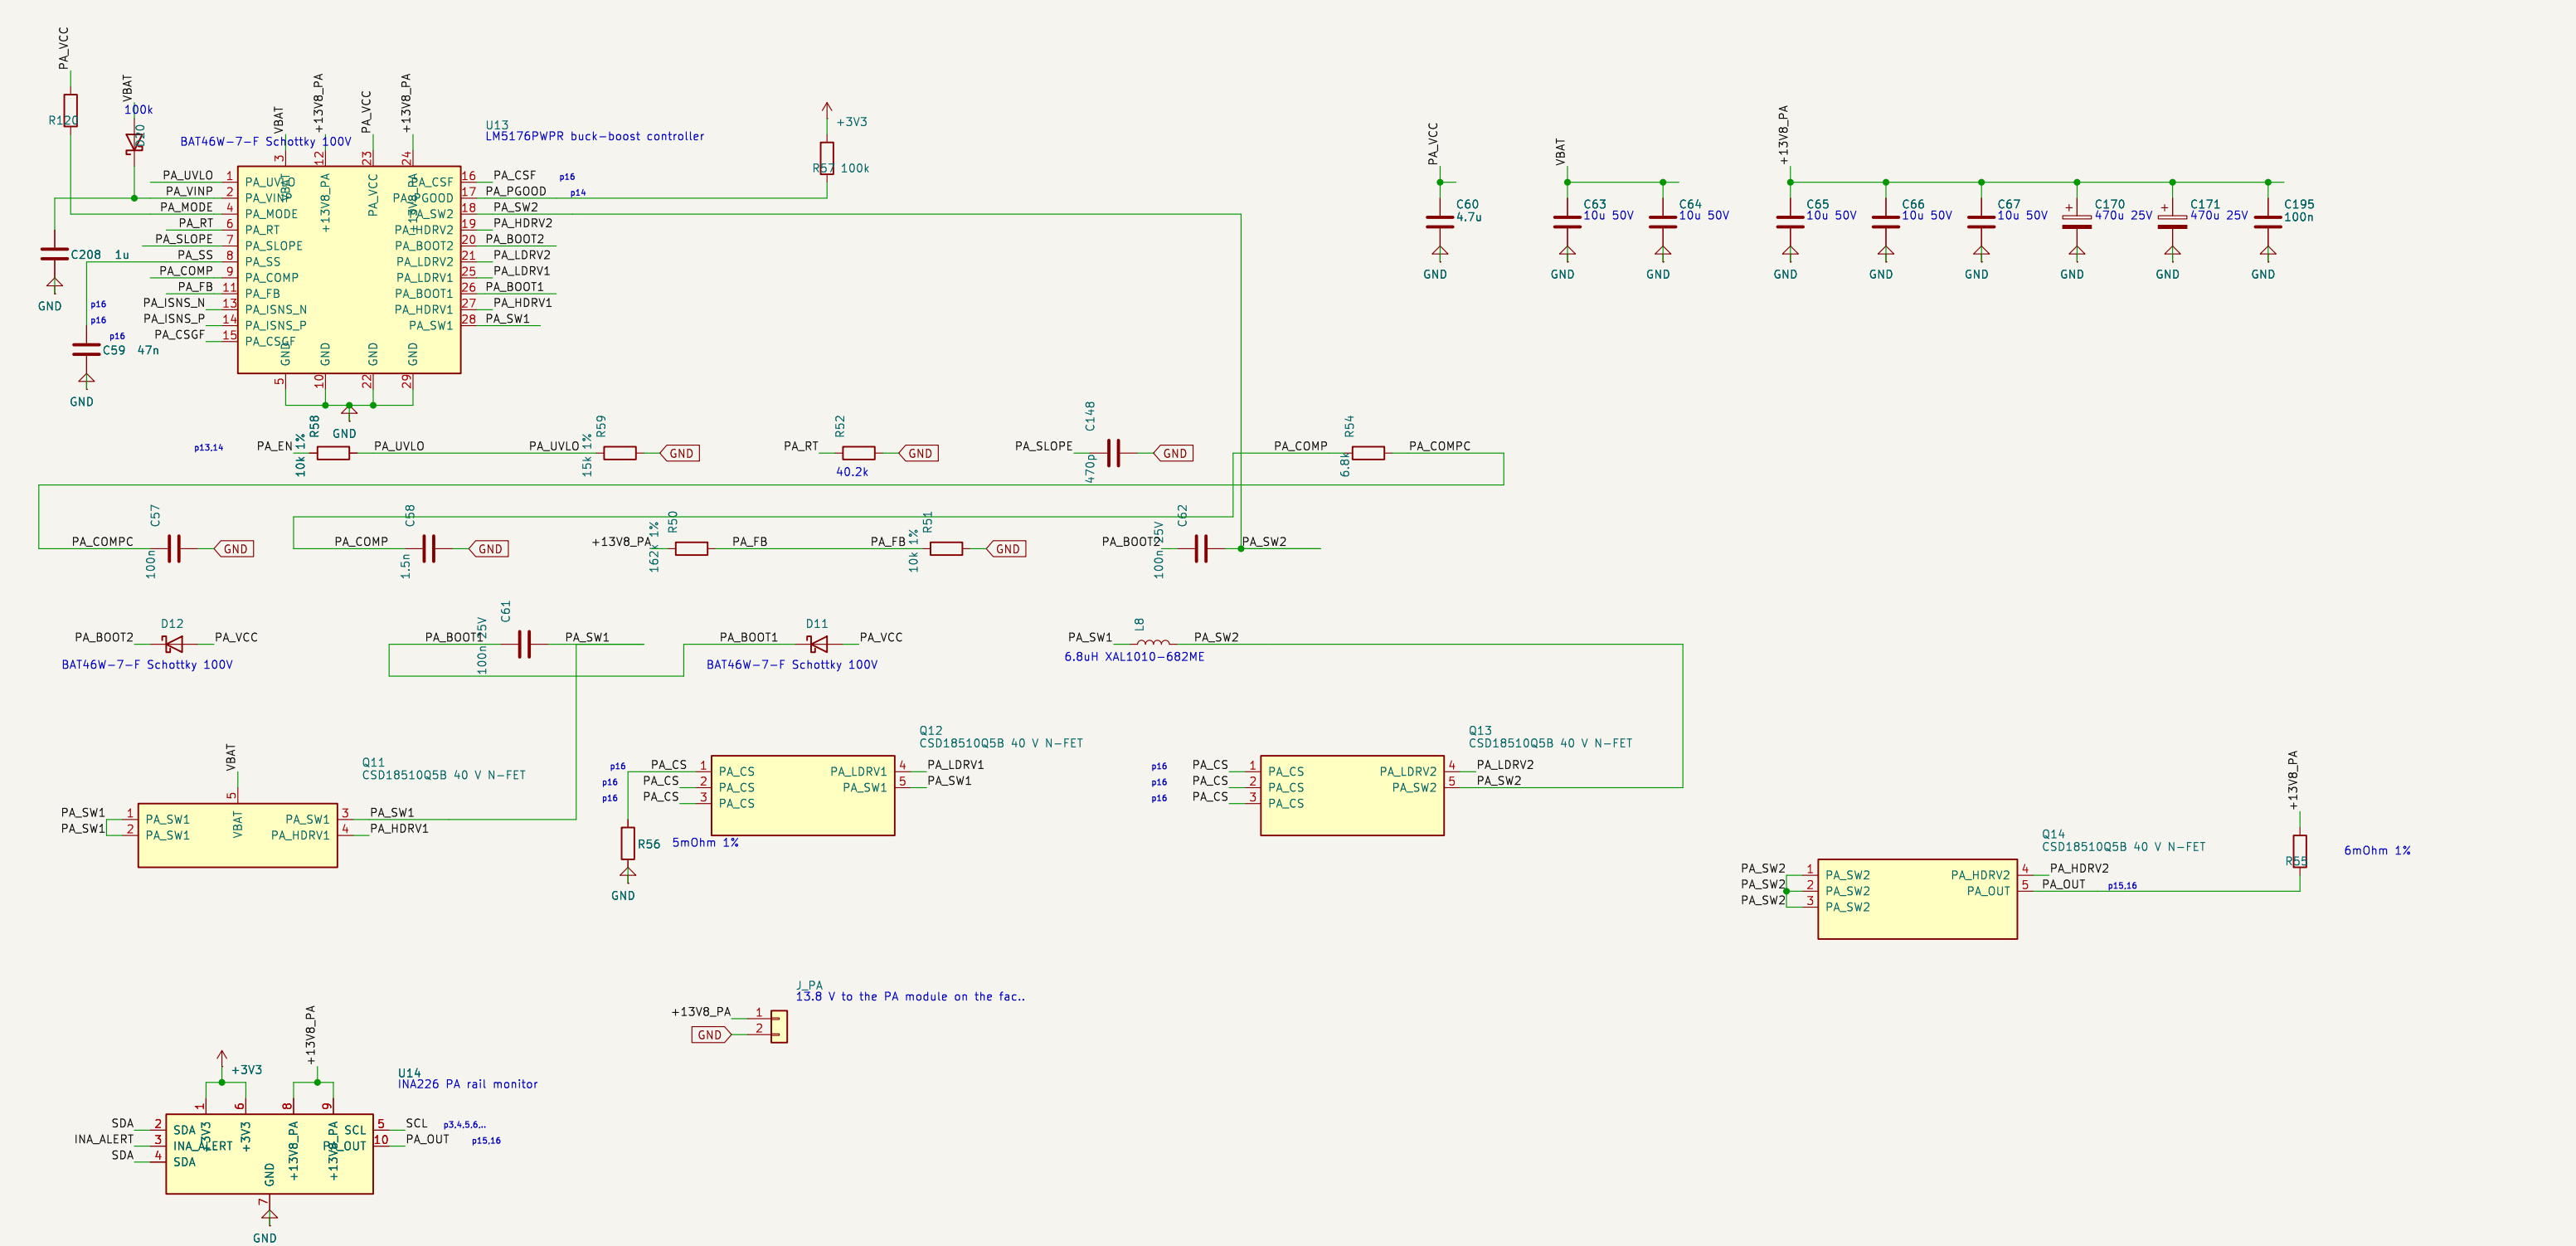


HF RAIL: LM5176 12.0 V 2 A, EMCON GATED

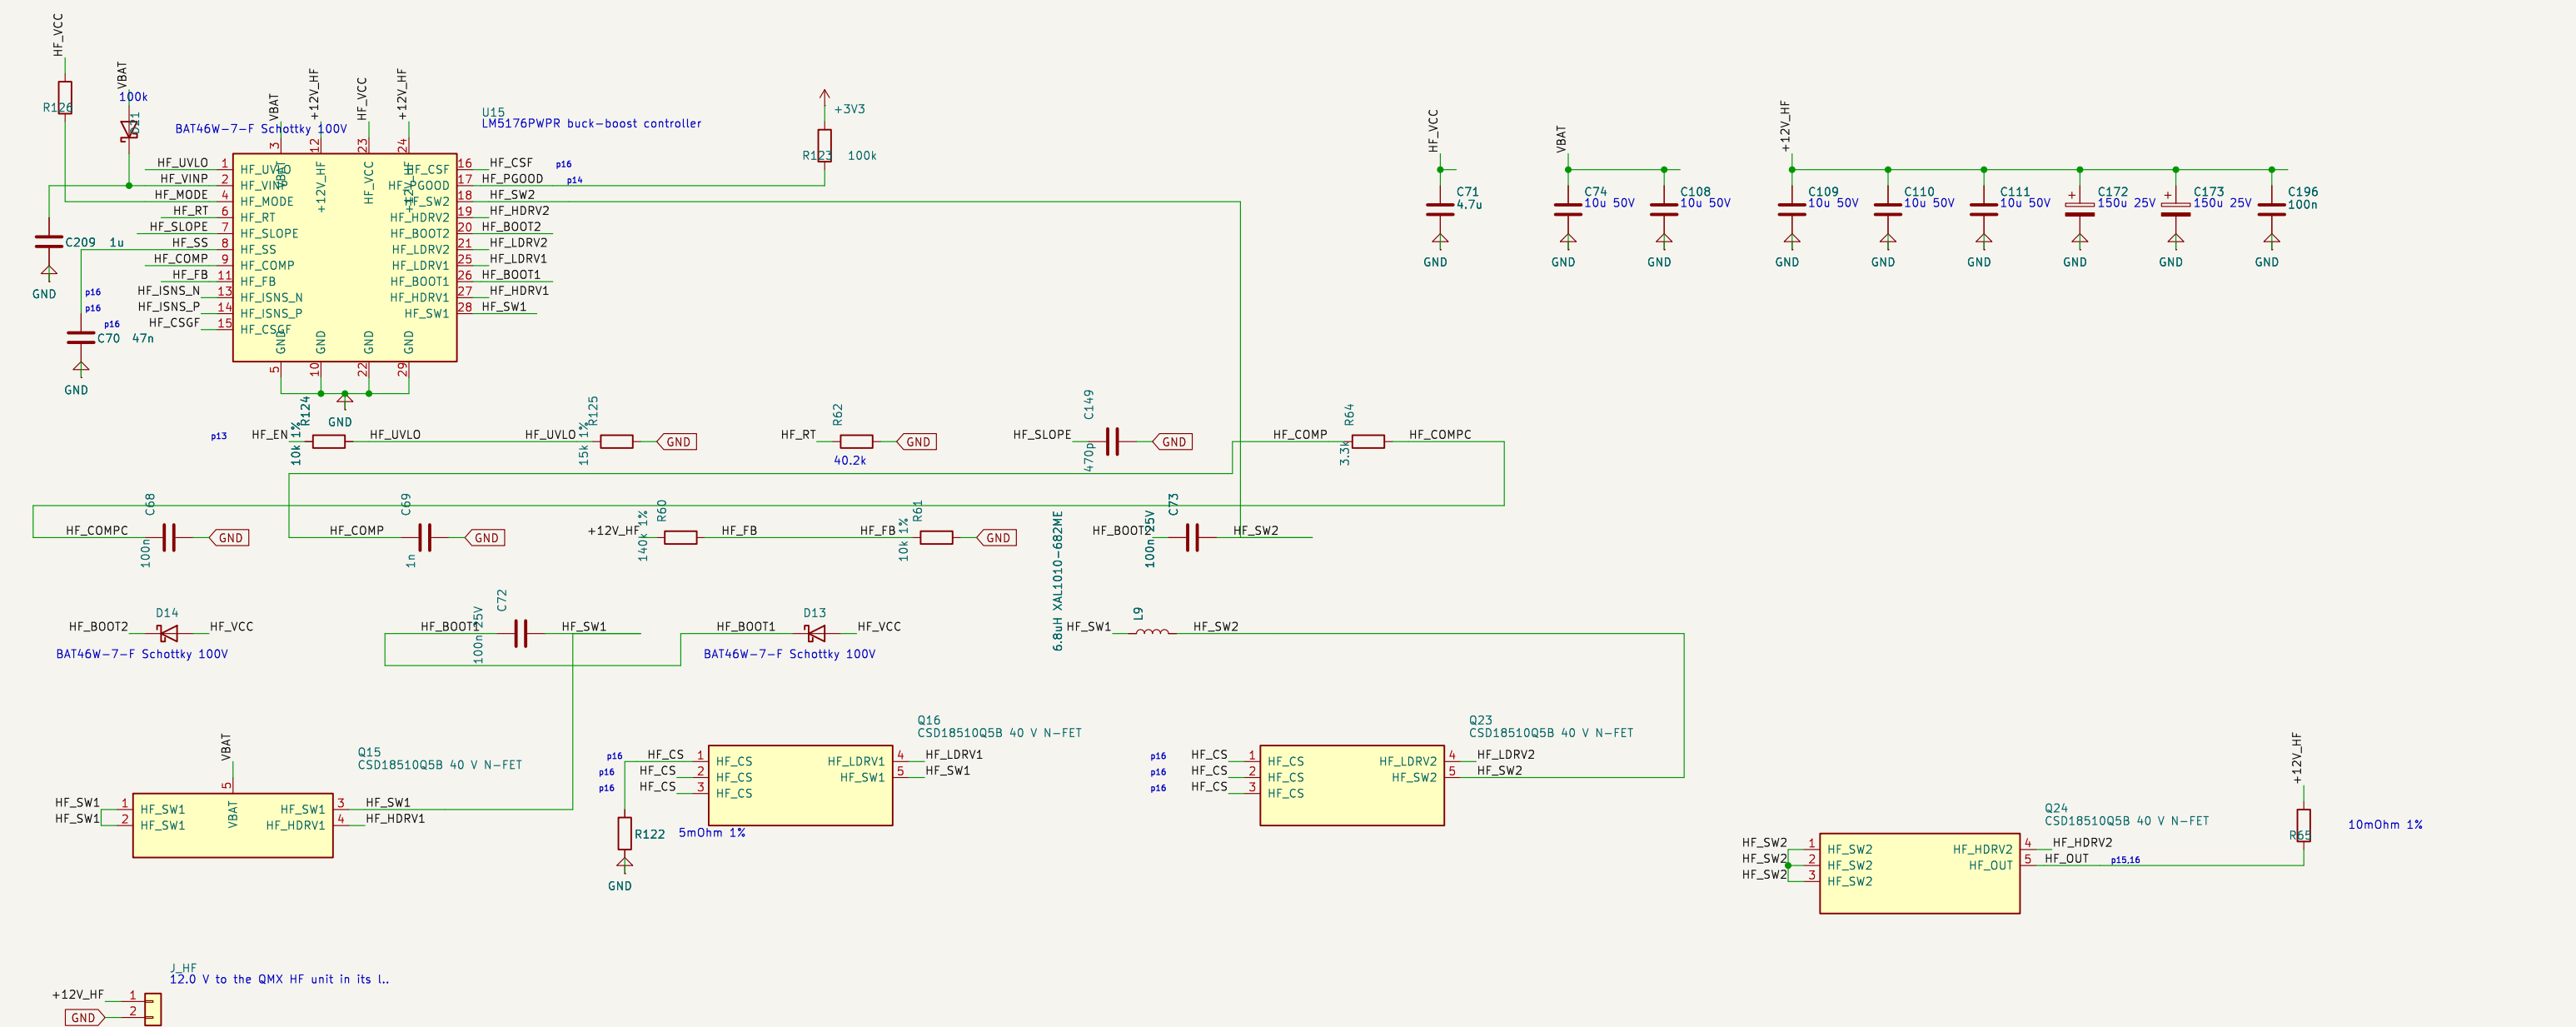


POE RAIL: LM5176 BOOST 54 V 0.6 A, INA226 0x47

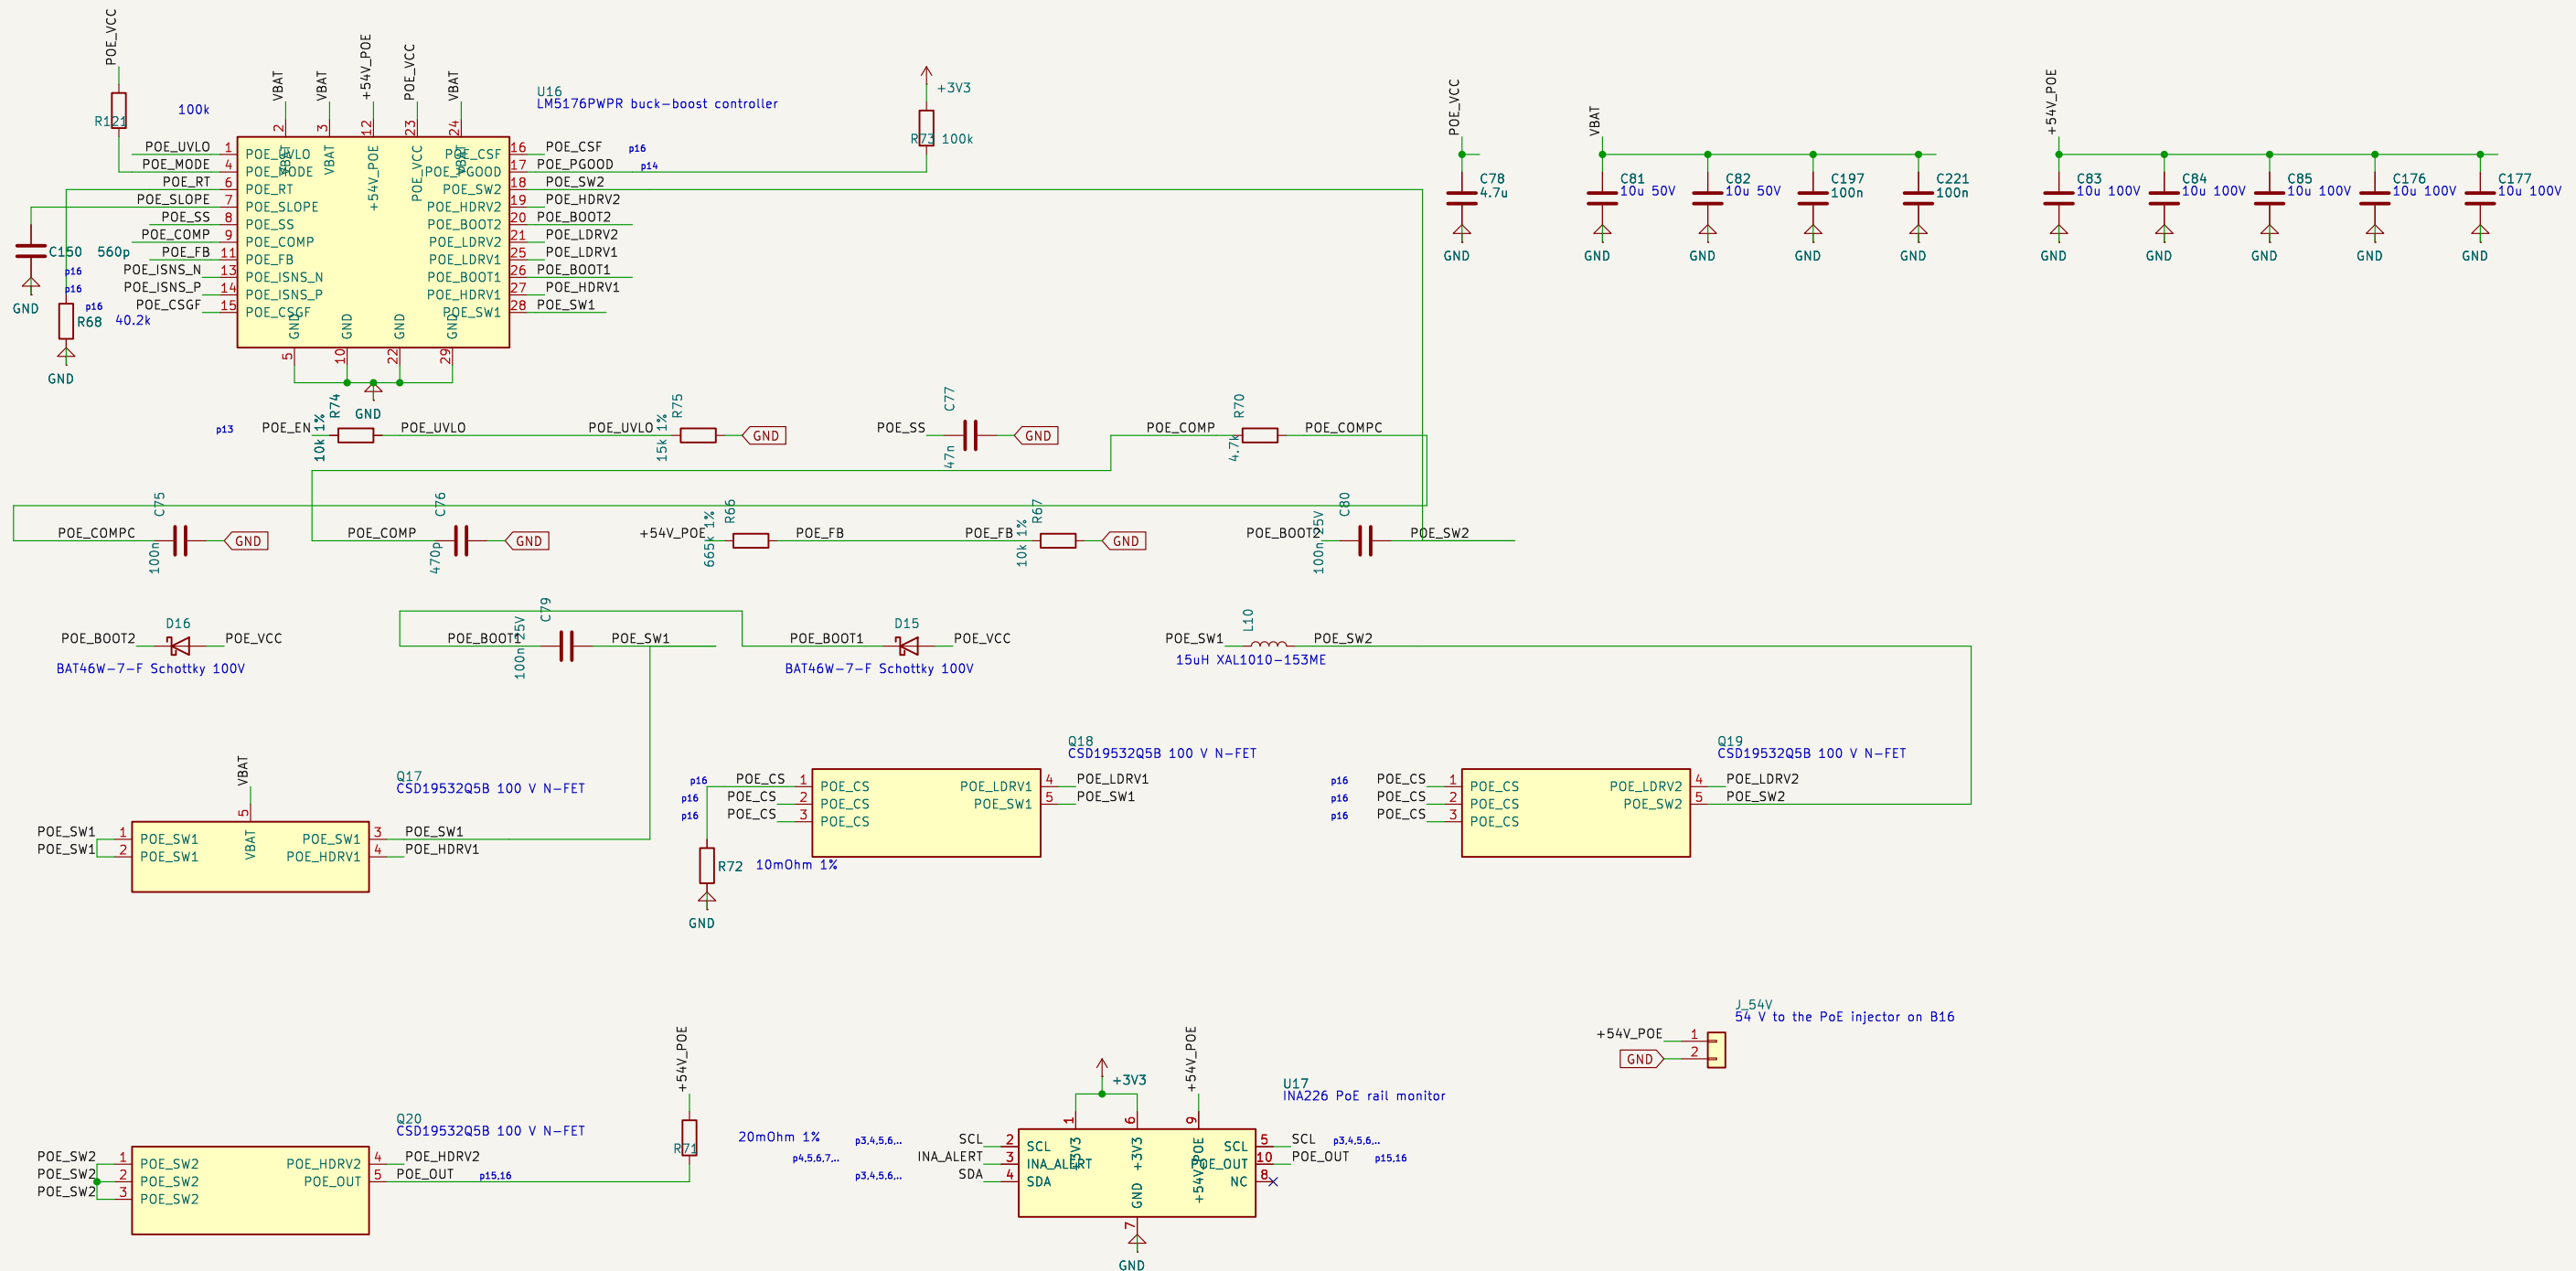


decoupling of U19

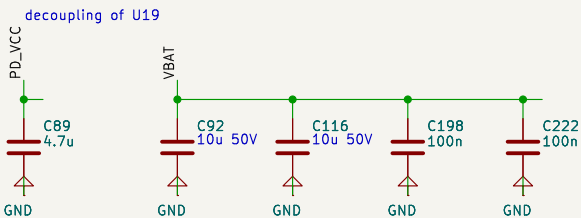

USB-C PD OUTLET: TPS25740A + LM5176 5/9/15 V STAGE (continued)

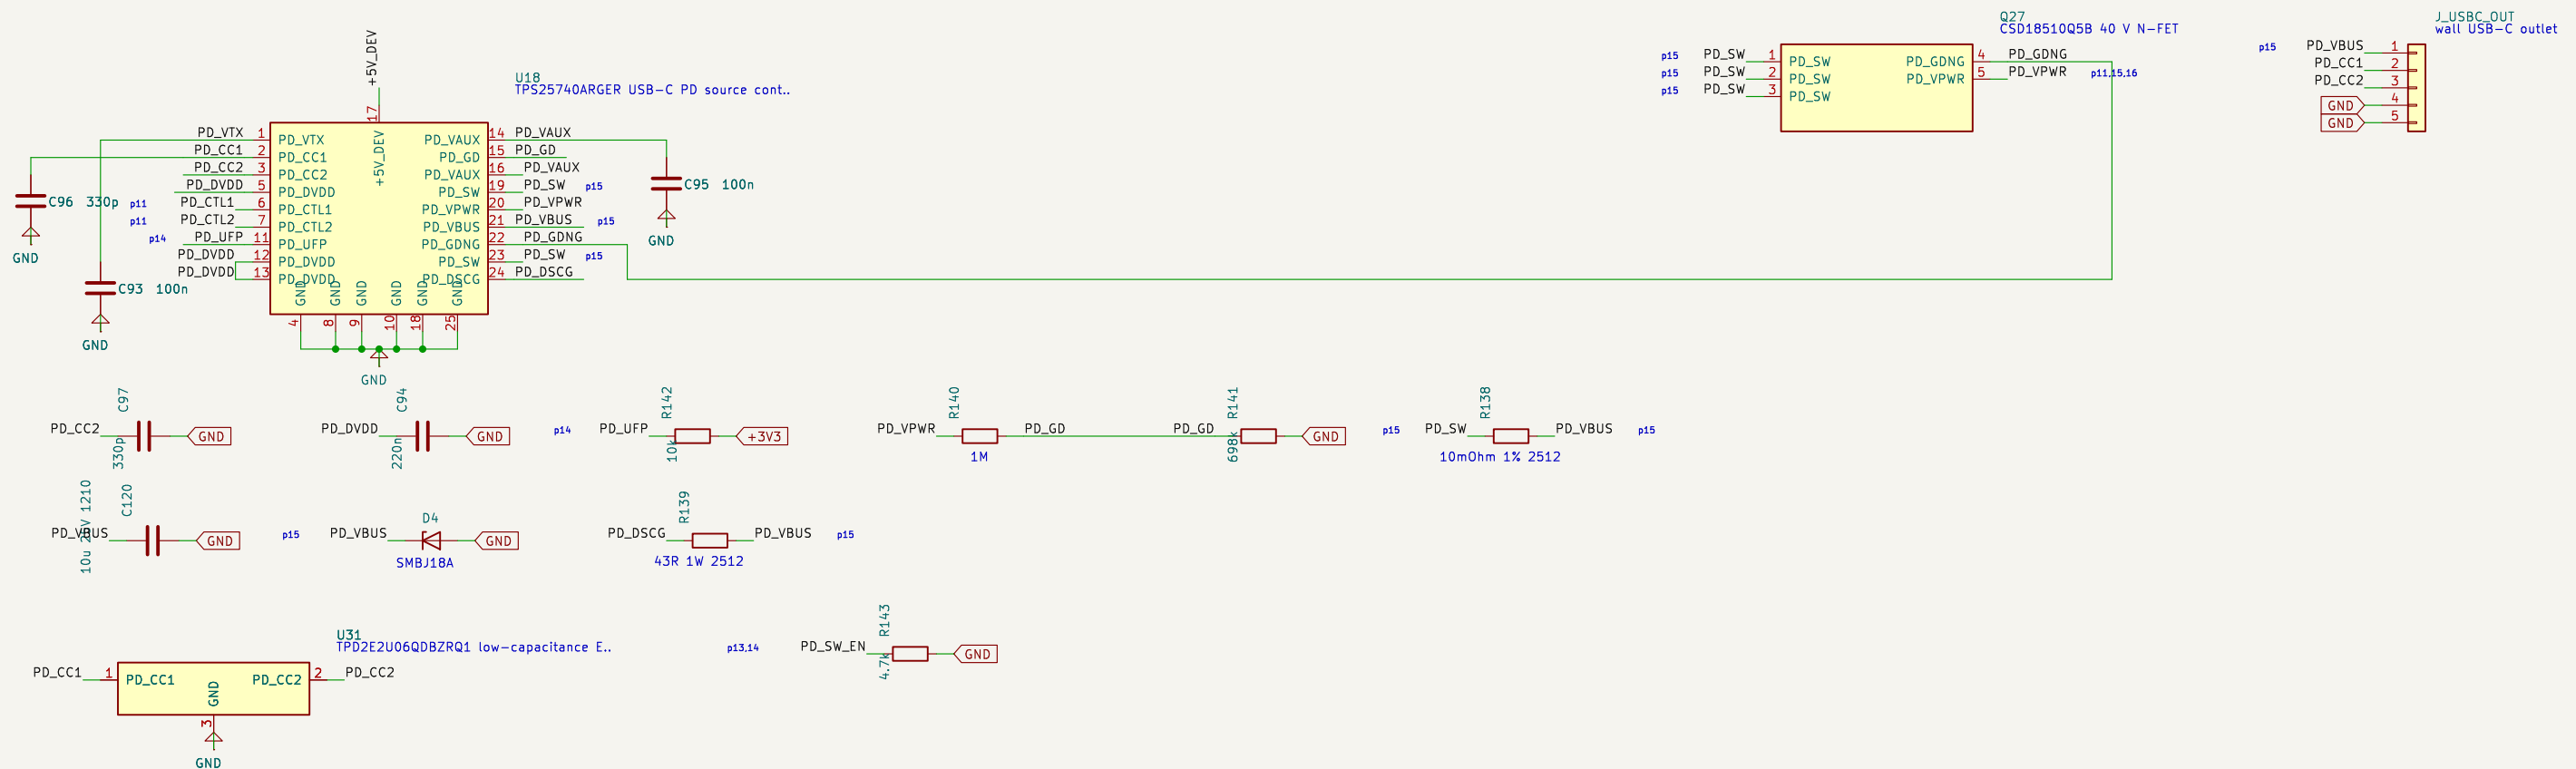


EFUSES: MONITOR, HEATER (12.0 V BUCK), D8 5 V

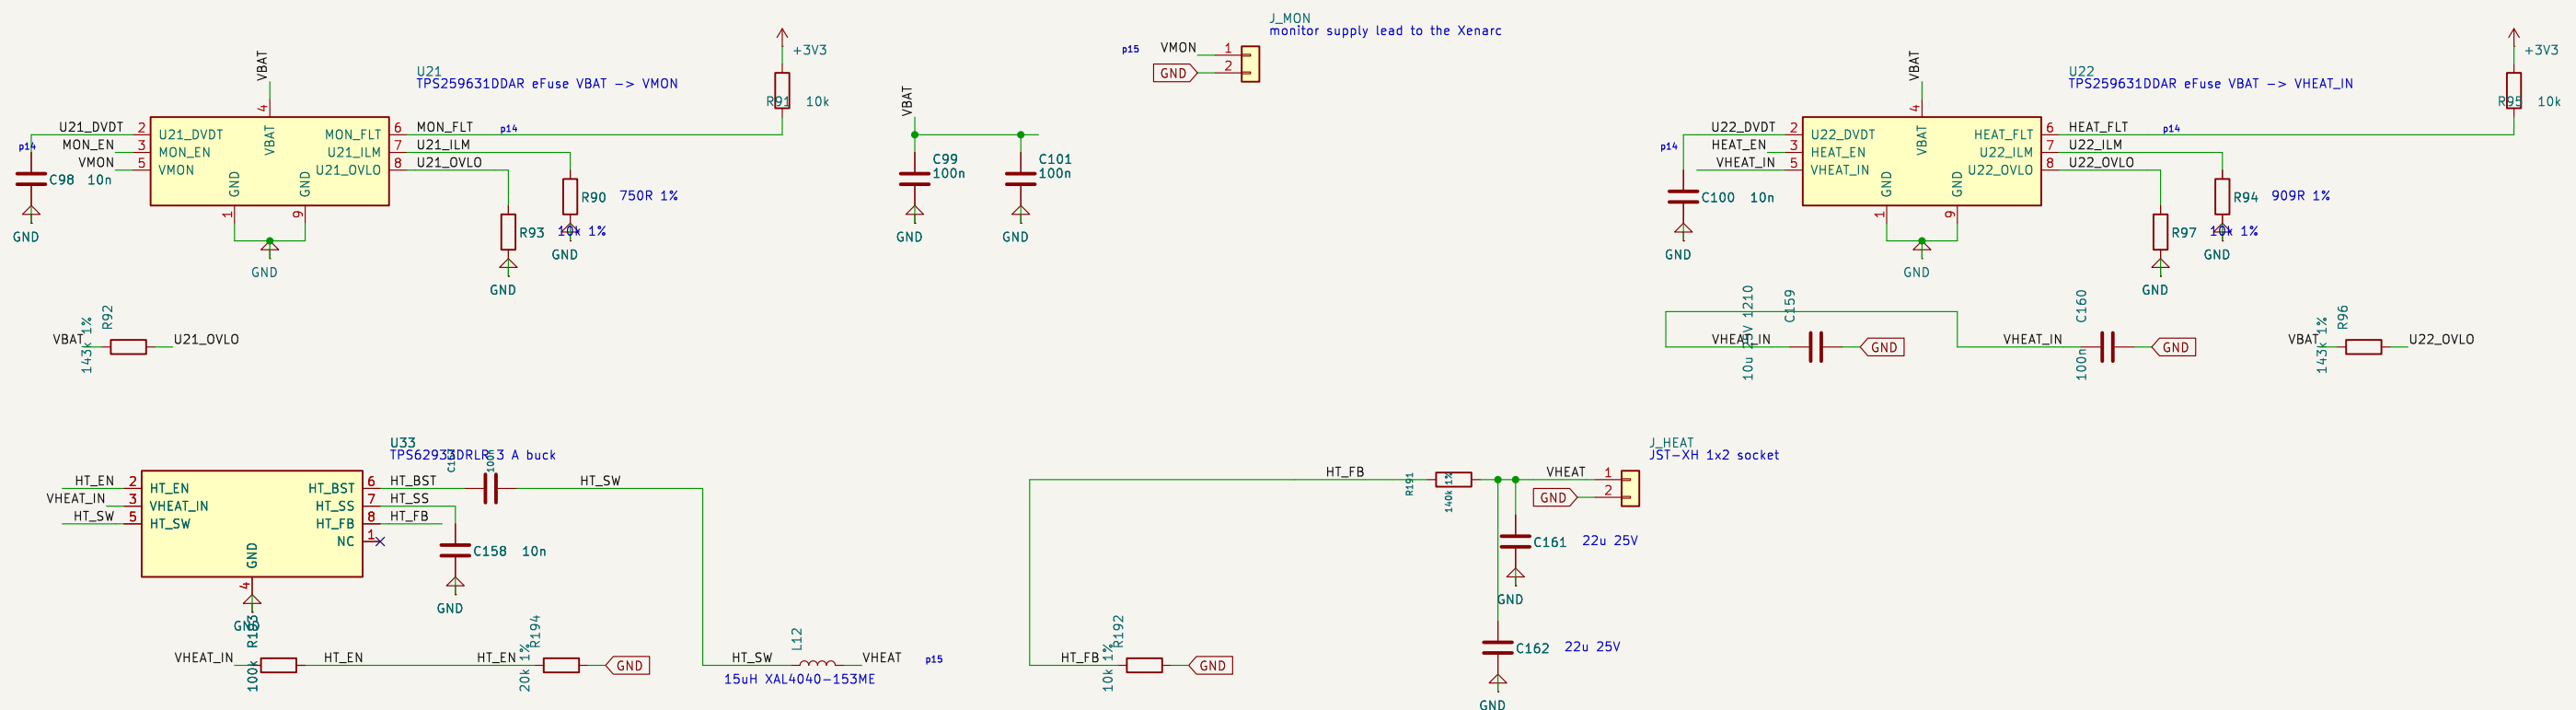


EFUSES | EMCON GATES 74AUP1G08 (BOTH LINES) ON THEIR OWN SUPPLY (U39 EFUSE, U40), OUTLET INTERLOCK 74LVC08, EXPANDERS 0x21 0x24

EFUSES: MONITOR, HEATER (12.0 V BUCK), D8 5 V (continued)

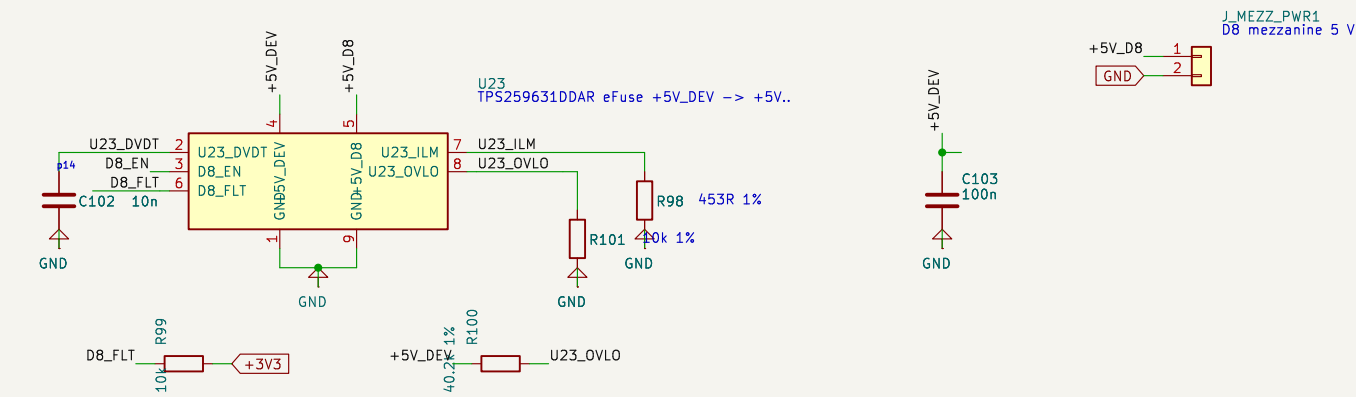


EMCON GATES 74AUP1G08 (BOTH LINES) ON THEIR OWN SUPPLY (U39 EFUSE, U40), OUTLET INTERLOCK 74LVC08, EXPANDERS 0x21 0x24

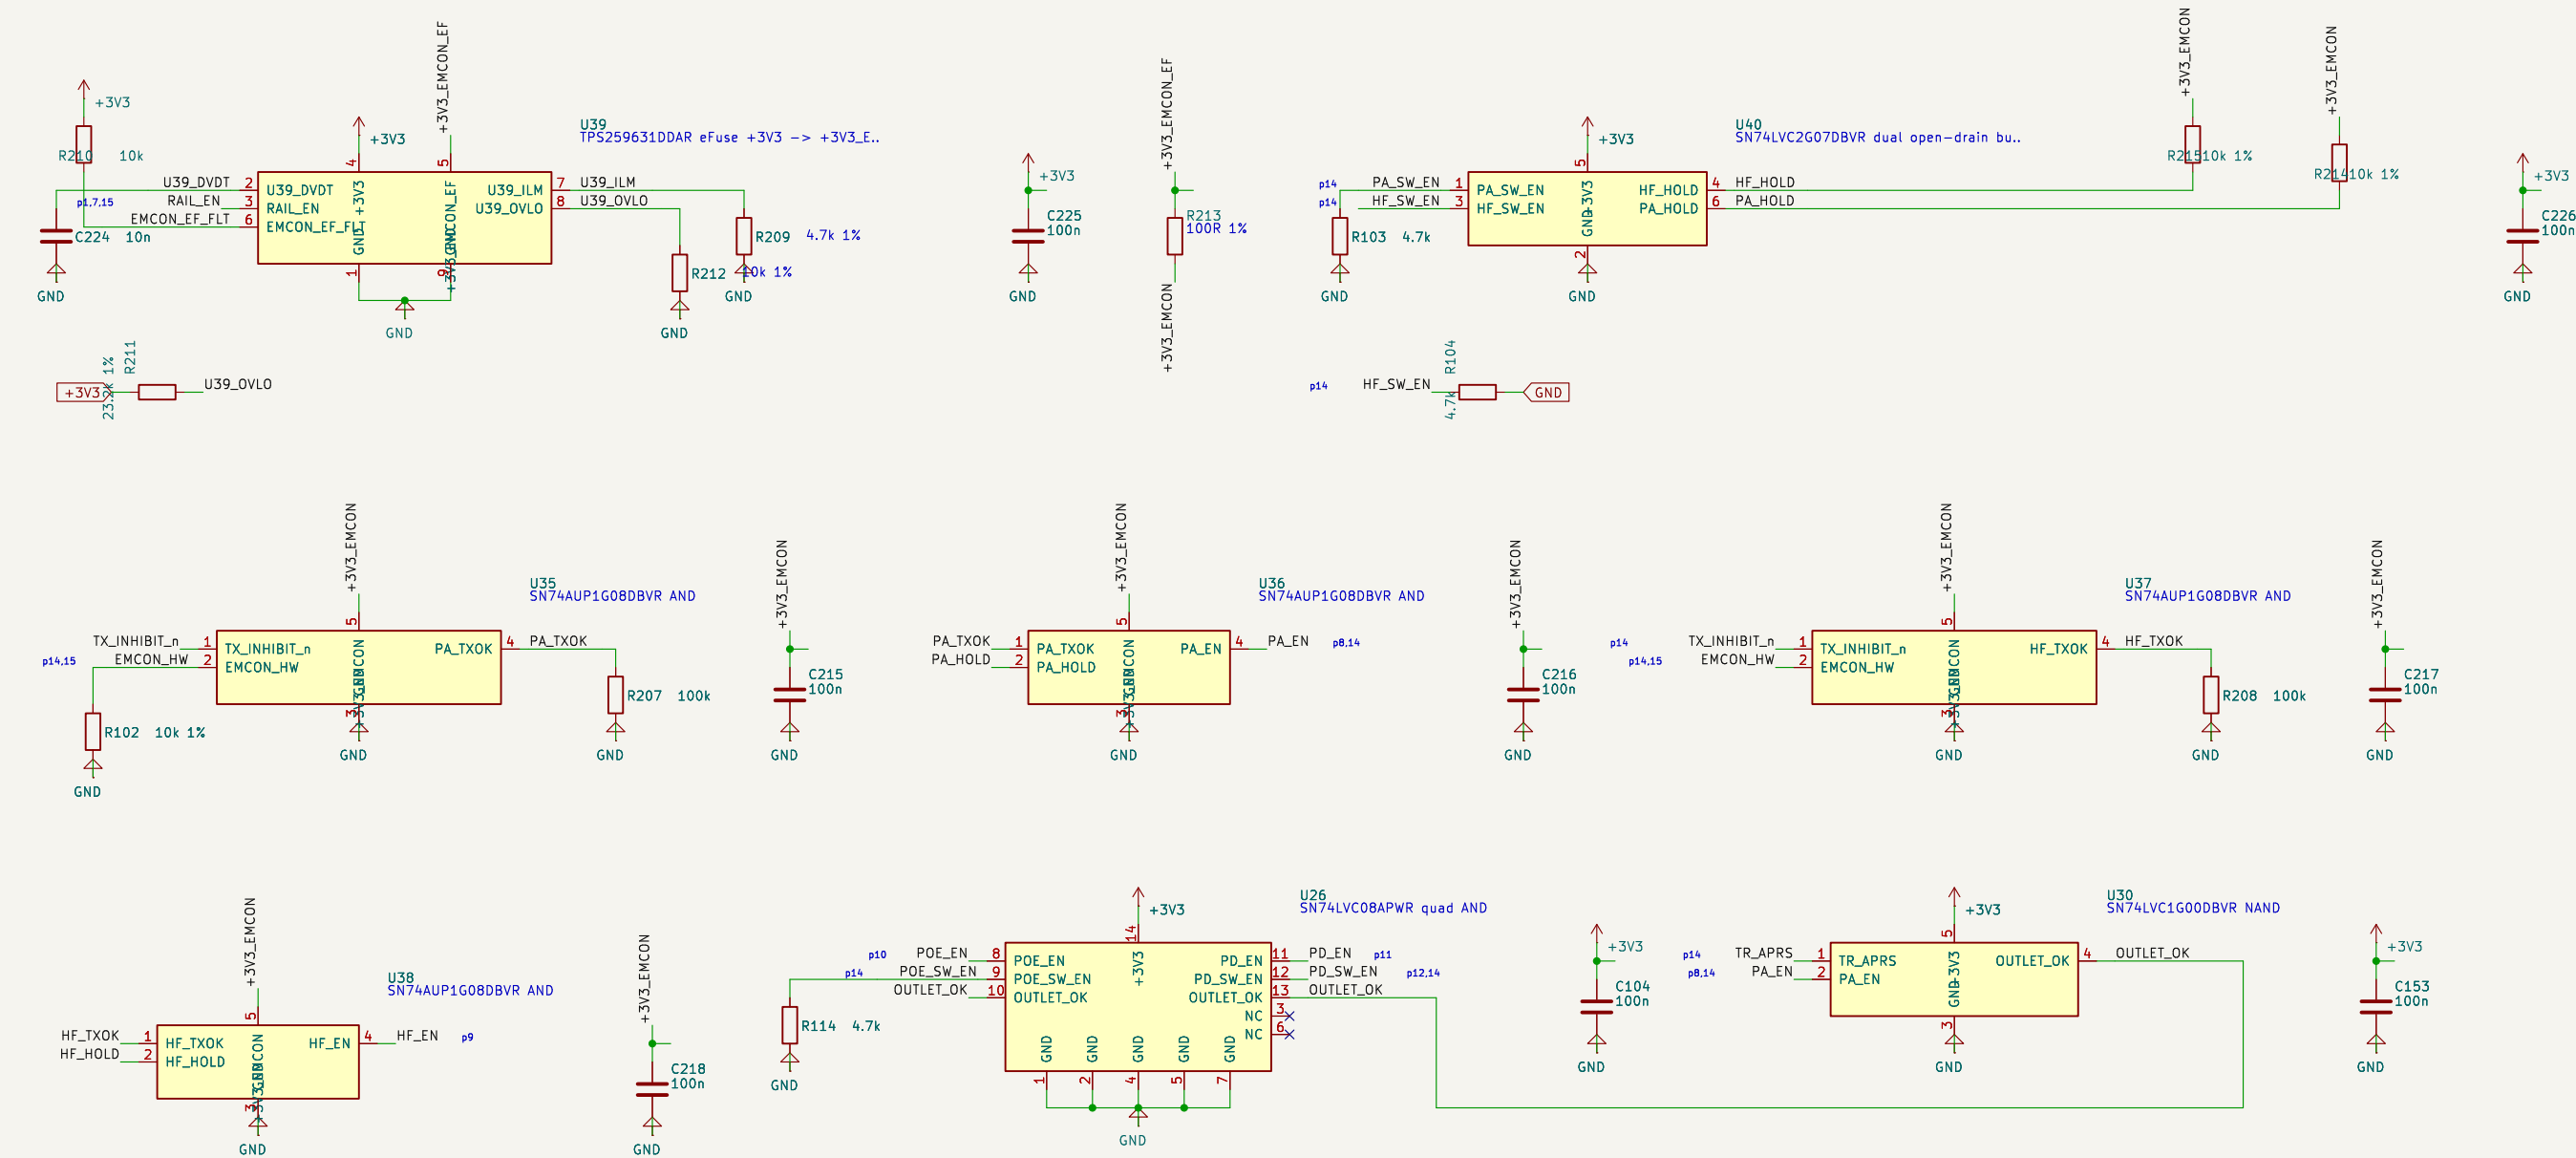


EMCON GATES 74AUP1G08 (BOTH LINES) ON THEIR OWN SUPPLY (U39 EFUSE, U40), OUTLET INTERLOCK 74LVC08, EXPANDERS 0x21 0x24 | RIBBON J_AB1 2x13, WALL–PORT RIBBON J_AB2 2x5,

EMCON GATES 74AUP1G08 (BOTH LINES) ON THEIR OWN SUPPLY (U39 EFUSE, U40), OUTLET INTERLOCK 74LVC08, EXPANDERS 0x21 0x24 (continued)

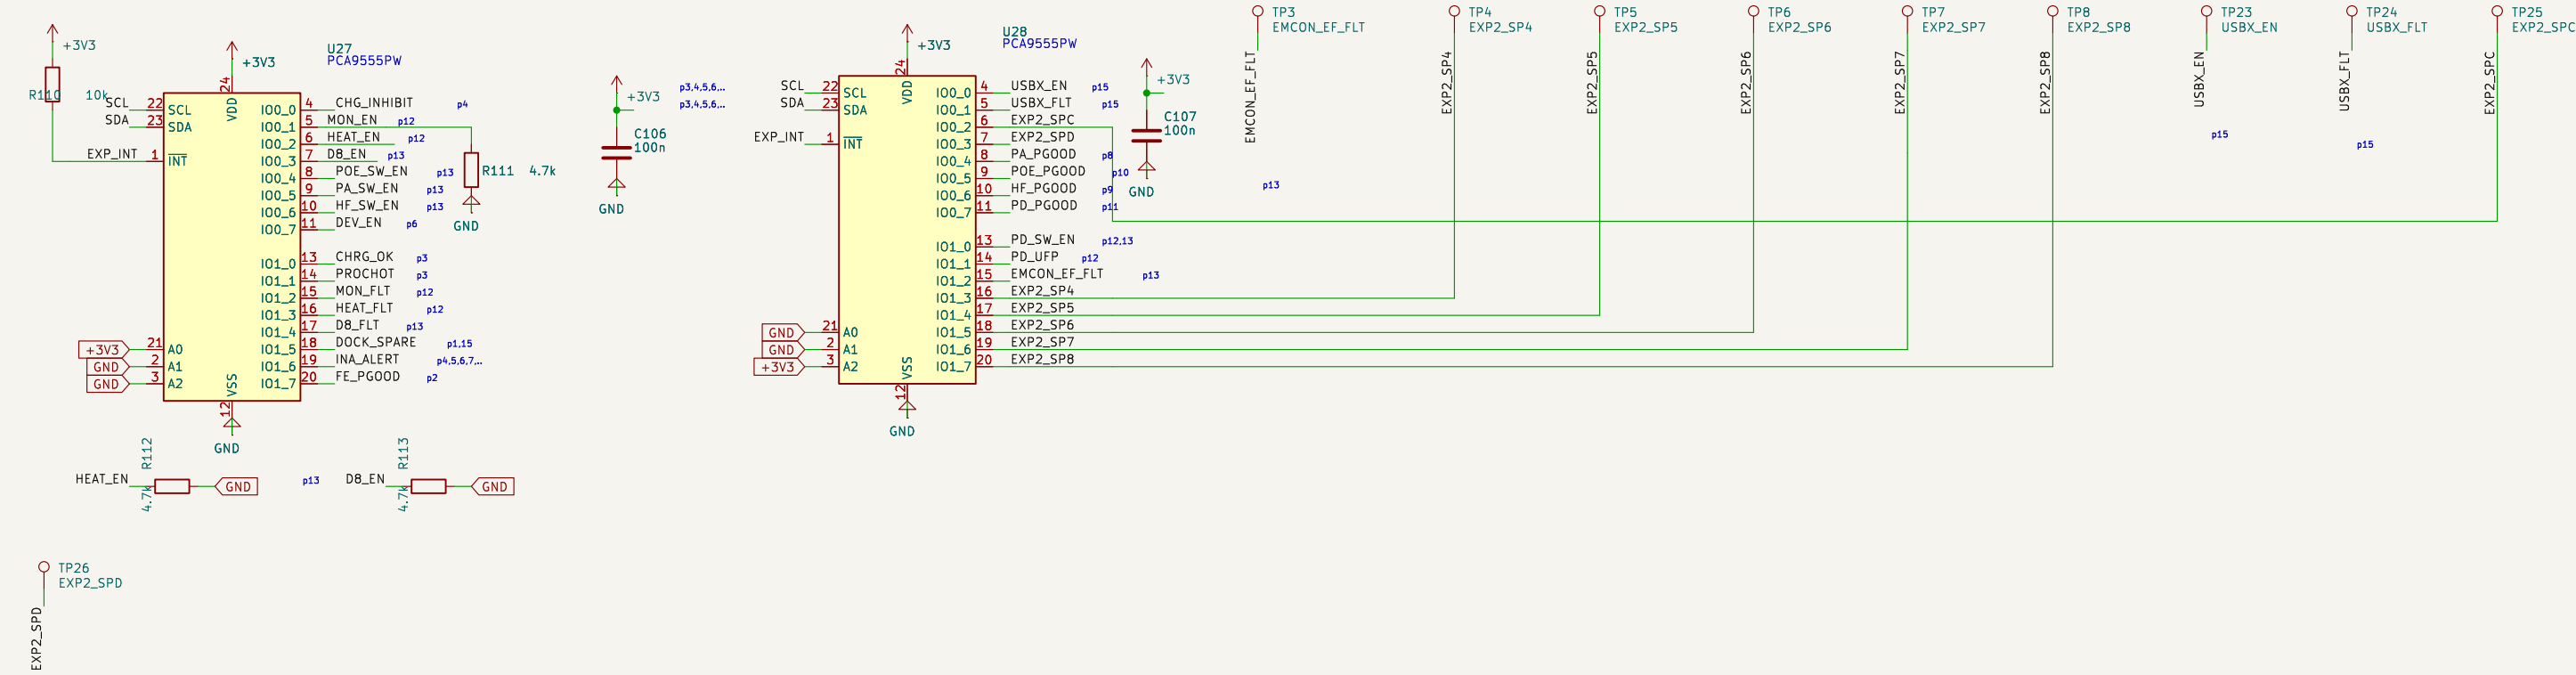


RIBBON J_AB1 2x13, WALL–PORT RIBBON J_AB2 2x5, MEZZANINE HARNESS J_MEZZ1 2x8, GLENAIR WALL USB HOST PORT

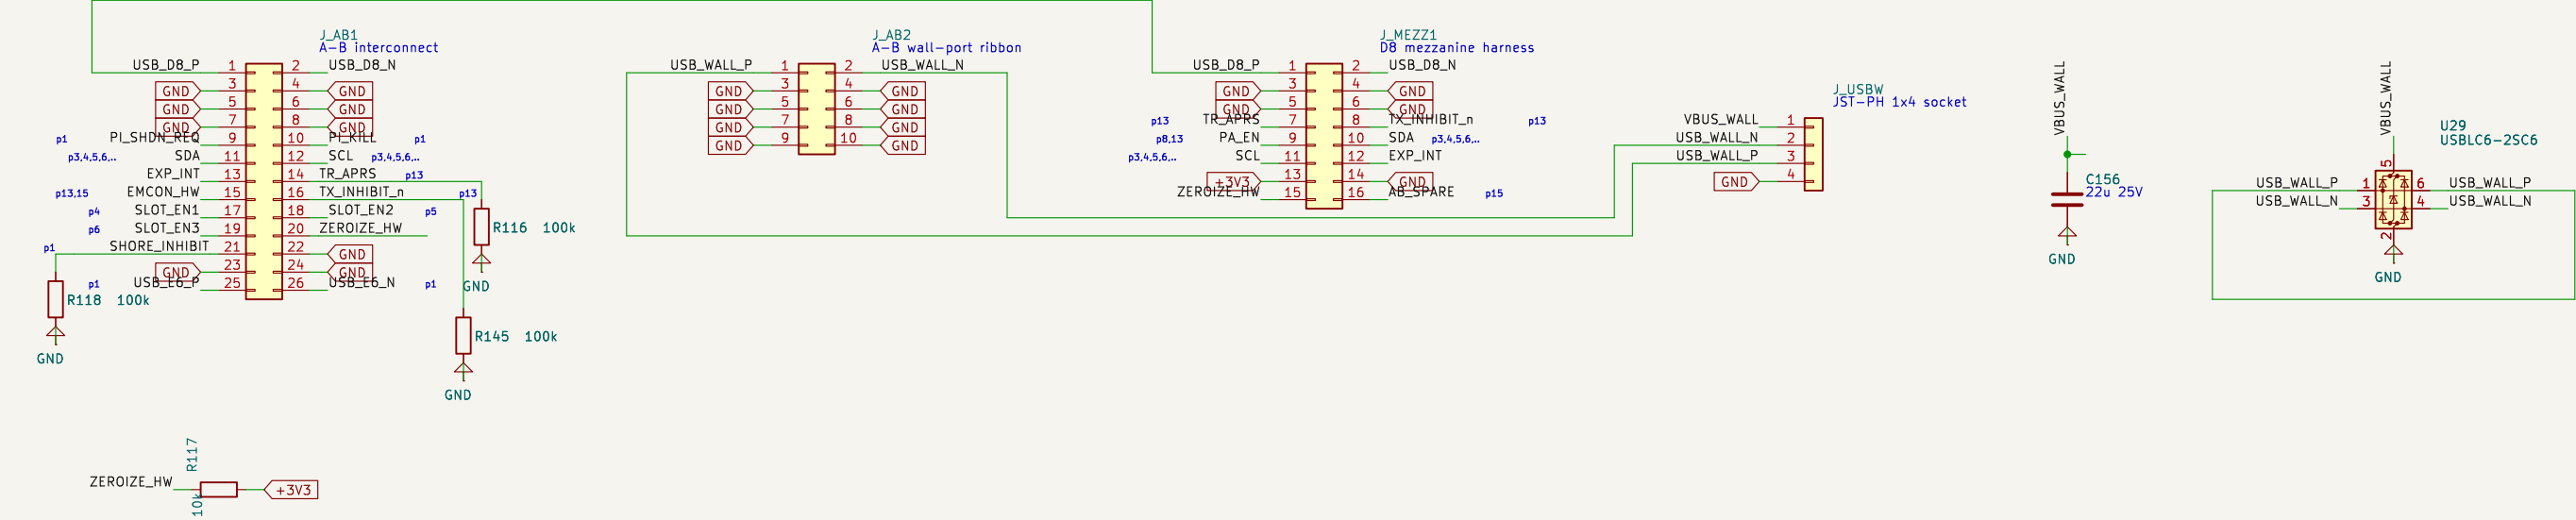


RIBBON_J_AB1 2x13, WALL-PORT RIBBON_J_AB2 2x5, MEZZANINE HARNESS_J_MEZZ1 2x8, GLENAIR WALL USB HOST PORT | ELEVEN BLIND-MATE RF SITES | TEST POINTS, FLAGS


RIBBON_J_AB1 2x13, WALL-PORT RIBBON_J_AB2 2x5, MEZZANINE HARNESS_J_MEZZ1 2x8, GLENAIR WALL USB HOST PORT (continued)

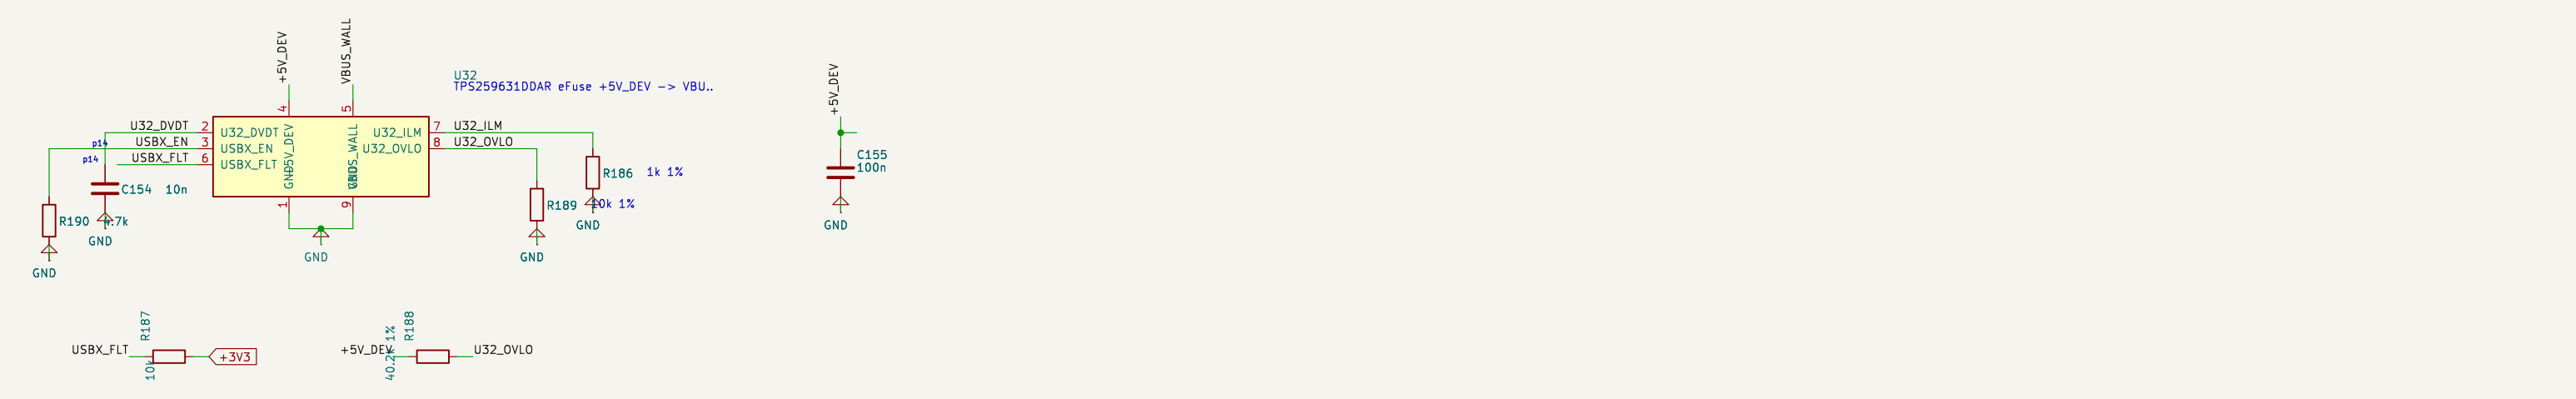

ELEVEN BLIND-MATE RF SITES: SMA JACK (TOP) + SMP-MAX RECEPTACLE (UNDERSIDE)

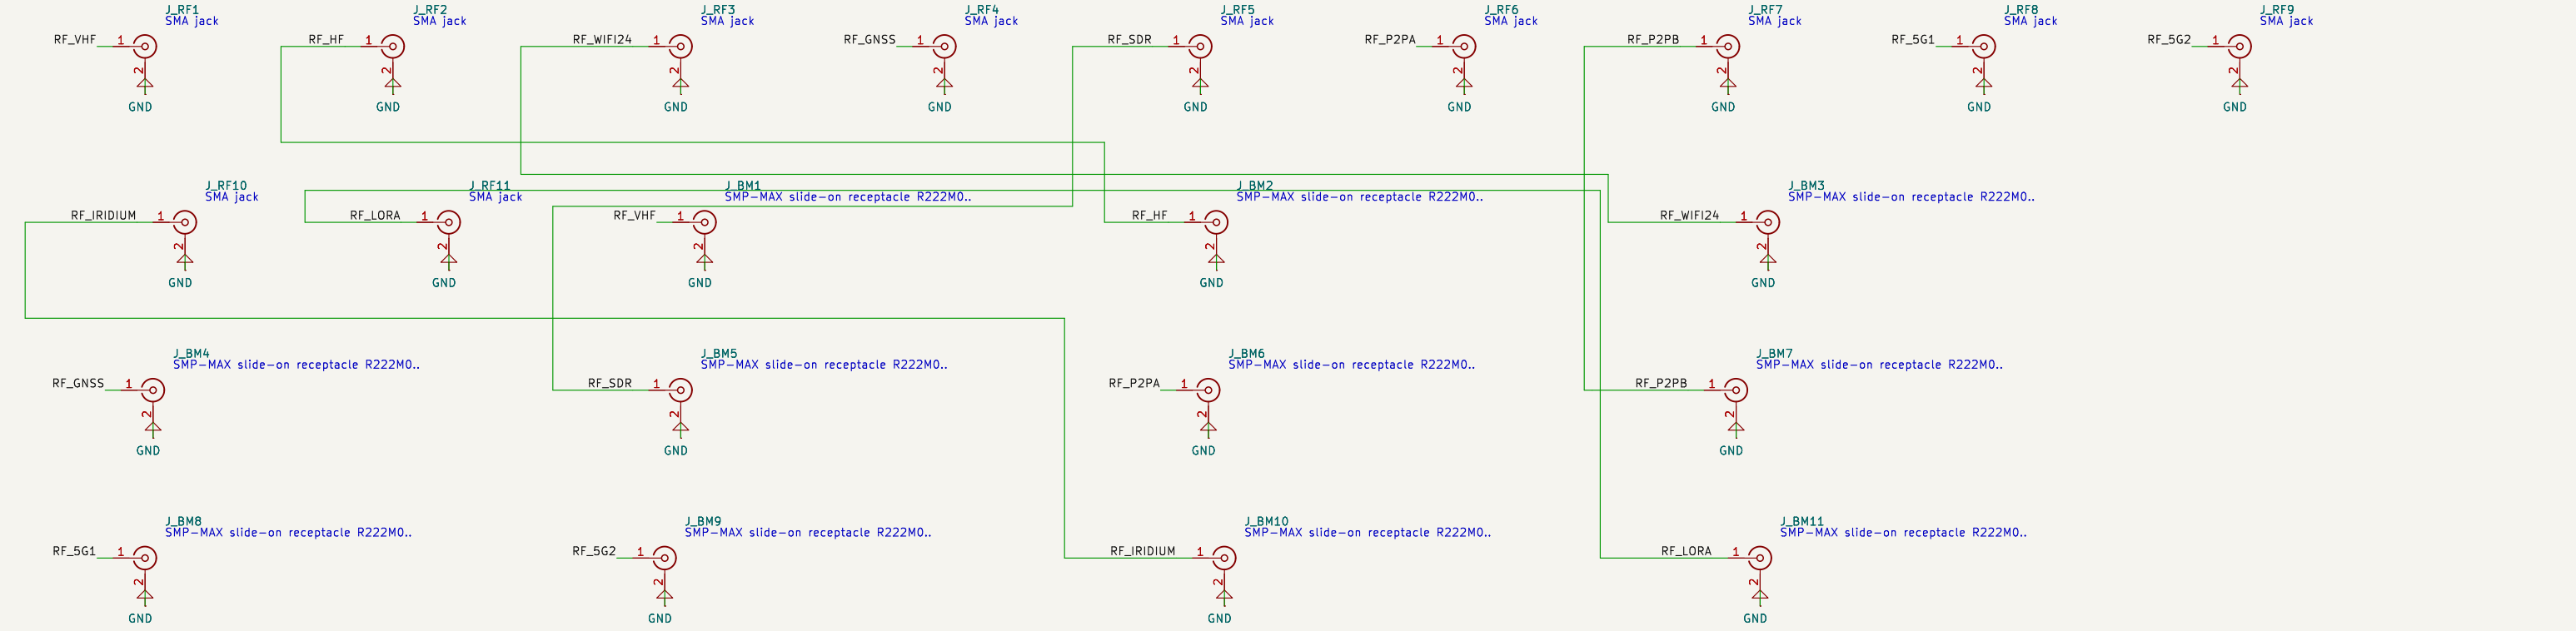

TEST POINTS, FLAGS

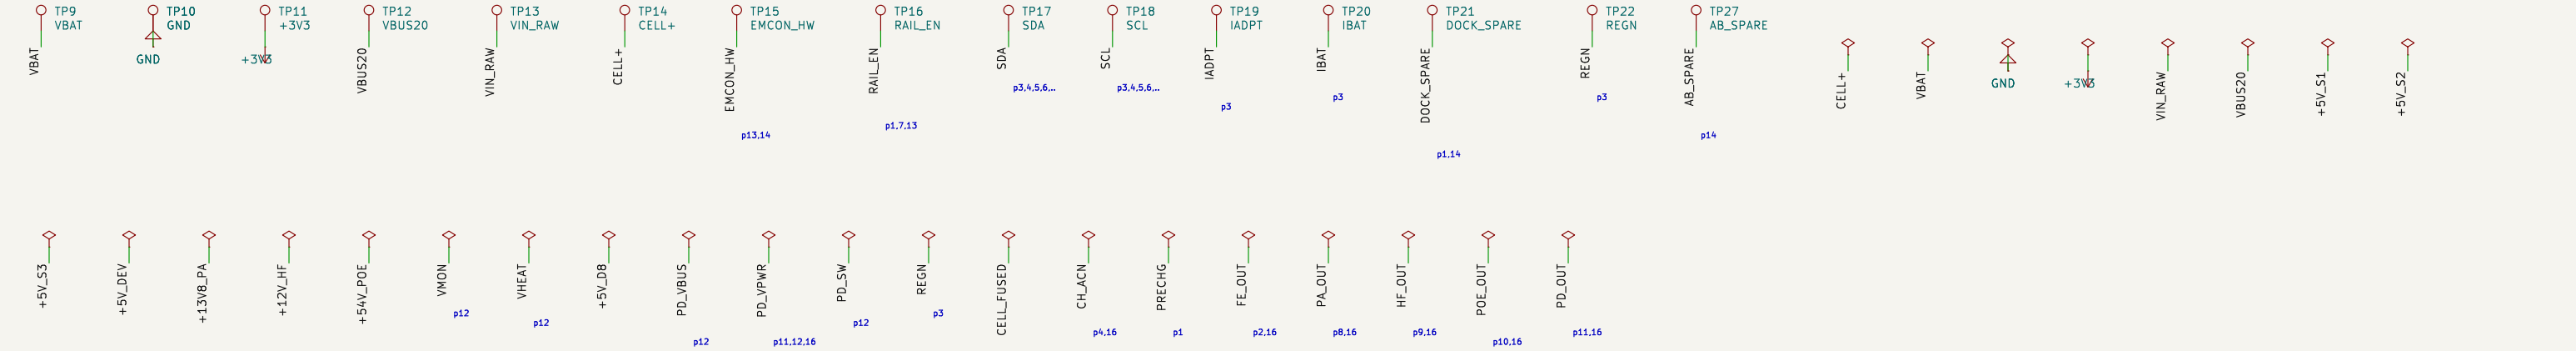

OTHER PARTS (not in a section list)

