




HARNESS, 5 V ENTRY, 3.3 V LDO, EXCITER SUPPLY AND ITS LOAD SWITCH

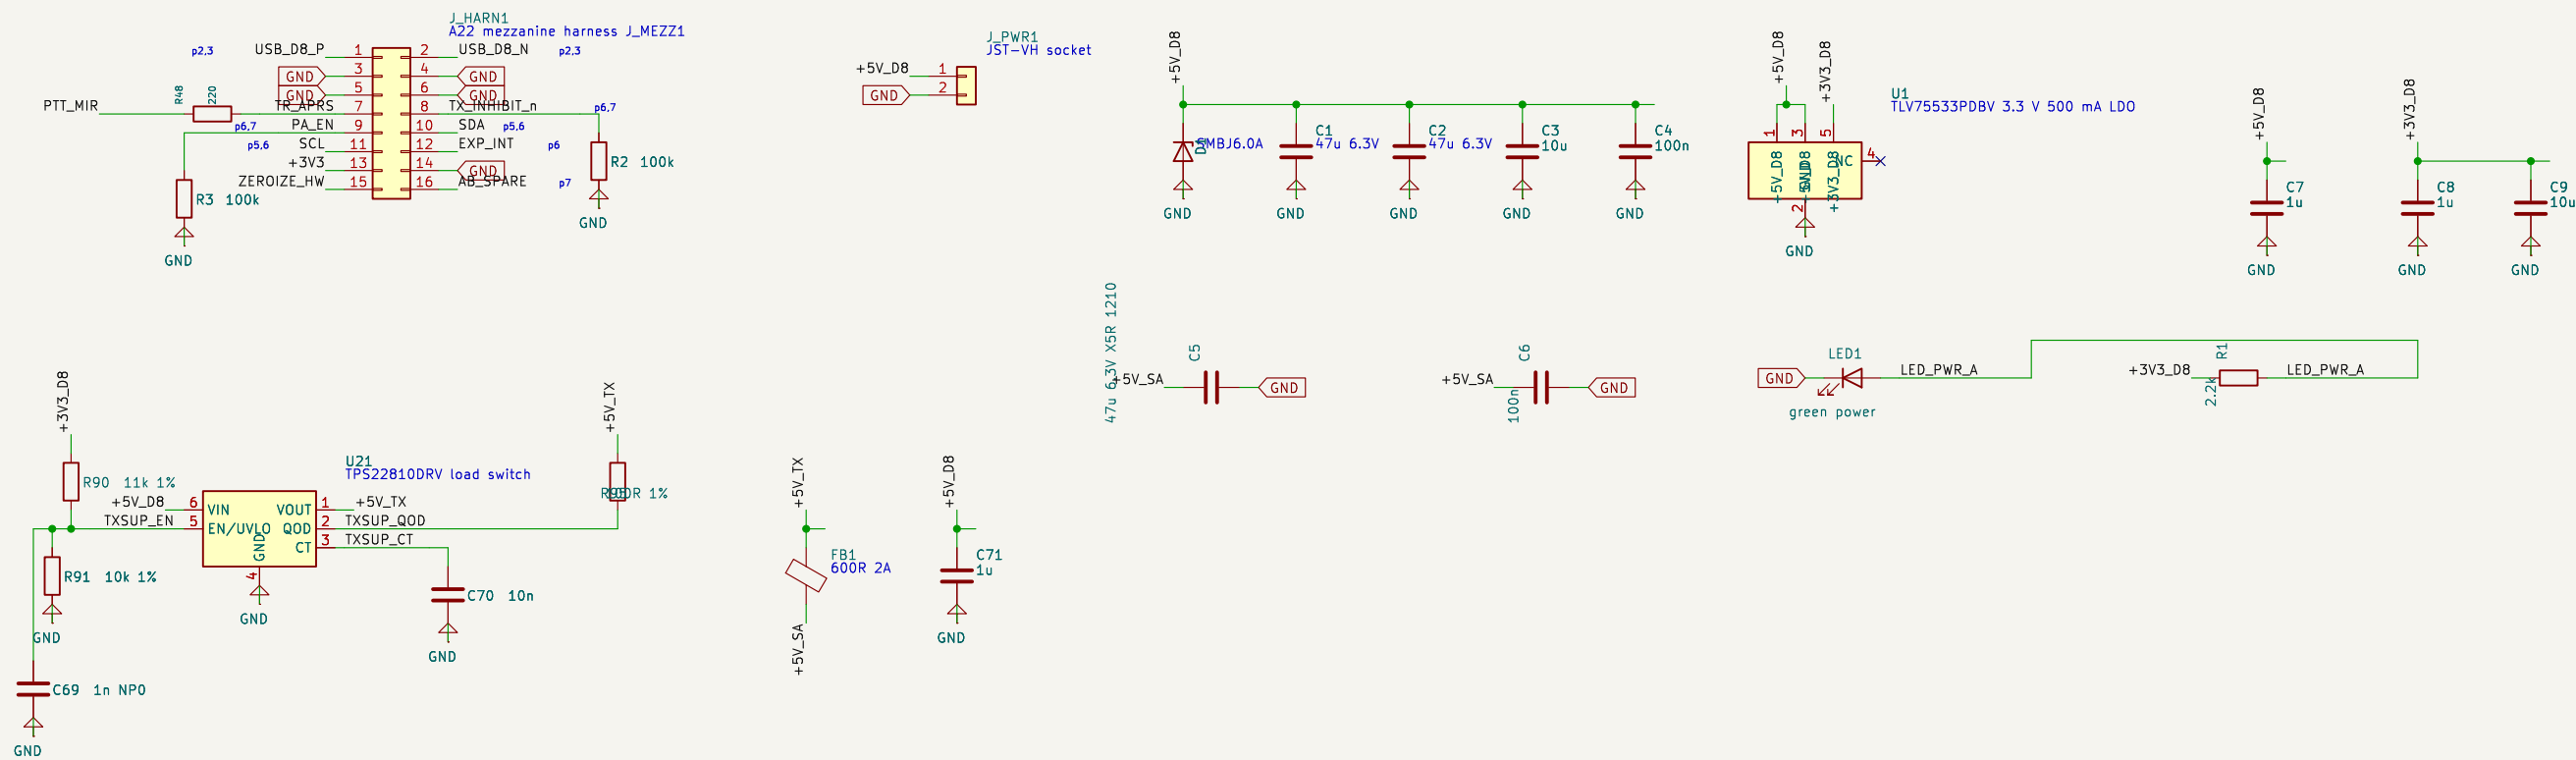


SA868 EXCITER, UART BRIDGE, T/R RELAY, 10 dB PAD, LPF, PA LEADS, GATE BIAS REGULATOR

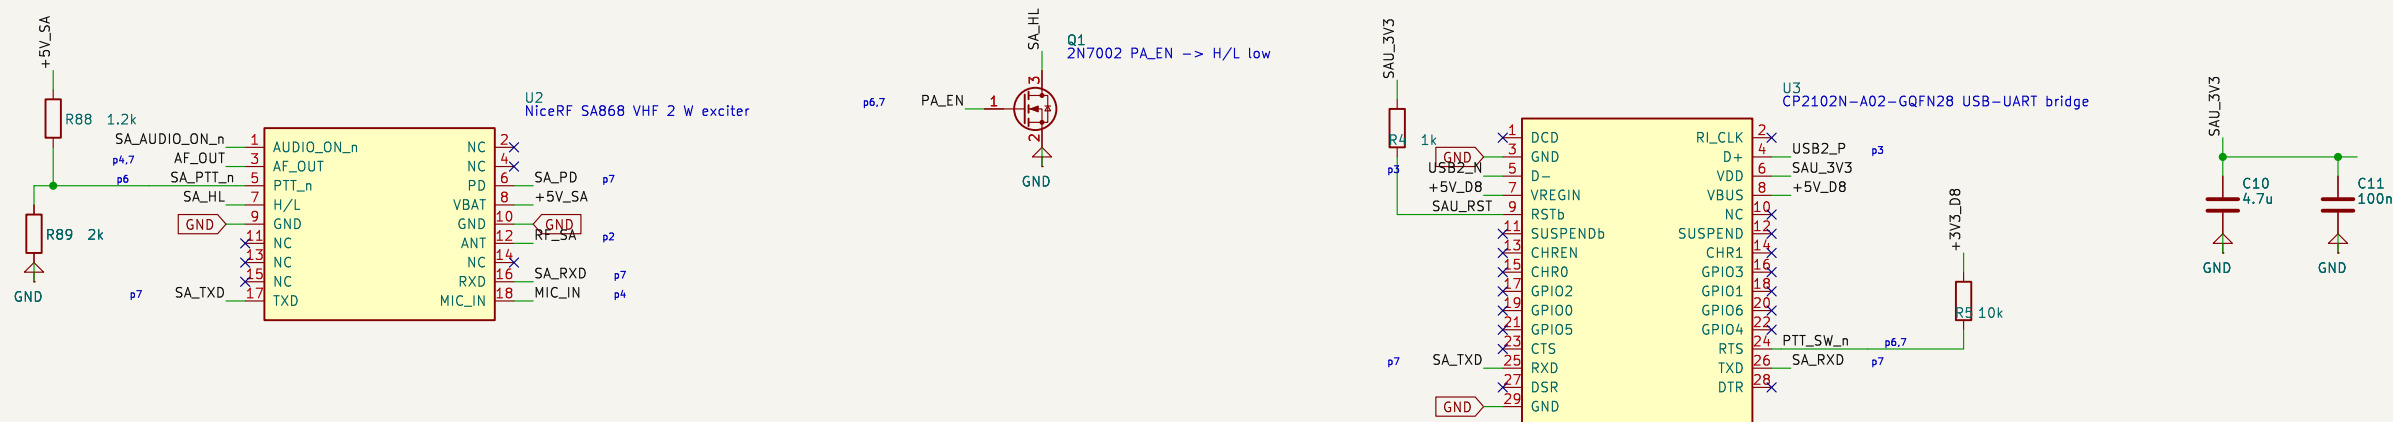


SA868 EXCITER, UART BRIDGE, T/R RELAY, 10 dB PAD, LPF, PA LEADS, GATE BIAS REGULATOR (continued)

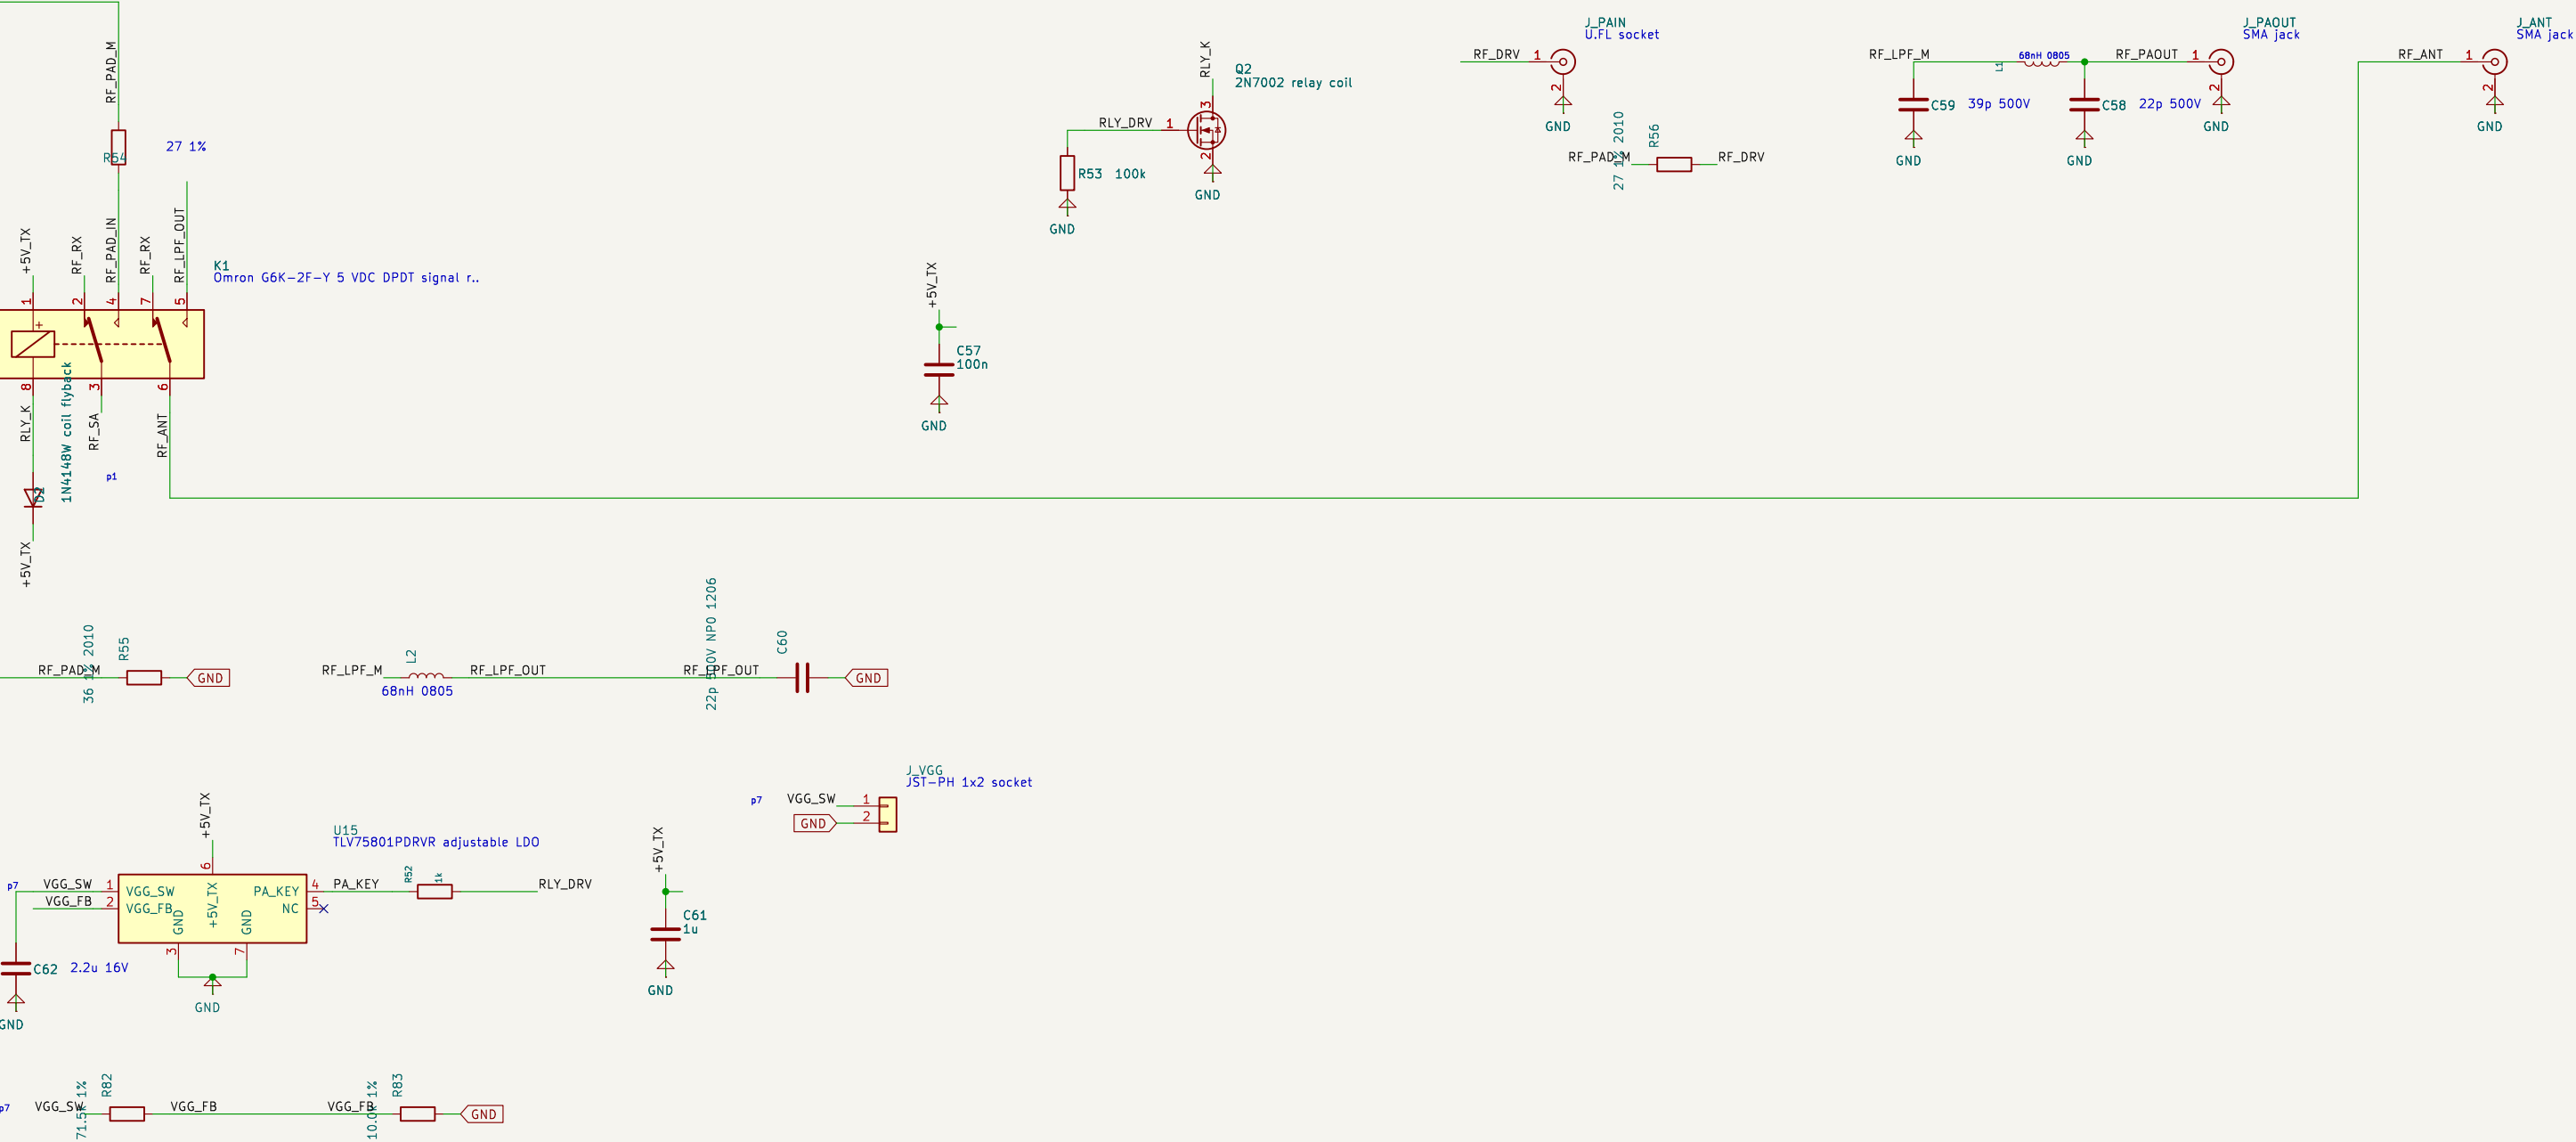

USB HUB TUSB2046I AND ITS 3.44 V LDO, PORT TERMINATIONS, SPARE PORT




USB HUB TUSB2046I AND ITS 3.44 V LDO, PORT TERMINATIONS, SPARE PORT (continued)

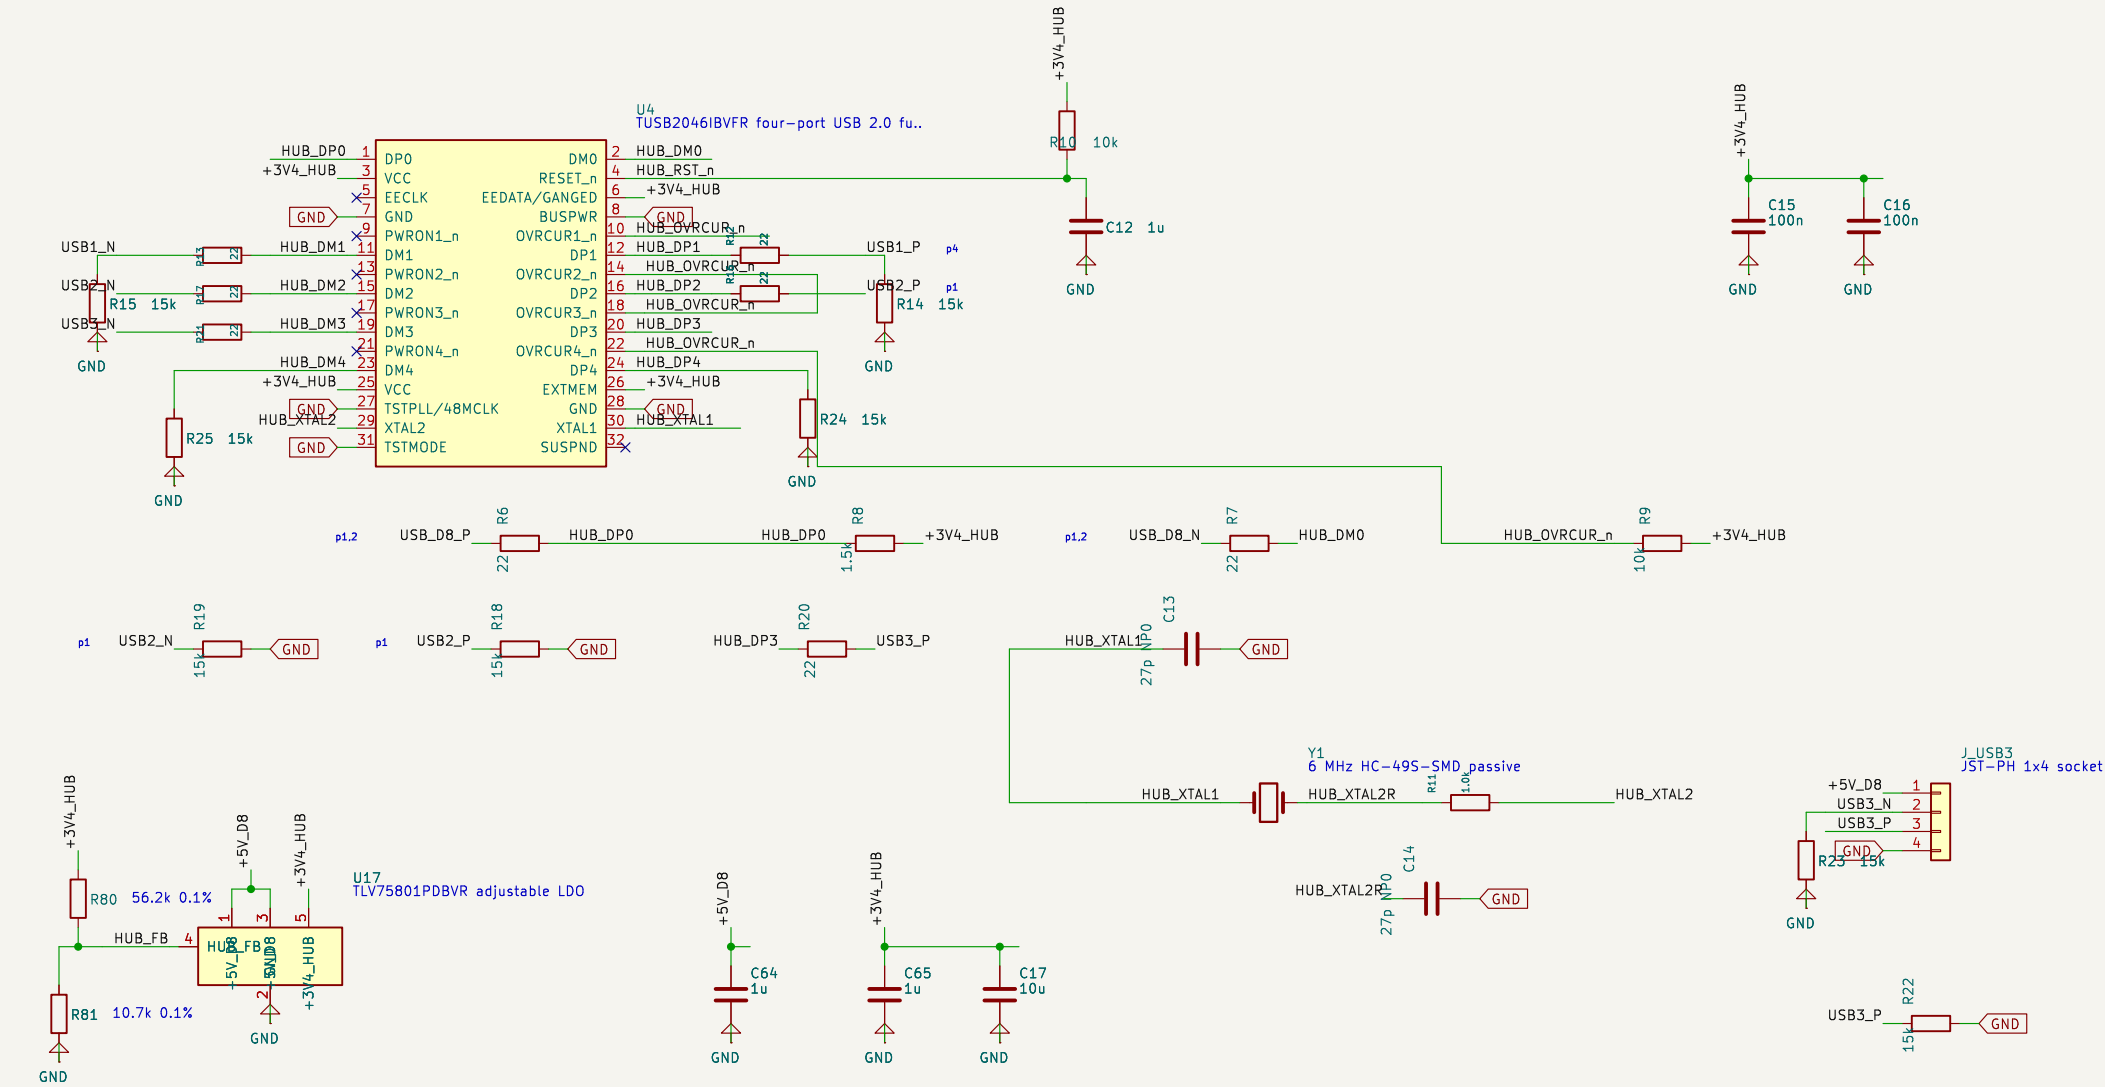


USB AUDIO CODEC PCM2912A, HEADPHONE AMPLIFIER, MIC PREAMP, HEADSET LEADS


USB AUDIO CODEC PCM2912A, HEADPHONE AMPLIFIER, MIC PREAMP, HEADSET LEADS

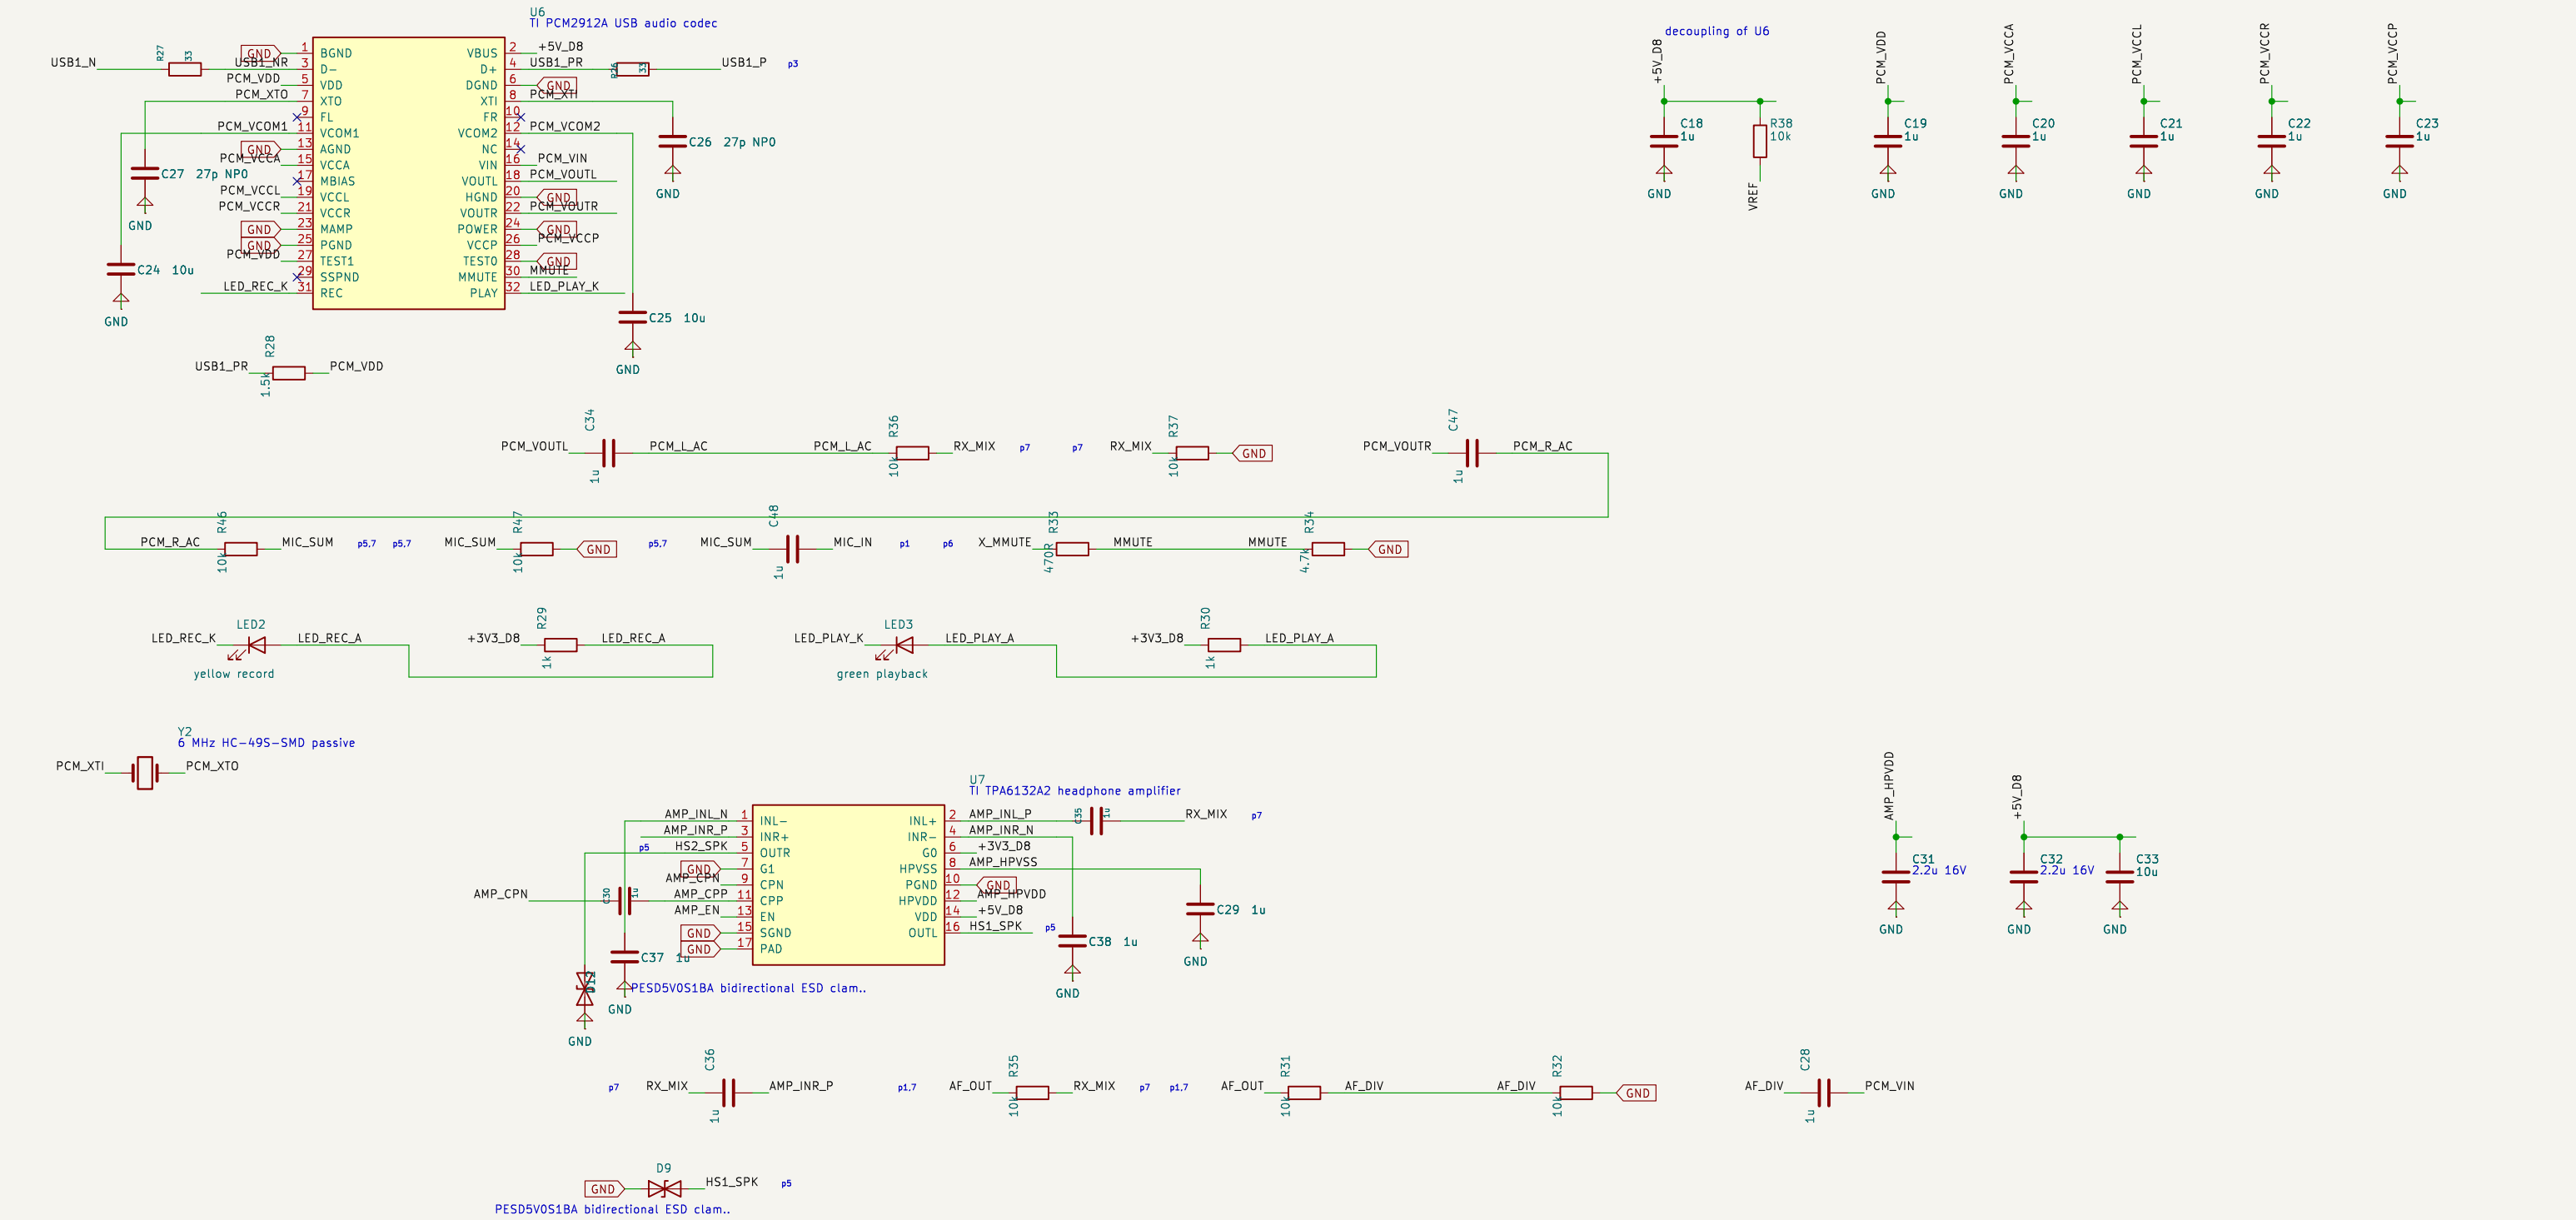

USB AUDIO CODEC PCM2912A, HEADPHONE AMPLIFIER, MIC PREAMP, HEADSET LEADS (continued)

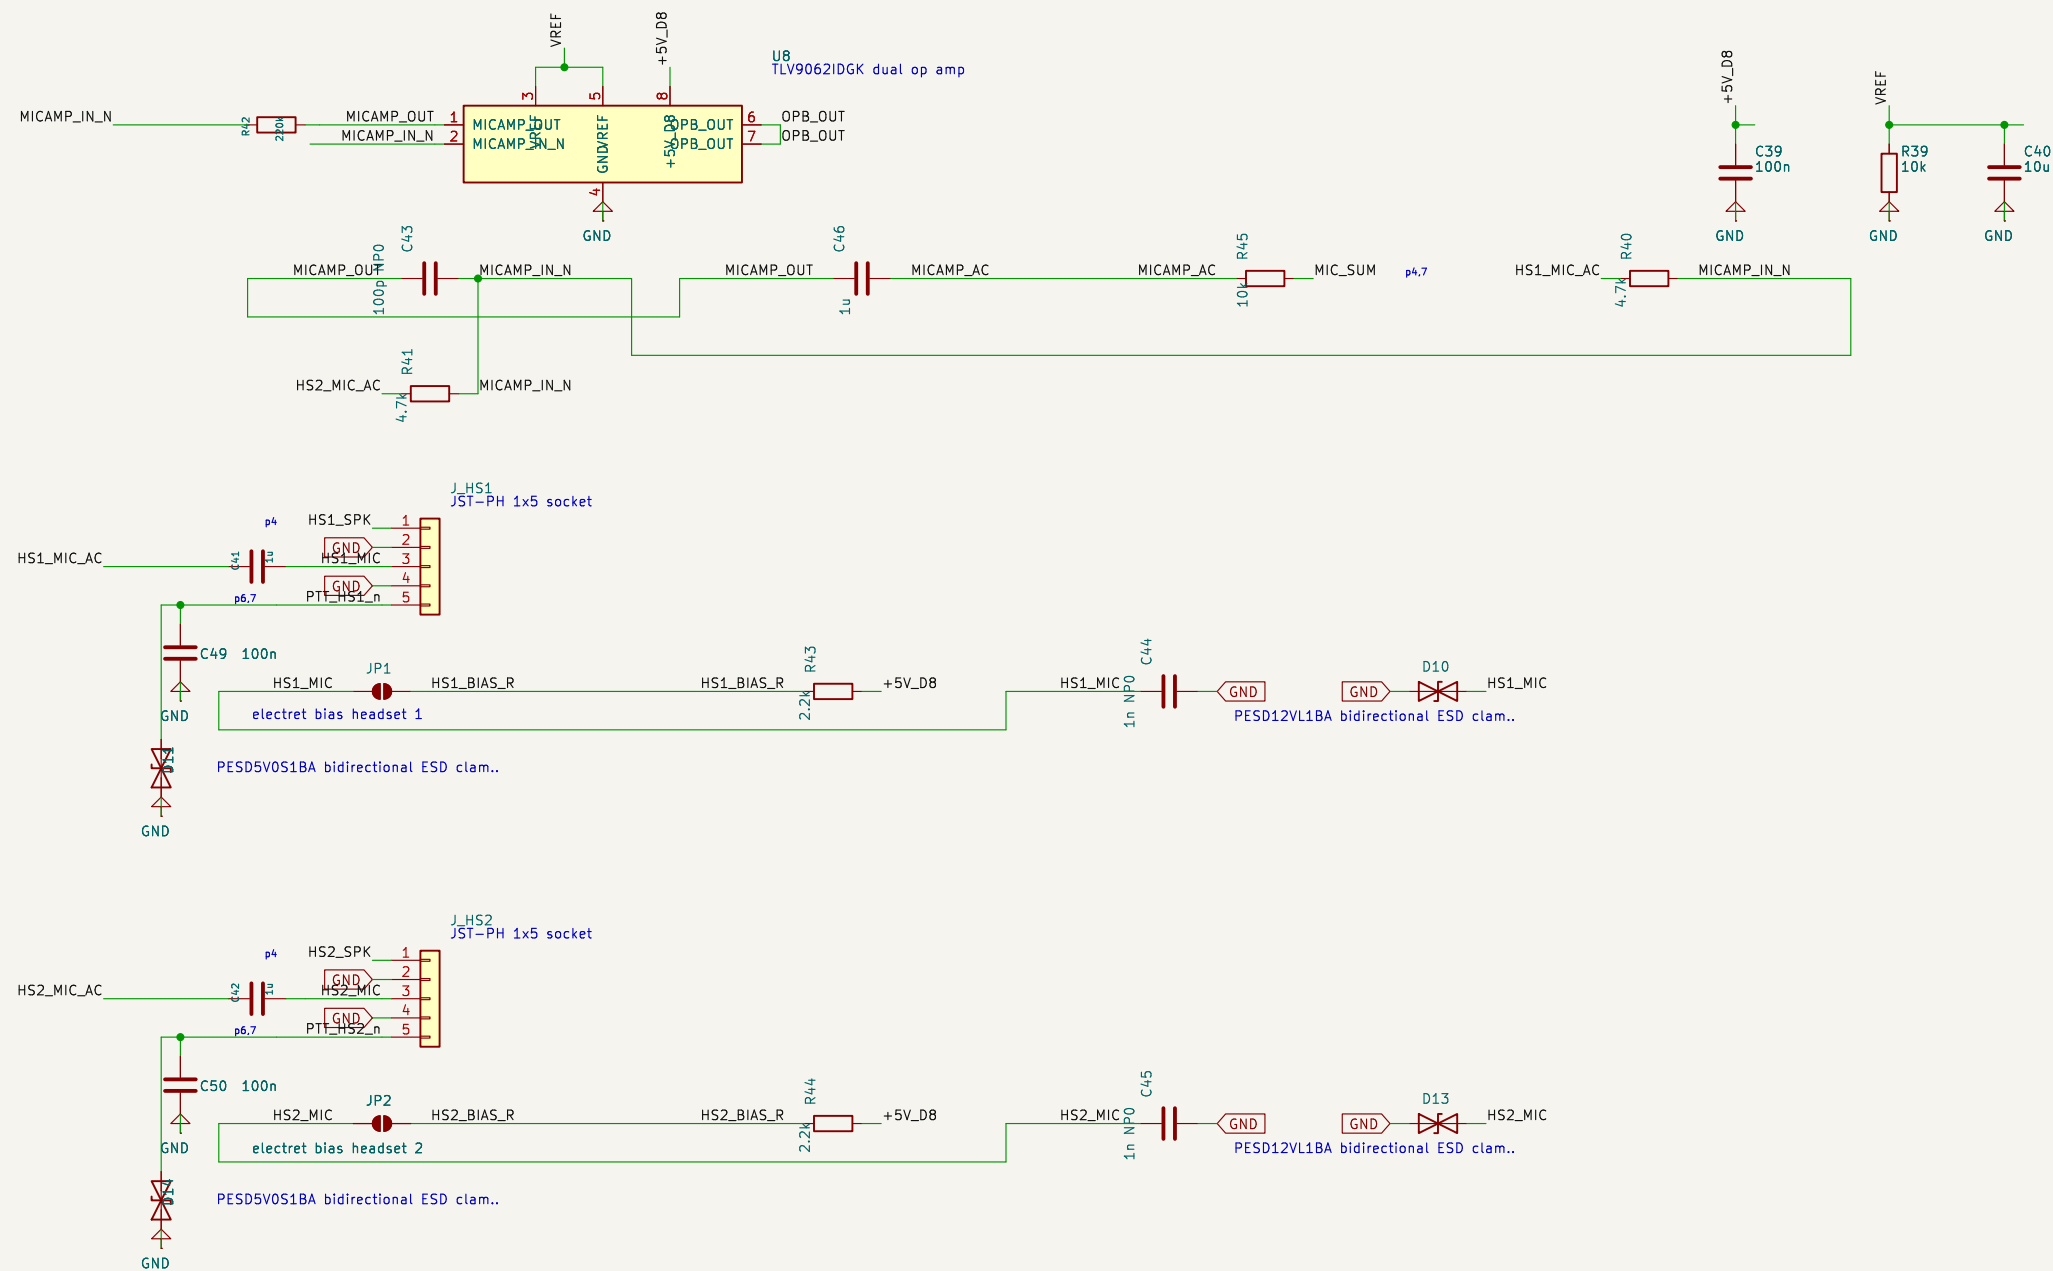


PA FLANGE TEMPERATURE: NTC LEAD AND ADC 0x48 ON THE KIT BUS (PWR-F15)

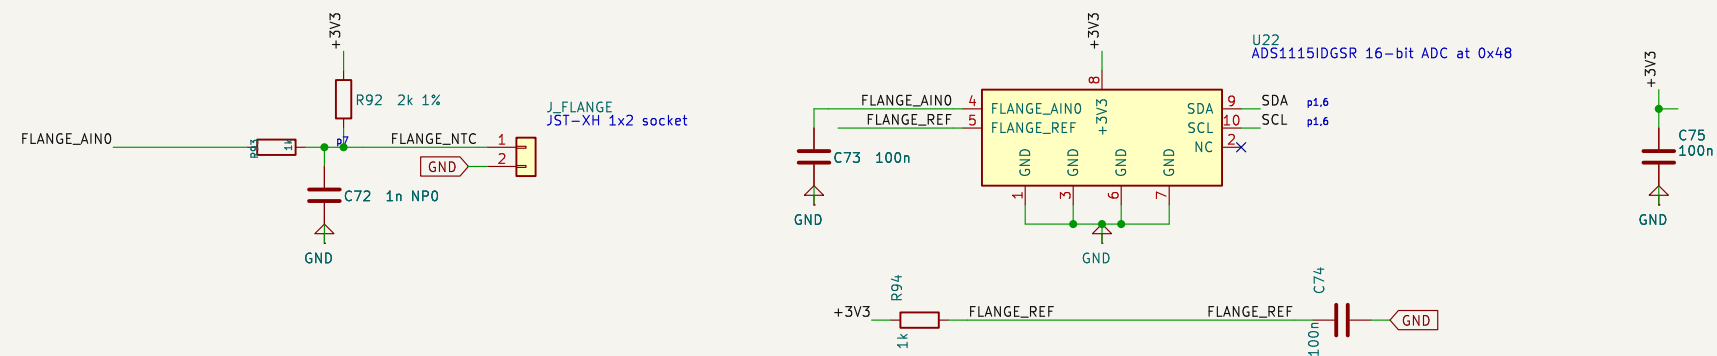

PTT AND EMCON LOGIC, PTT MIRROR, LEDS, EXPANDER 0x26 WITH LEVEL STAGES, TEST POINTS, FLAGS

PTT AND EMCON LOGIC, PTT MIRROR, LEDS, EXPANDER 0x26 WITH LEVEL STAGES, TEST POINTS, FLAGS

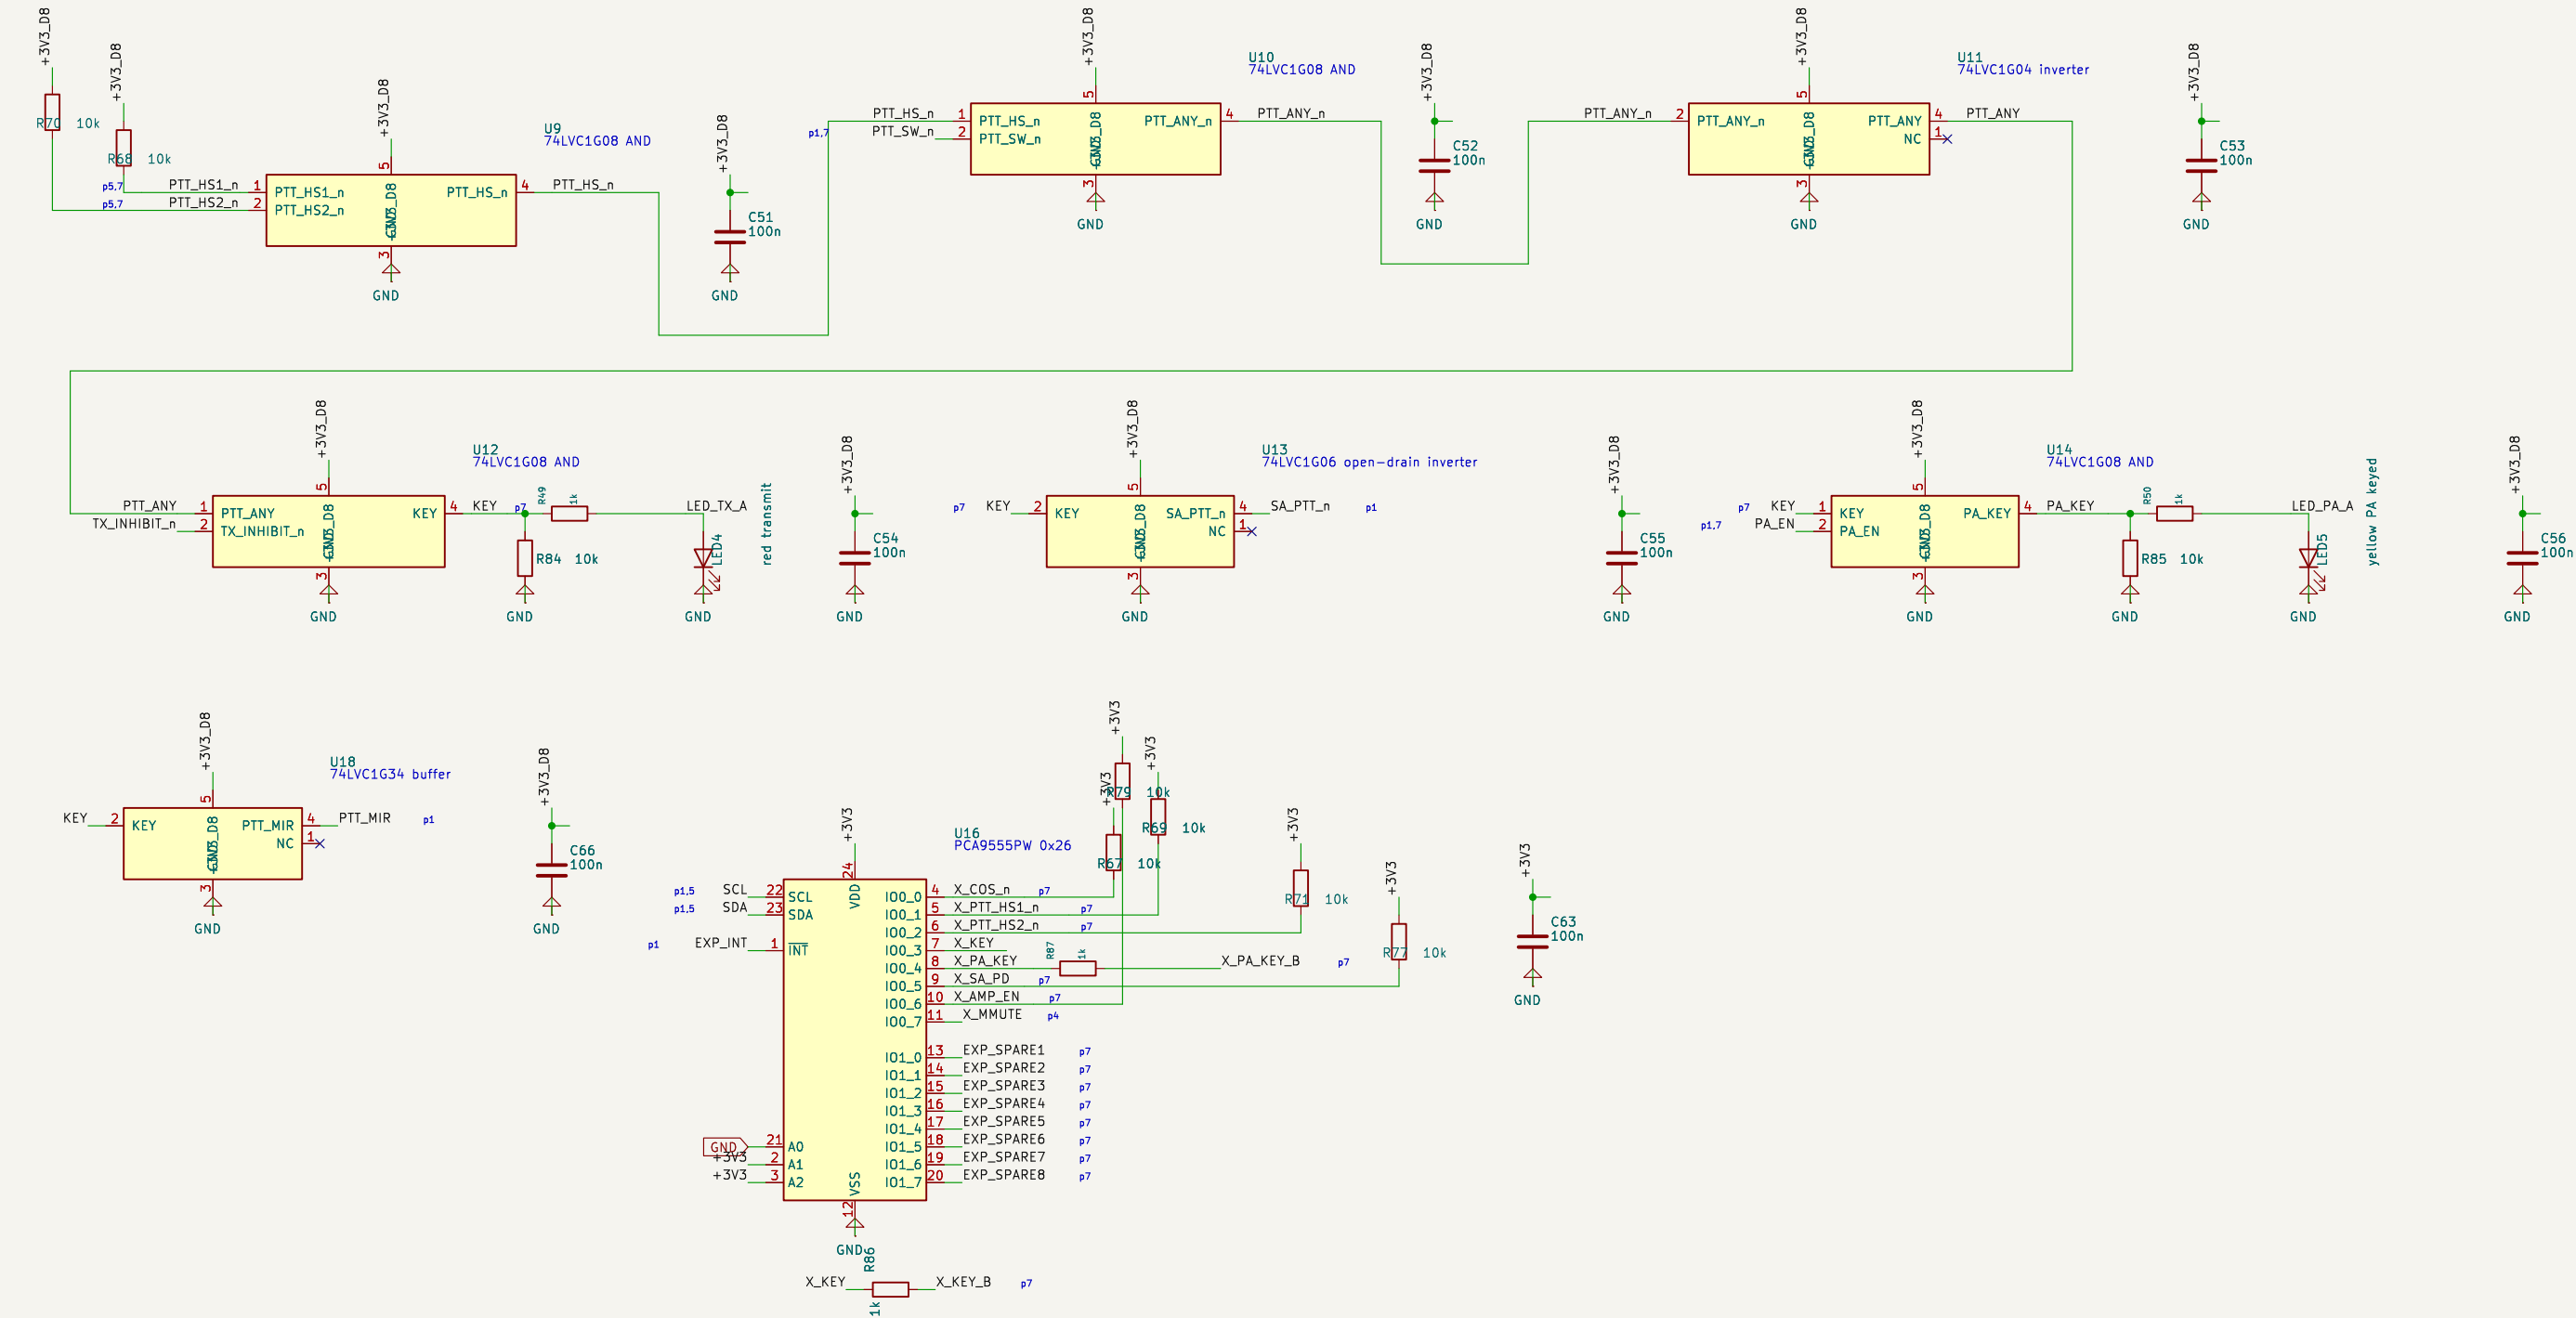

PTT AND EMCON LOGIC, PTT MIRROR, LEDS, EXPANDER 0x26 WITH LEVEL STAGES, TEST POINTS, FLAGS

PTT AND EMCON LOGIC, PTT MIRROR, LEDS, EXPANDER 0x26 WITH LEVEL STAGES, TEST POINTS, FLAGS (continued)

