




PACK ENTRY: PACK CABLE ON XT60, 25 A BLADE, PADS TO THE BLOCK, PACK SMBUS LEAD (JST-XH 1x4)

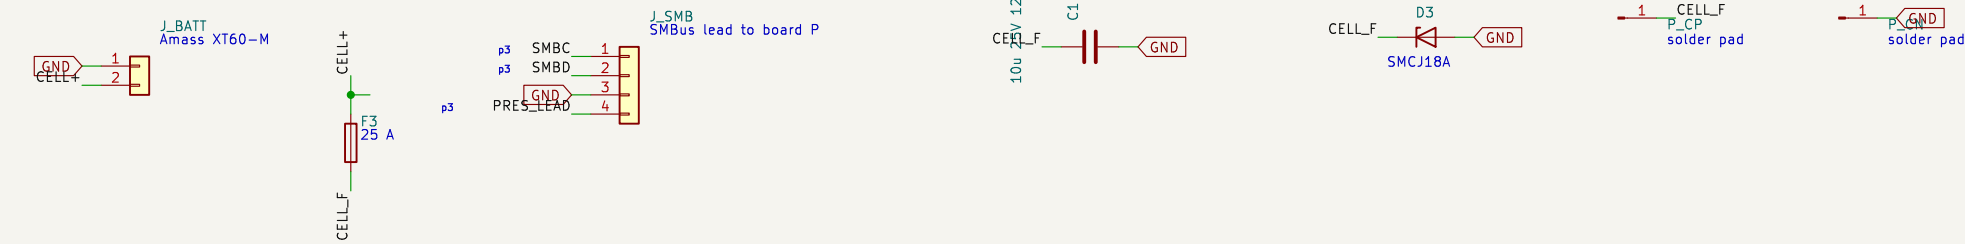


VEHICLE AND SHORE ENTRY 9-36 V: F1, LM74700 IDEAL DIODE, LM5069 HOT-SWAP, SRF1260 FILTER, CLAMPS

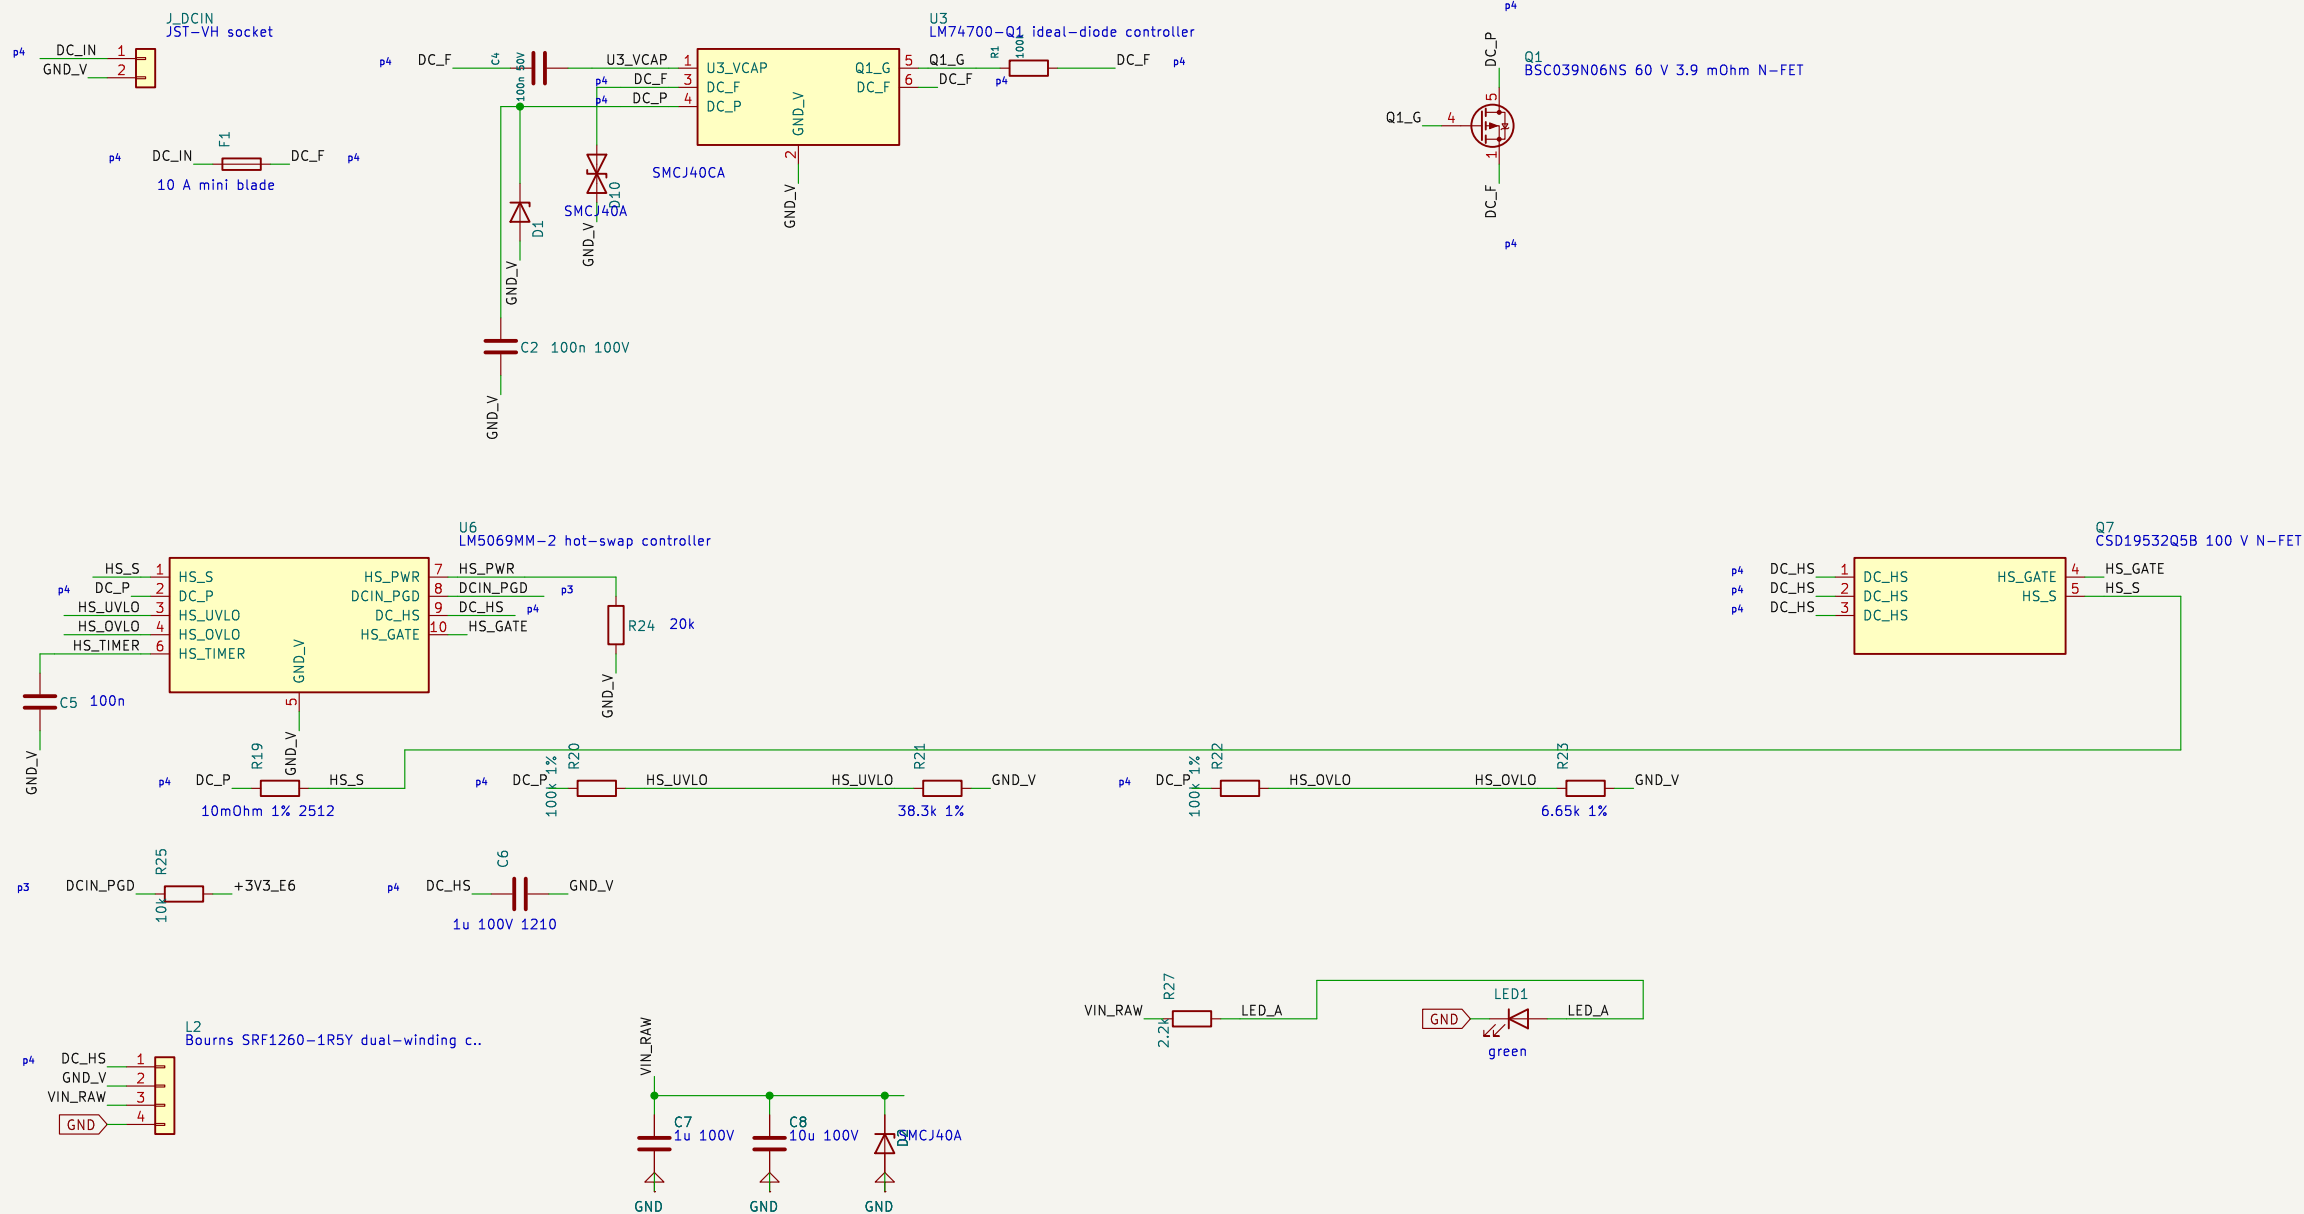


PANEL TRACKER: J_SOLAR, F2, LT8705A BUCK-BOOST (FBIN 17.6 V, FBOU 15.1 V, 202 kHz), ORed INTO THE RAW BUS

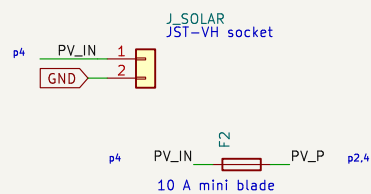


PANEL TRACKER: J_SOLAR, F2, LT8705A BUCK-BOOST (FBIN 17.6 V, FBOU 15.1 V, 202 kHz), ORed INTO THE RAW BUS (continued)

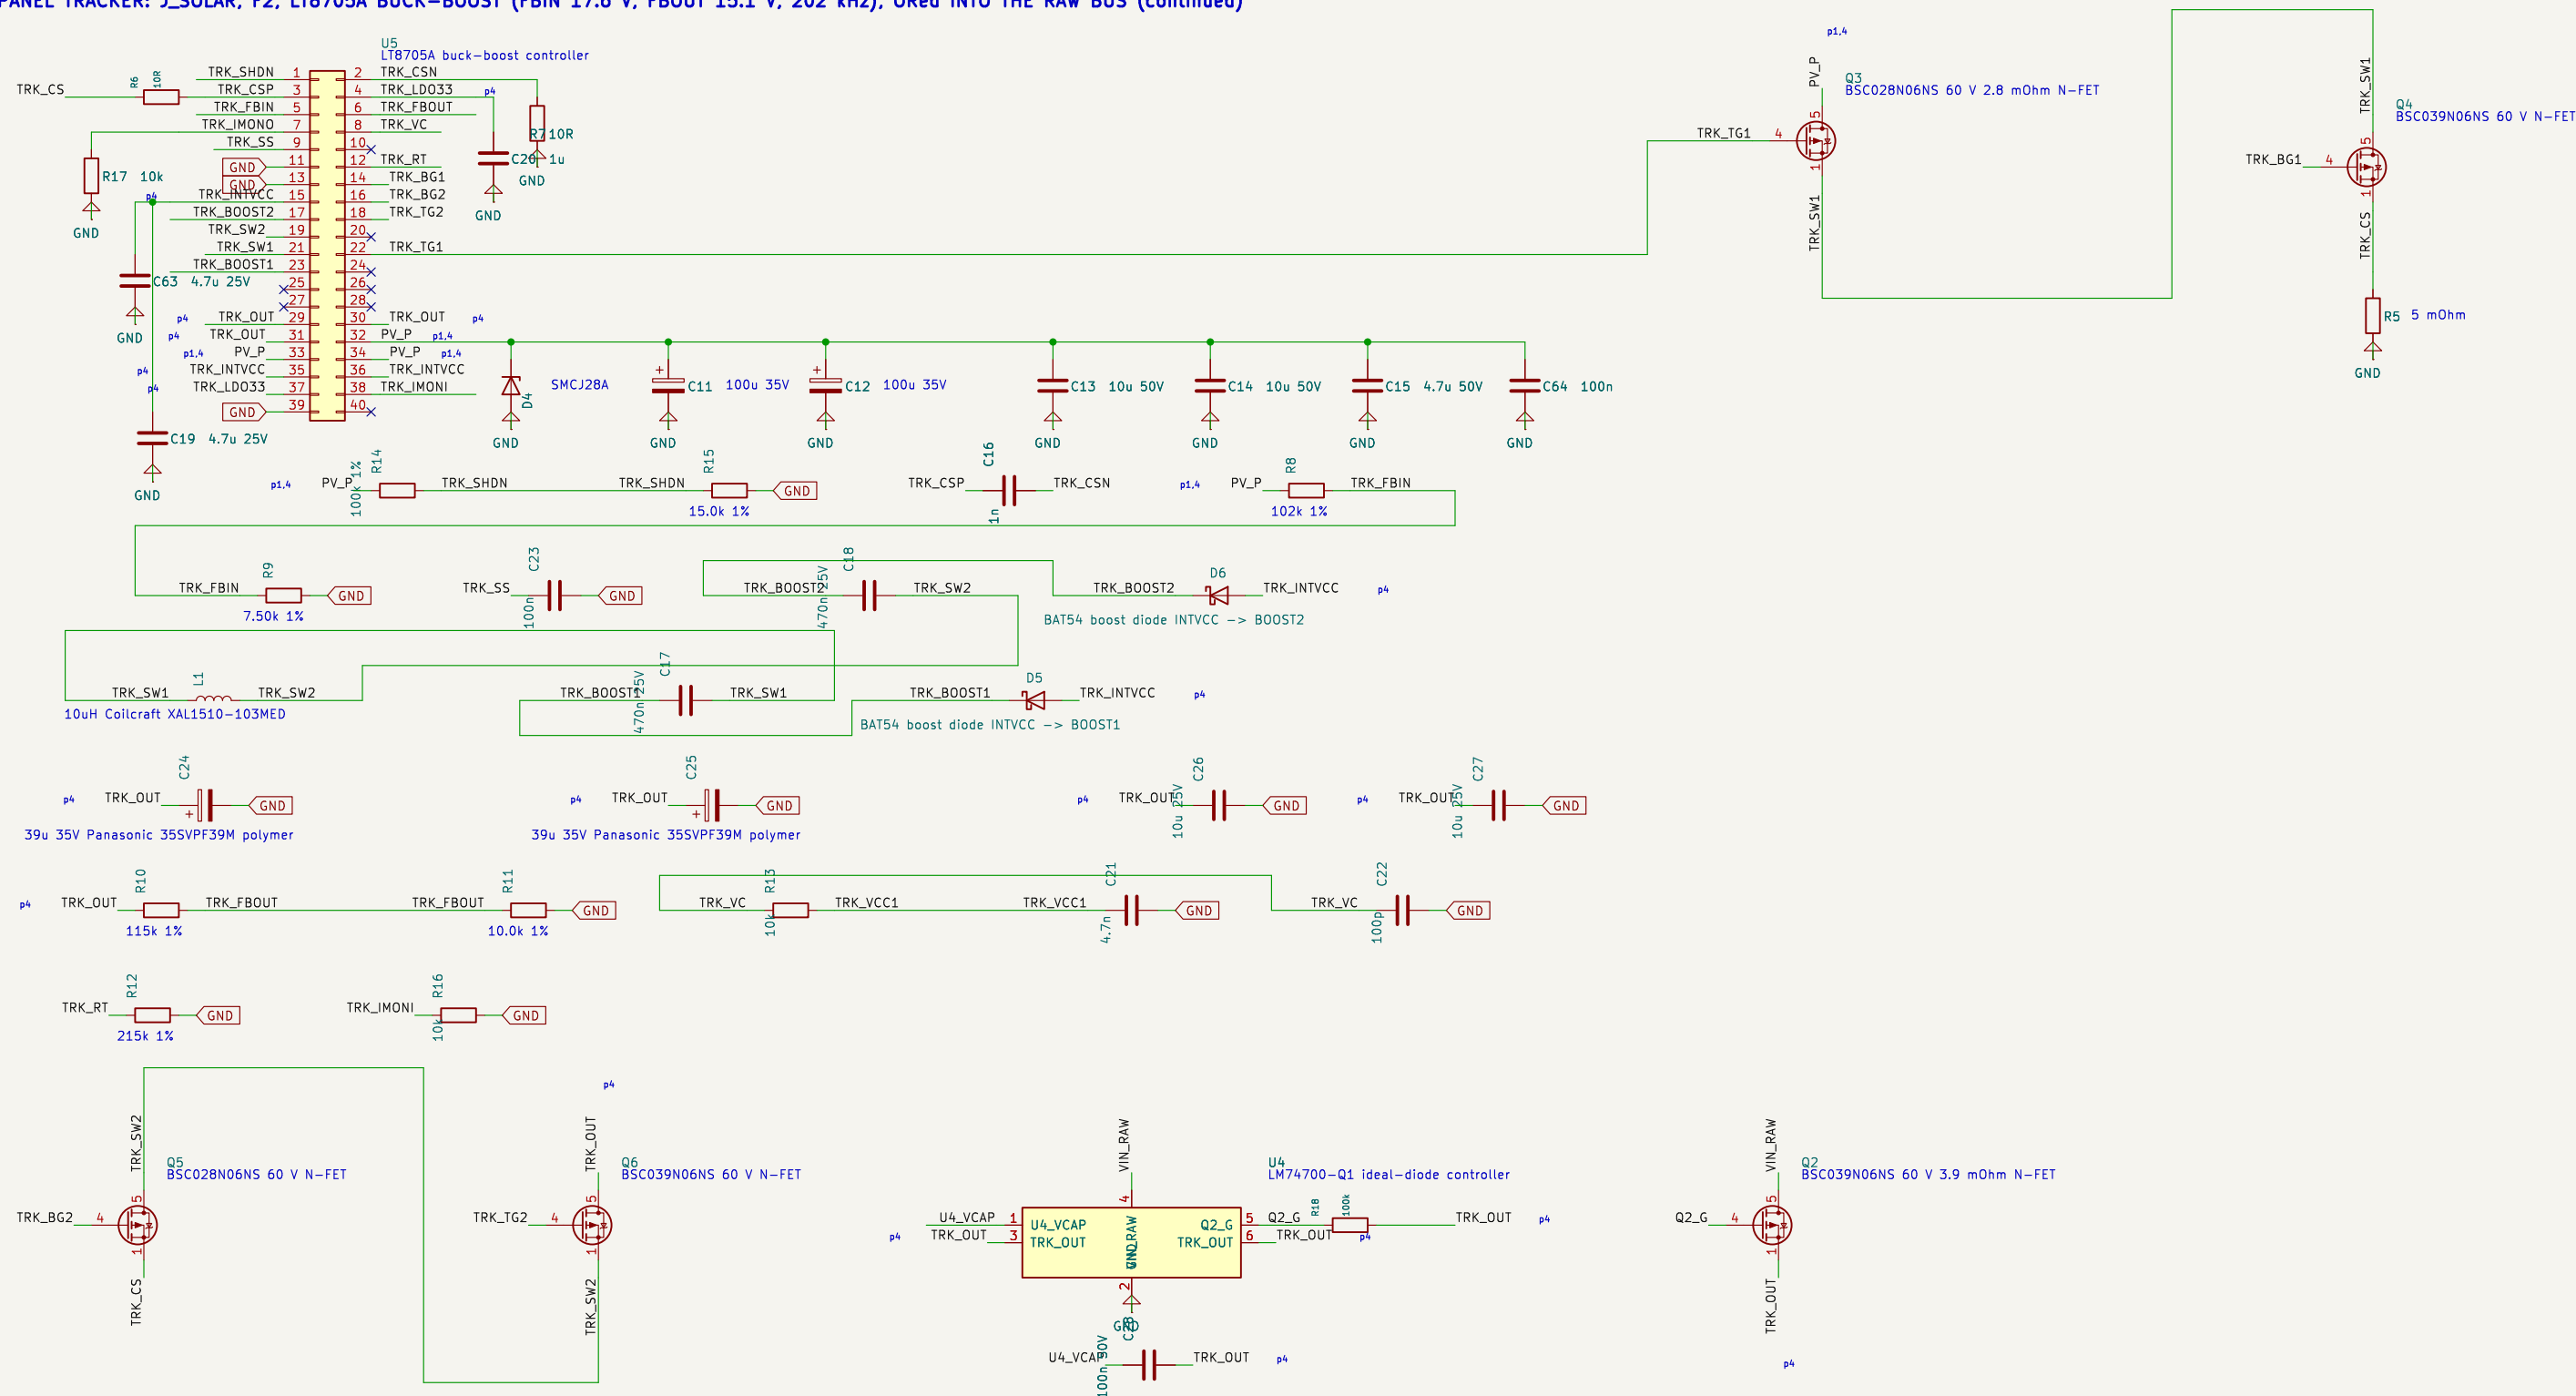

BLOCK LANDS (MIRROR OF A22 J_DOCK) AND THE VIN_RAW POWER PADS (EQ-16)

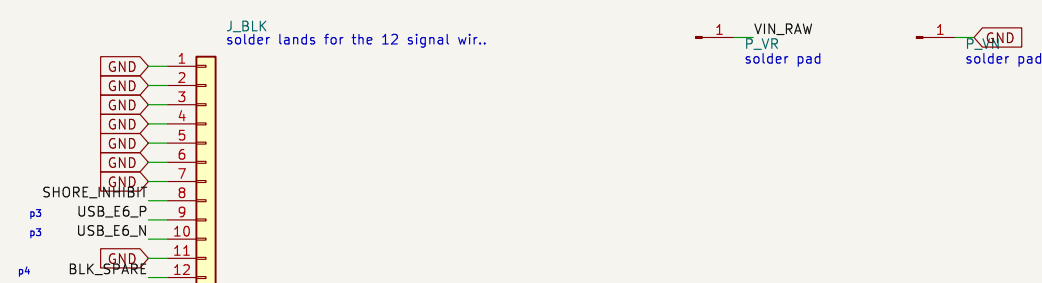

SENSOR CONTROLLER: 5 V BUCK, 3.3 V LDO, RP2040, QSPI FLASH, CRYSTAL, USB, BOOTSEL, PULL-UPS

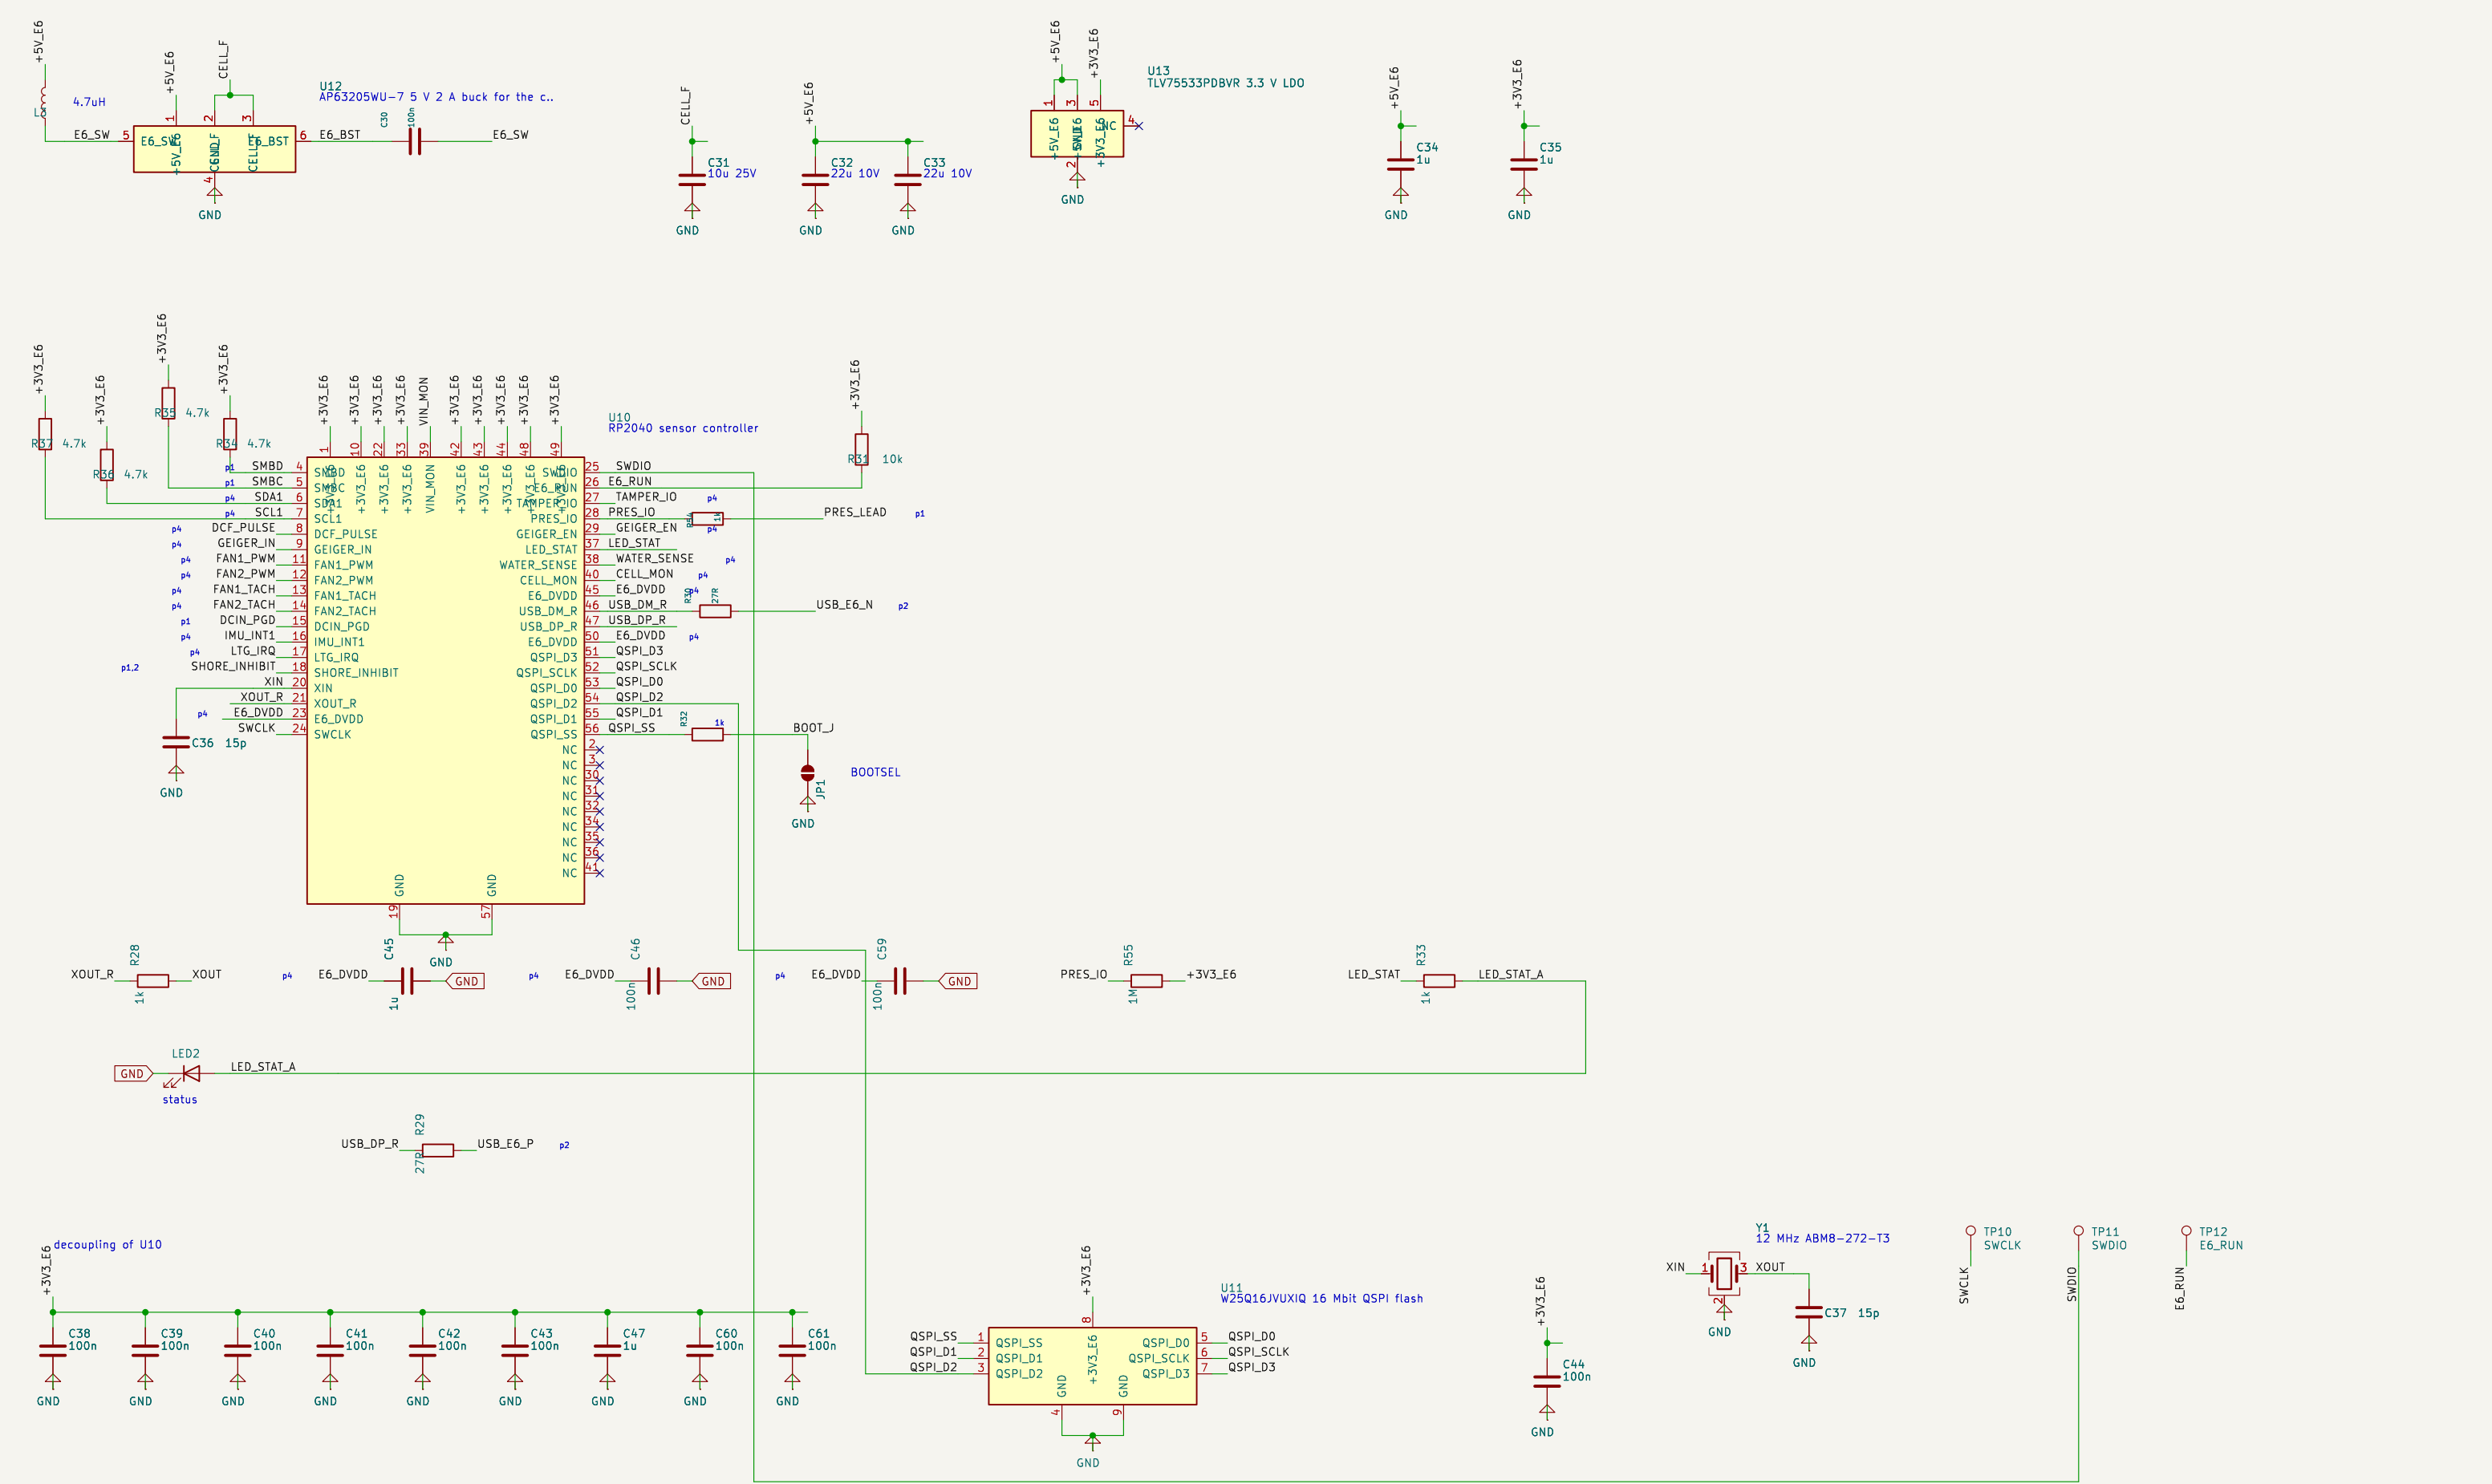

SENSORS, WATER ELECTRODES, MONITORS, FANS, HEADERS, LID SWITCH, GEIGER SUPPLY

