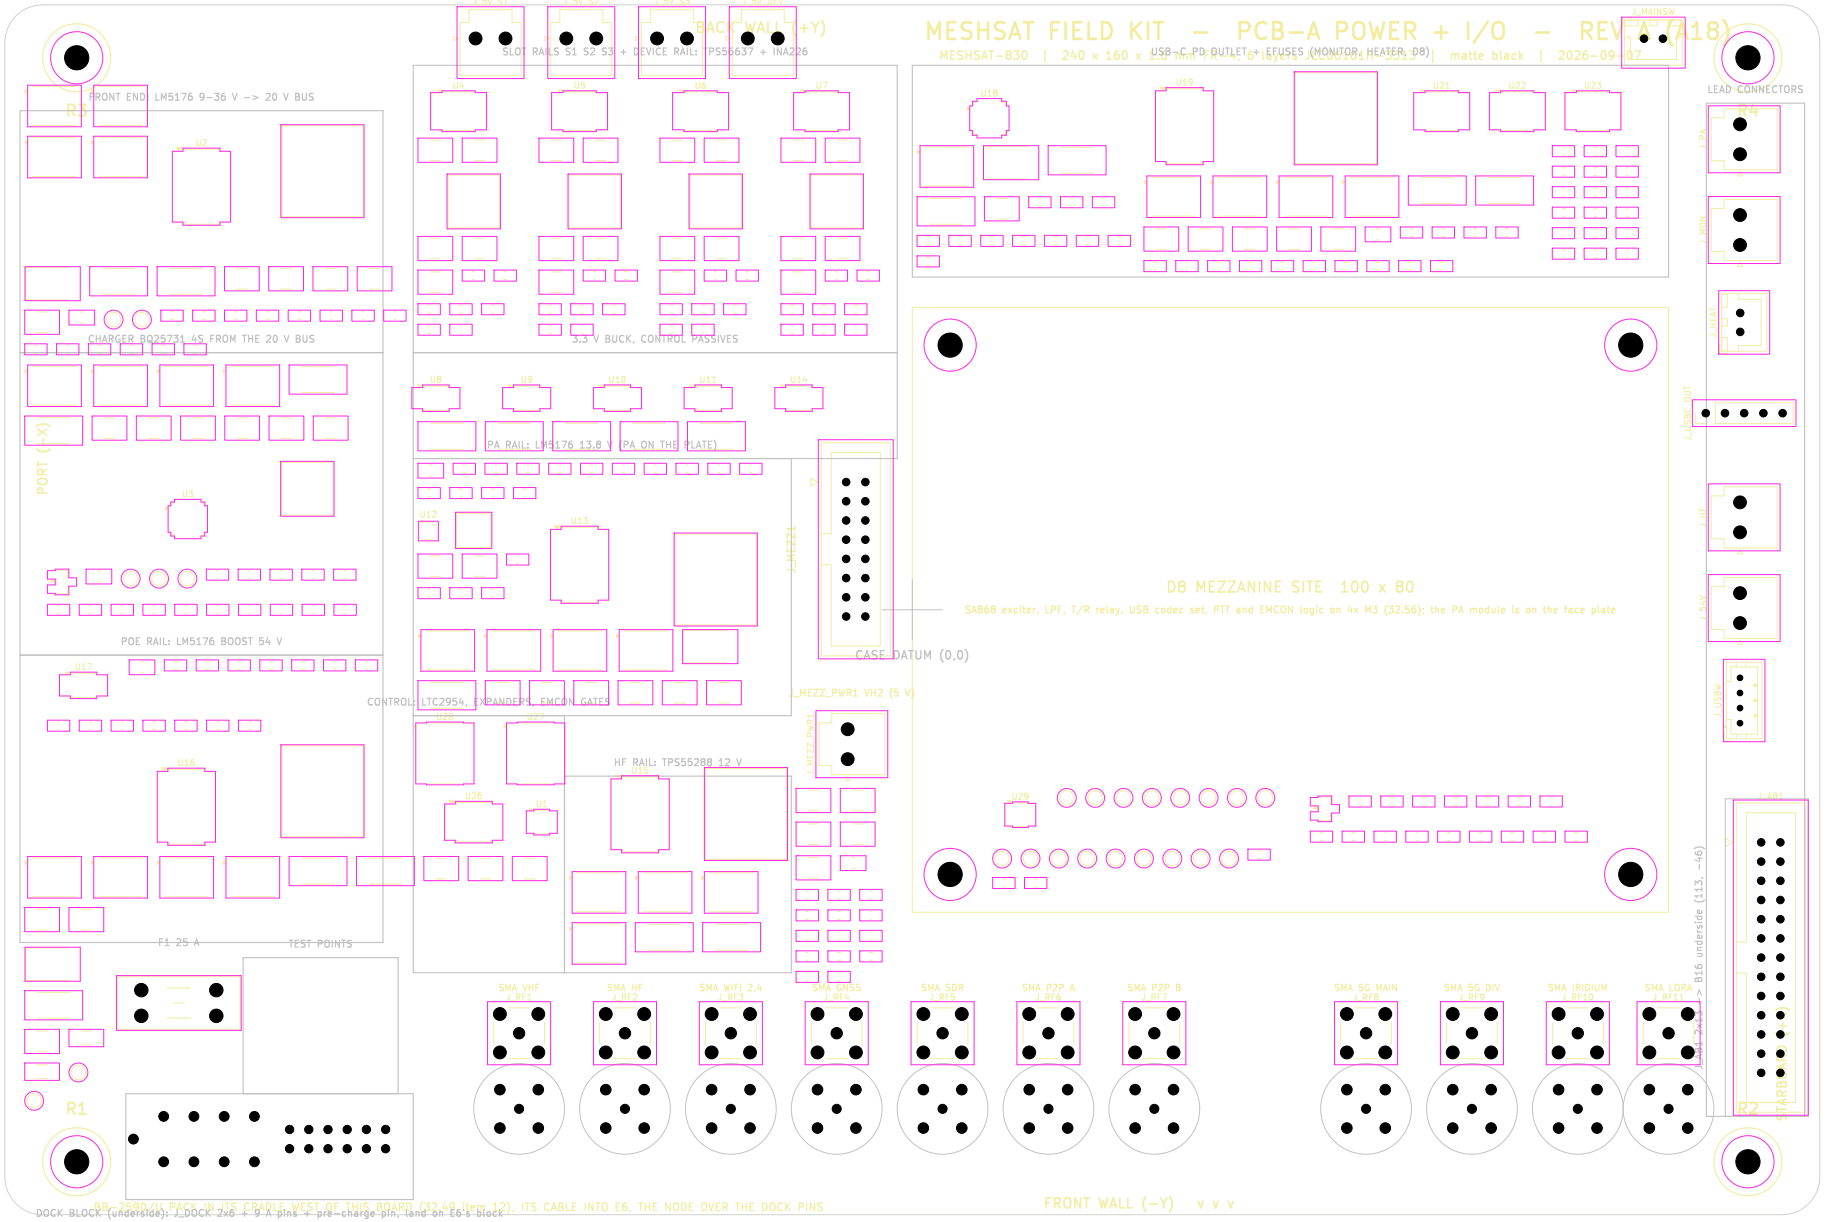

MESHSAT FIELD KIT — PCB-A POWER + I/O — REV A (A18)
MESHSAT-830 | 240 x 160 x 2.0 mm | 4 x 4, 6 layers | matte black | 2026-09-07
BACK WALL (+Y)
FRONT WALL (−Y)
SLOT RAILS S1 S2 S3 + DEVICE RAIL: TPS55637 + INA226
FRONT END: LM5176 9–36 V -> 20 V BUS
CHARGER BQ25731 4S FROM THE 20 V BUS
3.3 V BUCK, CONTROL PASSIVES
PA RAIL: LM5176 13.8 V (PA ON THE PLATE)
POE RAIL: LM5176 BOOST 54 V
CONTROL: LTC2954, EXPANDERS, EMCON GATES
HF RAIL: TPS55288 12 V
F1 25 A
TEST POINTS
D8 MEZZANINE SITE 100 x 80
SA868 exciter, LPF, T/R relay, USB codec set, PTT and EMCON logic on 4x M3 (32,56); the PA module is on the face plate
CASE DATUM (0,0)
LEAD CONNECTORS
USB-C PD OUTLET + EFUSES (MONITOR, HEATER, D8)
SMA VHF
SMA HF
SMA WIFI 2.4
SMA GNSS
SMA SDR
SMA P2P A
SMA P2P B
SMA 5G MAIN
SMA 5G DIV
SMA IRIDIUM
SMA LORA
DOCK BLOCK (underside): 2 DOCK 2x6 + 9 A pins + pre-charge pin, land on E6's block
RB-2800/U PACK IN ITS CRADLE WEST OF THIS BOARD (32.40 item 12); ITS CABLE INTO E6, THE NODE OVER THE DOCK PINS