

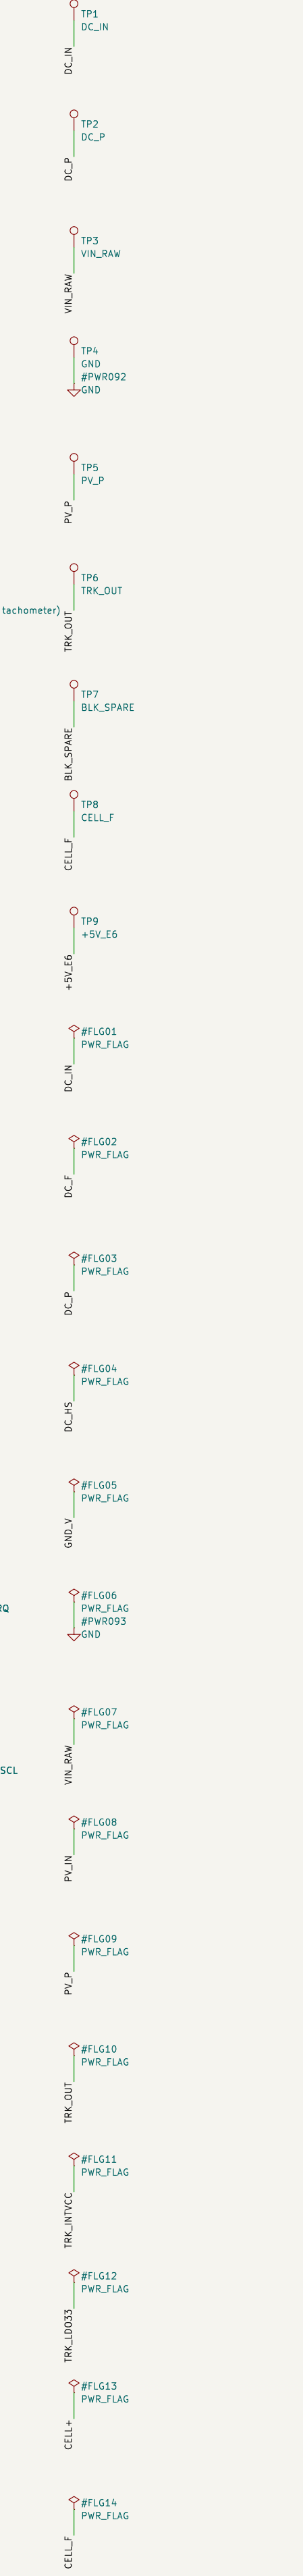
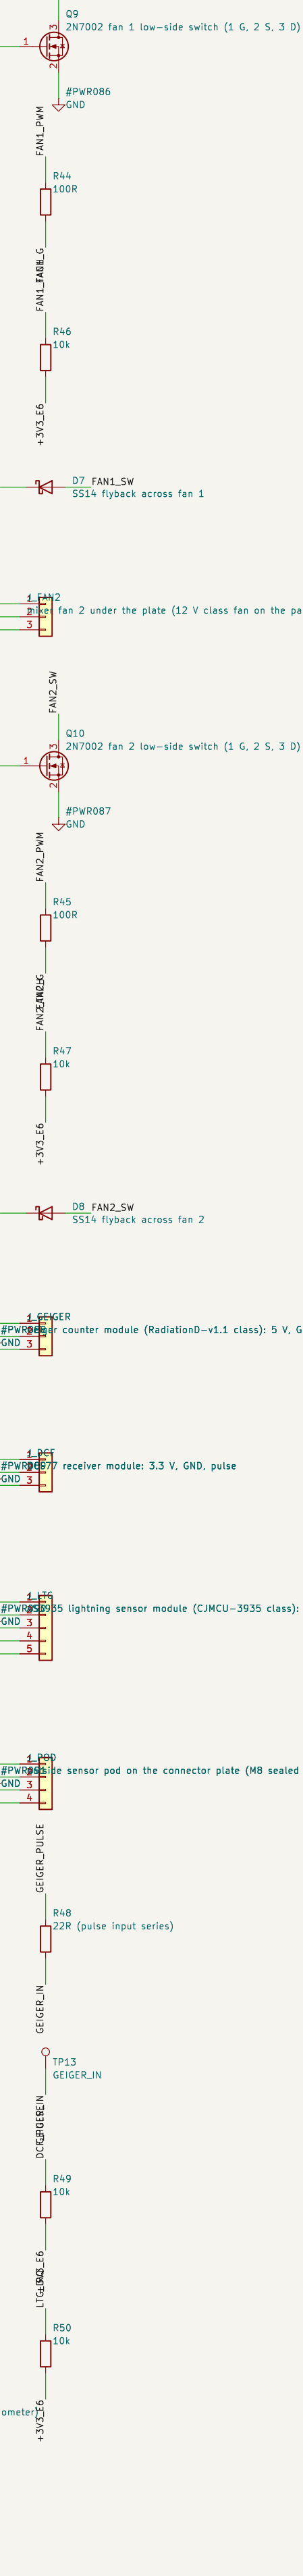
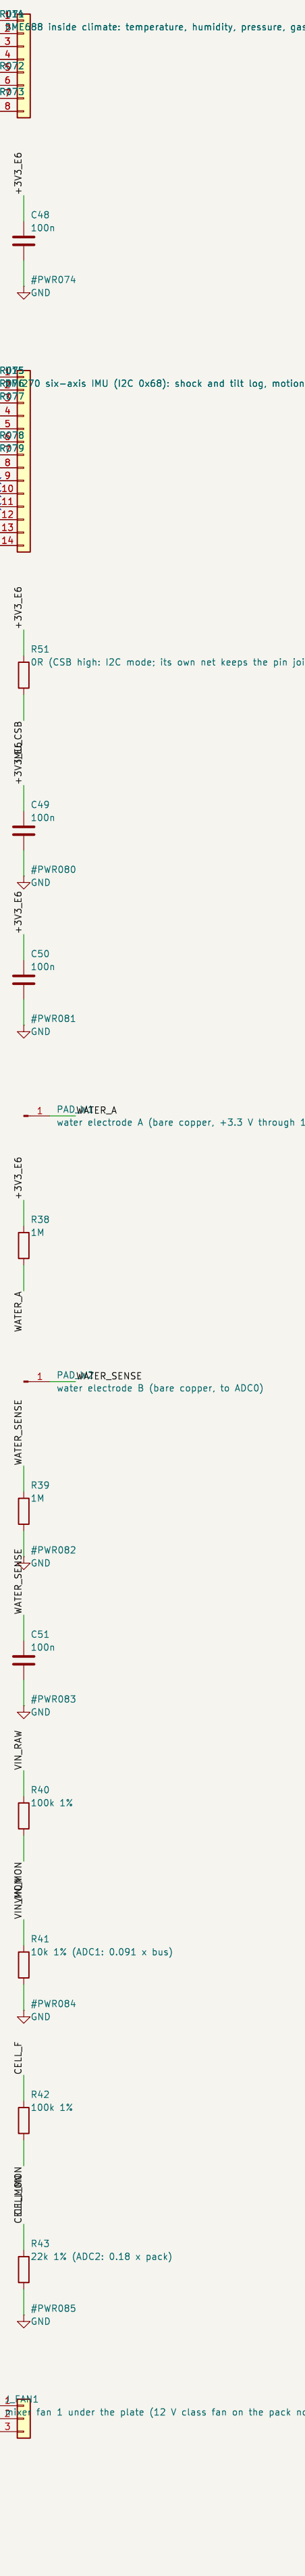
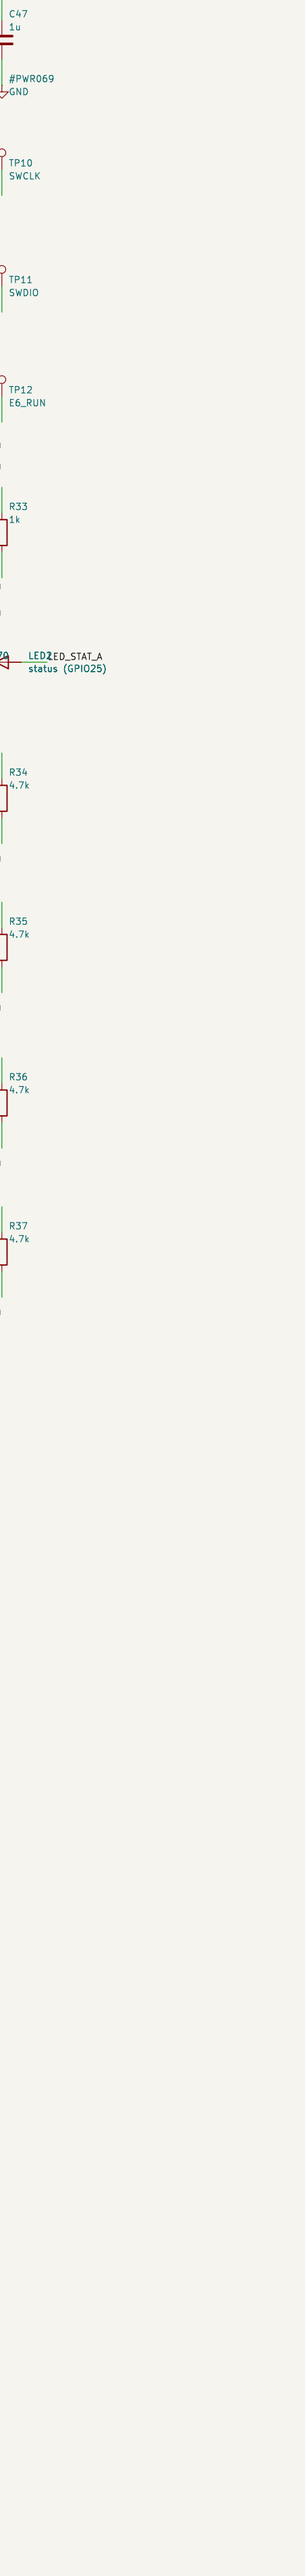
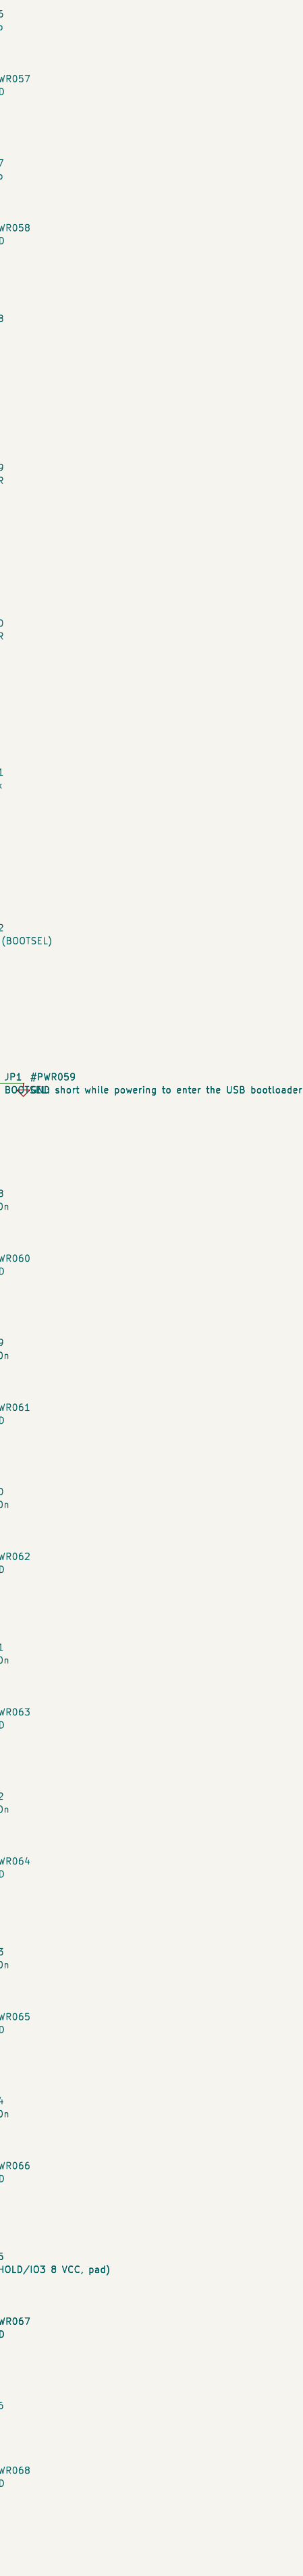
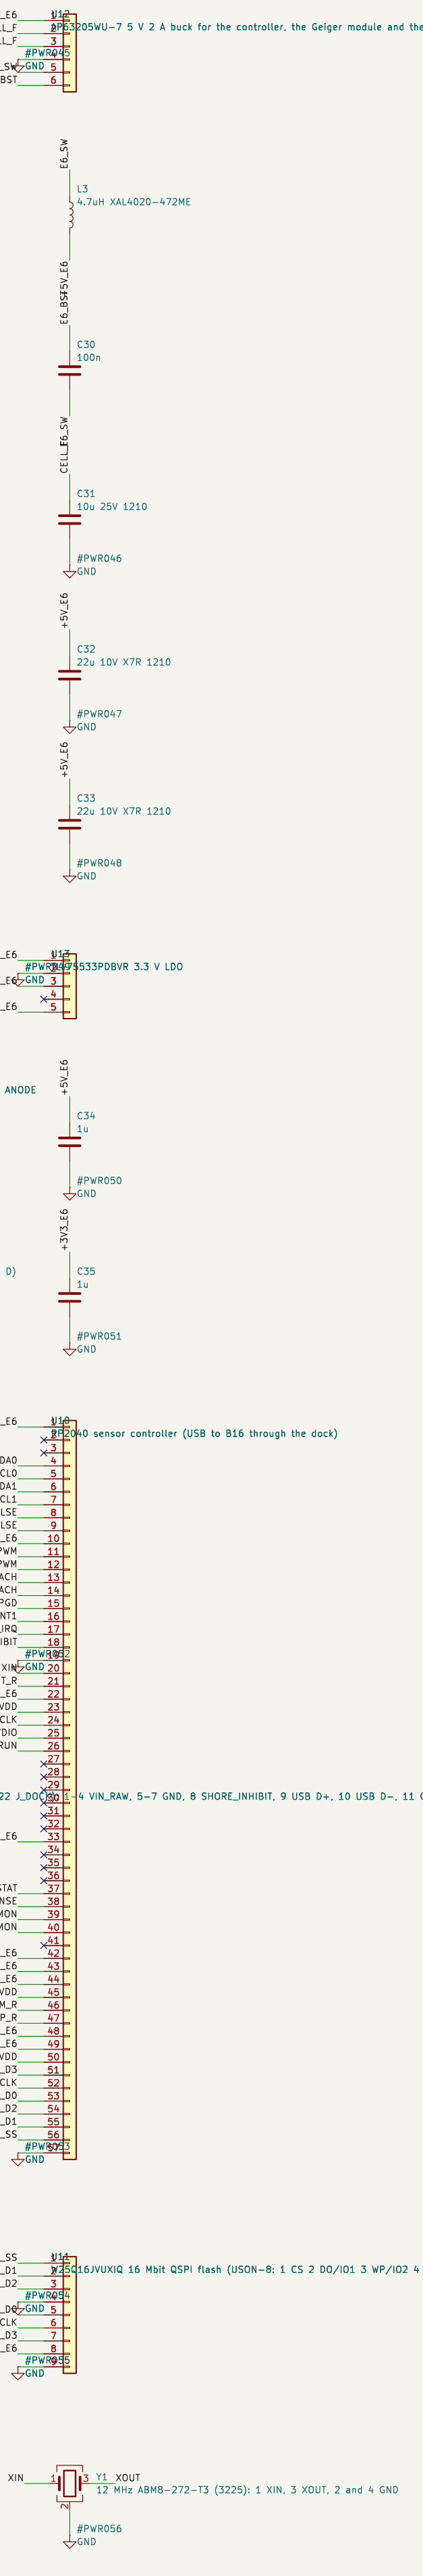
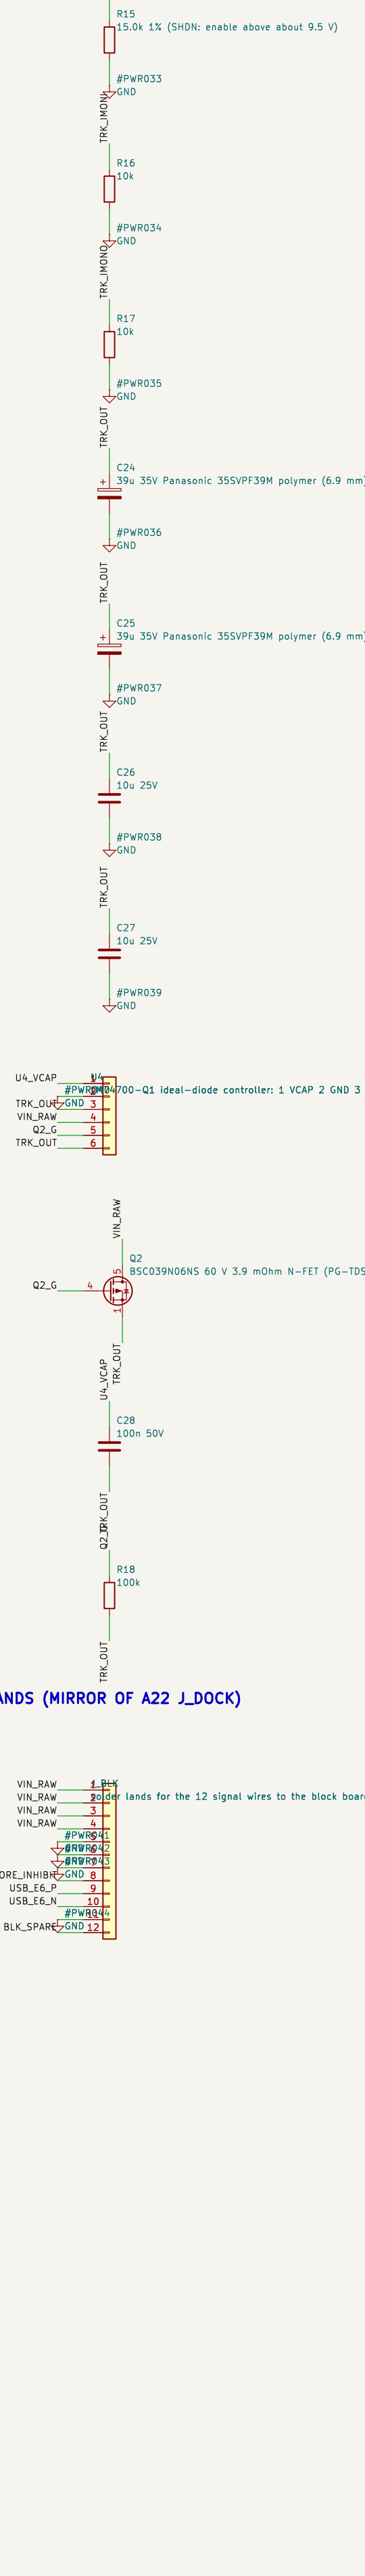
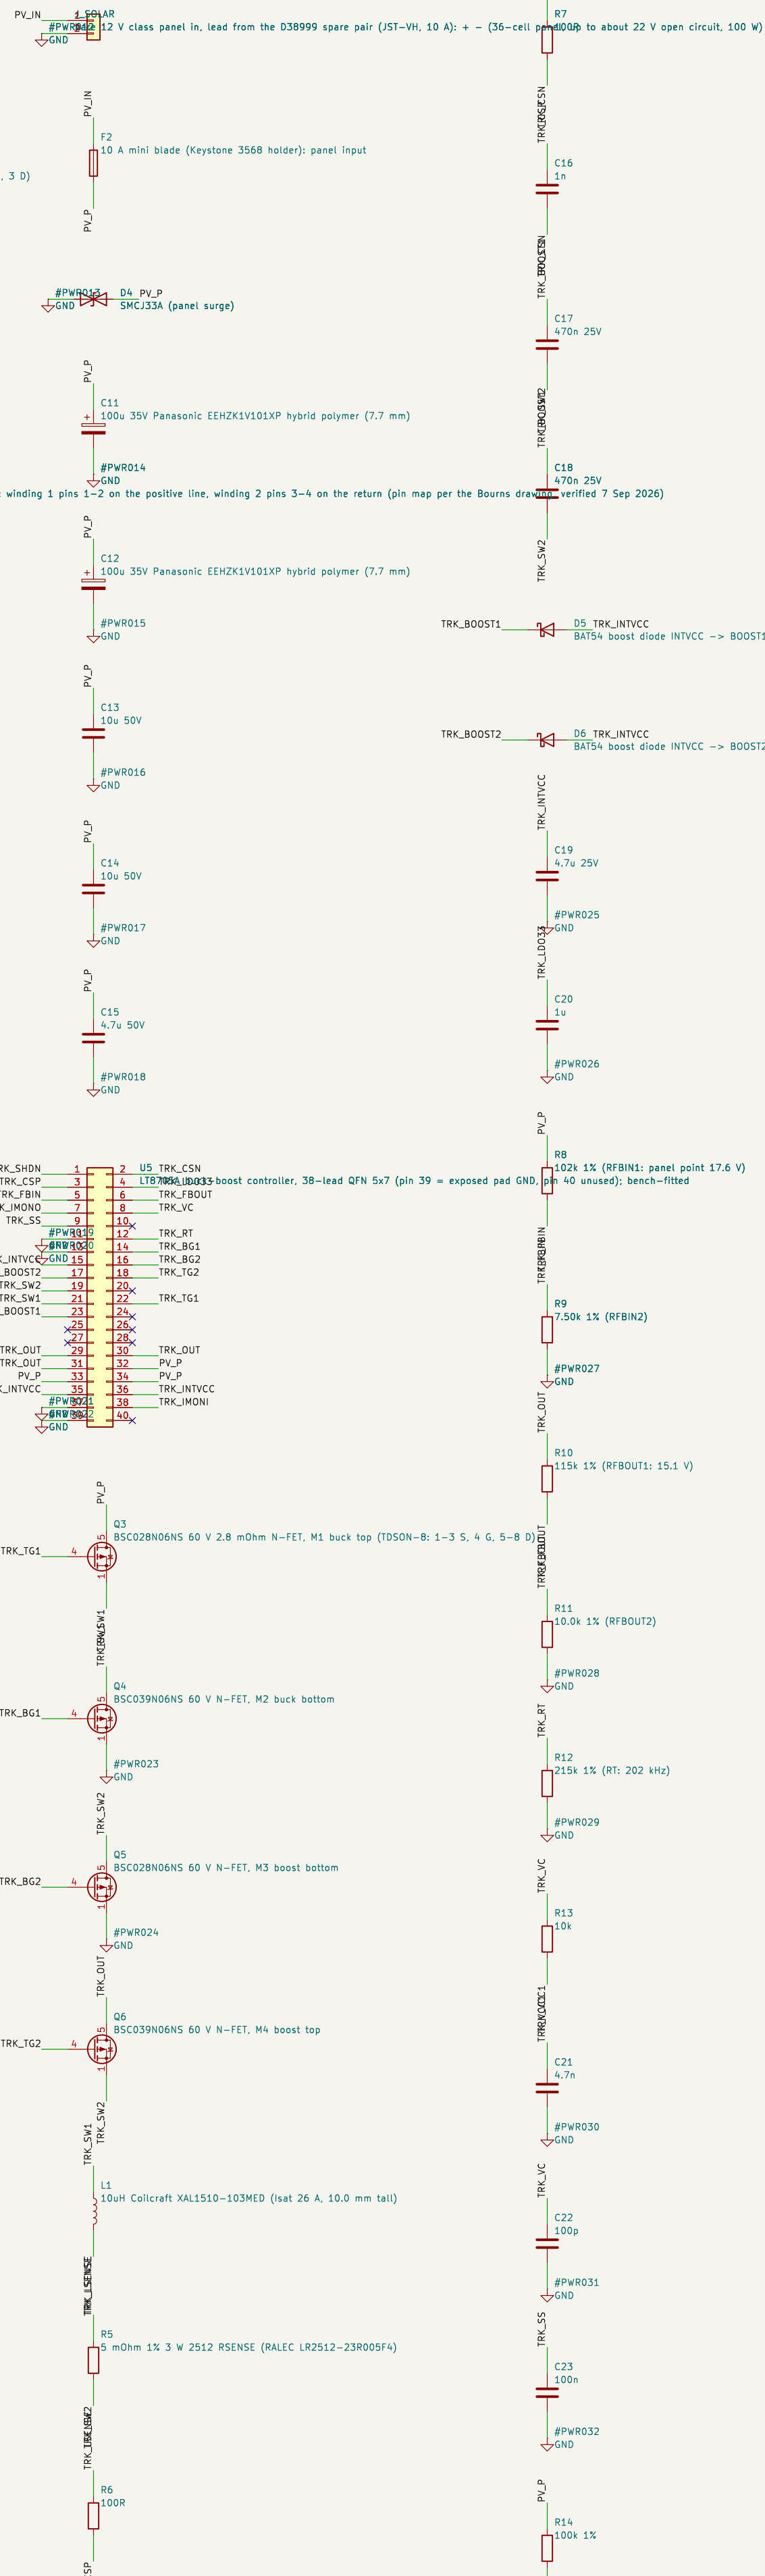


PACK ENTRY: BB-2590/U CABLE ON XT60, 25 A BLADE, **REMS1B** AND **BLSMR**, **EMR5/SHR01F1**, LM74700 IDEAL DIODE, LM5069 HOT-SWAP, SRF1260 FILTER, CLAMPS PANEL TRACKER: **J_SOLAR**, F2, LT8705A BUCK-BOOST (FBIN 17.6 V, FBOUT 15.1 V, 202 kHz), **0red** INTO THE RAW BUS

SENSOR CONTROLLER: 5 V BUCK, 3.3 V LDO, RP2040, QSPI FLASH, CRYSTAL, USB, BOOTSEL, PULL-UPS

SENSORS, WATER ELECTRODES, MONITORS, FANS, HEADERS

TEST POINTS, FLAGS

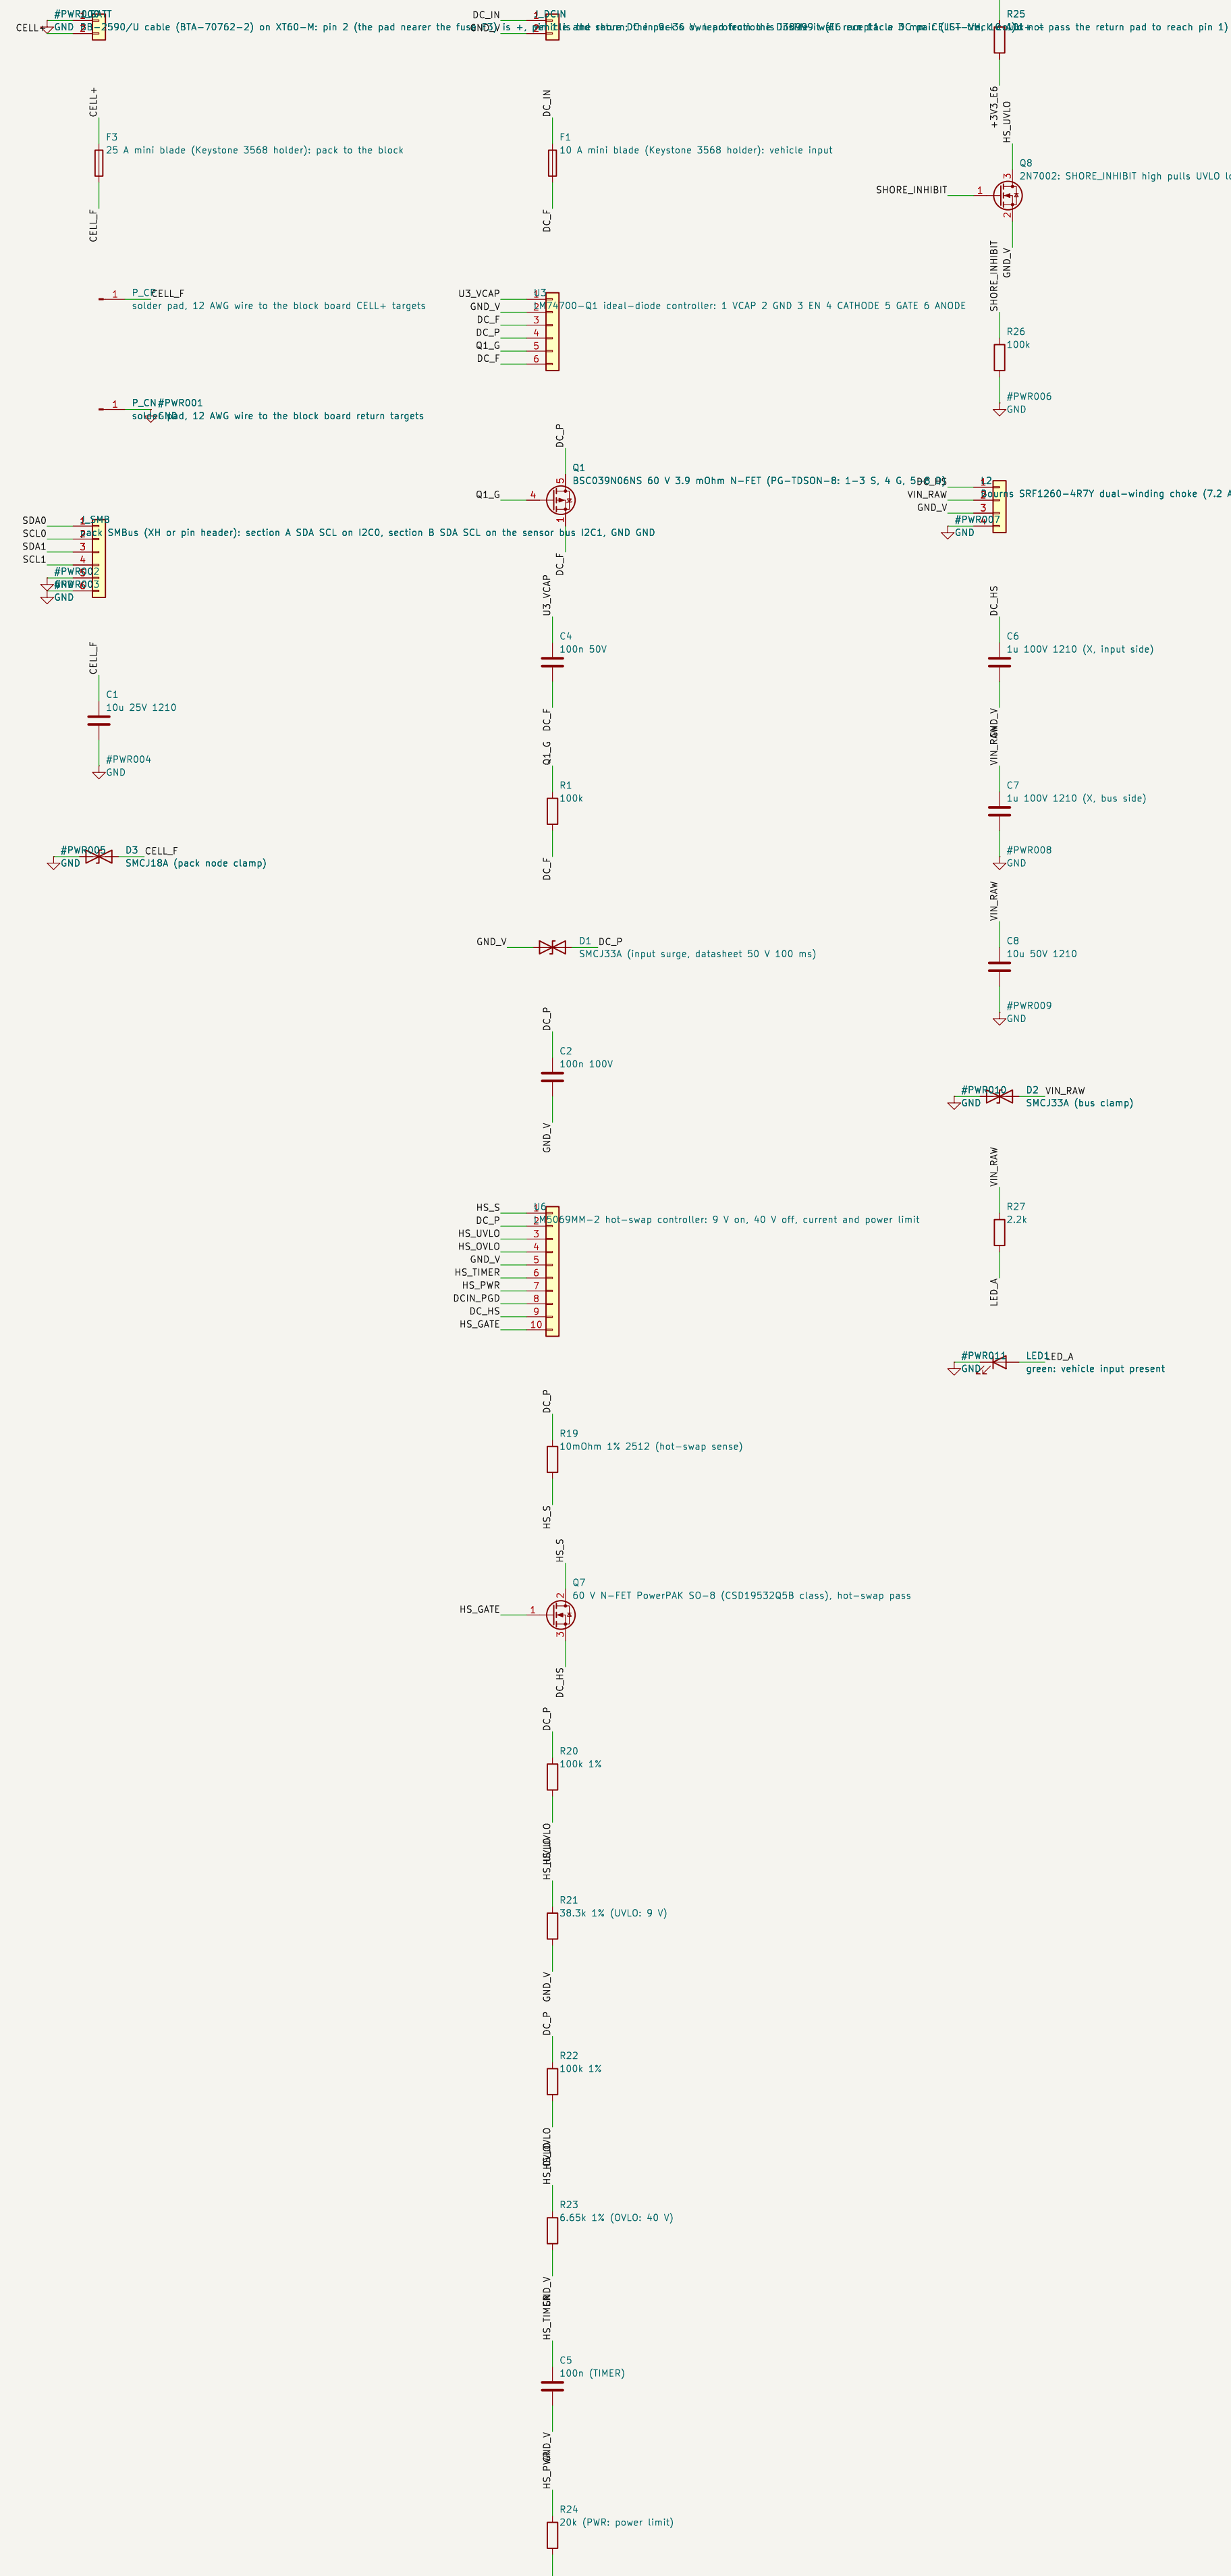

BLOCK LANDS (MIRROR OF A22_J_DOCK)