
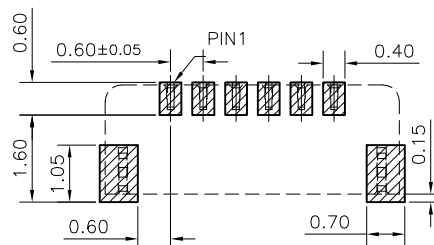
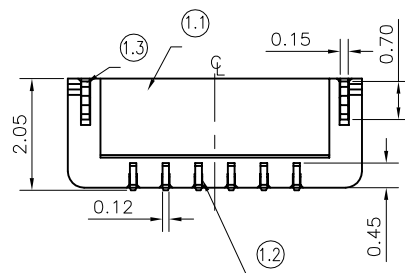




SECTION A-A
SCALE 2:1

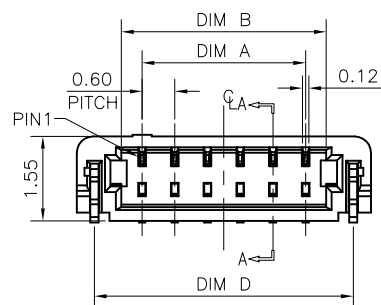

RECOMMEND PCB LAYOUT
GENERAL TOLERANCE ± 0.05

NOTES:

1. MATERIAL:

- 1.1 HOUSING: THERMOPLASTIC, HIGH TEMP.,UL94V-0
- 1.2 CONTACT: COPPER ALLOY
- 1.3 NAIL: BRASS

2. FINISH:

CONTACT:

- 50u" MIN. NICKEL UNDERPLATING OVERALL.
- 1: GOLD FLASH PLATING.
- N: 100u" MIN. MATT TIN.
- C: 15u" GOLD ON CONTACT AREA
- A: 3u" MIN GOLD PLATED ON CONTACT AREA
- GOLD FLASH PLATED ON SOLDER TAIL

NAIL:

- 50u" MIN. NICKEL UNDERPLATING OVERALL.
- 100u" MIN. MATT TIN.

3. SPEC. PLS. REFER TO PS-50376-XXXX-001

4. PACKAGE PLS. SEE PART NUMBER

5. PART NUMBER

50376-XXX X X-XXX

NO OF CKT

PACKING:

0:TAPE REEL

1:TUBE

XXX	COLOR	TAPE COVER: SULF BOND	PACKING
001	Black	N	EN-50376-XXXX-XX-TRP
002	NATURAL	N	EN-50376-XXXX-XX-TRP
Y02	Black	Y	EN-50376-XXXX-XX-TRP
003	Black	N	EN-50376-XXXX-05-TRP
004	Black	N	EN-50376-XXXX-11-TRP

CONTACT PLATING:

- 1: G/F (LEAD FREE)
- N: 100u" MATT TIN (LEAD FREE)
- C: 15u" ON CONTACT AREA
- A: 3u" MIN GOLD PLATED ON CONTACT AREA

CKT	DIM A	DIM B	DIM C	DIM D
2	0.6	1.36	3.00	2.35
4	1.80	2.56	4.20	3.55
5	2.40	3.16	4.80	4.15
6	3.00	3.76	5.40	4.75
7	3.60	4.36	6.00	5.35
8	4.20	4.96	6.60	5.95
10	5.40	6.16	7.80	7.15
12	6.60	7.36	9.00	8.35
14	7.80	8.56	10.20	9.55
16	9.00	9.76	11.40	10.75

QUALITY SYMBOLS MAJOR CRITICAL	DRAWN BY GUOFEI	DATE '20/07/15		
	CHECKED BY BRAVE	DATE '20/07/15		
	APPROVED BY BRAVE	DATE '20/07/15	TITLE 0.6mm PITCH WTB SMT R/A TYPE	
	UNITS mm		SIZE A4	DWG NO. 50376-XXXX-XXX
GENERAL TOLERANCES (UNLESS SPECIFIED) X. ± 0.5 .X ± 0.25 .XX ± 0.15 .XXX ± 0.1 ANGLES $\pm 2^\circ$		SCALE 1:1	SHEET NO. 1 OF 1	REV P
PART NO. SEE NOTES				