

ANCHOR NODE EXTENSION IN INDOORGML - SEAMLESS NAVIGATION BETWEEN INDOOR AND OUTDOOR SPACE

DISCUSSION PAPER

PUBLISHED

Submission Date: 2019-02-05

Approval Date: 2019-02-28

Publication Date: 2019-12-11

Editor: Kyoung-Sook Kim, Jiyeong Lee

Notice: This document is not an OGC Standard. This document is an OGC Discussion Paper and is therefore not an official position of the OGC membership. It is distributed for review and comment. It is subject to change without notice and may not be referred to as an OGC Standard. Further, an OGC Discussion Paper should not be referenced as required or mandatory technology in procurements.

License Agreement

Use of this document is subject to the license agreement at <https://www.ogc.org/license>

Copyright notice

Copyright © 2026 Open Geospatial Consortium

To obtain additional rights of use, visit <https://www.ogc.org/legal>

Note

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. The Open Geospatial Consortium shall not be held responsible for identifying any or all such patent rights.

Recipients of this document are requested to submit, with their comments, notification of any relevant patent claims or other intellectual property rights of which they may be aware that might be infringed by any implementation of the standard set forth in this document, and to provide supporting documentation.

CONTENTS

I. ABSTRACT	iv
II. KEYWORDS	iv
III. SECURITY CONSIDERATIONS	v
IV. SUBMITTING ORGANIZATIONS	vi
V. SUBMITTERS	vi
1. NORMATIVE REFERENCES	2
2. TERMS, DEFINITIONS AND ABBREVIATED TERMS	4
2.3. Abbreviated terms	4
3. INTRODUCTION	7
4. THE CONNECTION BETWEEN INDOOR AND OUTDOOR SPACES	9
5. SEAMLESS NAVIGATION MODULE OF INDOORGML USING ANCHOR NODE	11
5.1. Conversion method of the coordinate reference system	12
5.2. UML diagram of the seamless navigation module	15
6. USE CASES	24
6.1. Use case with CityGML	24
6.2. Use case with a specification for the pedestrian network model from Japan government	30
6.3. Use case with GDF 5.0	35
ANNEX A XML SCHEMA FOR INDOORGML SEAMLESSNAVIGATION MODULE	44
ANNEX B SEAMLESSNAVIGATION MODULE EXAMPLE DOCUMENT	48
ANNEX C BIBLIOGRAPHY	52
ANNEX D REVISION HISTORY	54

I

ABSTRACT

This OGC discussion paper provides an extension module of OGC Indoor Geography Markup Language (IndoorGML) for the seamless navigation between indoor and outdoor spaces. The OGC IndoorGML standard has an issue on the data model that affects the connection of indoor and outdoor spaces via an “Anchor Node,” which is a conceptual part for connecting indoor and outdoor spaces. This discussion paper aims to show use cases of how IndoorGML can connect with other geospatial standards that represent outdoor spaces (and road networks), such as OGC City Geography Markup Language (CityGML) and version 5.0 of the Geographic Data Files (GDF) format.

II

KEYWORDS

The following are keywords to be used by search engines and document catalogues.

ogcdoc, OGC document, OGC, IndoorGML, Indoor space, Outdoor space, Seamless navigation, CityGML



SECURITY CONSIDERATIONS

No security considerations have been made for this document.

IV

SUBMITTING ORGANIZATIONS

The following organizations submitted this Document to the Open Geospatial Consortium (OGC):

- National Institute of Advanced Industrial Science and Technology
- The University of Seoul
- All for Land Inc

V

SUBMITTERS

All questions regarding this submission should be directed to the editor or the submitters:

NAME	AFFILIATION
Kyong-Sook Kim	National Institute of Advanced Industrial Science and Technology
Teahoon Kim	National Institute of Advanced Industrial Science and Technology
Jiyeong Lee	University of Seoul
Hye-Young Kang	All for Land Inc.



1

NORMATIVE REFERENCES

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

International Organization for Standardization (committee): ISO 14825:2011, *Intelligent transport systems – Geographic Data Files (GDF) – GDF5.0*. International Organization for Standardization, Geneva (2011). <https://www.iso.org/standard/54610.html>.

Jiyeong Lee, Ki-Joune Li, Sisi Zlatanova, Thomas H. Kolbe, Claus Nagel, Thomas Becker, Open Geospatial Consortium: OGC 14-005r5, *OGC® IndoorGML – with Corrigendum*. Open Geospatial Consortium (2018). <http://www.opengis.net/doc/IS/indoorgml/1.0.3>.

Gerhard Gröger, Thomas H. Kolbe, Claus Nagel, Karl-Heinz Häfele, Open Geospatial Consortium: OGC 12-019, *OGC City Geography Markup Language (CityGML) Encoding Standard*. Open Geospatial Consortium (2012). <http://www.opengis.net/spec/citygml/2.0>.

The background features a dark blue field with several thin, light yellow lines intersecting at various points. Three of these intersection points are marked with small yellow dots. One dot is located in the upper right quadrant, another in the middle right, and a third in the lower left. The overall design is minimalist and modern.

2

TERMS, DEFINITIONS AND ABBREVIATED TERMS

TERMS, DEFINITIONS AND ABBREVIATED TERMS

This document uses the terms defined in OGC Policy Directive 49, which is based on the ISO/IEC Directives, Part 2, Rules for the structure and drafting of International Standards. In particular, the word “shall” (not “must”) is the verb form used to indicate a requirement to be strictly followed to conform to this document and OGC documents do not use the equivalent phrases in the ISO/IEC Directives, Part 2.

This document also uses terms defined in the OGC Standard for Modular specifications (OGC 08-131r3), also known as the ‘ModSpec’. The definitions of terms such as standard, specification, requirement, and conformance test are provided in the ModSpec.

For the purposes of this document, the following additional terms and definitions apply.

This document uses the terms defined in Sub-clause 5.3 of [OGC 06-121r8], which is based on the ISO/IEC Directives, Part 2, Rules for the structure and drafting of International Standards. In particular, the word “shall” (not “must”) is the verb form used to indicate a requirement to be strictly followed to conform to this Best Practice.

2.1. Indoor space

A space within one or multiple buildings consisting of architectural components.

2.2. Cellular Space

A space where location is identified by a cell identifier

2.3. Abbreviated terms

The following abbreviated terms are used in this discussion paper:

- AIST National Institute of Advanced Industrial Science and Technology
- CityGML City Geography Markup Language

- CRS Coordinate Reference System
- GDF Geographic Data Files
- GML Geography Markup Language
- IndoorGML Indoor Geography Markup Language
- ISO International Organization for Standardization
- OGC Open Geospatial Consortium
- OSM OpenStreetMap
- UML Unified Modeling Language

The background features a dark blue field with several thin, light yellow lines intersecting at various points. Three of these intersection points are marked with small yellow dots. One dot is located in the upper right quadrant, another in the middle right, and the third in the lower left. The overall design is minimalist and modern.

3

INTRODUCTION

This OGC document tries to extend the OGC IndoorGML core and navigation modules for supporting seamless navigation from an indoor to an outdoor space, and vice versa. Although there are many approaches to determine the indoor or outdoor location of a user, few services support both indoor and outdoor space due to the absence of a data model that covers/ connects them both. The scope of this discussion paper is to design an extension data model of IndoorGML for linking between two anchor parts of indoor and outdoor space. This paper consists of three parts:

- The concept of anchor nodes for the connection between indoor and outdoor space,
- An extension of IndoorGML schema for seamless navigation, and
- A use case with other geospatial data model standards: CityGML 2.0, Geographic Data Files 5.0, and the specification for a pedestrian network model from the Government of Japan [2]



4

THE CONNECTION BETWEEN INDOOR AND OUTDOOR SPACES

THE CONNECTION BETWEEN INDOOR AND OUTDOOR SPACES

Designing a converged data model to represent indoor and outdoor spaces is one of the typical issues on geographic information systems. In particular, a route navigation service is primarily associated with the network model of connectivity of roads. Compared to many standard formats that represent outdoor networks, only IndoorGML provides a standard model to describe the connectivity of components in indoor space. Since IndoorGML has been published, various studies have been carried out to express indoor and outdoor space connections.

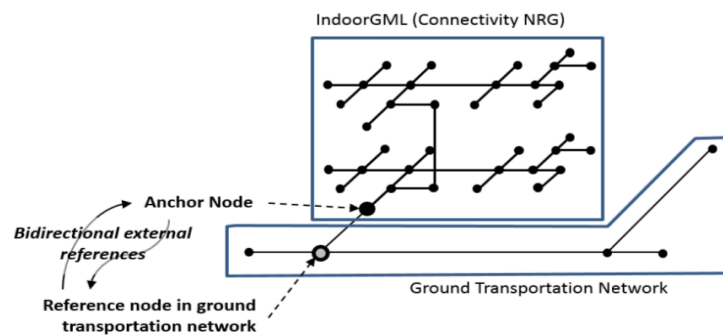


Figure 16: Anchor Node Connecting Indoor and Outdoor Networks [27]


Figure 1 – Anchor node connecting indoor and outdoor networks (OGC 14-005r5)

As shown in Figure 1, IndoorGML introduces a simple concept of an “anchor node” for representing indoor and outdoor connections. For example, an “entrance” is represented as an anchor node, a topological node to connect an indoor and outdoor element.

However, there is no element in the IndoorGML Core (and Navigation) model to represent anchor node, and specific examples of how to apply IndoorGML for connecting outdoor elements, such as roads, junctions, and pedestrian ways, are excluded in the IndoorGML standard document. In [4], the indoor and outdoor connections are expressed by extending the *State* and *Transition* of the core module of IndoorGML to *SpecialState* (Anchor node) and *SpecialTransition* (Anchor edge). However, this extension brings cost overruns when constructing and managing all indoor and outdoor data in/for an IndoorGML document.

This discussion paper proposes an IndoorGML extension model to interconnect indoor and outdoor models for seamless navigation by defining anchor node in the model. To this end, this document includes:

1. Definition of a conversion matrix between indoor and outdoor coordinate systems
2. Definition of the element of anchor node that extends IndoorGML core and navigation modules

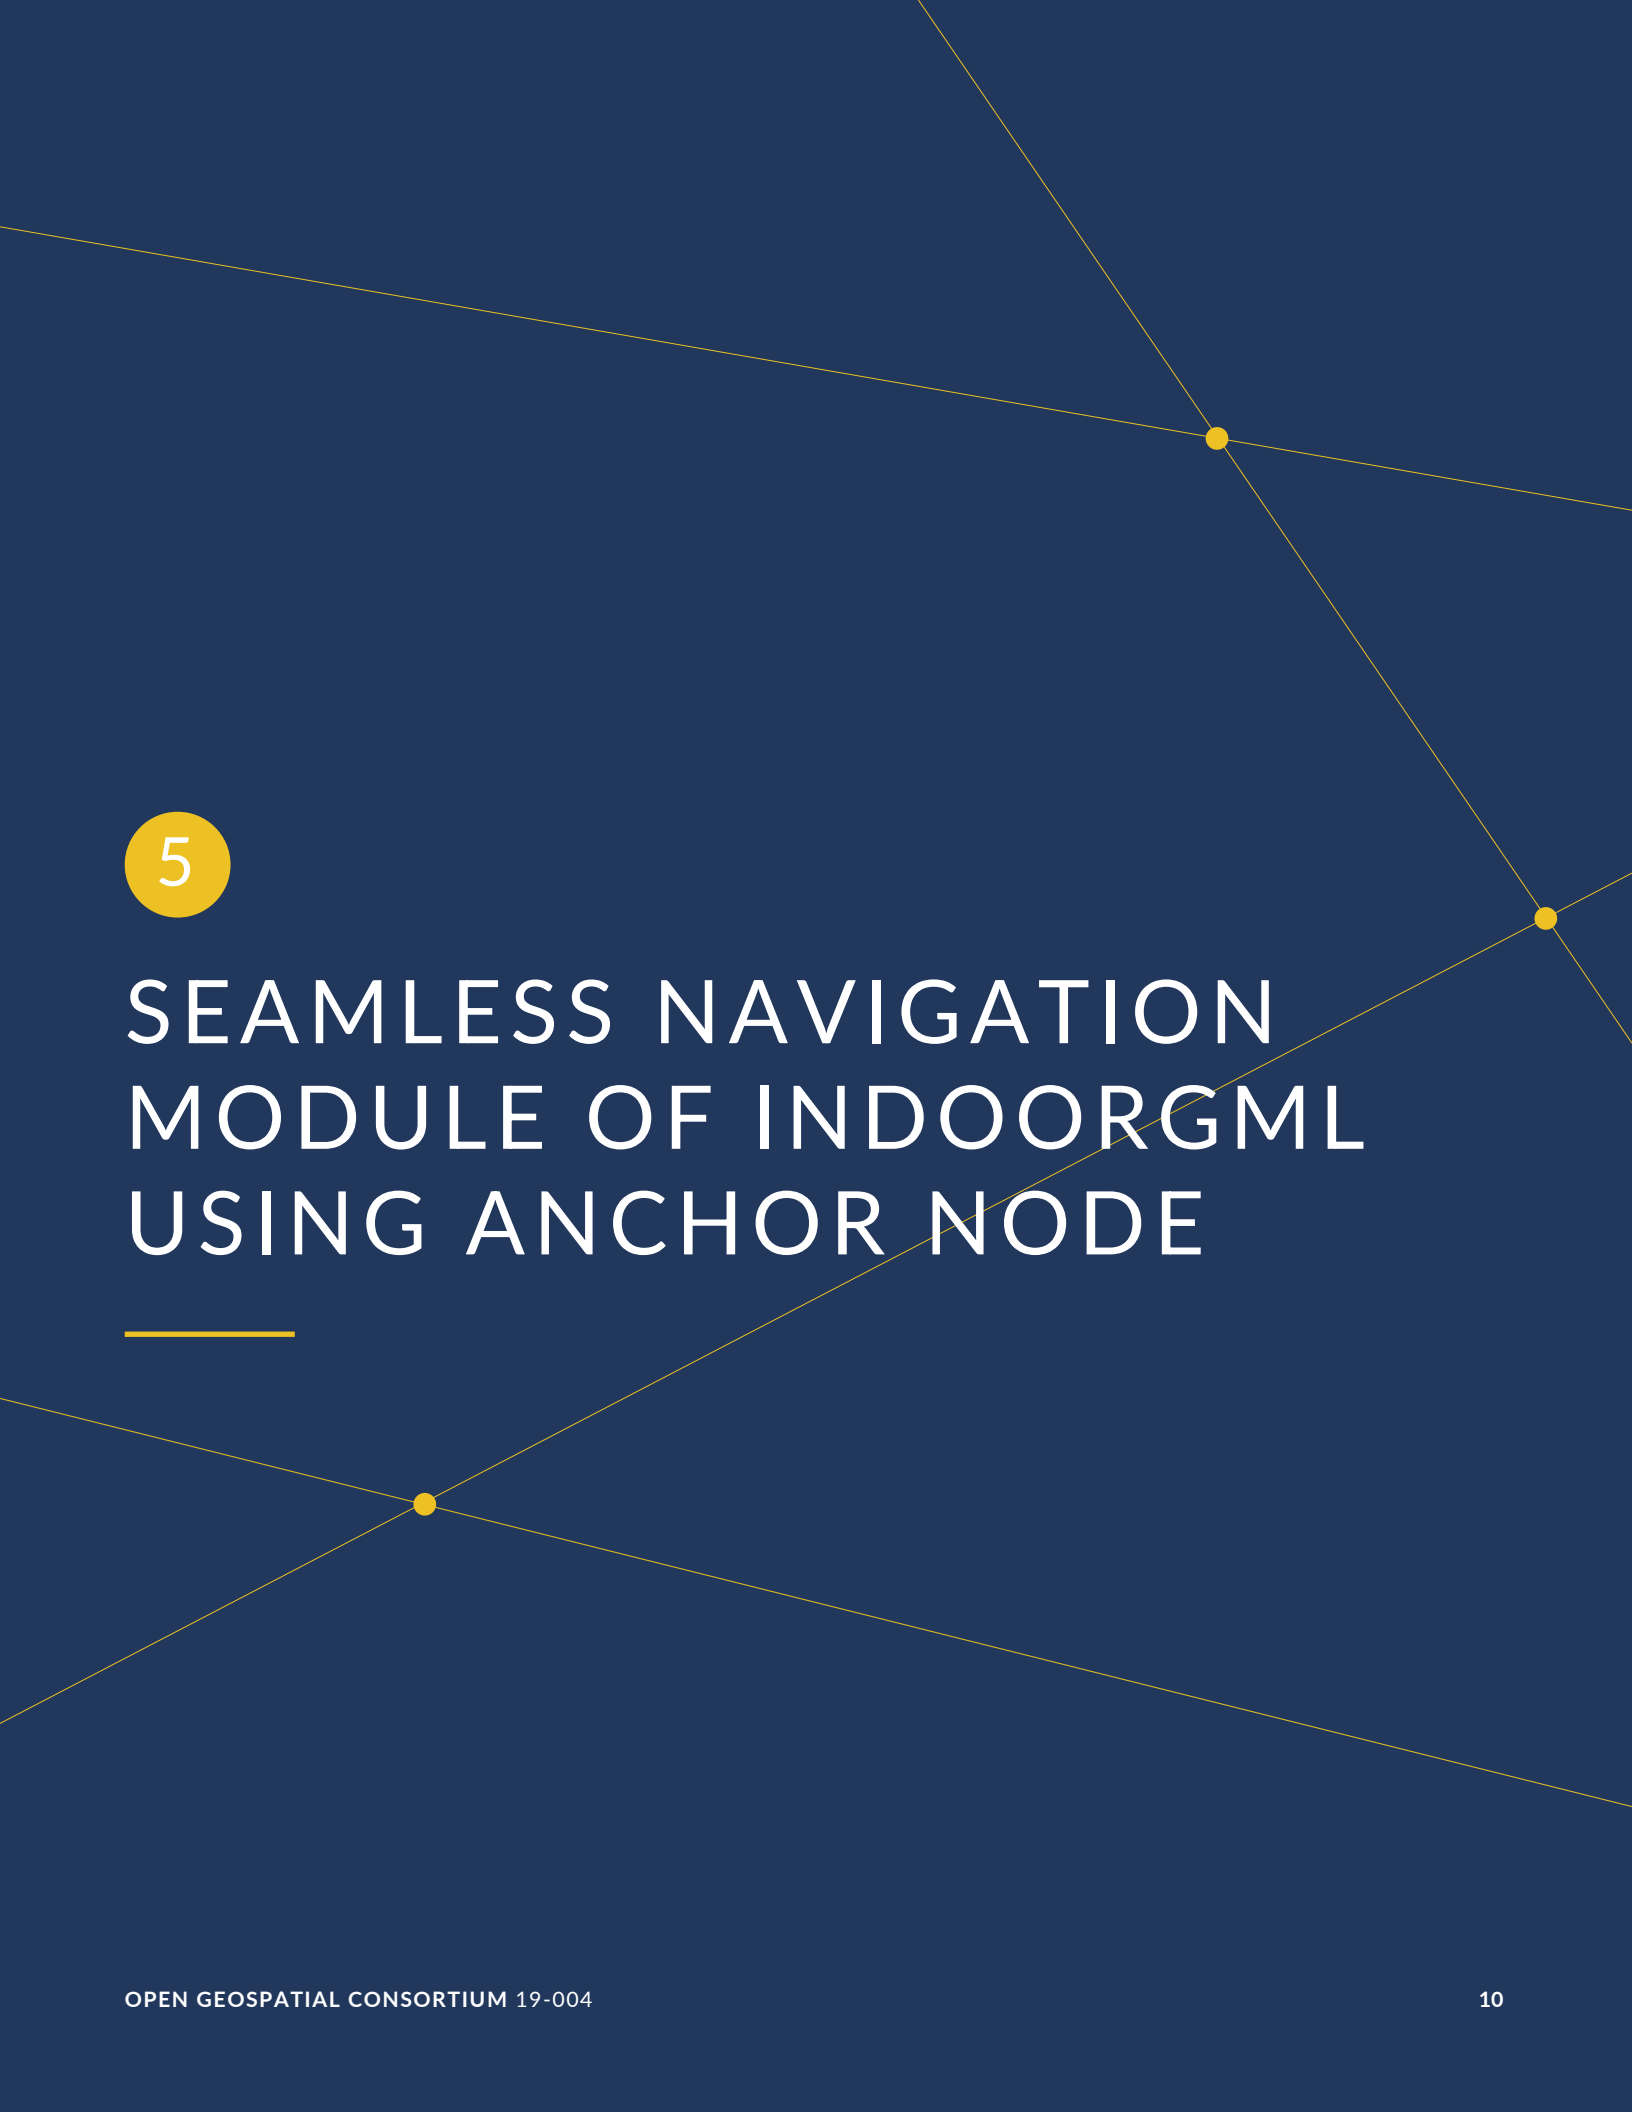

5

SEAMLESS NAVIGATION MODULE OF INDOORGML USING ANCHOR NODE

SEAMLESS NAVIGATION MODULE OF INDOORGML USING ANCHOR NODE

This section describes an IndoorGML SeamlessNavigation module for seamless navigation between indoors and outdoors.

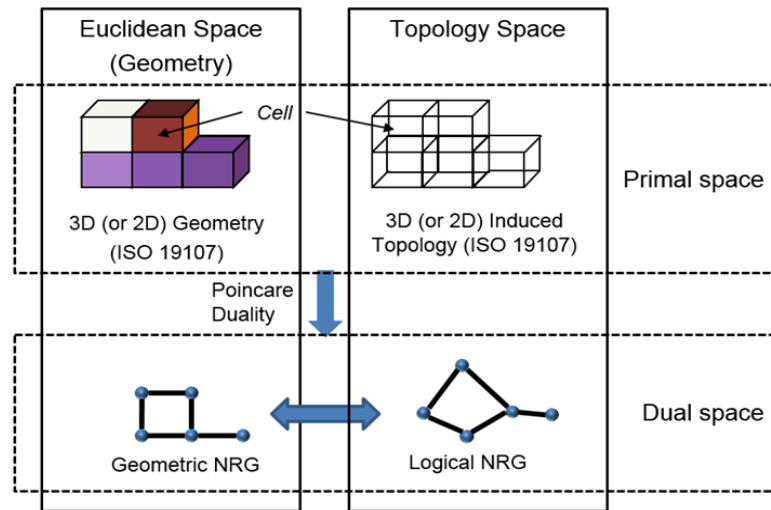


Figure 2 – Structure space model (OGC 14-005r5)

OGC IndoorGML provides a standard data model for indoor space with two spatial models, as shown in Figure 2: Euclidean Space represents the shape of a three-dimensional (3D) cell space; Topology Space represents connectivity between cell spaces. Topology represents a duality transformation of the 3D cell space and is an essential component for indoor navigation and routing system. By applying a duality transformation, the 3D cells in primal space are mapped to nodes (0D) in dual space. The topological adjacency relationships between 3D cells are transformed to edges (1D) linking pairs of nodes in dual space. In the current version of IndoorGML, a gate or entrance of building that connects indoor and outdoor spaces is represented by an *AnchorSpace* instance and can be represented by a *State* instance in dual space. However, the connectivity between an outdoor network and an indoor cell of the *AnchorSpace* class cannot be represented by the elements in IndoorGML.

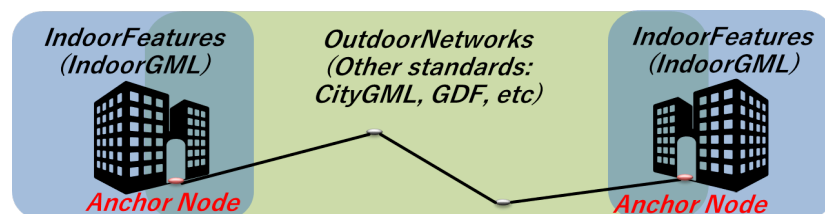


Figure 3 – The concept of SeamlessNavigation module

In this discussion paper, a SeamlessNavigation model as an extension of IndoorGML is designed for making connections with other standards that represent outdoor spaces, as shown in

Figure 3. Unlike defining a unified integration model, the SeamlessNavigation model defines a new element which has the following attributes to support the seamless traveling between indoor and outdoor spaces:

- Parameters for the conversion of coordinate reference systems
- External reference to the outdoor transportation network

5.1. Conversion method of the coordinate reference system

The conversion of the Coordinate Reference System (CRS) is an important process for seamless navigation between indoor and outdoor coordinate systems. In cases where the global CRS is used for indoor space, the conversion parameters are not necessary. However, many building datasets are represented in their own local CRS. In the case of using the local CRS, four parameters are required for Cartesian coordinate system conversion:

- the origin point of target CRS (or global CRS) $P_o (x_o, y_o, z_o)$,
- rescaling factor $R(s_x, s_y, s_z)$,
- rotation angles $A(\alpha, \beta, \gamma)$, along x, y, z -axis, and
- translation vector $T(t_x, t_y, t_z)$

Firstly, the origin P_o is required to perform the transformation. Next, a scale value R , between the local coordinate system and the global coordinate system, is required. Thirdly, the rotation angle of each axis A is required for the rotation movement between the coordinate systems. Lastly, a translation vector T is given for parallel movement between coordinate systems. Figure 4 shows examples of conversion methods.

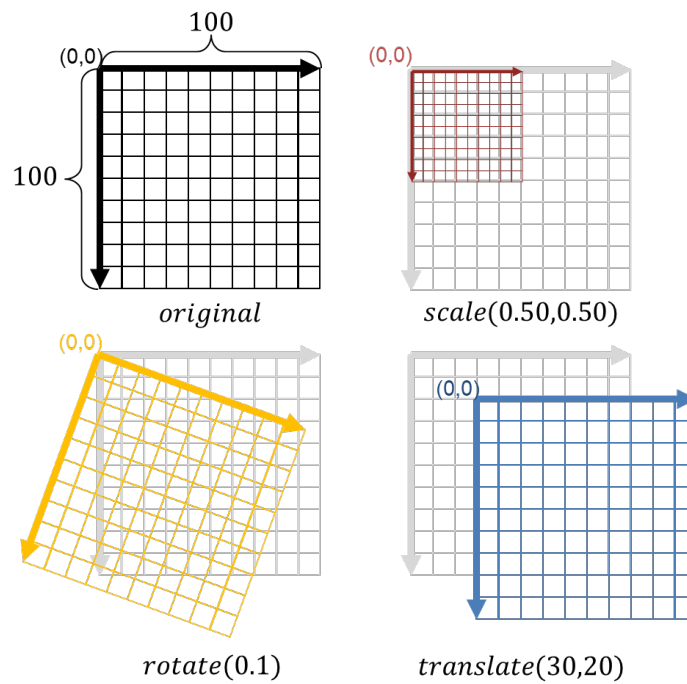


Figure 4 – Example of transform methods (2-dimensional case)

Unlike scaling and translation, the rotation is affected by the order in which the parameters (rotation angles) are applied. Typically, the Euler angle for 3D rotation described in [1,5] can be used. Euler angles are described as a sequence of rotations about three mutually orthogonal coordinate axes fixed in R^3 Space. This discussion paper uses yaw, pitch, and roll rotation, as shown in Figure 5, one of the sequences of Euler angles.

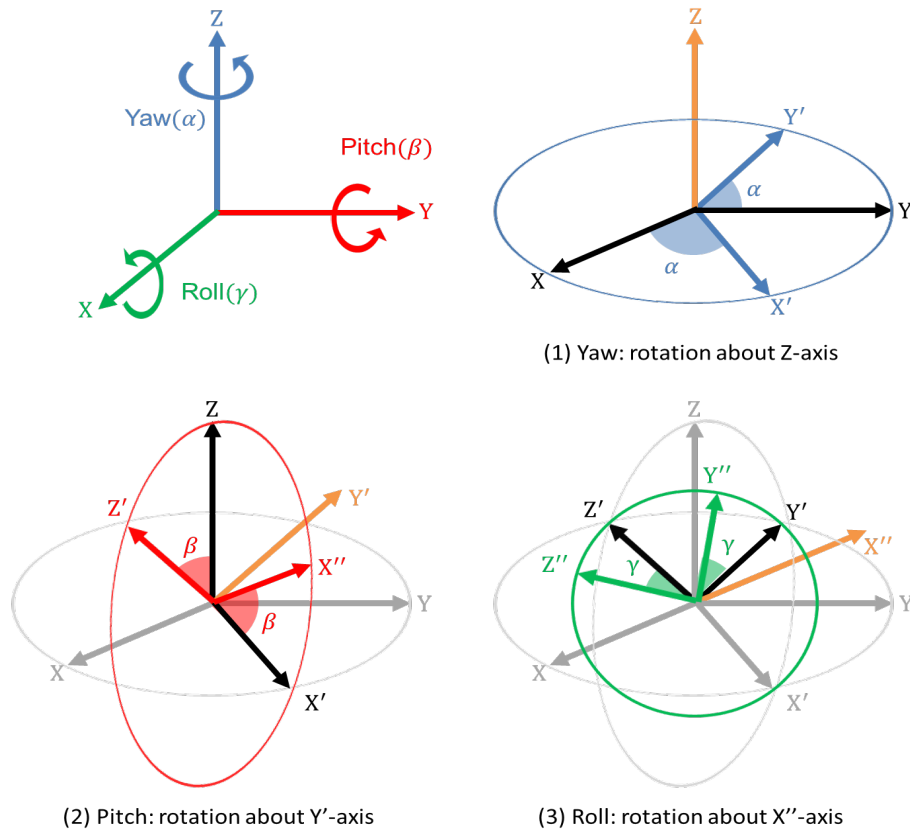


Figure 5 — Example of Yaw-Pitch-Roll rotation

Yaw is a counterclockwise rotation of α about the z -axis, as shown in Figure 5. The rotation matrix is given by:

$$R_z(\alpha) = \begin{bmatrix} \cos\alpha & -\sin\alpha & 0 \\ \sin\alpha & \cos\alpha & 0 \\ 0 & 0 & 1 \end{bmatrix}$$

Note that the upper left entries of $R_z(\alpha)$ from a 2D rotation applied to the x and y coordinates, whereas the z coordinate remains constant.

Similarly, a pitch is a counterclockwise rotation of β about the y -axis, and a roll is a counterclockwise rotation of γ about the x -axis, as shown in Figure 5. The rotation matrix of pitch and roll are given by:

$$R_y(\beta) = \begin{bmatrix} \cos\beta & 0 & \sin\beta \\ 0 & 1 & 0 \\ -\sin\beta & 0 & \cos\beta \end{bmatrix}$$

$$R_x(\gamma) = \begin{bmatrix} 1 & 0 & 0 \\ 0 & \cos\gamma & -\sin\gamma \\ 0 & \sin\gamma & \cos\gamma \end{bmatrix}$$

So, a 3D rotation matrix with α, β, γ is defined as follows:

$$R(\alpha, \beta, \gamma) = R_z(\alpha)R_y(\beta)R_x(\gamma) = \begin{bmatrix} \cos\alpha \cos\beta & \cos\alpha \sin\beta \sin\gamma - \sin\alpha \cos\gamma & \cos\alpha \sin\beta \cos\gamma + \sin\alpha \sin\gamma \\ \sin\alpha \cos\beta & \sin\alpha \sin\beta \sin\gamma + \cos\alpha \cos\gamma & \sin\alpha \sin\beta \cos\gamma - \cos\alpha \sin\gamma \\ -\sin\beta & \cos\beta \sin\gamma & \cos\beta \cos\gamma \end{bmatrix}$$

5.2. UML diagram of the seamless navigation module

IndoorGML has a thick model that represents the wall thickness of a building and a thin model that does not, as shown in Figure 6. The SeamlessNavigation module can be defined by considering both models.

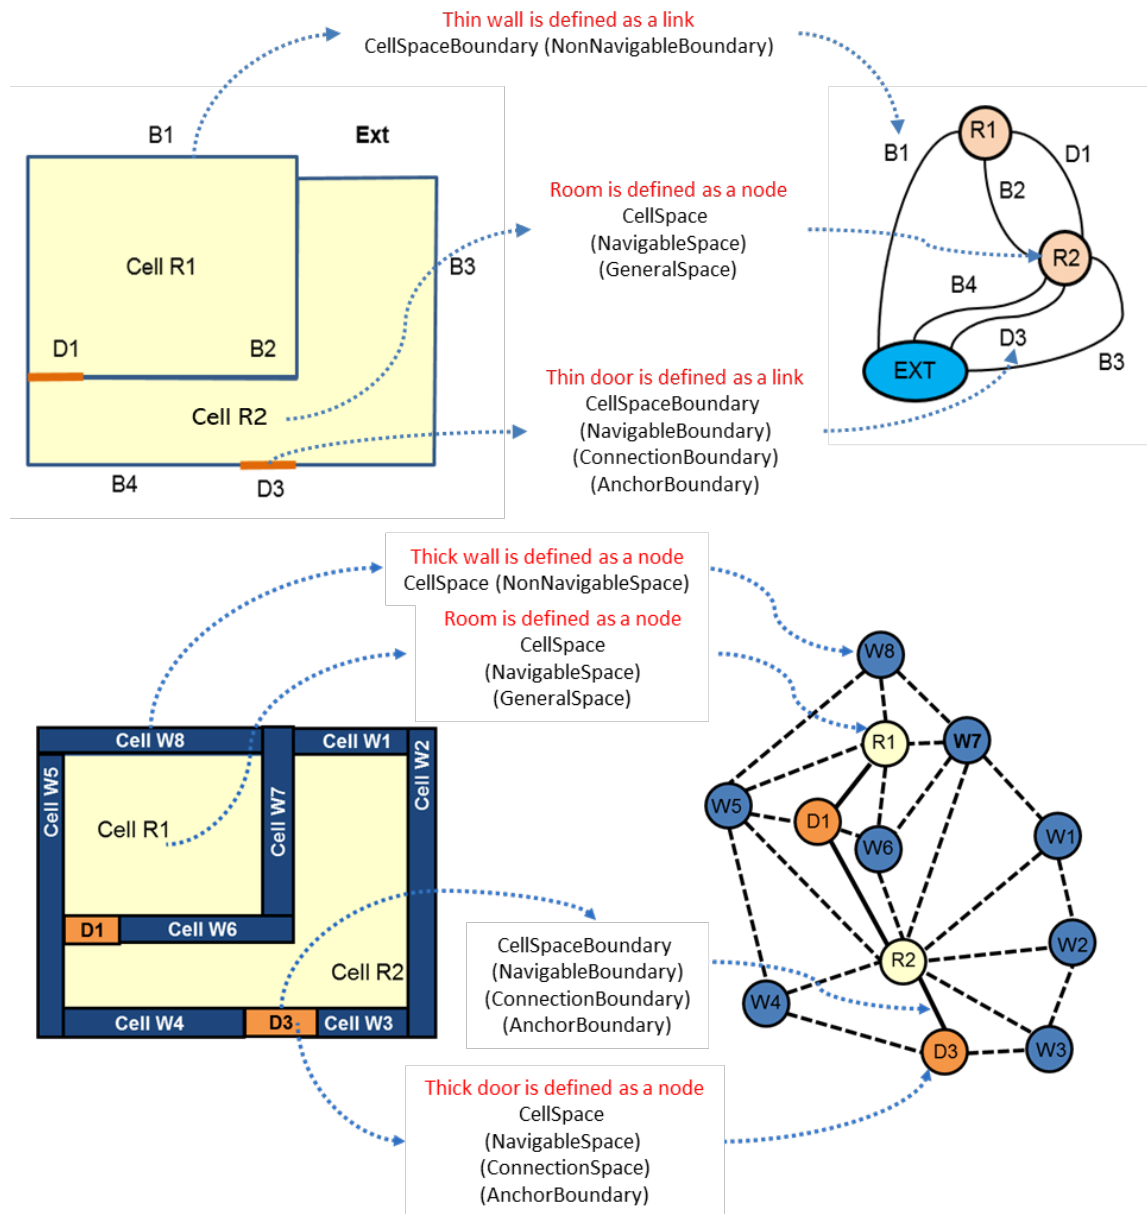


Figure 6 – Example of Thin and Thick model (OGC 14-005r5)

However, when expressing an entrance with a thin model, a *State* is required in the outdoor space according to the definition of transition. However, since *State* has a duality relation with *CellSpace*, it is necessary to express the outdoor space as *CellSpace* to create a *State* in outdoor space. However, this is not semantically equivalent to *CellSpace* defined in IndoorGML. In conclusion, the entrance should be expressed, as is the *State*, in the door of the thick model.

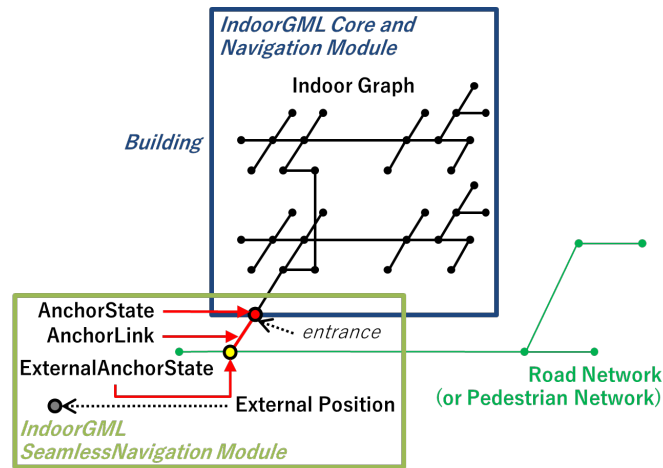


Figure 7 – IndoorGML SeamlessNavigation module

The proposed SeamlessNavigation module is shown in Figure 7. The SeamlessNavigation module consists of three elements: *AnchorState*, *AnchorLink*, and *ExternalAnchorState*. The UML diagram depicted in Figure 8 and Figure 9 shows the IndoorGML SeamlessNavigation module data model based on the IndoorGML core and navigation module.

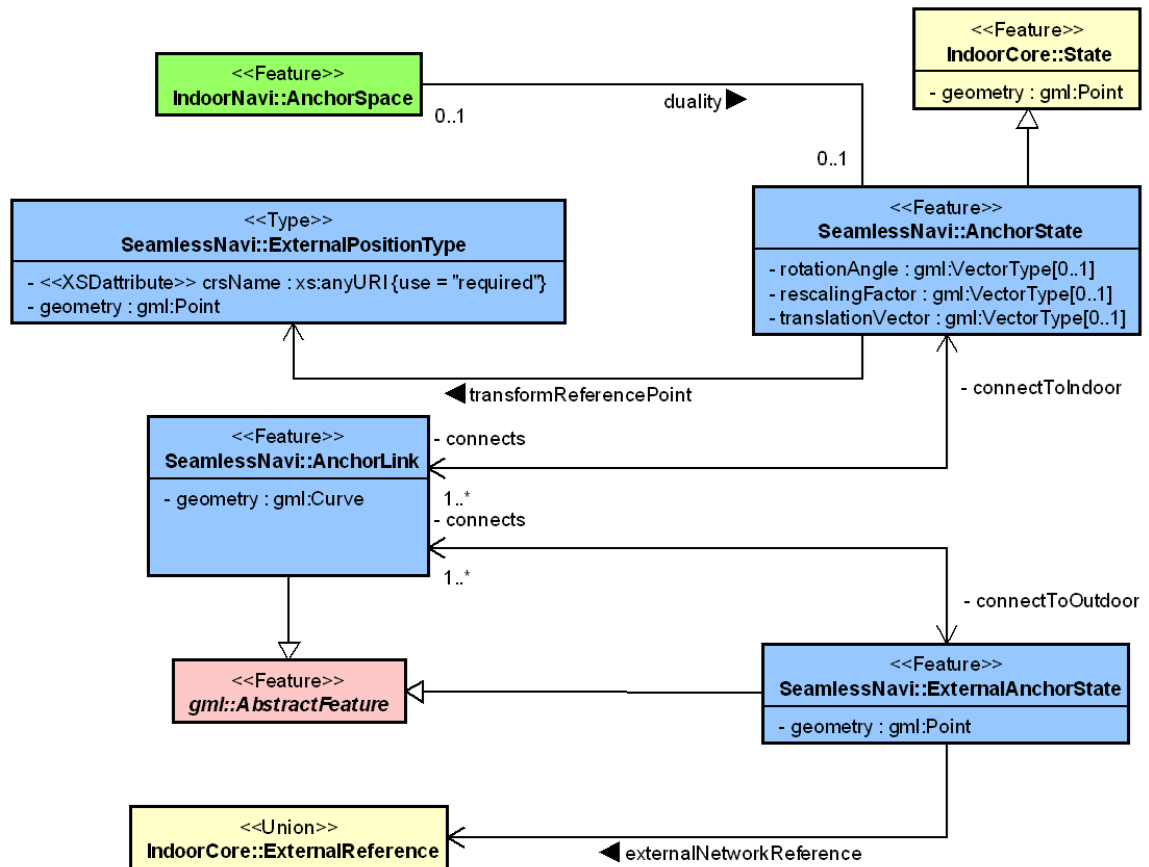


Figure 8 – UML diagram for SeamlessNavigation module (simple version)

5.2.1. <AnchorState>

AnchorState represents a node that provides the connection between indoor space and outdoor space. It refers to entrance doors. It can be used as a control point for indoor-outdoor integrations. It contains conversion parameters for transforming the local CRS coordinates of indoor geometry. In cases where the global CRS is used for indoor space, the conversion parameters are not necessary. The *transformReferencePoint* element describes a reference point that is used for the conversion. *TransformReferencePoint* is a point in the global CRS. *TransformReferencePoint* is represented geometrically as a *Point* in Geography Markup Language (GML). *TransformReferencePoint* must have an attribute *crsName* to represent the used CRS of the outdoor network. The *duality* element represents an association with the corresponding *AnchorSpace* class, which represents a special opening space. *AnchorState* has a geometry that is derived from *State* class, and it is one of the endpoints of the curve geometry of *AnchorLink*.

```
<xs:element name="AnchorState" type="AnchorStateType" substitutionGroup=
"IndoorCore:State"/>
<!-- ===== -->
<xs:complexType name="AnchorStateType">
<xs:complexContent>
<xs:extension base="IndoorCore:StateType">
<xs:sequence>
<xs:element name="transformReferencePoint" type="ExternalPositionType"/>
<xs:element name="rotationAngle" type="gml:VectorType" minOccurs="0"/>
<xs:element name="rescalingFactor" type="gml:VectorType" minOccurs="0"/>
<xs:element name="translationVector" type="gml:VectorType" minOccurs="0"/>
<xs:element name="duality" type="AnchorSpacePropertyType" minOccurs="0"/>
<xs:element name="connects" type="AnchorLinkPropertyType" maxOccurs="unbounded"/>
</xs:sequence>
</xs:extension>
</xs:complexContent>
</xs:complexType>
<!-- ===== -->
<xs:complexType name="AnchorStatePropertyType">
<xs:sequence minOccurs="0">
<xs:element ref="AnchorState"/>
</xs:sequence>
<xs:attributeGroup ref="gml:AssociationAttributeGroup"/>
</xs:complexType>
<!-- ===== -->
<xs:complexType name="AnchorSpacePropertyType">
<xs:sequence minOccurs="0">
<xs:element ref="IndoorNavi:AnchorSpace"/>
</xs:sequence>
<xs:attributeGroup ref="gml:AssociationAttributeGroup"/>
</xs:complexType>
<!-- ===== -->
<xs:complexType name="ExternalPositionType">
<xs:sequence>
<xs:element name="geometry" type="gml:PointPropertyType"/>
</xs:sequence>
<xs:attribute name="srsName" type="xs:anyURI" use="required"/>
</xs:complexType>
```

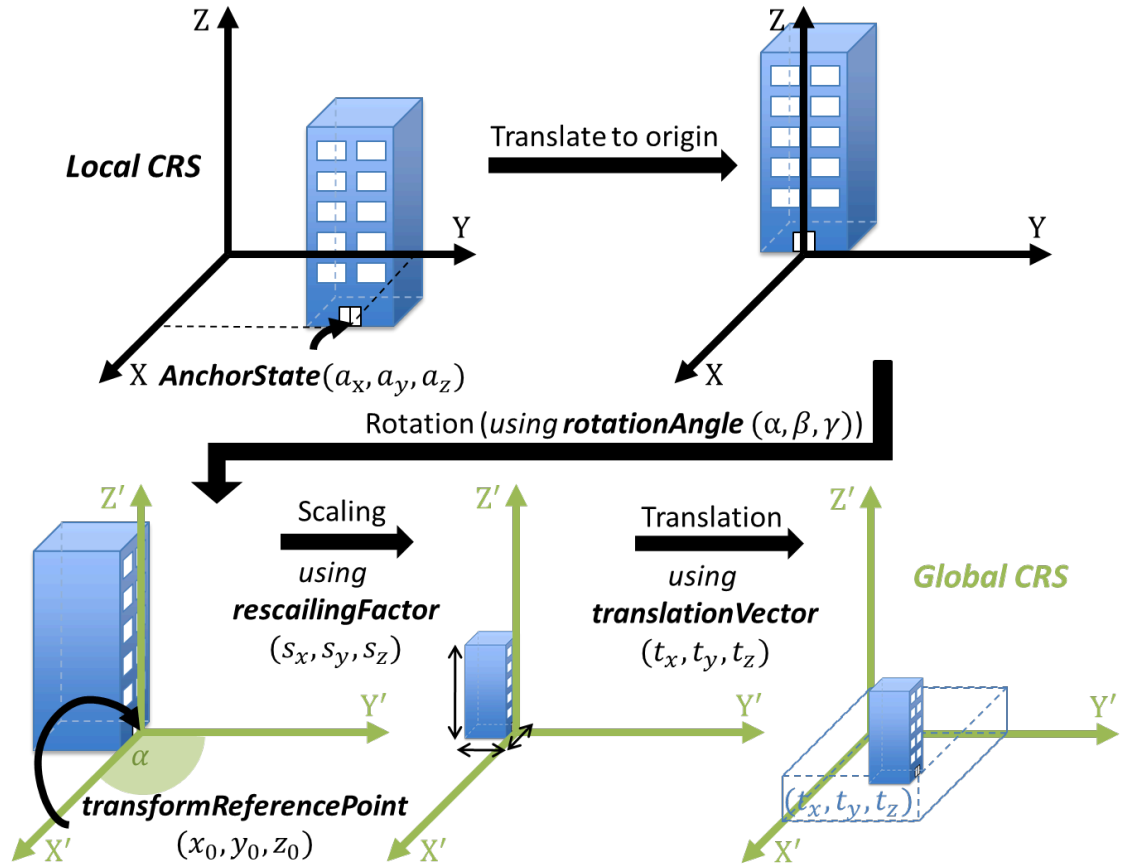


Figure 10 – The process of CRS conversion

All *AnchorState* elements are used for conversion, except the duality and connects elements: transformReferencePoint $p_o (x_o, y_o, z_o)$, rotationAngle $R(s_x, s_y, s_z)$, rescalingFactor $A(\alpha, \beta, \gamma)$, and translationVector $T(t_x, t_y, t_z)$. The conversion using these parameters depends on the order in which they are applied. This document assumes that the transformation is performed in the order, as shown in Figure 10: Rotation Scaling Translation. In the case of rotation, the rotation should be performed after shifting to the origin based on the *AnchorState* point $p_a (a_x, a_y, a_z)$ for simplification of the problem. Finally, the method to obtain the conversion result, $\text{Convert}(x, y, z, p_a, p_o, R, S, T)$ using the given parameters is as follows:

$$\text{Convert}(x, y, z, p_a, p_o, R, S, T) = R_z(\alpha)R_y(\beta)R_x(\gamma)S(x - a_x, y - a_y, z - a_z) + p_o + T = \begin{bmatrix} \cos\alpha \cos\beta & \cos\alpha \sin\beta & \sin\alpha \\ \sin\alpha \cos\beta & \sin\alpha \sin\beta & \cos\alpha \\ -\sin\beta & 0 & 0 \end{bmatrix} \begin{bmatrix} x - a_x \\ y - a_y \\ z - a_z \end{bmatrix} + \begin{bmatrix} x_o \\ y_o \\ z_o \end{bmatrix} + \begin{bmatrix} t_x \\ t_y \\ t_z \end{bmatrix}$$

5.2.2. <ExternalAnchorState>

ExternalAnchorState represents a node that represents the position on the outdoor network. It is represented geometrically as a *Point* in GML and it is one of the endpoints of the curve geometry of *AnchorLink*. It also has references to outdoor networks in other standards;

e.g., CityGML, GDF, etc.

```
<xs:element name="ExternalAnchorState" type="ExternalAnchorStateType"
substitutionGroup="gml:AbstractFeature"/>
<!-- ===== -->
<xs:complexType name="ExternalAnchorStateType">
<xs:complexContent>
<xs:extension base="gml:AbstractFeatureType">
<xs:sequence>
<xs:element name="externalNetworkReference" type="IndoorCore:
ExternalReferenceType"/>
<xs:element name="geometry" type="gml:PointPropertyType"/>
<xs:element name="connects" type="AnchorLinkPropertyType" maxOccurs="unbounded"/>
</xs:sequence>
<xs:attributeGroup ref="gml:AssociationAttributeGroup"/>
</xs:extension>
</xs:complexContent>
</xs:complexType>
<!-- ===== -->
<xs:complexType name="ExternalAnchorStatePropertyType">
<xs:sequence minOccurs="0">
<xs:element ref="ExternalAnchorState"/>
</xs:sequence>
<xs:attributeGroup ref="gml:AssociationAttributeGroup"/>
</xs:complexType>
```

Figure 11 depicts an example of mapping relation between *ExternalAnchorState* and *externalNetworkReference* for each case: The shape of *externalNetworkReference* should be represented as one of those types; (a) a point type, (b) an edge type and © a polygon type.

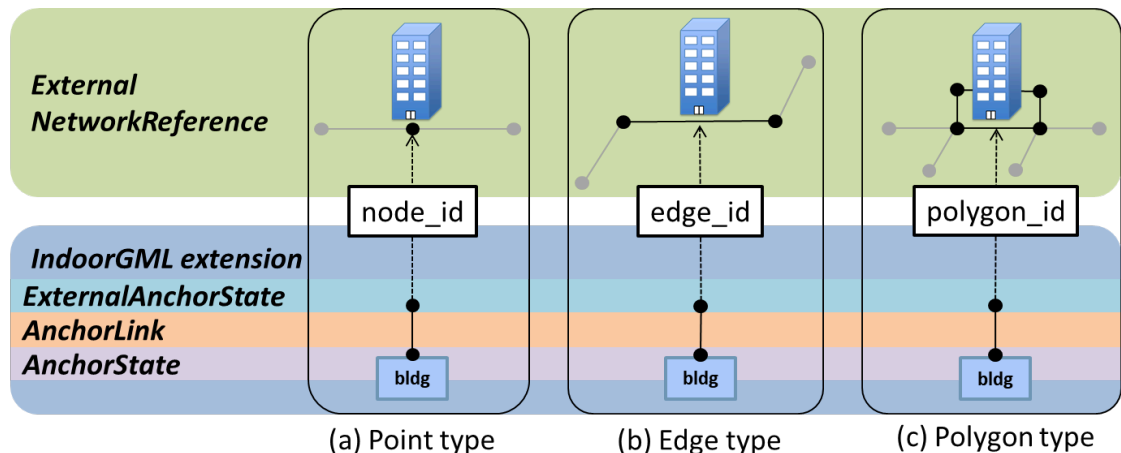


Figure 11 – Example of mapping relation between *ExternalAnchorState* and *externalNetworkReference*

In the case of (a) in Figure 11, *externalNetworkReference* is represented as a point that is the closest to the entrance of the building in the outside network. Similarly, in (b) in Figure 11, *externalNetworkReference* represents an edge that is the most adjacent to the opening of the building in the outside network. In this case, the geometry of *ExternalAnchorState* should be a point on the edge of *externalNetworkReference*. Lastly, in © in Figure 11, *externalNetworkReference* represents a polygon that expresses the area of the building. In this case, the geometry of *ExternalAnchorState* should be a central point of the polygon of *externalNetworkReference*.

5.2.3. <AnchorLink>

AnchorLink represents an edge between the indoor network and outdoor networks. *AnchorLink* always connects *AnchorState* and *ExternalAnchorState*. For the geometrical representation of an *AnchorLink*, a *Curve* geometric primitive object from the GML is used.

```
<xs:element name="AnchorLink" type="AnchorLinkType" substitutionGroup="gml:
AbstractFeature"/>
<!-- ===== -->
<xs:complexType name="AnchorLinkType">
<xs:complexContent>
<xs:extension base="gml:AbstractFeatureType">
<xs:sequence>
<xs:element name="connectToIndoor" type="AnchorStatePropertyType"/>
<xs:element name="connectToOutdoor" type="ExternalAnchorStatePropertyType"/>
<xs:element name="geometry" type="gml:CurvePropertyType"/>
</xs:sequence>
<xs:attributeGroup ref="gml:AssociationAttributeGroup"/>
</xs:extension>
</xs:complexContent>
</xs:complexType>
<!-- ===== -->
<xs:complexType name="AnchorLinkPropertyType">
<xs:sequence minOccurs="0">
<xs:element ref="AnchorLink"/>
</xs:sequence>
<xs:attributeGroup ref="gml:AssociationAttributeGroup"/>
</xs:complexType>
```



6

USE CASES

6.1. Use case with CityGML

For better understanding, this document provides a use case of the SeamlessNavigation module for the Transportation model of CityGML 2.0. This section briefly introduces the CityGML Transportation model and suggests some guidelines for using the sample data to create the SeamlessNavigation module data.

6.1.1. CityGML 2.0 Transportation model

CityGML is an OGC standard data model and exchange format for storing digital 3D models of cities and landscapes. CityGML supports a transportation model that focuses on thematic as well as on geometrical/topological aspects, as shown in Figure 12.

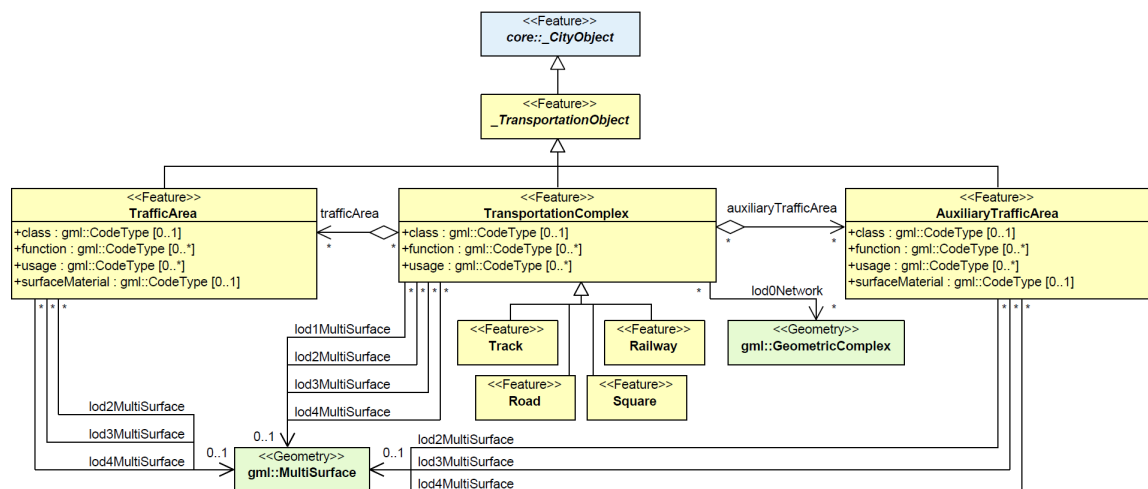


Figure 12 – UML diagram of transportation model in CityGML 2.0 (OGC 12-019)

The main class is *TransportationComplex*, which is composed of the parts *TrafficArea* and *AuxiliaryTrafficArea*. In the 'LOD 0' level of detail, the transportation complexes are modeled by line objects establishing a linear network. On this level, pathfinding algorithms or similar analyses can execute.

Therefore, the geometry of *ExternalAnchorState* should be created as a point on the *lod0Network* and must have the source data information of the *TransportationComplex* using the GML ID or URL information, as shown in Figure 13. The geometry of *AnchorLink* can be derived from two points, which are the geometries of *AnchorState* and *ExternalAnchorState*.

data consists of two spaces: one *CellSpace* and one *AnchorSpace*. The CityGML data has only one *TransportationComplex* instance.

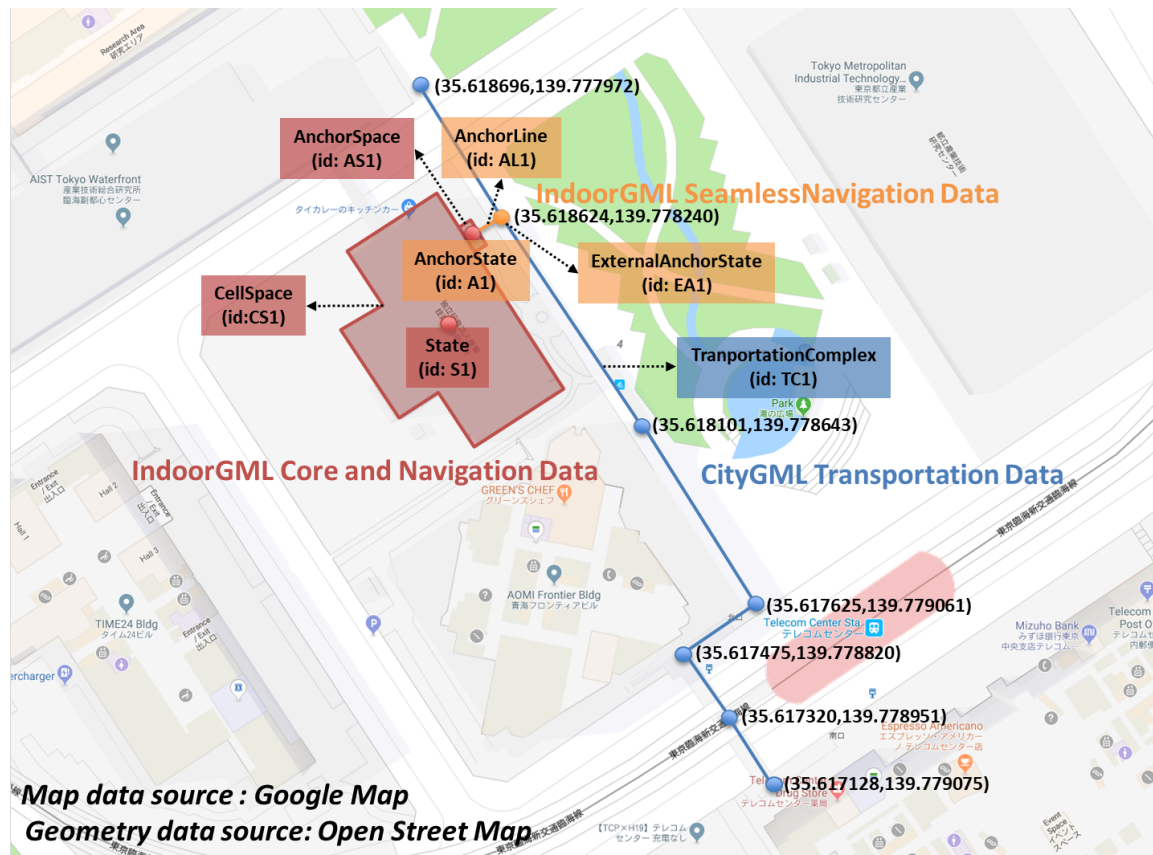


Figure 14 – CityGML use case site - AIST Tokyo Waterfront Annex

The detailed contents of sample data for the *AnchorState* class are as shown in Figure 15. This data consists of IndoorGML Core and Navigation modules. *AnchorState* can have a geometry derived from the *State* class. This geometry is used to create the geometry of an *AnchorLink*. It can have several elements for conversion. However, in this case, all geometries have the same CRS, so these elements are omitted. *AnchorState* must have a *transformReferencePoint* and *connects* element. The *TransformReferencePoint* must have CRS information, as shown in the yellow part of Figure 15. The *connects* element is represented by an *xlink* for the GML ID of the *AnchorLink* class instance, as shown in the green part of Figure 15 and Figure 18. *AnchorState* can have a duality association with the *AnchorSpace* class instance, as shown in the blue part of Figure 15.

```

oorFeatures gml:id="IFs">
  cellSpaceMember>
    i:AnchorSpace gml:id="AS1">
      gml:name>Entrance</gml:name>
      core:cellSpaceGeometry>
        <core:Geometry2D>
          <gml:Polygon srsName="EPSG:4326">
            <gml:exterior>
              <gml:LinearRing>
                <gml:posList> 35.6185243 139.7781466 35.61857293778 139.77810644557 35.6
1733809 35.61852967618 139.77815783109 35.6185243 139.7781466 </gml:posList>
              </gml:LinearRing>
            </gml:exterior>
          </gml:Polygon>
        </core:Geometry2D>
      core:cellSpaceGeometry>
        navi:class> 1000 </navi:class>
        navi:function>1000</navi:function>
        navi:usage>1000</navi:usage>
      i:AnchorSpace>
    cellSpaceMember>
      ...
    stateMember>
      chorState gml:id="A1">
        core:geometry>
          <gml:Point srsName="EPSG:4326">
            <gml:pos>35.61855174466 139.77813125399</gml:pos>
          </gml:Point>
        core:geometry>
          transformReferencePoint srsName="EPSG:4326">
            <geometry>
              <gml:Point srsName="EPSG:4326">
                <gml:pos>35.61855174466 139.77813125399</gml:pos>
              </gml:Point>

```

Figure 16 shows the *ExternalAnchorState* sample data. It consists of three properties: *externalNetworkReference*, *geometry*, and *connects*. *ExternalNetworkReference* is a corresponding object in the *TransportationComplex* instance, as shown in the blue part of Figure 16 and Figure 17. The geometry of *ExternalAnchorState* is derived from one of the points on a *lod0network*, as shown in the yellow part of Figure 16 and Figure 17. *connects* is represented by xlink for GML id of *AnchorLink* class instance, as shown in the green part of Figure 16 and Figure 18.

```
gml:id="EA1">
  externalNetworkReference>
    System>cityTransSample.gml</core:informationSystem>
  object>
    MLID_TC1</core:name>
  object>
    externalNetworkReference>
      8624 139.778240</gml:pos>
    connects>
      xlink:href="#AL1"/>
    </gml:ExternalAnchorState>
  </gml:ExternalAnchorState>
```

Figure 16 — Part of sample data for *ExternalAnchorState* (seamlessNaviSample.gml)

```

Complex gml:id="TC1">
<
Curve srsName="EPSG:4326">
member>
ring>
>35.618696 139.777972</gml:pos>
>35.618624 139.778240</gml:pos>
>35.618101 139.778643</gml:pos>
>35.617625 139.779061</gml:pos>
>35.617475 139.778820</gml:pos>
>35.617320 139.778951</gml:pos>
tring>
ember>
eCurve>
rk>
nComplex>

```

Figure 17 — Part of sample data for *TransportationComplex* (cityTransSample.gml)

AnchorLink sample data is shown in Figure 18. The association elements (connectToIndoor and connectToOutdoor) are represented by xlink for GML ID of each class instance. The curve geometry is derived from the geometry of connectToIndoor and connectToOutdoor instances.

```
L1">  
link:href="#A1"/>  
xlink:href="#EA1"/>  
sName="EPSG:4326">  
466 139.77813125399  
9.778240
```

Figure 18 — Part of sample data for *AnchorLink* (seamlessNaviSample.gml)

6.2. Use case with a specification for the pedestrian network model from Japan government

This section briefly introduces the “Development Specification for Spatial Network Model for Pedestrians (for short, PNspec) [2]” and suggests guidelines for conversion of the SeamlessNavigation module data using the specific cases.

6.2.1. Conversion method from PNspec to IndoorGML

PNspec includes both indoor and outdoor network information. To use the SeamlessNavigation module, we need to convert the indoors content of the PNspec into IndoorGML.

This chapter describes how to convert PNspec to IndoorGML. Because both IndoorGML and PNspec have node and link-based network models, they can easily convert between each

schema. However, some special cases have different parts. In the case of a staircase, the PNspec places nodes at the beginning and end of the staircase, then links the two nodes. However, in IndoorGML, a staircase is expressed as a single space, so it is expressed as a single *State*. To resolve these conflicts, we need the mapping rules shown in Figure 19.

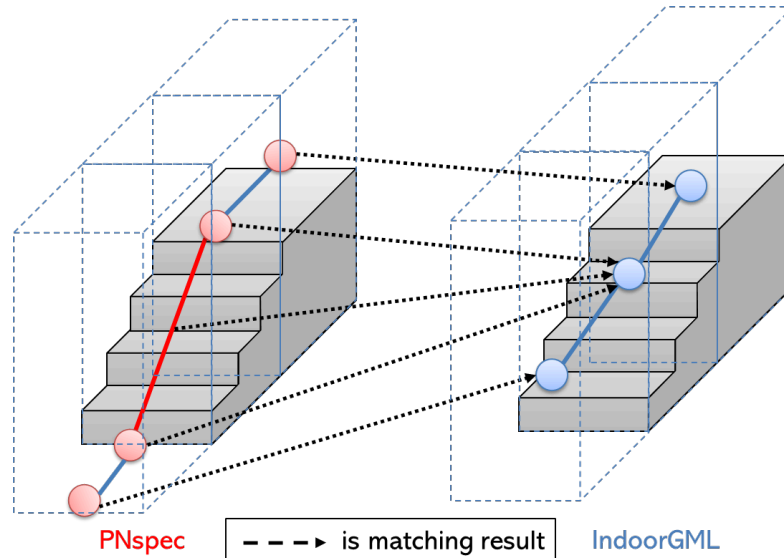


Figure 19 – An example of mapping PNspec to IndoorGML in a stairs case_

Similarly, for gradients, PNspec places nodes at the beginning and end of the sloped space, then links the two nodes. However, in IndoorGML, the space with slope is expressed as a single space, so it is expressed as a single *State*. To resolve these conflicts, we need the mapping rules shown in Figure 20.

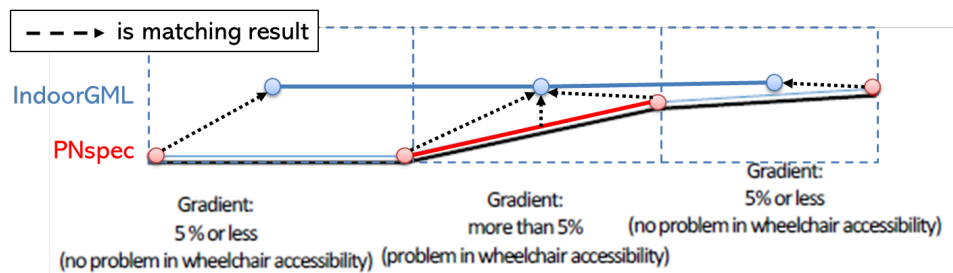


Figure 20 – An example of mapping PNspec to IndoorGML in changing points of barriers (gradient) case

Finally, in the case of a step, PNspec places nodes before and after a step. In the case of IndoorGML, we can divide space around a step. However, we do not create a state around the step. Depending on the concept of cellular space of IndoorGML, multiple nodes will be mapped to a single *State*, as shown in Figure 21.

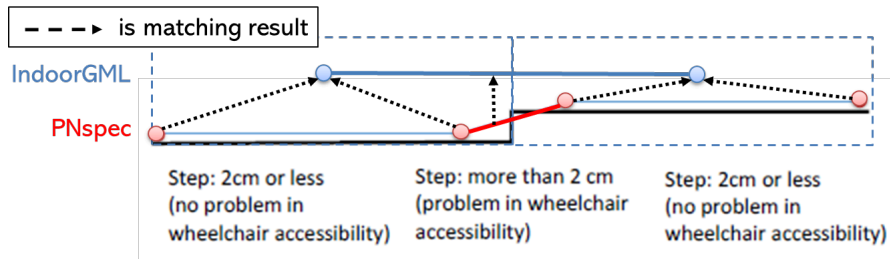


Figure 21 – An example of mapping PNspec to IndoorGML in changing points of barriers (step) case

In addition, PNspec expresses a node having the same concept as an anchor node of this document as ‘the in/out boundary of the facility.’ However, in PNspec, an entrance is supposed to be a link. Depending on the characteristics of the *AnchorState* defined in this discussion paper, the entrance should be represented as a *State*. Therefore, the nodes and links representing the entrance in the PNspec should be represented by classes of IndoorGML Core and SeamlessNavigation module as shown in Figure 22.

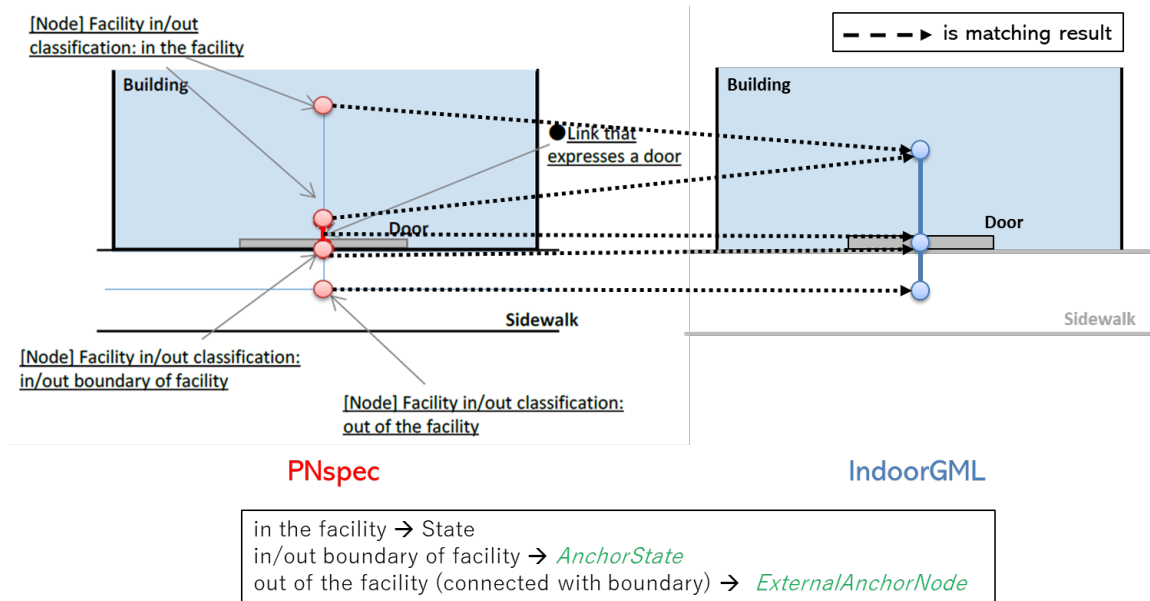


Figure 22 – An example of mapping PNspec to IndoorGML in entrance of building case

6.2.2. Use case site – Tokyo Station

The sample data for the use case have been conducted at a real site: Tokyo station, as shown in Figure 23. PNspec sample data is derived from data by the Government of Japan, and is provided through an open license¹. This chapter shows how the SeamlessNavigation module and PNspec datasets are linked via external references.

¹<https://www.geospatial.jp/ckan/dataset/0401>

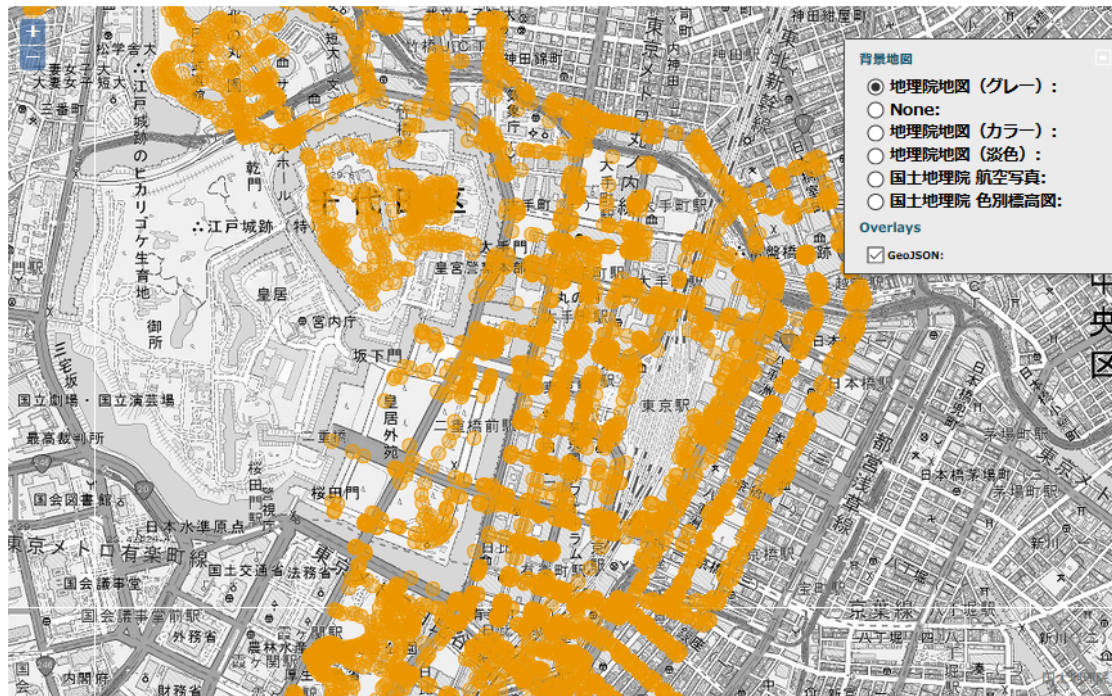


Figure 23 – PNSpec use case site – Tokyo station (Node case)

For simplicity, we used a part of Tokyo station data, as shown in Figure 24: four nodes and three edges.

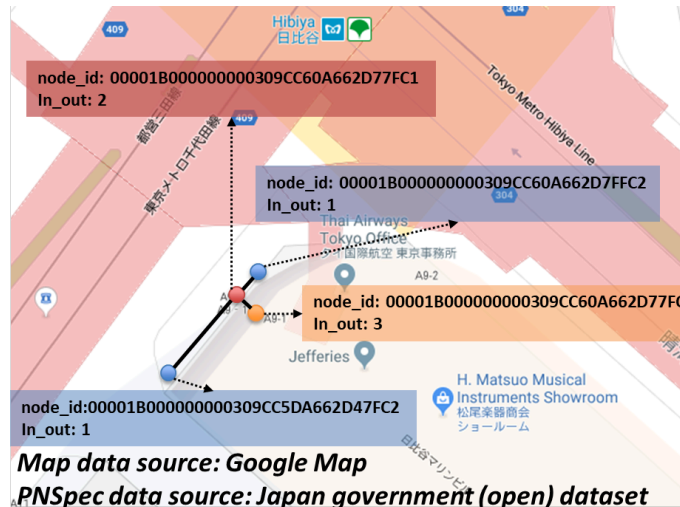


Figure 24 – Part of PNSpec sample data

The detailed contents of sample data for the nodes is shown in Listing 1. The PNSpec data provided by the GeoJSON format. Nodes can be distinguished by the 'in_out' attribute. In the case of an 'in_out' attribute of value '2', this node represents the entrance of the building. And then, we can choose one node for connecting *ExternalAnchorState*, using the link attribute of the node. Listing 2 shows the sample data for edges that linked with the entrance of the building node with an ID of '00001B0000000000309CC60A662D77FC1'. For making an *ExternalAnchorState* instance, we have to choose one of the connected nodes with the entrance

of the building, and the 'in_out' value is '1'. In this sample data, there are three Nodes connected to the entrance of the building node. However, one of these nodes is located in indoor space: with an 'in_out' value of '2'. Therefore, we have to choose one node from the remaining two nodes. The mapped *ExternalAnchorState* result is shown in Figure 25.

```
{
  "type": "FeatureCollection",
  "name": "node",
  "crs": { "type": "name", "properties": { "name": "urn:ogc:def:crs:EPSG::6668" } },
  "features": [
    { "type": "Feature", "properties": { "FID": 1603, "node_id": "00001B0000000000
0309CC60A662D77FC1", "lat": 35.674696, "lon": 139.759514, "floor": "0", "in_
out": 2, "link1_id": "00001B00000000000309CC5F2662D5FFC1", "link2_id": "00001B
0000000000309CC60A662D77FC3", "link3_id": "00001B00000000000309CC60A662D77FC4",
"link4_id": " ", "link5_id": " ", "link6_id": " ", "link7_id": " ", "link8_id":
" " }, "geometry": { "type": "Point", "coordinates": [ 139.759513964000121,
35.674695651000036 ] } },
    { "type": "Feature", "properties": { "FID": 1595, "node_id": "00001B0000000000
0309CC5DA662D47FC2", "lat": 35.674545, "lon": 139.759354, "floor": "0", "in_
out": 1, "link1_id": "00001B00000000000309CC5D2662D3FFC2", "link2_id": "00001B
0000000000309CC5F2662D5FFC1", "link3_id": "00001B00000000000309CC58A662DBFFC1",
"link4_id": " ", "link5_id": " ", "link6_id": " ", "link7_id": " ", "link8_id":
" " }, "geometry": { "type": "Point", "coordinates": [ 139.759354253000083,
35.674545111000043 ] } },
    { "type": "Feature", "properties": { "FID": 1607, "node_id": "00001B0000000000
0309CC60A662D77FC2", "lat": 35.674714, "lon": 139.759534, "floor": "0", "in_
out": 1, "link1_id": "00001B00000000000309CC60A662D77FC3", "link2_id": "00001B
0000000000309CC60A662D97FC2", "link3_id": "00001B00000000000309CC62A662D4FFC2",
"link4_id": " ", "link5_id": " ", "link6_id": " ", "link7_id": " ", "link8_id":
" " }, "geometry": { "type": "Point", "coordinates": [ 139.759534400000121,
35.6747144440000059 ] } },
    { "type": "Feature", "properties": { "FID": 1604, "node_id": "00001B0000000000030
9CC60A662D77FC2", "lat": 35.674695, "lon": 139.759525, "floor": "0", "in_out":
3, "link1_id": "00001B00000000000309CC60A662D77FC4", "link2_id": "00001B0000000000
309CC60A662D77FC3", "link3_id": " ", "link4_id": " ", "link5_id": " ", "link6_
id": " ", "link7_id": " ", "link8_id": " " }, "geometry": { "type": "Point",
"coordinates": [ 139.759525074000067, 35.674694875000057 ] } }
  ]
}
```

Listing 1 – Part of sample data for PNSpec Node (PNSpec_node.json)

```
{
  "type": "FeatureCollection",
  "name": "link",
  "crs": { "type": "name", "properties": { "name": "urn:ogc:def:crs:EPSG::6668" } },
  "features": [
    { "type": "Feature", "properties": { "FID": 2197, "link_id": "00001B00000000000
309CC5F2662D5FFC1", "start_id": "00001B00000000000309CC5DA662D47FC2", "end_id":
"00001B00000000000309CC60A662D77FC1", "distance": "22.100000", "rt_struct": 1,
"route_type": 1, "direction": 1, "width": 4, "vtcl_slope": 1, "lev_diff": 1,
"tfc_signal": 1, "tfc_s_type": 1, "brail_tile": 2, "elevator": 1, "roof": 1
}, "geometry": { "type": "LineString", "coordinates": [ [ 139.759354253000083,
35.674545111000043 ], [ 139.759513964000121, 35.674695651000036 ] ] } },
    { "type": "Feature", "properties": { "FID": 2200, "link_id": "00001B00000000000
309CC60A662D77FC3", "start_id": "00001B00000000000309CC60A662D77FC1", "end_id":
"00001B00000000000309CC60A662D77FC2", "distance": "2.800000", "rt_struct": 1,
"route_type": 1, "direction": 1, "width": 4, "vtcl_slope": 1, "lev_diff": 1,
"tfc_signal": 1, "tfc_s_type": 1, "brail_tile": 2, "elevator": 1, "roof": 1 },
  ]
}
```

```

"geometry": { "type": "LineString", "coordinates": [ [ 139.759513964000121,
35.674695651000036 ], [ 139.759534400000121, 35.674714440000059 ] ] } },
{ "type": "Feature", "properties": { "FID": 4294, "link_id": "00001B0000000000309
CC60A662D77FC4", "start_id": "00001B0000000000309CC60A662D77FC2", "end_id": "000
01B0000000000309CC60A662D77FC1", "distance": "1", "rt_struct": 7, "route_type":
6, "direction": 1, "width": 4, "vtcl_slope": 3, "lev_diff": 2, "tfc_signal":
1, "tfc_s_type": 1, "brail_tile": 1, "elevator": 1, "roof": 1 }, "geometry": {
"type": "LineString", "coordinates": [ [ 139.759525074000067, 35.674694875000057
], [ 139.759513964000121, 35.674695651000036 ] ] } },
]
}

```

Listing 2 — Part of sample data for PNSpec Edge (PNSpec_edge.json)

```

gml:id="EA1">
reference>
System>PNSpec_node.json</core:informationSystem>
ect>
de_id_00001B0000000000309CC60A662D7FFC2</core:name>
ject>
reference>
59534400000121 35.674714440000059</gml:pos>
>

```

Figure 25 — Part of sample data for ExternalAnchorState

6.3. Use case with GDF 5.0

This section briefly introduces the Geographic Data Files (GDF) 5.0 format and suggests guidelines for the conversion of SeamlessNavigation module data using the specific cases.

6.3.1. GDF 5.0

GDF is an ISO international standard that specifies the conceptual and logical data models and physical encoding formats for geographic databases for Intelligent Transportation Systems (ITS) applications and services. It has the reference number ISO 14825:2011.

Figure 26 shows that the overall conceptual data model of GDF 5.0. Within the GDF 5.0 model, a *Feature* is a database representation of a real-world geographic object: roads, buildings, etc. Each *Feature* must belong to exactly one *FeatureClass* and *FeatureTheme*. A *Feature* may have zero or more *AttributeValue* instances that serve to represent characteristics of a *Feature*. A *Relationship* is used to associate two or more *Features* together and may have zero or more *AttributeValue* instances.

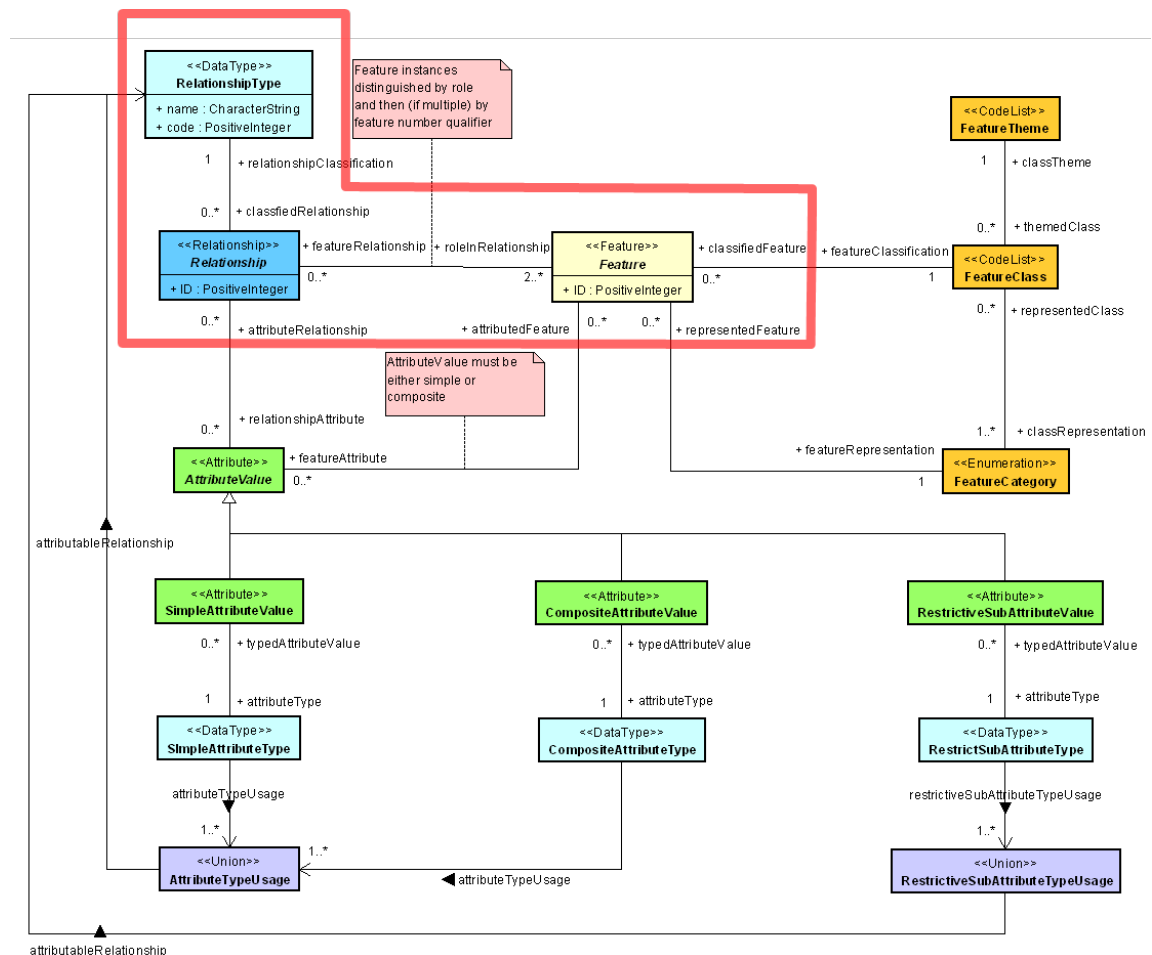


Figure 26 — UML diagram of the overall conceptual data model of GDF 5.0 (GDF 5.0, 2011)

In this discussion paper, we focused on how to connect the outdoor network and indoor network using the IndoorGML SeamlessNavigation module. Therefore, we have to make a connection between *ExternalAnchorState* and a specific feature of GDF 5.0; i.e., the entrance of the building, the element of pedestrian network, etc. Firstly, the entrance of the building element can be expressed in two ways: Using *Relationship*, Using *Feature*.

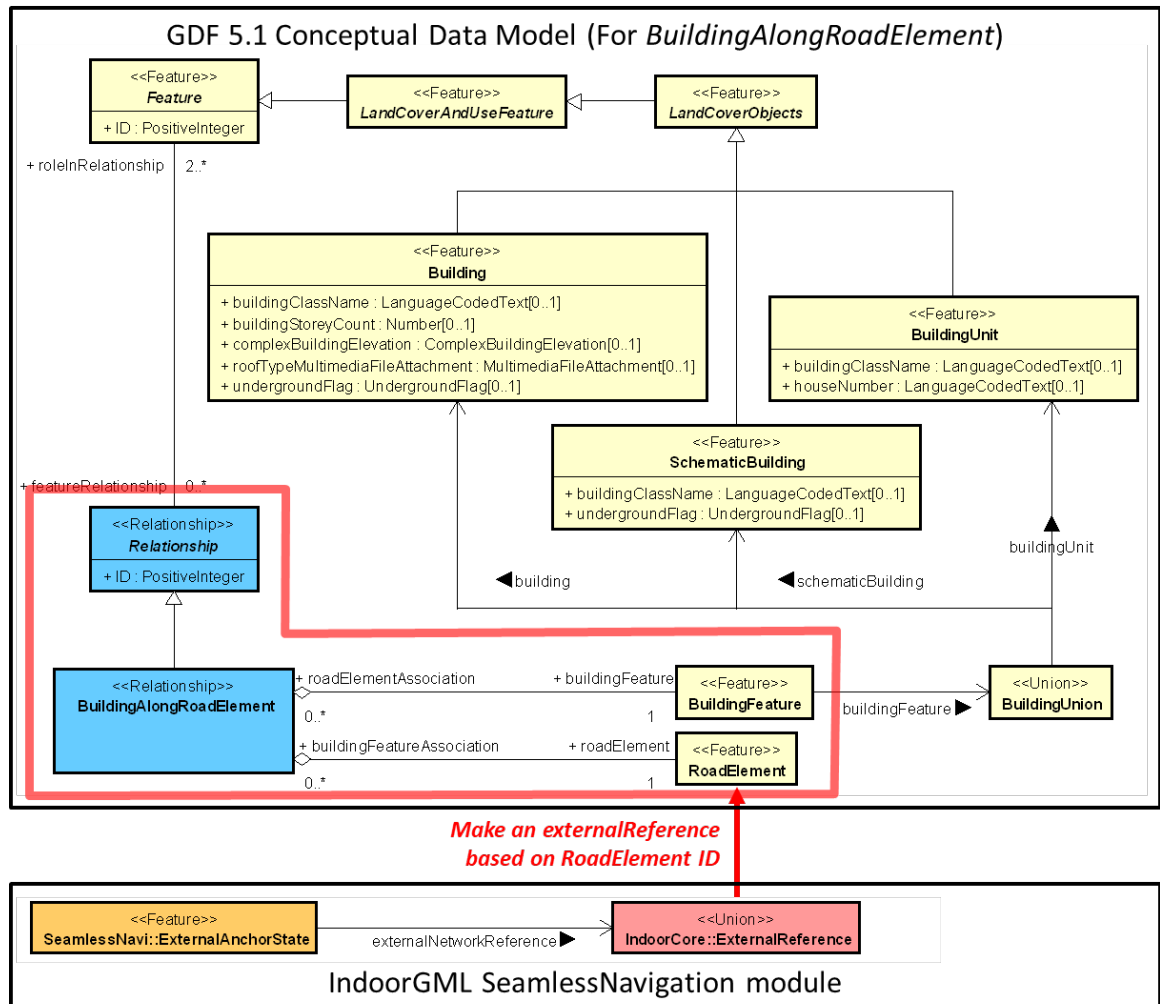


Figure 27 – UML diagram of the conceptual data model for 'Relationships' with 'BuildingAlongRoadElement'

As shown in Figure 27, the entrance of the building can be expressed as a *BuildingAlongRoadElement*, one of the types of *Relationship*. *BuildingAlongRoadElement* identifies the *RoadElement* along which the entrance of the *Building*, *SchematicBuilding*, or *BuildingUnit* is situated. In the case of using *BuildingAlongRoadElement*, for connecting to *ExternalAnchorState*, we have to make externalReference based on *roadElement* ID, an element of *BuildingAlongRoadElement*.

As shown in Figure 28, the entrance of the building can be expressed as an *EntryPoint*, one of the *Types of GeneralFeature*. *EntryPoint* can be distinguished through the characteristics of the entrance. A “main” entrance is generally characterized by the following:

- It coincides with the address of the selected Service;

- It is provided with a reception/lobby for the visitor;
- It is the entrance which attracts the most attention;
- It is the entrance to which road signs (if present) point. And at least one of the *EntryPoint* instances of a service shall be attributed as “Main.”

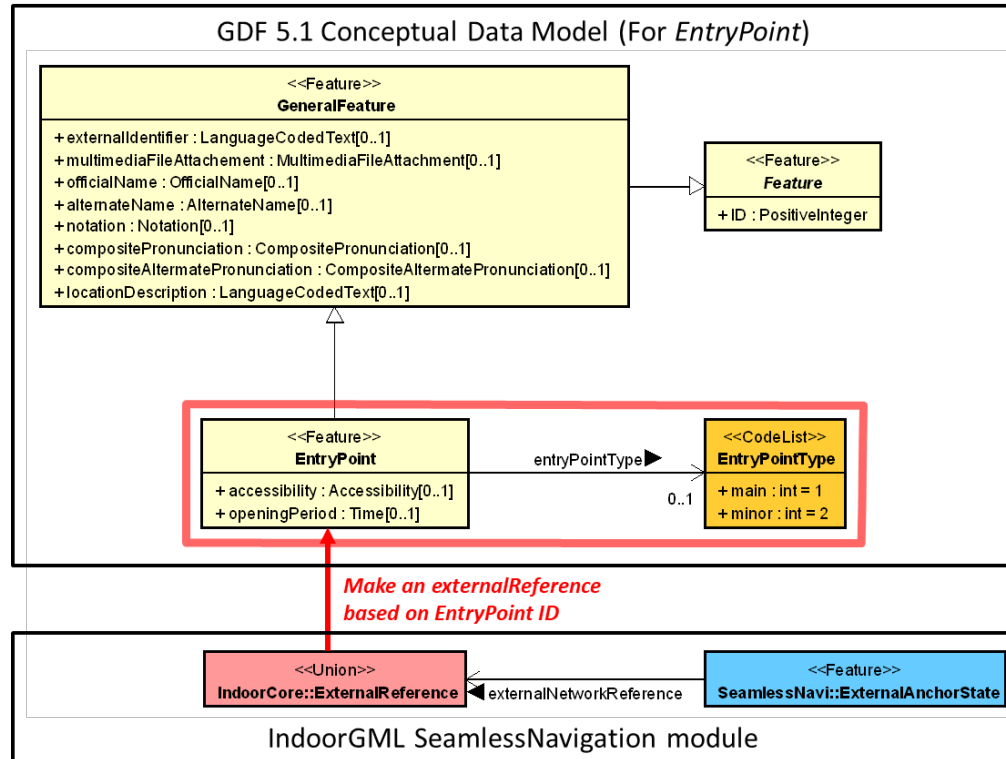


Figure 28 – UML diagram of the conceptual data model for *EntryPoint* of General Feature

In the case of using *EntryPoint*, for connecting to *ExternalAnchorState*, we have to make an *externalReference* based on the *EntryPoint* ID.

The geometry of all *Features* in GDF 5.0 shall be expressed by *Node*, *Edge*, and *Face*. Figure 29 shows a UML diagram of the conceptual data model for *PlanarTopoSimpleFeature*, one of the types of graph topology.

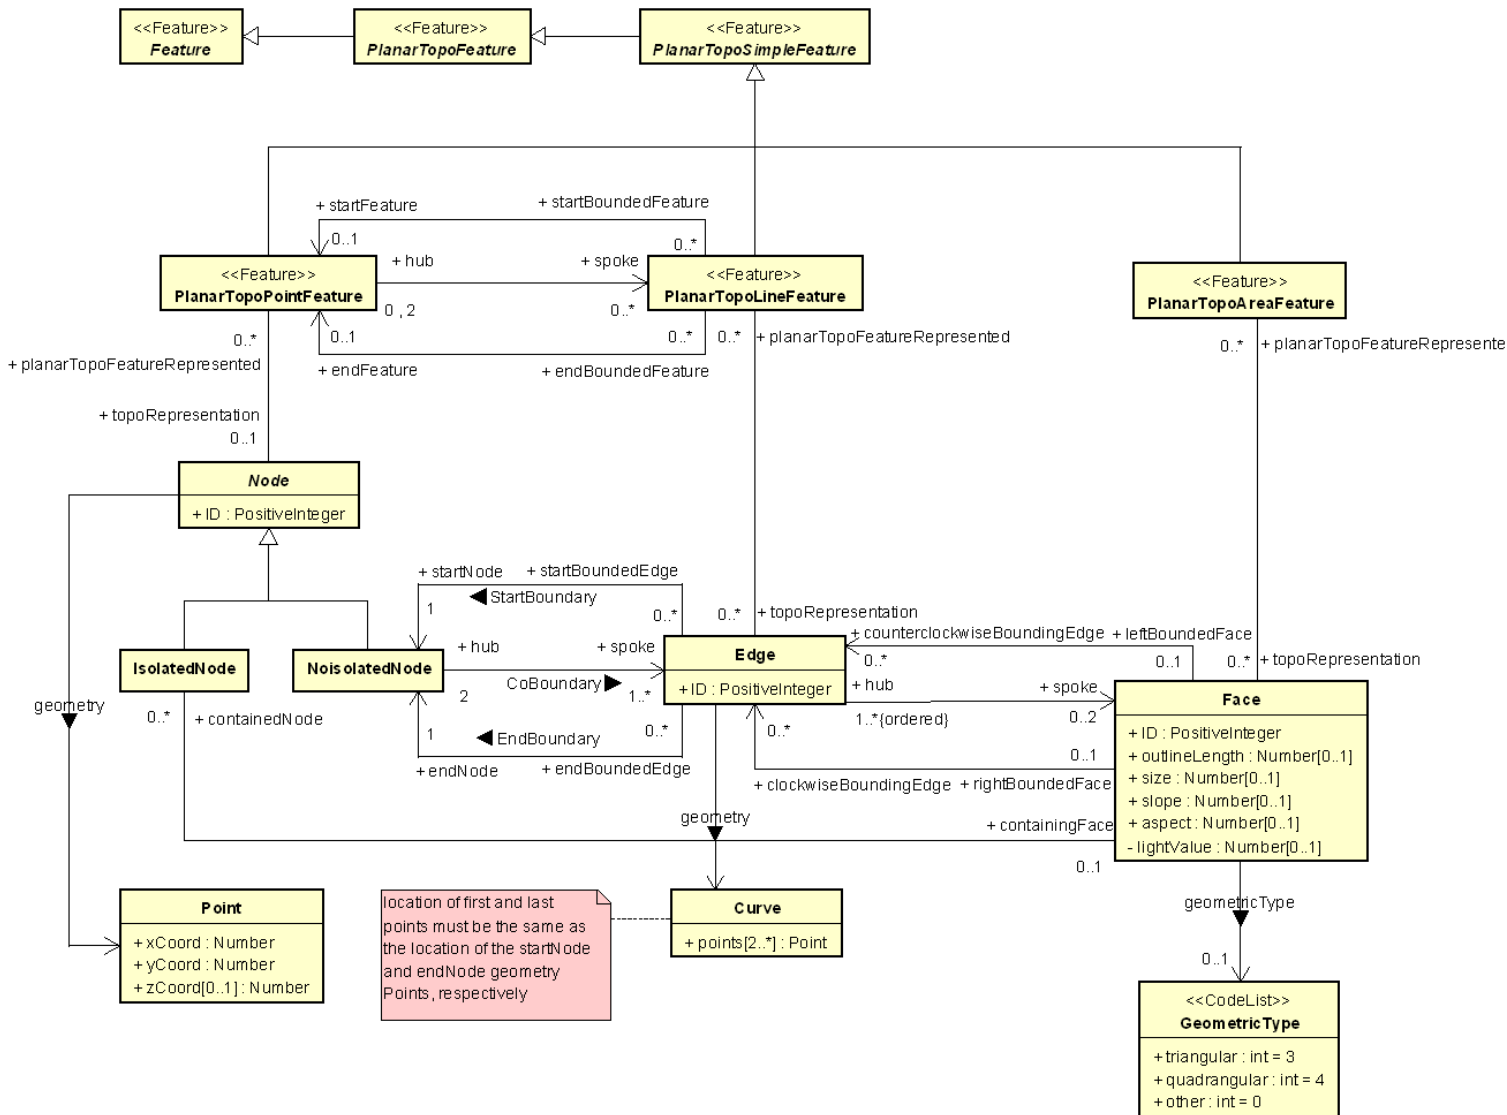


Figure 29 – UML diagram of the conceptual data model for 'PlanarTopoSimpleFeature'

6.3.2. Use case site – AIST Tokyo Waterfront Annex building

The sample data for the use case have been conducted at a real site: AIST Tokyo Waterfront Annex in Japan, as shown in Figure 30. The GDF 5.0 sample data created was based on the XML schema that is provided in Chapter 13 of GDF 5.0. For simplicity, we elide *DLS* (*Dataset, Layer, Section*) information in sample data. The detailed contents of the GDF sample data are shown in Figure 31. This data consists of four *Point Features* and one *Relationship*.

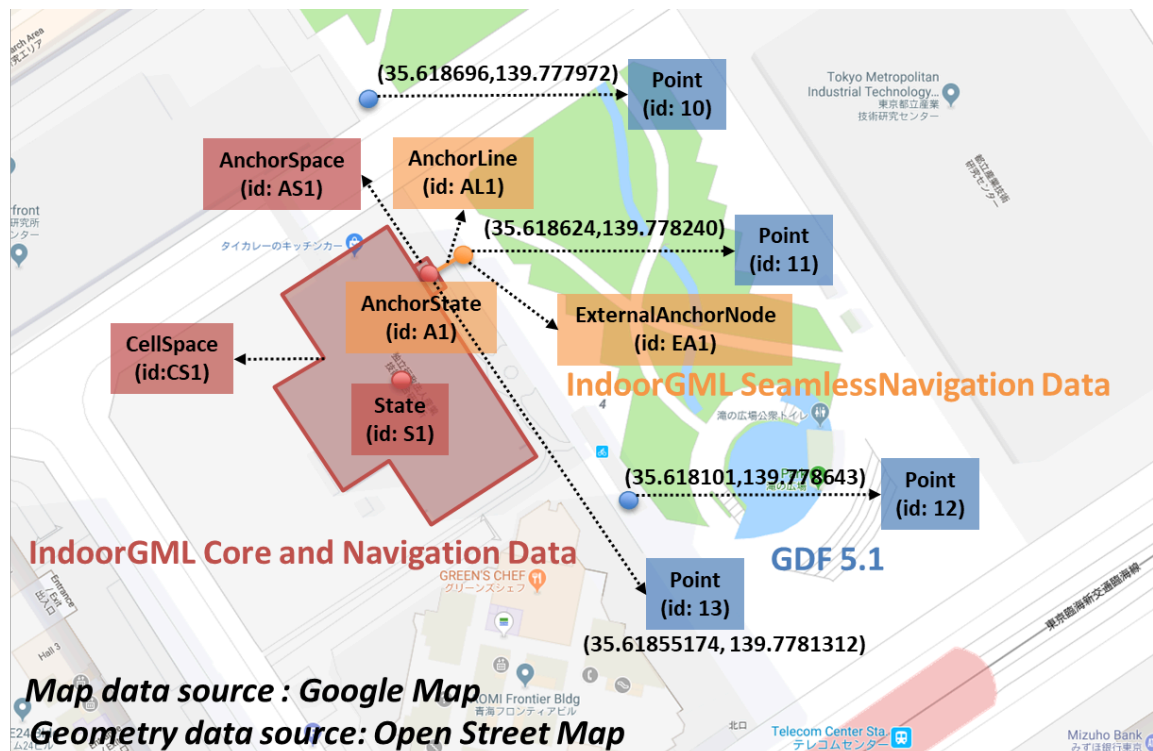


Figure 30 – GDF 5.0 Use case site - AIST Tokyo Waterfront Annex

Point Feature instances must have *point_feat_ID*, *feature_code*, and *coord* properties: *point_feat_ID* means identifier of *Point Feature*, *feature_code* means the four-digit code of the *Feature__Class* to which the *Feature* in issue belongs, and *coord* means a position of *Feature*.

Relationship must have *rel_ID* and *rel_code*: *rel_ID* means identifier of *Relationship* and *rel_code* means (pre-defined or user-defined) relationship type code. And *Relationship* can have *num_feat* and *rel_feature*: *num_feat* means the number of features that belong to *Relationship* and *rel_feature* means the feature information belong to *Relationship*.

The mapped *ExternalAnchorState* result is shown in Figure 32.

```

<?xml version="1.0" encoding="UTF-8"?>
<gdf xmlns="http://www.ukusa.org"
  xmlns:xlink="http://www.w3.org/1999/xlink"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xsi:schemaLocation="http://www.ukusa.org GDF_5_0.xsd">
  <point_feature>
    <non-explicit_point_feat>
      <point_feat_ID>10</point_feat_ID>
      <feature_code>
        <feat_code_D>
          <value.n>4110</value.n>
          <name.n>Road Element</name.n>
        </feat_code_D>
      </feature_code>
      <coord>
        <x_coord>1397779720</x_coord>
        <y_coord>3561869600</y_coord>
      </coord>
    </non-explicit_point_feat>
  </point_feature>
  <point_feature>
    <non-explicit_point_feat>
      <point_feat_ID>11</point_feat_ID>
      <feature_code>
        <feat_code_D>
          <value.n>4110</value.n>
          <name.n>Road Element</name.n>
        </feat_code_D>
      </feature_code>
      <coord>
        <x_coord>1397782400</x_coord>
        <y_coord>3561862400</y_coord>
      </coord>
    </non-explicit_point_feat>
  </point_feature>
  <point_feature>
    <non-explicit_point_feat>
      <point_feat_ID>12</point_feat_ID>
      <feature_code>
        <feat_code_D>
          <value.n>4110</value.n>
          <name.n>Road Element</name.n>
        </feat_code_D>
      </feature_code>
      <coord>
        <x_coord>1397786430</x_coord>
        <y_coord>3561810100</y_coord>
      </coord>
    </non-explicit_point_feat>
  </point_feature>
  <point_feature>
    <non-explicit_point_feat>
      <point_feat_ID>13</point_feat_ID>
      <feature_code>
        <feat_code_D>
          <value.n>7110</value.n>
          <name.n>Non-Residential Building</name.n>
        </feat_code_D>
      </feature_code>
      <coord>

```

```
ml:id="EA1">  
erence>  
ystem>GDF_5_0_sample.gml</core:informationSystem>  
ct>  
TURE_ID_11</core:name>  
ect>  
ference>  
  
624 139.778240</gml:pos>
```

Figure 32 — Part of sample data for 'ExternalAnchorState'



ANNEX A (NORMATIVE) XML SCHEMA FOR INDOORGML SEAMLESSNAVIGATION MODULE

ANNEX A

(NORMATIVE)

XML SCHEMA FOR INDOORGML SEAMLESSNAVIGATION MODULE

This annex provides the normative XML schema document for the SeamlessNavigation Module.

```
<?xml version="1.0" encoding="UTF-8"?>
<xs:schema
  xmlns="http://www.opengis.net/indoorgml/1.0/seamlessNavi"
  xmlns:xs="http://www.w3.org/2001/XMLSchema"
  xmlns:gml="http://www.opengis.net/gml/3.2"
  xmlns:xlink="http://www.w3.org/1999/xlink"
  xmlns:IndoorCore="http://www.opengis.net/indoorgml/1.0/core"
  xmlns:IndoorNavi="http://www.opengis.net/indoorgml/1.0/navigation"
  targetNamespace="http://www.opengis.net/indoorgml/1.0/seamlessNavi"
  version="1.0"
  elementFormDefault="qualified">
  <xs:import namespace="http://www.opengis.net/gml/3.2"
    schemaLocation="http://schemas.opengis.net/gml/3.2.1/gml.xsd"/>
  <xs:import namespace="http://www.opengis.net/indoorgml/1.0/core"
    schemaLocation="http://schemas.opengis.net/indoorgml/1.0/indoorgmlcore.xsd"/>
  <xs:import namespace="http://www.opengis.net/indoorgml/1.0/navigation"
    schemaLocation="http://schemas.opengis.net/indoorgml/1.0/indoorgmlnavi.xsd"/>
  <!-- ===== -->
  <xs:element name="AnchorState" type="AnchorStateType" substitutionGroup=
    "IndoorCore:State">
  <xs:annotation>
  <xs:documentation>AnchorState
  </xs:documentation>
  </xs:annotation>
  </xs:element>
  <!-- ===== -->
  <xs:complexType name="AnchorStateType">
  <xs:complexContent>
  <xs:extension base="IndoorCore:StateType">
  <xs:sequence>
  <xs:element name="transformReferencePoint" type="ExternalPositionType"/>
  <xs:element name="rotationAngle" type="gml:VectorType" minOccurs="0"/>
  <xs:element name="rescalingFactor" type="gml:VectorType" minOccurs="0"/>
  <xs:element name="translationVector" type="gml:VectorType" minOccurs="0"/>
  <xs:element name="duality" type="AnchorSpacePropertyType" minOccurs="0"/>
  <xs:element name="connects" type="AnchorLinkPropertyType" maxOccurs="unbounded"/>
  </xs:sequence>
  </xs:extension>
  </xs:complexContent>
  </xs:complexType>
  <!-- ===== -->
  <xs:complexType name="AnchorStatePropertyType">
  <xs:sequence minOccurs="0">
  <xs:element ref="AnchorState"/>
  </xs:sequence>
  <xs:attributeGroup ref="gml:AssociationAttributeGroup"/>
  </xs:complexType>
  <!-- ===== -->
```

```

<xs:complexType name="AnchorSpacePropertyType">
<xs:sequence minOccurs="0">
<xs:element ref="IndoorNavi:AnchorSpace"/>
</xs:sequence>
<xs:attributeGroup ref="gml:AssociationAttributeGroup"/>
</xs:complexType>
<!-- ===== -->
<xs:complexType name="ExternalPositionType">
<xs:sequence>
<xs:element name="geometry" type="gml:PointPropertyType"/>
</xs:sequence>
<xs:attribute name="srsName" type="xs:anyURI" use="required"/>
</xs:complexType>
<!-- ===== -->
<xs:element name="AnchorLink" type="AnchorLinkType" substitutionGroup="gml:
AbstractFeature">
<xs:annotation>
<xs:documentation>AnchorLink
</xs:documentation>
</xs:annotation>
</xs:element>
<!-- ===== -->
<xs:complexType name="AnchorLinkType">
<xs:complexContent>
<xs:extension base="gml:AbstractFeatureType">
<xs:sequence>
<xs:element name="connectToIndoor" type="AnchorStatePropertyType"/>
<xs:element name="connectToOutdoor" type="ExternalAnchorStatePropertyType"/>
<xs:element name="geometry" type="gml:CurvePropertyType"/>
</xs:sequence>
<xs:attributeGroup ref="gml:AssociationAttributeGroup"/>
</xs:extension>
</xs:complexContent>
</xs:complexType>
<!-- ===== -->
<xs:complexType name="AnchorLinkPropertyType">
<xs:sequence minOccurs="0">
<xs:element ref="AnchorLink"/>
</xs:sequence>
<xs:attributeGroup ref="gml:AssociationAttributeGroup"/>
</xs:complexType>
<!-- ===== -->
<xs:element name="ExternalAnchorState" type="ExternalAnchorStateType"
substitutionGroup="gml:AbstractFeature">
<xs:annotation>
<xs:documentation>ExternalAnchorState
</xs:documentation>
</xs:annotation>
</xs:element>
<!-- ===== -->
<xs:complexType name="ExternalAnchorStateType">
<xs:complexContent>
<xs:extension base="gml:AbstractFeatureType">
<xs:sequence>
<xs:element name="externalNetworkReference" type="IndoorCore:
ExternalReferenceType"/>
<xs:element name="geometry" type="gml:PointPropertyType"/>
<xs:element name="connects" type="AnchorLinkPropertyType" maxOccurs="unbounded"/>
</xs:sequence>
<xs:attributeGroup ref="gml:AssociationAttributeGroup"/>
</xs:extension>
</xs:complexContent>
</xs:complexType>

```

```

<!-- ===== -->
<xs:complexType name="ExternalAnchorStatePropertyType">
<xs:sequence minOccurs="0">
<xs:element ref="ExternalAnchorState"/>
</xs:sequence>
<xs:attributeGroup ref="gml:AssociationAttributeGroup"/>
</xs:complexType>
<!-- ===== -->
</xs:schema>

```



ANNEX B (NORMATIVE) SEAMLESS NAVIGATION MODULE EXAMPLE DOCUMENT

ANNEX B

(NORMATIVE)

SEAMLESSNAVIGATION MODULE EXAMPLE DOCUMENT

The following are examples of the SeamlessNavigation module documents generated as described in Clause 6.2

```
<CityModel xmlns="http://www.opengis.net/citygml/2.0"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xlink="http://www.w3.org/1999/xlink"
xmlns:gml="http://www.opengis.net/gml"
xmlns:tran="http://www.opengis.net/citygml/transportation/2.0"
xsi:schemaLocation="http://www.opengis.net/citygml/2.0 http://schemas.opengis.net/citygml/profiles/base/2.0/CityGML.xsd">
<cityObjectMember>
<tran:TransportationComplex gml:id="TC1">
<tran:lod0Network>
<gml:CompositeCurve srsName="EPSG:4326">
<gml:curveMember>
<gml:LineString>
<gml:pos>35.618696 139.777972</gml:pos>
<gml:pos>35.618624 139.778240</gml:pos>
<gml:pos>35.618101 139.778643</gml:pos>
<gml:pos>35.617625 139.779061</gml:pos>
<gml:pos>35.617475 139.778820</gml:pos>
<gml:pos>35.617320 139.778951</gml:pos>
</gml:LineString>
</gml:curveMember>
</gml:CompositeCurve>
</tran:lod0Network>
</tran:TransportationComplex>
</cityObjectMember>
</CityModel>
```

Listing — cityTransSample.gml

```
<gml:FeatureCollection
xmlns:gml="http://www.opengis.net/gml/3.2"
xmlns:xlink="http://www.w3.org/1999/xlink"
xmlns="http://www.opengis.net/indoorgml/1.0/seamlessNavi"
xmlns:core="http://www.opengis.net/indoorgml/1.0/core"
xmlns:navi="http://www.opengis.net/indoorgml/1.0/navigation"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:schemaLocation="http://www.opengis.net/indoorgml/1.0/core http://schemas.opengis.net/indoorgml/1.0/indoorgmlcore.xsd
http://www.opengis.net/indoorgml/1.0/navigation http://schemas.opengis.net/indoorgml/1.0/indoorgmlnavi.xsd
http://www.opengis.net/indoorgml/1.0/seamlessNavi seamlessnavi.xsd">
<gml:featureMembers>
<core:IndoorFeatures gml:id="IFs">
<core:primalSpaceFeatures>
<core:PrimalSpaceFeatures gml:id="PSs">
<core:cellSpaceMember>
```

```

<core:CellSpace gml:id="CS1">
<gml:name>Main Hall</gml:name>
<core:cellSpaceGeometry>
<core:Geometry2D>
<gml:Polygon srsName="EPSG:4326">
<gml:exterior>
<gml:LinearRing>
<gml:posList> 35.6181996 139.7784147 35.6186619 139.778033 35.61851 139.7777545
35.6183772 139.7778641 35.6183119 139.7777444 35.618092 139.777926 35.6181573
139.7780457 35.6180476 139.7781362 35.6180561 139.7781516 35.6180339 139.77817
35.6181648 139.77841 35.618187 139.7783916 35.6181996 139.7784147 </gml:posList>
</gml:LinearRing>
</gml:exterior>
</gml:Polygon>
</core:Geometry2D>
</core:cellSpaceGeometry>
</core:CellSpace>
</core:cellSpaceMember>
<core:cellSpaceMember>
<navi:AnchorSpace gml:id="AS1">
<gml:name>Entrance</gml:name>
<core:cellSpaceGeometry>
<core:Geometry2D>
<gml:Polygon srsName="EPSG:4326">
<gml:exterior>
<gml:LinearRing>
<gml:posList>
35.6185243 139.7781466 35.61857293778 139.77810644557 35.61857882026
139.77811733809 35.61852967618 139.77815783109 35.6185243 139.7781466
</gml:posList>
</gml:LinearRing>
</gml:exterior>
</gml:Polygon>
</core:Geometry2D>
</core:cellSpaceGeometry>
<navi:class> 1000 </navi:class>
<navi:function> 1000 </navi:function>
<navi:usage> 1000 </navi:usage>
</navi:AnchorSpace>
</core:cellSpaceMember>
</core:PrimalSpaceFeatures>
</core:primalSpaceFeatures>
<core:multiLayeredGraph>
<core:MultiLayeredGraph gml:id="MLG1">
<core:spaceLayers>
<core:spaceLayerMember>
<core:SpaceLayer gml:id="SL1">
<core:nodes>
<core:stateMember>
<core:State gml:id="S1">
<core:duality xlink:href="#CS1"/>
<core:geometry>
<gml:Point>
<gml:pos> 35.61833152465 139.77806794632 </gml:pos>
</gml:Point>
</core:geometry>
</core:State>
</core:stateMember>
<core:stateMember>
<AnchorState gml:id="A1">
<core:geometry>
<gml:Point srsName="EPSG:4326">
<gml:pos> 35.61855174466 139.77813125399 </gml:pos>

```

```

</gml:Point>
</core:geometry>
<transformReferencePoint srsName="EPSG:4326">
<geometry>
<gml:Point srsName="EPSG:4326">
<gml:pos> 35.61855174466 139.77813125399 </gml:pos>
</gml:Point>
</geometry>
</transformReferencePoint>
<duality xlink:href="#AS1"/>
<connects xlink:href="#AL1"/>

</AnchorState>
</core:stateMember>
</core:nodes>
</core:SpaceLayer>
</core:spaceLayerMember>
</core:spaceLayers>
</core:MultiLayeredGraph>
</core:multiLayeredGraph>
</core:IndoorFeatures>
<ExternalAnchorState gml:id="EA1">
<externalNetworkReference>
<core:informationSystem>cityTransSample.gml</core:informationSystem>
<core:externalObject>
<core:name>GMLID_T1</core:name>
</core:externalObject>
</externalNetworkReference>
<geometry>
<gml:Point>
<gml:pos>35.618624 139.778240</gml:pos>
</gml:Point>
</geometry>
<connects xlink:href="#AL1"/>
</ExternalAnchorState>
<AnchorLink gml:id="AL1">
<connectToIndoor xlink:href="#A1"/>
<connectToOutdoor xlink:href="#EA1"/>
<geometry>
<gml:LineString srsName="EPSG:4326">
<gml:posList> 35.61855174466 139.77813125399 35.618624 139.778240 </gml:posList>
</gml:LineString>
</geometry>
</AnchorLink>
</gml:featureMembers>
</gml:FeatureCollection>

```

Listing — *seamlessNaviSample.gml*



ANNEX C (INFORMATIVE) BIBLIOGRAPHY



ANNEX C (INFORMATIVE) BIBLIOGRAPHY



ANNEX D (INFORMATIVE) REVISION HISTORY



ANNEX D (INFORMATIVE) REVISION HISTORY

DATE	RELEASE	EDITOR	PRIMARY CLAUSES MODIFIED	DESCRIPTION
2018-11-01	0.1	Kyong-Sook Kim Teahoon Kim Jiyeong Lee	all	Initial version
2018-12-03	0.5	Kyong-Sook Kim Teahoon Kim Jiyeong Lee	5, 6, Annex B	complemented
2019-02-04	1.0	Kyong-Sook Kim Teahoon Kim Jiyeong Lee Hye-Young Kang	all	final version