

Form S-6 Interactive Grid and Wind Fields

Sensitivity and Uncertainty Analysis over Southern Florida

Paul Fishwick and Claude Code

June 23, 2026

1 Purpose

This project implements the grid and wind-field machinery underlying *Form S-6 (Hypothetical Events for Sensitivity and Uncertainty Analysis)* of the Florida Commission on Hurricane Loss Projection Methodology Report of Activities (ROA), which supports *Standard S-3 (Uncertainty Analysis for Hurricane Model Output)*. The deliverable is an interactive browser application (HTML/CSS/JavaScript + Leaflet) that draws the official 21×40 grid over southern Florida, runs selectable hurricane wind-field models over it, and performs the sensitivity (SRC) and uncertainty (EPR) analyses the ROA prescribes.

2 The grid and storm track

The grid (ROA Figs. 3–4) has $21 \times 40 = 840$ vertices at ~ 3 statute-mile spacing: east–west $E = 0, 3, \dots, 117$ (40 columns) and north–south $N = -15, -12, \dots, 45$ (21 rows). Of the 840 vertices, **682 are land** and 158 water, taken directly from the **Land-Water** ID worksheet of **FormS6Input.xlsx**. The point $(0, 0)$ is the storm centre at $t = 0$, nine miles east of the landfall location (25.8611°N , 80.1196°W); the storm tracks due west, $(0, 0) \rightarrow (117, 0)$, over 12 hours. Figure 1 shows the rendered grid (land vs. water), the track, and the landfall marker.

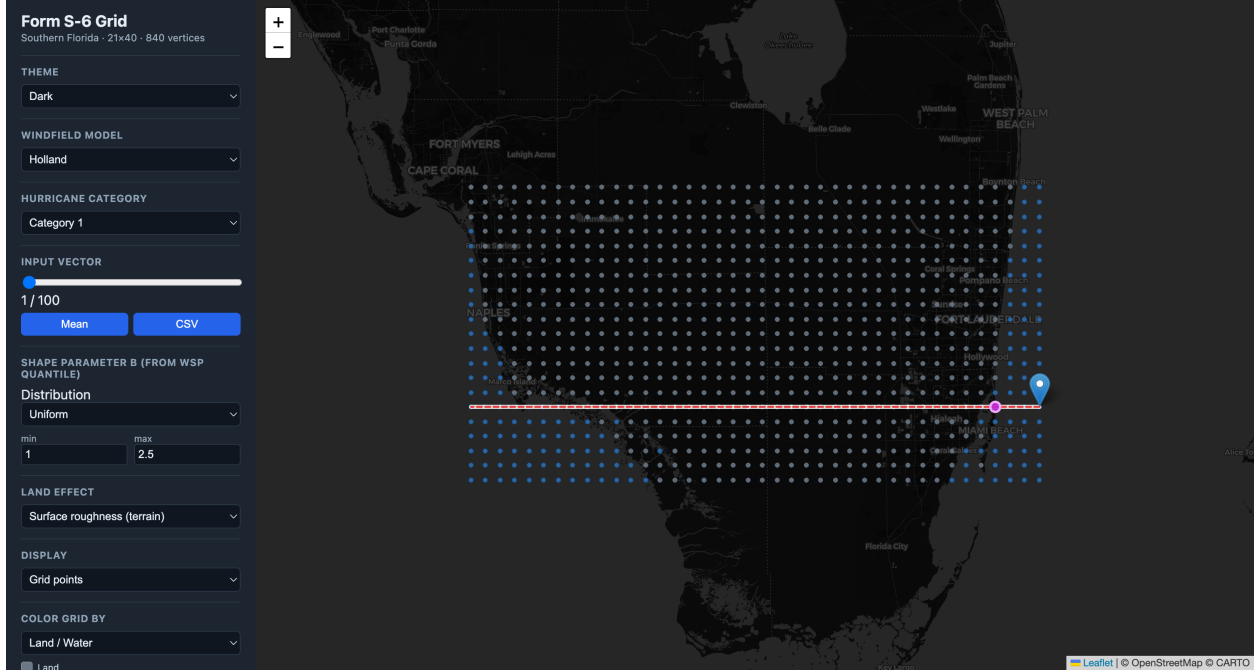


Figure 1: The 840-vertex Form S-6 grid over southern Florida: land (grey) and water (blue) vertices, the due-west storm track (dashed), the $t=0$ centre, and the landfall marker.

3 Wind-field models

Three wind-field models are provided, each evaluated at all 840 vertices. **Powell** is an iterative boundary-layer PDE (slab) solver; **Holland** is the closed-form gradient-wind profile; **Willoughby** is a piecewise power-law profile anchored to the Holland $V_{\max}$. All three include translation asymmetry from the storm motion. Powell is precomputed in Python (PyTorch/MPS, ~ 2.3 s per solve); Holland and Willoughby are closed-form and computed live in the browser.

Per-vector inputs come from the **SA all Variables** worksheet: central pressure CP, radius of maximum wind $R_{\max}$, translation speed VT, wind-field shape parameter WSP, conversion factor CF, and far-field pressure FFP, for 100 vectors in each of categories 1, 3, and 5. The pressure deficit is $\Delta p = \text{FFP} - \text{CP}$. WSP is supplied as a quantile $p \in [0, 1]$ and mapped to the Holland shape parameter B through a user-selectable distribution (default Uniform[1.0, 2.5], $B = B_{\min} + p(B_{\max} - B_{\min})$).

Conversion factor (CF). The ROA CF variable converts modelled gradient winds to surface winds using a three-zone radial rule (ROA pp. 184–185): for $r < R_{\max}$, $\text{CF}_{\text{eff}} = \text{CF} \cdot r/R_{\max}$; for $R_{\max} < r < 3R_{\max}$, $\text{CF}_{\text{eff}} = \text{CF} - 0.1(r - R_{\max})/(2R_{\max})$; and for $r > 3R_{\max}$, $\text{CF}_{\text{eff}} = \text{CF} - 0.1$. The models are run at gradient level ($\beta_{10} = 1$) and CF performs the gradient→surface conversion exactly as specified.

Peak-wind metric and time sampling. For each vector we record the per-vertex **12-hour peak surface wind**. The storm position is sampled finely ($\Delta t = 0.1$ h); coarse hourly sampling aliases the fast westward motion and produces a spurious “comb” artifact in the peak field, which fine sampling removes. Figures 2 and 3 show the peak field as coloured points and as filled contours.

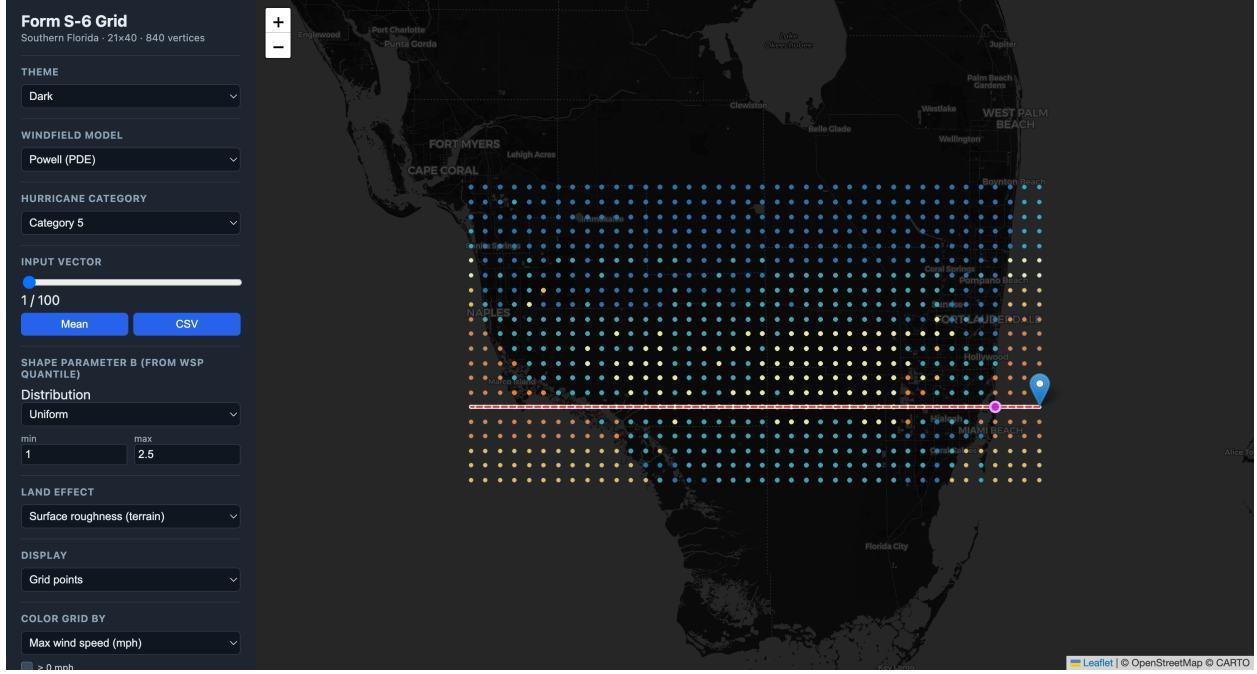


Figure 2: Powell peak surface wind (Category 5, vector 1) coloured per vertex, with surface roughness applied. Strongest winds lie north of the track—correct for a westward-moving Northern-Hemisphere cyclone, where translation adds to rotation on the north side.

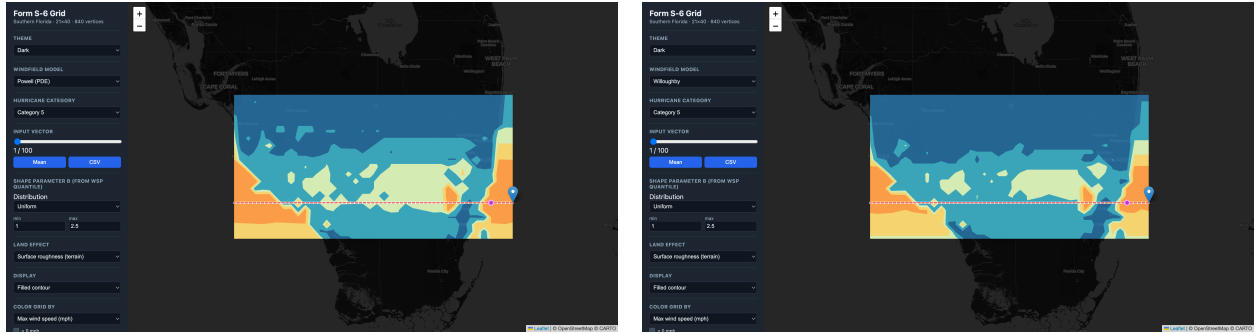


Figure 3: Filled-contour display (ROA Figs. 6–8 style) of the Category 5 peak field: Powell (left) and Willoughby (right). Contours are built on the 21×40 lattice with the wind-speed colour bands.

4 Land effect: roughness and decay

A single *land-effect* selector offers three mutually exclusive treatments of the storm’s interaction with the land: **None** (marine winds), **Surface roughness**, and **Kaplan–DeMaria decay**.

Surface roughness. Roughness is applied as a per-vertex, wind-speed-independent multiplier on the final surface wind. The roughness length z_0 at each vertex is sampled from **NLCD 2021 land cover** (fetched as a properly georeferenced GeoTIFF from the MRLC WCS) via a published land-cover $\rightarrow z_0$ table, then converted from marine to terrain exposure with the gradient-tied **log-law**

(Vickery et al. 2009 / ESDU):

$$\text{factor} = \frac{\ln(z_{\text{ref}}/z_{0,\text{land}})/\ln(z_g/z_{0,\text{land}})}{\ln(z_{\text{ref}}/z_{0,\text{marine}})/\ln(z_g/z_{0,\text{marine}})},$$

with $z_{\text{ref}} = 10$ m and gradient height $z_g = 500$ m; water returns ≈ 1 . The land-mean factor is ≈ 0.67 (urban ~ 0.50 , wetland ~ 0.70). This is a *spatial* terrain-friction effect.

Kaplan–DeMaria decay. Roughness alone cannot reproduce a storm weakening as it moves inland, which is a *temporal* filling process. The Kaplan–DeMaria (1995) model is offered as a separate option: a one-time coastal reduction ($R = 0.90$) at first landfall, then $V(t) = V_b + (R V_0 - V_b) e^{-\alpha t}$ with $\alpha = 0.095 \text{ h}^{-1}$ and background $V_b = 30.7 \text{ mph}$ over land, with a gentle recovery ($\alpha_{\text{rec}} = 0.05 \text{ h}^{-1}$) once the centre re-emerges over the Gulf. Landfall ($\approx \text{E-W } 9$) and Gulf exit ($\approx \text{E-W } 99$) are read from the $N\text{-}S = 0$ track land mask. Figure 6 (left) shows the resulting inland decay for a Category 5 storm. The two options are kept exclusive because α already lumps surface friction with loss of the ocean energy source.

5 Sensitivity and uncertainty analysis

Following Iman, Johnson, and Schroeder (2001), as the ROA cites:

- **Sensitivity (SRC).** Standardized regression coefficients from regressing the standardized output on the six standardized inputs over the 100 SA vectors, per category. Sign gives direction, magnitude gives influence (ROA Fig. 9).
- **Uncertainty (EPR).** Expected percentage reduction in output variance per input (ROA Fig. 10). For *Powell* the EPR is the variance share

$$\text{EPR}_i = \frac{\text{Var}(Y \mid \text{only } X_i \text{ varies})}{\text{Var}(Y_{\text{SA}})} \times 100\%,$$

computed faithfully from the six one-variable ROA “UA for X ” worksheets (1,800 PDE solves); the analytic models use the $\text{EPR}_i = \text{SRC}_i^2$ approximation.

The output metric is the **mean peak wind over the 682 land vertices** (loss-cost is the additional metric in Section 6). The computed SRCs and faithful EPRs reproduce the ROA’s findings: WSP dominates for Category 1 while Rmax grows to dominate for Category 5 (faithful EPR: Cat 1 WSP $\approx 54\%$, Cat 5 Rmax $\approx 57\%$), with CP negative and CF, FFP, Rmax positive (Figure 4).

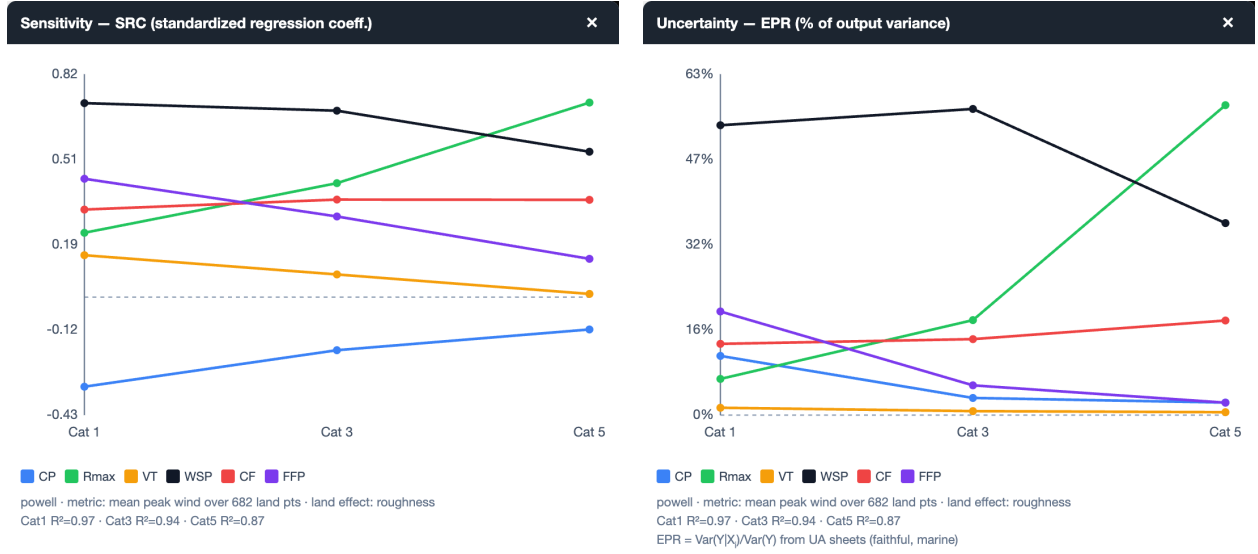


Figure 4: Sensitivity (SRC, left) and uncertainty (EPR, right) for the Powell model, plotted by hurricane category—the interactive analogues of ROA Figs. 9–10. The windows are independently movable and resizable.

6 Vulnerability and loss cost

The ROA (p. 186) fixes a single insured structure at *every* one of the 682 land vertices: a \$100,000, zero-deductible, single-family, single-story, masonry, gable-roof, no-shutter home with truss anchors, shingles over 15# felt, a $\frac{1}{2}$ in. plywood deck (8d nails at 6 in. edge / 12 in. field), built 1995, roof age unknown. Because the structure is uniform, a **single vulnerability curve** applies at all points and only the wind varies.

The curve is generated from our existing HAZUS/ARA wind-vulnerability tool (`wind_vulnerability_tool.v5.html`) driven headlessly to the structure above, yielding Mean Damage Ratio (MDR) versus the ASCE 7-98 3-second peak gust at 10 m (Exposure C). The resulting masonry curve (Figure 5) is a smooth sigmoid: ~ 0 below 50 mph, 50% near 100 mph, and a plateau at $\text{MDR} \approx 0.60$ above ~ 140 mph—the masonry ceiling (walls survive; roof, openings, and contents bound the loss), in contrast to frame construction which approaches 1.0.

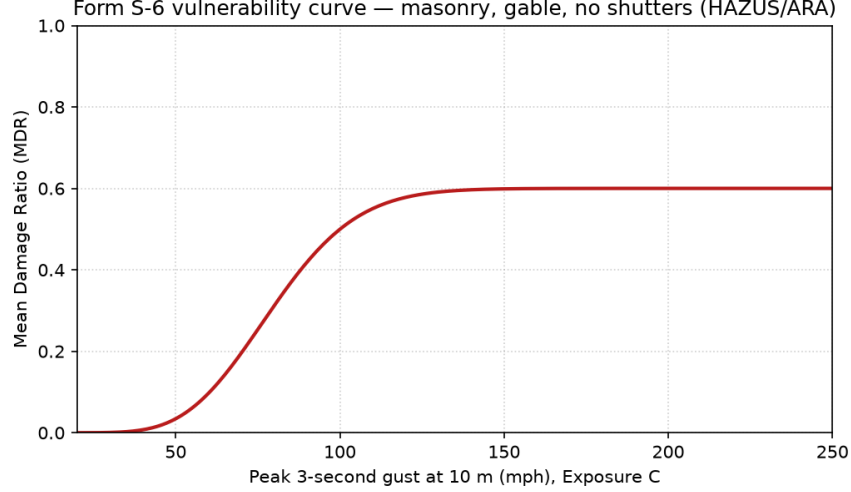


Figure 5: Form S-6 vulnerability curve (Mean Damage Ratio vs. peak 3-second gust) for the masonry, gable, no-shutter structure, generated from the HAZUS/ARA tool.

Per-vertex loss is $\text{loss} = \text{MDR}(\text{peak wind}) \times \$100,000$; the expected loss as a percent of exposure is the total over the 682 land vertices divided by $\$68,200,000$ ($= 682 \times \$100,000$). The viewer colours the grid by MDR, reports total loss (\$M) and % exposure, and the hover popup shows loss % and dollars beside the peak wind. Figure 6 shows Category 5 Kaplan–DeMaria-decayed wind (left) and the corresponding loss field (right).

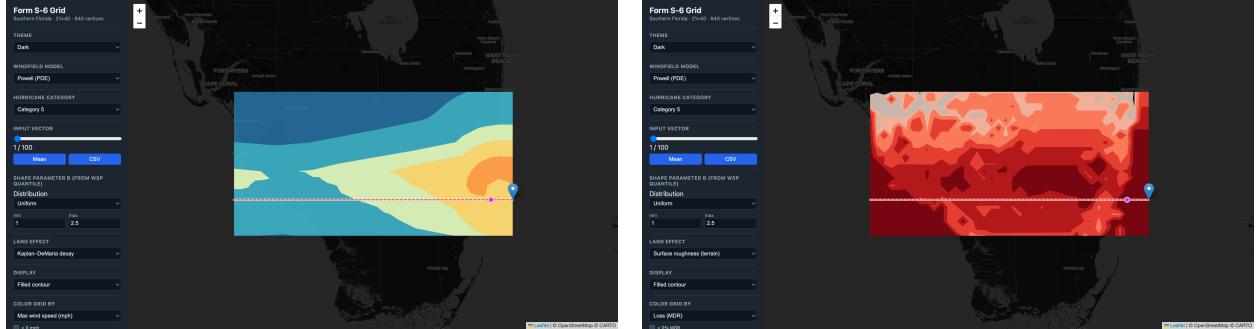


Figure 6: Category 5, Powell: Kaplan–DeMaria-decayed peak wind (left) and the loss field as Mean Damage Ratio (right), both as filled contours.

7 Metamodels and the interaction profiler

The standardized regression coefficients of Section 5 treat the input–output map as *first order*: each input acts independently and linearly. A 2026 review of the Form S-6 sensitivity procedure (M. Johnson and colleagues) noted that the simulated response is in fact nonlinear and that the inputs *interact*, and recommended replacing the linear fit with a flexible *metamodel* (response surface, Gaussian-process regression, or neural network) examined through an interaction *profiler*. The viewer implements this directly.

Response variable. A **Response (Y)** selector chooses the scalar output that every analysis tool regresses on: either the **mean peak wind** over the 682 land vertices (Section 5) or the **loss cost** %TLC(i), defined exactly as in Section 6,

$$\%TLC(i) = \frac{TLC(i)}{\$68,200,000} \times 100\% = 100 \times \overline{MDR}_{\text{land}}(i),$$

the total loss cost of input vector i as a percent of total exposure, equal to $100 \times$ the mean Mean-Damage-Ratio over the 682 land vertices. Switching the response re-fits the SRC, EPR, profiler, and CDF panels live (for loss-cost the faithful EPR worksheets do not apply, so the SRC² variance share is used).

Second-order metamodel. For the profiler the viewer fits, per category, a standardized second-order response surface in the six inputs $z_k = (X_k - \bar{X}_k)/s_{X_k}$,

$$\hat{Y} = b_0 + \sum_k b_k z_k + \sum_k b_{kk} z_k^2 + \sum_{j < k} b_{jk} z_j z_k,$$

i.e. linear, quadratic, and all 15 pairwise cross terms (28 coefficients, fit by least squares over the 100 Latin-hypercube vectors via the normal equations with a small ridge for stability). The quadratic and cross terms are what let the metamodel *bend* and express interactions; a purely linear fit would draw flat, parallel profiles. Because the simulator is a smooth deterministic function of the six inputs, this surface typically reproduces the 100 runs almost exactly ($R^2 \approx 1$).

Interaction profiler. The profiler (Figure 7) draws one partial-dependence curve per input: $\hat{Y}$ as that input sweeps its range while the other five are held at a reference point shown by the dashed crosshair. Six sliders set the reference point (initialized at the input means). Dragging one slider re-draws the other five curves; *a curve whose slope changes is interacting with the moved variable*. This is the JMP-style “prediction profiler” of the review deck: for the Category-5 Powell fit, for example, the R_{max} profile is strongly concave and its slope steepens as CP is lowered (more intense storms), the signature two-factor $CP \times R_{\text{max}}$ interaction.

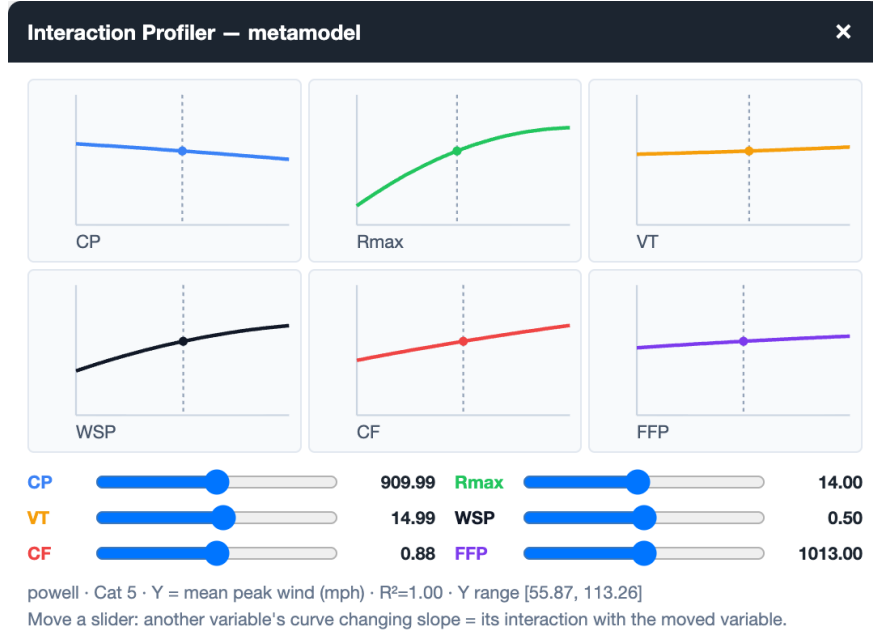


Figure 7: Interaction profiler for the Category 5 Powell metamodel (Y = mean peak wind). Each panel is the partial-dependence of $\hat{Y}$ on one input with the others held at the slider reference point (dashed crosshair). Moving a slider re-renders the other curves, so a change of slope reveals the interaction between that pair of variables.

Loss-cost distribution. A companion panel plots the empirical CDF of $\%TLC(i)$ over the 100 vectors for the selected category (the ROA's Fig. 5 analogue), summarizing the spread of simulated loss cost. For Category 5 (Figure 8) the loss cost ranges from roughly 14% to 53% of exposure with a mean near 33%.

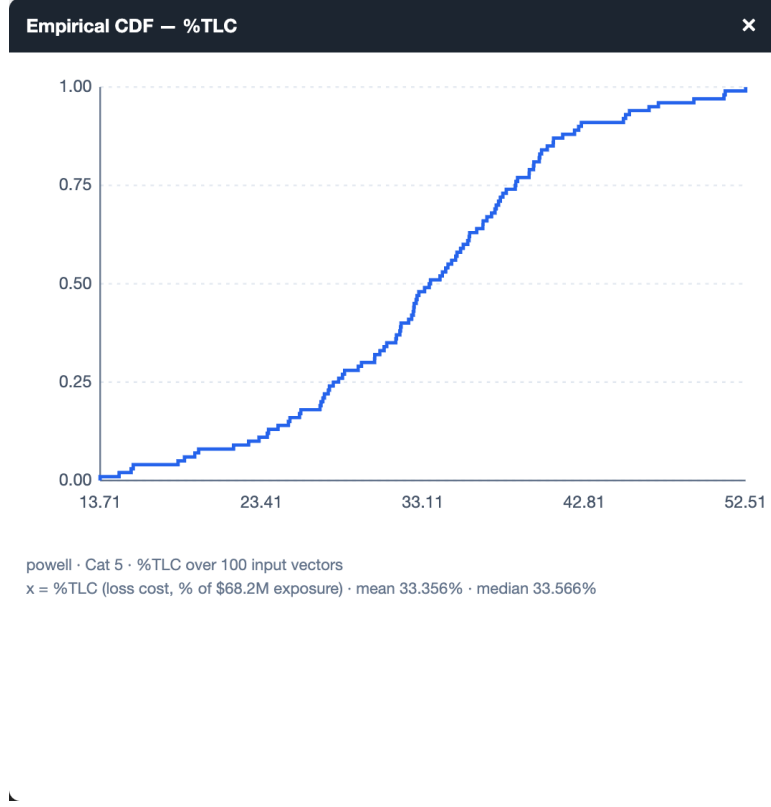


Figure 8: Empirical CDF of $\%TLC(i)$ —loss cost as a percent of the \$68.2M exposure—over the 100 Category 5 input vectors (Powell).

These tools are pure client-side computations (no precompute). Gaussian-process regression with automatic-relevance-determination length scales and a small neural network, together with variance-based total/interaction indices and grid-point-level sensitivity, are the planned next step.

8 Interface and reproducibility

The viewer offers model / category / input-vector selection (the input vector chooses one of the 100 randomized storms for the category), the $WSP \rightarrow B$ distribution control, the three-way land-effect selector, a colour-by control (peak wind, loss MDR, or land/water), a points/filled-contour display toggle, light and dark themes (Figure 9), and nearest-point hover (peak wind, loss, coordinates, land/water, place name, and the active input parameters). Beneath the input-vector slider, a **Mean** toggle recolours the grid by the per-vertex wind averaged over all 100 input vectors (for the current model, category, and land effect), and a **CSV** button exports the six Form S-6 input variables (CP, $R_{\max}$, VT, WSP, CF, FFP) for all 100 vectors across the three categories. **Left-clicking** a vertex opens a floating windfield popup (Figure 8) with the storm-relative isotach field—the marked vertex at its peak time—and that vertex’s wind time series over the 12-hour passage. The Sensitivity and Uncertainty results open as independent, movable, resizable windows.

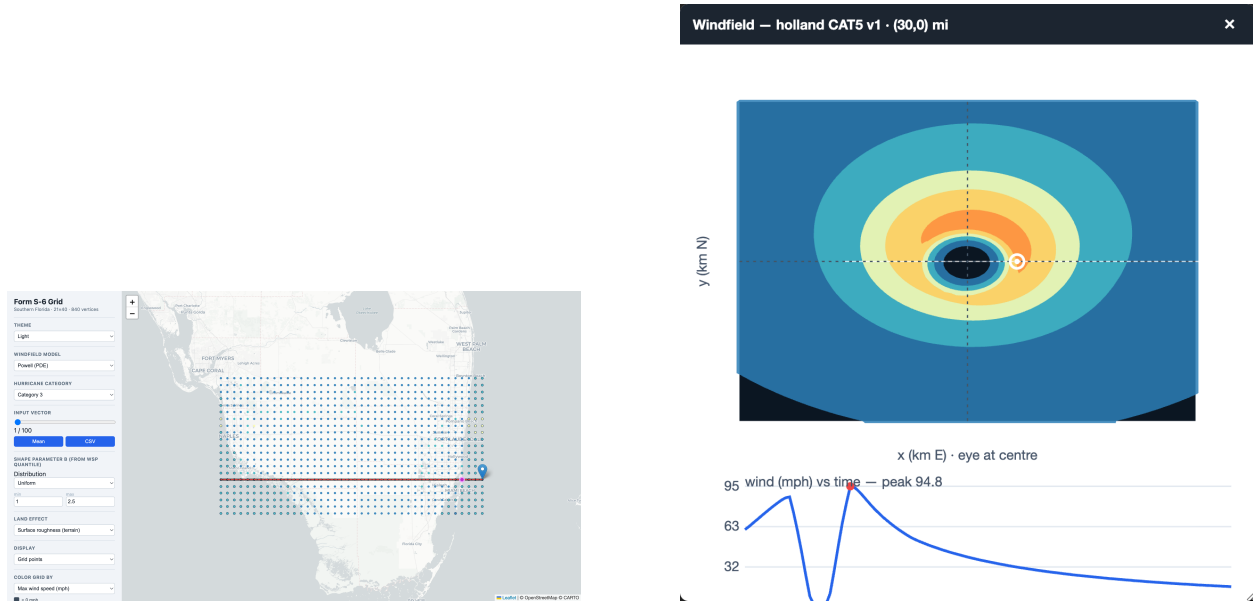


Figure 9: Left: light theme, Powell Category 3 peak-wind points. Right: the left-click windfield popup—storm-relative isotachs with the clicked vertex marked at its peak time, plus the per-vertex wind time series.

All data artifacts are reproducible via `pipeline/build_all.sh` (grid, place names, NLCD fetch, roughness, inputs, and the Powell marine/K&D/field precomputes), with `build_vulnerability.py` for the loss curve and `windfield.ua.py` for the faithful Powell EPR. The app is served with `./start` at <http://localhost:8012/web/index.html>. Figures here are captured by `docs/capture_figures.py` (Selenium driving headless Chrome against the running viewer).

References

- [1] Florida Commission on Hurricane Loss Projection Methodology (2025). *Report of Activities*. Standard S-3 and Form S-6.
- [2] Iman, R. L., Johnson, M. E., and Schroeder, T. A. (2001). *Professional Team Demonstration Uncertainty/Sensitivity Analysis*. <https://fchlpm.sbafla.com/media/teping21/ua-sa-demo.pdf>
- [3] Holland, G. J. (1980). An analytic model of the wind and pressure profiles in hurricanes. *Monthly Weather Review*, 108, 1212–1218.
- [4] Willoughby, H. E., Darling, R. W. R., and Rahn, M. E. (2006). Parametric representation of the primary hurricane vortex. Part II: A new family of sectionally continuous profiles. *Monthly Weather Review*, 134, 1102–1120.
- [5] Powell, M. D., Soukup, G., Cocke, S., Gulati, S., Morisseau-Leroy, N., Hamid, S., Dorst, N., and Axe, L. (2005). State of Florida hurricane loss projection model: Atmospheric science component. *Journal of Wind Engineering and Industrial Aerodynamics*, 93(8), 651–674. <https://www.aoml.noaa.gov/hrd/Powell/JWEIA1.pdf>

- [6] Powell, M. D., Houston, S. H., and Reinhold, T. A. (1996). Hurricane Andrew’s landfall in South Florida. Part I: Standardizing the surface wind observations. *Weather and Forecasting*, 11, 304–328.
- [7] Vickery, P. J., Wadhera, D., Powell, M. D., and Chen, Y. (2009). A hurricane boundary layer and wind field model for use in engineering applications. *Journal of Applied Meteorology and Climatology*, 48, 381–405.
- [8] Kaplan, J., and DeMaria, M. (1995). A simple empirical model for predicting the decay of tropical cyclone winds after landfall. *Journal of Applied Meteorology*, 34, 2499–2512.
- [9] ESDU (1985). *Characteristics of atmospheric turbulence near the ground. Part II: Single point data for strong winds (neutral atmosphere)*. ESDU 85020.
- [10] Multi-Resolution Land Characteristics Consortium (2023). *NLCD 2021 Land Cover (CONUS)*. <https://www.mrlc.gov>.
- [11] U.S. Environmental Protection Agency. *AERSURFACE User’s Guide*, land-cover to surface-roughness (z_0) tables.