




Your Partner in Quality Health Care Delivery




Metcare Brochure

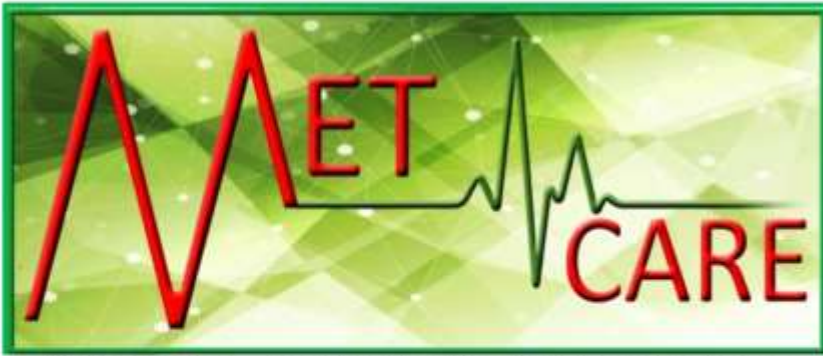

Business Area - Indoor Environmental Equipment

Indoor Oxygen Supply System Concept Diagram

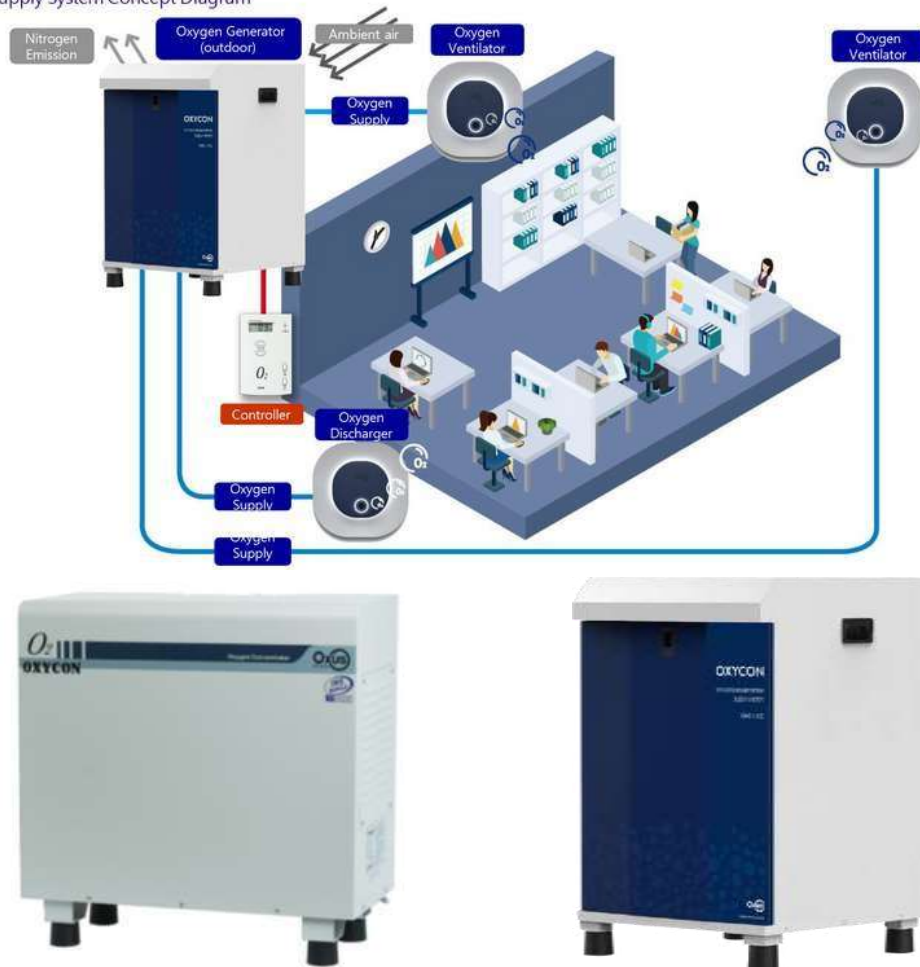

RMC-127C2

Advanced Indoor Environment Solution The RMC-127C2 is the newest product, engineered for integration into modern, health-focused facilities. Key Features: Low noise (44 dB) Convenient maintenance
 Technical Specifications: Oxygen Flow: 12 LPM Oxygen Purity: 70 percent above Noise Level: 44 dB (Low Noise) Power Consumption: 570W Voltage (Frequency): 220V (60Hz) Working Temperature: -10 to 40 degrees C Size (W x D x H): 390 x 445 x 625 mm Weight: 37 kg

REX-127

Proven Reliability Equipment

The REX-127 is a powerful and reliable oxygen concentrator, distinguished by its proven track record in the public sector and is a benchmark product for institutional buyers. Key Features: Durable design for continuous operation
 Technical Specifications: Oxygen Flow: 12 LPM Oxygen Purity: 70 percent above Noise Level: 60 dB Power Consumption: 570W Voltage (Frequency): 220V (60Hz) Working Temperature: -10 to 40 degrees C Size (W x D x H): 403 x 414 x 622 mm Weight: 38 kg





RAK-U06M2E



Medical Oxygen Supply System As a system built to replace the continuous supply of liquefied and high-pressure oxygen to the central gas piping system used in medium, large hospitals, and nursing clinics medical oxygen supply system (RAK-Series) can continuously operate and supply oxygen to the central piping system for 24 hours, 365 days a year.

Total production in one day: 86,400L
Gas oxygen (As for 40L, 120bar): 18 cylinders




RAK-U03M2E



Medical Oxygen Supply System
As a system built to replace the continuous supply of liquefied and high-pressure oxygen to the central gas piping system used in medium, large hospitals, and nursing clinics medical oxygen supply system (RAK-Series) can continuously operate and supply oxygen to the central piping system for 24 hours, 365 days a year.

Total production in one day: 43,200L
Gas oxygen (As for 40L, 120bar): 9 cylinders

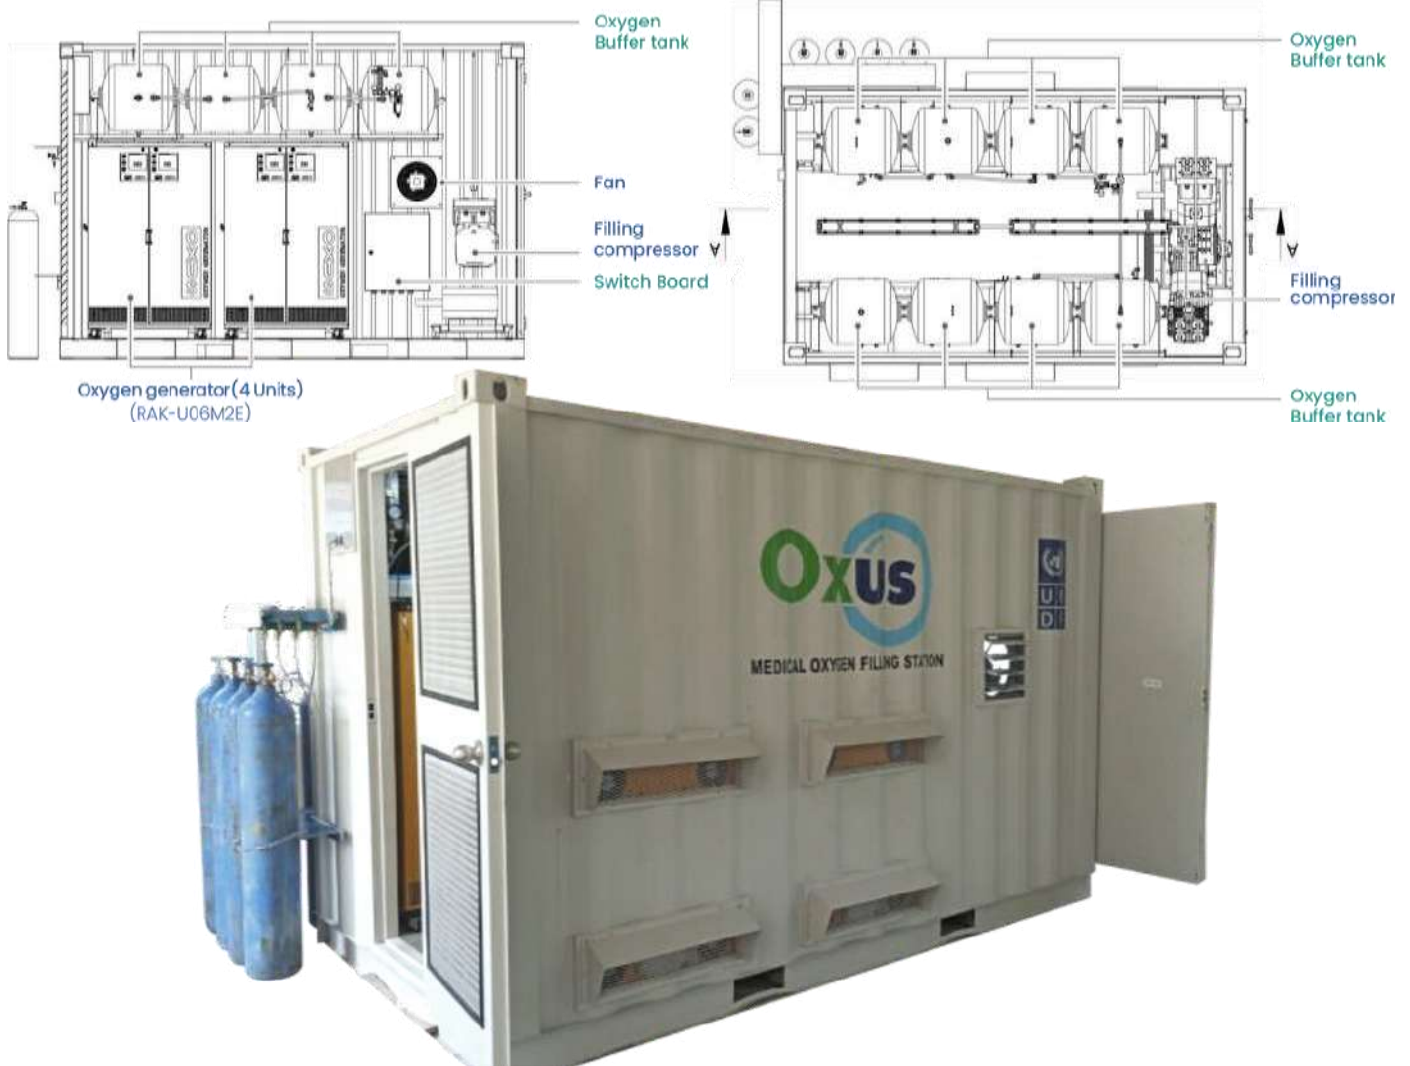

TOS (Transportable Oxygen Station)



Core Function/Design: A transportable oxygen plant designed to fill oxygen cylinders and directly supply oxygen to a hospital's Central Piping System (CPS).

Development Focus: Developed to address medical infrastructure in areas with poor accessibility, low infrastructure, or heavy reliance on oxygen cylinders.

Structure/Components: A compact, easy-to-manage system housed within a 12-foot container, including Oxygen Generator(s), Buffer Tank(s), Booster, and Piping.

Operation Flexibility: Capable of simultaneously filling cylinders and supplying oxygen directly to the hospital's gas line.

Efficiency & Maintenance: Features simple structure/maintenance, low energy consumption, and provides separate control for oxygen supplement and filling.

Installation Note: In areas with unstable electricity, it is recommended to install an AVR and diesel generator suitable for the capacity.



AX-160-EO Gas Sterilizer



- 160 liter EO Gas Sterilizer
- 100% EO and 100% Safe
- Vacuum type sealing and gasket pressure plate
- With negative pressure operation
- Sterilization and Ventilation in the same cabinet
- 2 hour short program *with Sterijet
- Practical and easy to use
- Robust construction
- Floor heating system
- Automatic door-lock system
- Suitable for invasive sterilization



AX-400-EO Gas Sterilizer




- 400 liter EO Gas Sterilizer
- 100% EO and 100% Safe
- Vacuum type sealing and gasket pressure plate
- With negative pressure operation
- Sterilization and Ventilation in the same cabinet
- 2 hour short program *with Sterijet
- Practical and easy to use
- Robust construction
- Floor heating system
- Automatic door-lock system
- Suitable for invasive sterilization



AX-1000-EO Gas Sterilizer



- 1000 liter EO Gas Sterilizer
- 100% EO and 100% Safe
- Vacuum type sealing and gasket pressure plate
- With negative pressure operation
- Sterilization and Ventilation in the same cabinet
- 2 hour short program *with Sterijet
- Practical and easy to use
- Robust construction
- Floor heating system
- Automatic door-lock system
- Suitable for invasive sterilization

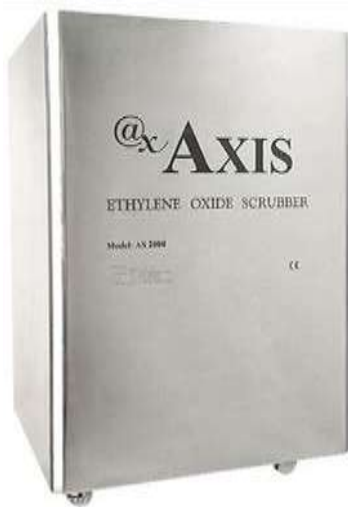

EO SCRUBBER



Pharmagem's Ethylene Oxide Scrubbers has been designed to work with all models of EO AX series sterilizers. It use online installation technology of exhaust line of sterilizer and provide simply connections usage without tools. The scrubber body and hoses; made of stainless steel and consist of 50 kg ion exchange activated carbon which capable to abate 3,000 pcs 11 gram EO Gas cartridges, extracting over 98% of the ethylene oxide in the exhaust air stream.



MIDDLE



LARGE



X-LARGE

Sterile Jet




Pharmagem's EO Cartridge Storage Containers, to keep all ethylene oxide cartridges safe; made of 100% liquid/gas tight, heat resistant, and from anodized aluminum that does not react with ethylene oxide.

Protection: Special cover system secures cartridges against dust, liquid, light, heat, and air contamination.

Sizes Available:

- AAC-MD (Middle): 465x280x640 mm
- AAC-L (Large): 580x280x490 mm
- AAC-XL (Extra Large): 590x370x490 mm

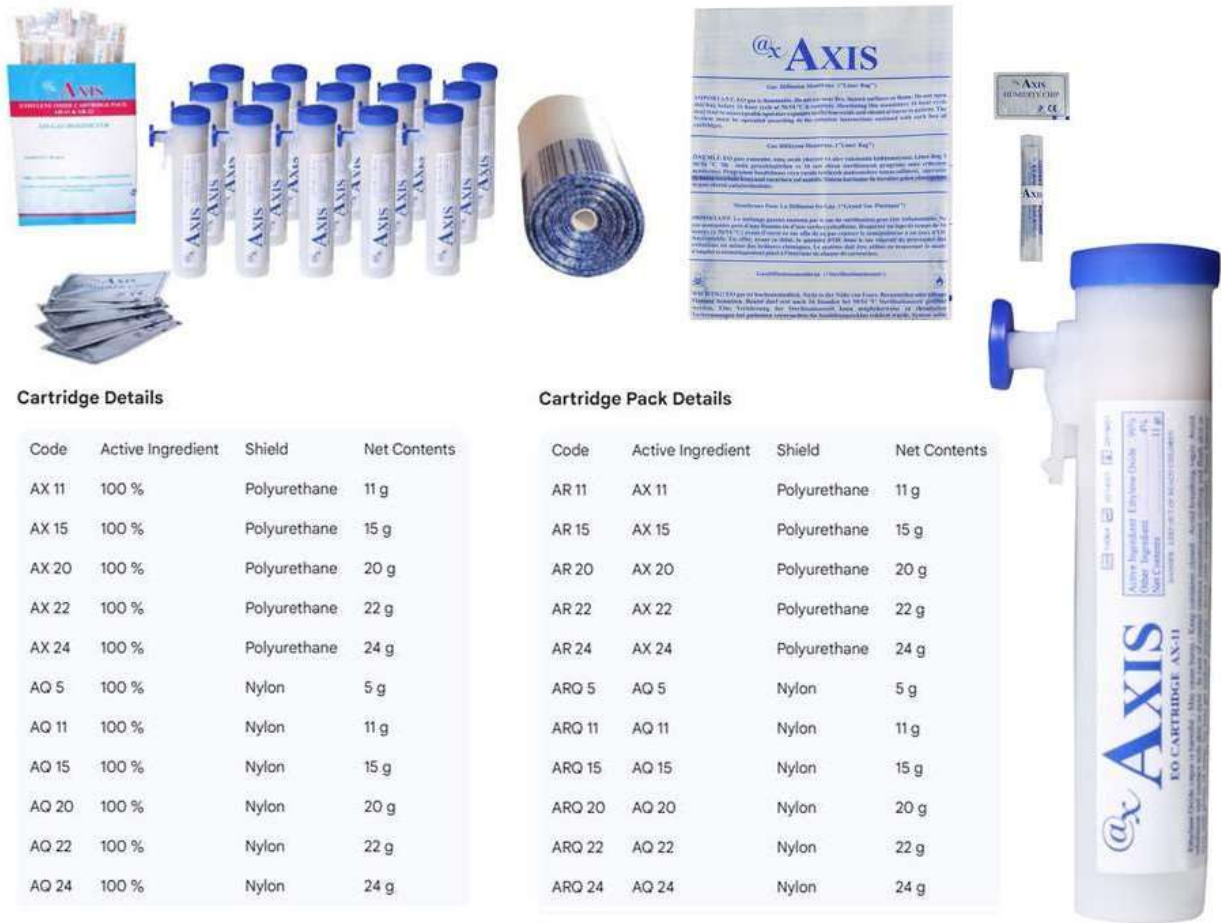

Cartridge Details

Code	Active Ingredient	Shield	Net Contents
AX 11	100 %	Polyurethane	11 g
AX 15	100 %	Polyurethane	15 g
AX 20	100 %	Polyurethane	20 g
AX 22	100 %	Polyurethane	22 g
AX 24	100 %	Polyurethane	24 g
AQ 5	100 %	Nylon	5 g
AQ 11	100 %	Nylon	11 g
AQ 15	100 %	Nylon	15 g
AQ 20	100 %	Nylon	20 g
AQ 22	100 %	Nylon	22 g
AQ 24	100 %	Nylon	24 g

Cartridge Pack Details

Code	Active Ingredient	Shield	Net Contents
AR 11	AX 11	Polyurethane	11 g
AR 15	AX 15	Polyurethane	15 g
AR 20	AX 20	Polyurethane	20 g
AR 22	AX 22	Polyurethane	22 g
AR 24	AX 24	Polyurethane	24 g
ARQ 5	AQ 5	Nylon	5 g
ARQ 11	AQ 11	Nylon	11 g
ARQ 15	AQ 15	Nylon	15 g
ARQ 20	AQ 20	Nylon	20 g
ARQ 22	AQ 22	Nylon	22 g
ARQ 24	AQ 24	Nylon	24 g

AXIS ETHYLENE OXIDE AMPOULES & AMPOULE BASED CARTRIDGES



Ethylene Oxide Sterilization

Using sterilizing gas ampoules is a very simple method that can be performed anywhere, specially under emergency conditions. No electric power, natural gas, etc. connections are necessary. This method allows sterilizing any sort of materials, including those ones that cannot be exposed to steam environment in either autoclave or heat. Mainly, this gas penetrates into and spreads through different materials thus achieving proper sterilization. Utilization under Pressure and Room Temperature Conditions. 80% less gas consumption than the competitors

With AXIS's match load to cartridge method you never have to worry about tanks of Ethylene Oxide. Axis Products offers cutting-edge technologies and expertise in sterilization with the only system that offers multiload capability. The new diffusion chamber provides extra protection to the operator in case of accidental activation. Its robust design and polyurethane body make the Ethylene Oxide Gas cartridge one of the most reliable tool for releasing the ethylene oxide gas. Operator safety is insured by the double protection of the trigger via a plastic lock and a safety seal.



STEAM BIOLOGICAL INDICATORS



AXIS Steam biological indicators are developed to control the steam sterilization process. They contain *Geobacillus stearothermophilus* bacterial spores on filter paper inside a plastic tube. The liquid in the sealed glass ampule changes color if the spores germinate. The indicators are placed in the autoclave with the materials to be sterilized.

Code	Organism	Process	Readout Time	Packing	Required Incubator
AX20	<i>G. stearothermophilus</i>	Steam	24 hr	100 pcs	AXDL-100
AX21	<i>G. stearothermophilus</i>	Steam	48 hr	100 pcs	AXDL-100
AX220	<i>G. stearothermophilus</i>	Steam	3 hr	50 pcs	AXRD-100
AX221	<i>G. stearothermophilus</i>	Steam (Gravitational/Air Exchange)	1 hr	50 pcs	AXRD-100
AX222	<i>G. stearothermophilus</i>	Steam (All)	1 hr	50 pcs	AXRD-100
AX223	<i>G. stearothermophilus</i>	Steam (Gravitational/Air Exchange)	30 min	50 pcs	AXRD-100
AX224	<i>G. stearothermophilus</i>	Steam (All)	20 min	50 pcs	AXRD-100
AX225	<i>G. stearothermophilus</i>	Steam (All)	Instant	50 pcs	AXRD-100



ETO BIOLOGICAL INDICATORS



AXIS Ethylene Oxide (EO) biological indicators control the Ethylene Oxide sterilization process. They contain *Bacillus atrophaeus* bacterial spores.

Standards: Produced under ISO 11138 and ISO 13485.

Certification: Certified for species, population, D-value, and survival/mortality data.

Function: Liquid in the tube changes color when spores germinate.

Code	Organism	Process	Readout Time	Packing	Required Incubator
AX10	<i>Bacillus atrophaeus</i>	EO	48 hours	100 pcs	AXDL-100
AX110	<i>Bacillus atrophaeus</i>	EO	4 hours	50 pcs	AXRD-100



DUAL BIOLOGICAL INCUBATOR



- Designed For: Specifically for use with Verify Self Contained Biological Indicators (SCBIs).
- Temperature: Dual temperature capability for Steam and Ethylene Oxide (EO) processes.
- Steam Temp: Operates at 60 degC for steam indicators.
- EO Temp: Operates at 37 degC for Ethylene Oxide indicators.
- Supply Voltage: Available for both 120 V or 220 V electric supply.
- Capacity: 34 positions for conventional and colorimetric SCBIs.
- Extra Capacity: 4 positions for self-contained ampoules, culture media, and protein detection pen.
- Monitoring: Includes a special hole for an external thermometer.
- Function: Built-in ampoule crusher for Biological Indicators (BIs).



AXRD-100 RAPID READOUT BIOLOGICAL INCUBATOR



- Function: Automatic system for incubation and readout of Rapid and Super Rapid Biological Indicators.
- Compatibility: Works with BI's for EO, Steam, Plasma, and Formaldehyde sterilization processes.
- Simultaneous Use: Allows simultaneous incubation of indicators with different incubation times.
- Display: 7" LCD touch screen displays the remaining incubation time for each position.
- Programs: Offers 20 min, 30 min, 1 hr, 3 hr, and 4 hr program options.
- Temperature: Adjustable temperature from 37°C - 60°C.
- Capacity: 10 incubation wells.
- Connectivity: Includes In-built printer, LAN port, and USB port.



AXIS AUTOCLAVE TAPES



- Safe solution for sealing all Steam and EO packaging materials.
- Chemical indicator strips on the tape change color after exposure to Steam or Ethylene Oxide (EO).
- Provides instant identification of processed products.
- Production in different sizes and colors is available upon request.

AUTOCLAVE TAPE CODES:

- AX012: 12 mm x 50 m (Steam Process)
- AX019: 19 mm x 50 m (Steam Process)
- AX025: 25 mm x 50 m (Steam Process)
- AXE12: 12 mm x 50 m (EO Process)
- AXE19: 19 mm x 50 m (EO Process)
- AXE25: 25 mm x 50 m (EO Process)



Sterilization Reels and Pouches



- Safety Barrier: Provides strong and reliable sterile barrier systems.
- Tear Resistance: Uses extra reinforced layered film to avoid tearing during opening.
- Visibility: Transparent, multilayer co-polymer film allows easy viewing of contents.
- Paper Quality: Superior barrier using 60 gsm or 70 gsm medical kraft paper.
- Seal Integrity: Strong seal-strength with a triple band seal creating three independent barriers to contamination.
- Sealing: Easily sealed with all sealing machines.



PXS-400 AUTOMATIC SEALING MACHINE



- Sealing: Automatic, continuous, 12 millimeter width, unlimited sealing length.
- Speed: 10 meters per minute.
- Heating: Ceramic element; heats to 180 degrees Celsius in just 40 seconds.
- Temperature: Microcomputer intelligent control (plus or minus 1 percent accuracy); 60 degrees Celsius - 220 degrees Celsius range.
- Versatility: Seals all paper-plastic and paper-paper bags.
- Size/Weight: Equipment size: 480 by 240 by 150 millimeters / 15 kilograms.



PXS-300 AUTOMATIC SEALING MACHINE



- Sealing Type: Automatic, continuous, with unlimited length and reliable quality.
- Speed: Infinitely adjustable speed from 0 - 12 m/min.
- Sealing Width: 12 mm.
- Temperature: Adjustable range from 0°C - 300°C.
- Design: Interior and exterior surfaces are stainless steel for operating room use.
- Usability: Includes a removable conveyor (no need to hold packages during sealing).
- Included: Electronic control board, 4 guide belts, 20 teflon belts, and tool sets.



Vertical Pressure Steam Sterilizer

JIBIMED

LCD display automation Vertical Pressure Steam Sterilizer is a Fully stainless steel structure, This feature ensures durability, corrosion resistance, and easy cleaning of the sterilizer. Stainless steel is commonly used in medical equipment due to its hygienic properties. Auto discharge the cool air, and steam, Hand wheel type of quick-open door, With two stainless steel sterilizing baskets. enhances the efficiency of the sterilization process and ensures a safe and controlled environment when opening the sterilizer after the cycle. The LCD display provides a visual representation of the sterilizer's current status. It displays information such as temperature, pressure, and cycle progress, allowing users to monitor the sterilization process in real time.



Horizontal Cylindrical Pressure Steam Sterilizer

JIBIMED

The horizontal autoclave adopted the way of gravity exchange to release the cold air from the chamber more completely to ensure reliable sterilization. The control system automatically adjusts the steam inlet and outlet according to chamber temperature during sterilizing. This unit is ideal equipment for clinics, scientific research institutes, and other organizations to sterilize surgical instruments, fabric glass, and culture media, etc.



Vertical Pressure Steam Sterilizer

JIBIMED

LED display automation Vertical Pressure Steam Sterilizer is assembled with a heating system, micro-computer-controlled system, overheat and over. This system likely regulates various parameters such as temperature, pressure, and cycle duration to ensure precise and consistent sterilization results. the LED display provides a visual representation of the sterilizer's working status. It is likely to show information such as temperature, pressure, and cycle progress in a clear and easily readable format, touch type key. With two stainless steel disinfection baskets, you can sterilize multiple items at the same time to improve efficiency. A beep will be sounded after sterilization.



Small Table Top Steam Sterilizer

JIBIMED

- Sterilizing course: Automatic sterilization controlled by computer, easy to operate.
- Maximum temperature: 134 degrees, suitable for 4-6 minutes of flash sterilizing.
- Safe protection of water lacking.
- With overheat and over-pressure protection.
- After sterilization it will automatically cut the power and then alarm.
- Fully stainless steel structure.



Dental Autoclave Table Top Steam Sterilizer

JIBIMED

- Indicator light indicates working state.
- For 4 to 6 minutes rapidly sterilizing.
- Sterilizing temperature and time can be preset.
- Steam-water inner circulation system: no steam discharge, and

- the environment for sterilizing will be clean and dry.
- Over temperature and over pressure auto-protection.
- Safe protection of water lacking.
- Exhaust the cool air automatically.
- With three stainless steel sterilizing plates.
- The chamber of the sterilizer is made of stainless steel.
- Automatically shut off with beep reminding after sterilization.



Table Top Pulse Vacuum Steam Sterilizer

JIBIMED

- Standard Class B with three times vacuum and drying, the remaining temperature of sterilized instrument is less than 0.2 percent.
- LCD display working status, touch keys.
- The vacuum data can reach minus 0.8 bar, it fits various instruments, including package, unpackaged, solid, hollow, multi-apertures, and inset pipes.
- Fully computer-controlled LCD display bright show.
- It is installed with BOWIE and DICK which measures the penetration of water steam.
- Fast and independent steam generator.
- Built-in mini printer which can record the sterilizing information.



Atlas N5



Anesthesia Machine - 12.1" TFT touch screen - User friendly interface. - Tidal volume 10-1500 ml, optional choice 5~1500 ml - Semi-electronic flowmeter. - PPSU/Metallic material breathing circuit. - By-pass Tech for soda lime canister. - All ventilation modes to satisfy neonate, pediatric and adult

patients.

- Integrated breathing circuit with built-in heater.
- High visible ACGO.
- Optional plug-in module socket.



Crius V6 Ventilator



- Ventilator Turbine
- 360° Rotatable LCD
 - 15.6" TFT Touch Screen (18.5" Optional)
 - One-hand operative valves
 - Stable and durable trolley (with
 - Servo control humidifier (Optional)
 - In-built nebulizer



Venus modular 15.6" | 18.5"



Modular Patient Monitor - High resolution TFT LCD Touch screen - 10 waveform display, up to 12-lead ECG analysis - Wired/Wireless CMS, support HL7 protocol to HIS - Plug-in modules: Masimo SPO2, IBP, CO2, AG, C.O., BIS - Pacemaker detection, PWTT function. - ST & arrhythmia analysis - SpO2 support PVI and PI, low perfusion 0.2% - Other bed observation - Aspect BISx module, NMT module optional - Integrated WIFI module - HDMI support external display - Graphical & tabular trend review (480 hours)



uMI Panorama GS

UNITED
IMAGING

- Detector: Next-generation uExcel UDP detector.
- FOV/Coverage: Record-breaking 148 centimeter axial FOV enables single-bed whole-body imaging.
- Resolution: 2.9 millimeter NEMA PET resolution; 189 picosecond timing resolution (breaks the 200 picosecond barrier).
- CT System: Fully configured 160-slice AI-empowered diagnostic CT (0.25 second rotation speed).
- Workflow: uAI Vision 3D camera for AI-empowered scan planning and positioning (EasyRange).
- Patient Comfort: 76 centimeter illuminated patient bore; tunnel cameras and intercoms.



uEXPLORER

UNITED
IMAGING

- FOV/Coverage: Ultra-large 194 centimeter axial FOV for single-bed Total-Body scanning.
- Sensitivity: 40 times sensitivity improvement; 176 counts per second per kilobecquerel NEMA sensitivity.
- Resolution: 2.9 millimeter NEMA spatial resolution.
- Imaging: Enables total-body dynamic scanning with ultra-high temporal resolution.
- Dose: Supports imaging with ultra-reduced tracer dose.
- Innovation: Integrated-Light-Guide Digital Detector.



uMI Panorama

UNITED
IMAGING

- Resolution: 2.9 millimeter NEMA PET resolution; sub-200 picosecond TOF timing resolution.
- CT System: 160-slice CT scanner (0.25 second rotation speed); ultra-low noise Z-Detector.
- FOV/Scalability: Large 35 centimeter PET axial FOV (scalable).
- AI Features: uAI Vision 3D camera for positioning; AI reconstruction engines.
- Patient Comfort: 76 centimeter wide bore; 318 kilogram (700 pounds) table capacity.
- QC: Automatic daily QC requires no radioactive sources.



uMI Panvivo



- Design: Air-cooled, compact design (no equipment room needed) for smaller footprint.
- Resolution: 2.9 millimeter NEMA spatial resolution; 219 picosecond TOF timing resolution.
- Workflow: Fully AI-powered intuitive workflow (uAI Vision 3D camera).
- CT System: 80-slice CT capability (0.3 second rotation speed).
- Patient Experience: Large tunnel clearance; ambient lighting with guided breathing feature.



uMI 780



- Resolution: 2.9 millimeter Ultra-high NEMA resolution.
- FOV/Coverage: Ultra-large 300 millimeter axial FOV (whole-organ coverage).
- CT System: Combines SiPM-based PET with 160-slice CT.
- Speed: Powerful 300 millimeter FOV enables whole-body scan in 3 bed positions for ultrafast scans.
- TOF: Time-of-Flight capability with 520 picosecond timing resolution.
- Features: Digital Self-Gating; intelligent motion detection and compensation.



uMI Vista



- Detector: Unique Integrated-Light-Guide Digital PET technology.
- Resolution: 2.9 millimeter NEMA resolution; 300 picosecond Time-of-Flight (TOF).
- CT System: Integrated 160-slice CT system.
- Speed: 24 centimeter Axial FOV enables a whole-body scan in 4 bed positions within 8 minutes.
- AI: Ground-breaking HYPER DPR AI technology.
- QC: Source-free quality control technology (no radioactive source required for daily QC).



uMI 550

UNITED
IMAGING 

- Detector: Digital PET/CT featuring UEXPLORER technology inside.
 - FOV/CT: 24 centimeter PET axial FOV and 80-slice CT capabilities.
 - Speed/Efficiency: Can finish a whole-body scan in 4 beds within 8 minutes.
 - Resolution: Ultra-fine 2.76 millimeter LYSO crystals.
 - Features: Wireless Vital Signal Monitor (VSM); Integrated Light Guide (ILG).
 - QC: Automatic Daily QC requires no radioactive source.
-



uMR JUPITER

UNITED
IMAGING 

- Field Strength: 5 Tesla (Ultra-High Field).
 - Bore Size: 60 centimeter.
 - Gradient: 120 millitesla per meter maximum amplitude and 200 tesla per meter per second maximum slew rate.
 - Features: World's first whole-body 5T MR, 8-channel Parallel Transmit Volume Coil, 96 independent receiver channels, Innovative 5T Magnet design.
-



uMR ULTRA

UNITED
IMAGING 

- Field Strength: 3 Tesla.
 - Bore Size: 70 centimeter.
 - Gradient: 100 millitesla per meter maximum amplitude and 200 tesla per meter per second maximum slew rate.
 - Features: uAIFI.LIVE system for whole-body LIVE imaging, Zero liquid helium consumption, Up to 192 independent receiver channels, Green Tech Sequences (52 percent energy saving).
-



uMR OMEGA



- Field Strength: 3 Tesla (Ultra-wide bore).
- Bore Size: 75 centimeter aperture.
- Features: QScan (Quiet scanning technology), EasySense (Belt-free respiratory monitoring/gating), SuperFlex Coil (Position-free imaging), Embedded AI Engines (ACS times DeepRecon), Supports up to 310 kilograms (700 pounds).



uMI 780



- Field Strength: 3.0 Tesla.
- Features: Hybrid AI Engines (ACS times DeepRecon) for ultra-fast imaging, 48 high-channel RF, 170 centimeter short-magnet design.



uMR 680



- Field Strength: 1.5 Tesla.
- Bore Size: 70 centimeter.
- Gradient: 45 millitesla per meter maximum amplitude and 200 tesla per meter per second maximum slew rate.
- Features: 0 percent cryogen evaporation during scanning, Up to 96 independent receiver channels, uAIFI technology (DeepRecon, EasySense).



uMR 670

UNITED
IMAGING 

- Field Strength: 1.5 Tesla (Wide-bore).
- Features: UAIFI DeepRecon (provides '3.0T-like' image quality), UAIFI EasySense (contactless respiratory sensing), UAIFI Qscan (Quiet Scanning), UCS (Compressed Sensing).



uMR 588

UNITED
IMAGING 

- Field Strength: 1.5 Tesla.
- Features: UCS 2.0 imaging platform (up to 16 times acquisition acceleration), DeepRecon, Precise Quantification (MAPS, FACT), Intelligent Examination (EasyPlan, EasyScan, Automatic Table Positioning).



uMR 580

UNITED
IMAGING 

- Field Strength: 1.5 Tesla.
- Features: Intelligent Platform (Magnet and Gradient), High-Speed Imaging, Intelligent System Management (Real-time monitoring/ Early-Warning, Intelligent Wake-Up to working mode in 5 seconds).



uCT 960+

UNITED
IMAGING 

- Detector/Slices: 16 centimeter Z-axis coverage detector, 160-slice reconstruction.
- Speed: 0.25 second rotation speed.
- AI Imaging (Cardiac): CardioBoost (AI-empowered cardiac reconstruction, up to 99 percent LCD enhancement, 70 percent dose reduction).
- AI Workflow (Cardiac): CardioAssist, CardioAdapt (detects/skips irregular heartbeats), CardioXphase (optimal phase selection), CardioCapture (motion correction to 25 millisecond temporal resolution).



uCT 868

UNITED
IMAGING 

- Detector/Slices: 8 centimeter detector width, 160-slice reconstruction.
- Tube: 34 MHU liquid-bearing tube.
- Speed: High table speed up to 440 millimeters per second.
- AI Imaging: AIIR (AI Iterative Reconstruction) for up to 90 percent dose reduction and 267 percent LCD improvement.



uCT 820

UNITED
IMAGING 

- Detector/Slices: Up to 160 slices per rotation.
- Bore/Capacity: 82 centimeter Ultra-wide Bore, up to 318 kilograms (700 pounds) table load.
- Speed: Up to 0.25 second rotation speed, 25 millisecond temporal resolution with CardioCapture.
- Tube: Equivalent 34 MHU heat capacity.
- AI Imaging: AIIR, CardioBoost, CardioXphase, CardioCapture, Motion Freeze.



uCT 780

UNITED
IMAGING 

- Detector/Slices: Z-Detector, 80 detector rows, 160 maximum slices.
- Speed: 0.3 second rotation speed (optional), 150 millisecond native temporal resolution.
- AI Imaging: DELTA (Deep Learning Trained Algorithm) for up to 80 percent dose reduction.
- Cardiac: Dynamic Pitch (one-stop ECG/non-ECG imaging), CardioXphase.



uCT 550

UNITED
IMAGING 

- Detector/Slices: Z-Detector, 80 maximum slices per rotation.
- Tube: 3.8 MHU Tube.
- AI Workflow: uAI Vision (Dual cameras for real-time monitoring), Easy Positioning (single-click), Easy Scan Planning, Easy Dose Control.
- AI Patient Care: Patient-gantry Collision Check, AI-based Brain Hemorrhage Detection, Quality Check (for breath-hold, motion, metal).



uCT ORION ELITE

UNITED
IMAGING 

- Field Strength: 3 Tesla.
- Bore Size: 70 centimeter.
- Gradient: 100 millitesla per meter maximum amplitude and 200 tesla per meter per second maximum slew rate.
- Features: uAIFI.LIVE system for whole-body LIVE imaging, Zero liquid helium consumption, Up to 192 independent receiver channels, Green Tech Sequences (52 percent energy saving).



uCT ORION EXTRA



- Detector/Slices: Z-Detector (40-slice), 80 maximum slices per rotation (reconstructed).
- Tube: High heat-dissipation tube (746 kHU per minute).
- AI Workflow: uAI Vision (Dual cameras), AI-based Automatic Patient Positioning (single-click), Intelligent Dose Control.
- AI Patient Care: Patient-gantry Collision Check, AI-based Brain Hemorrhage Detection, Quality Check (for breath-hold, motion, metal).



uCT 528



- Detector/Slices: 40/80-slice, Z-Detector (Fine Sampling).
- AI Dose Control: uDose 3D Dose Modulation, KARL 3D Iterative Denoising.
- Workflow: Easy-Logic (predicts next operation), Easy-Range (optimizes dose distribution).
- Features: 70 kV Scan Mode, uECO mode (30 percent power saving), Advanced Post-processing integrated on console.



uCT 520



- Detector/Slices: 40-slice.
- Detector Technology: Innovative Z-Detector (GOS scintillator, ultra-low noise design, fine sampling).
- AI Dose Control: uDose 3D Dose Modulation, KARL 3D Iterative Denoising.
- Workflow: EasyScan, EasyLogic (predictive platform).



uDR Aurora CX



- Type: Intelligent Ceiling-Mounted DR with integrated AI.
- Key Features: AI-powered workflow for automated positioning and exposure.
- uAI Vision Camera for precise 3D patient modeling. AI Quality Assurance (real-time QC) to reduce retakes and dose.
- Supports smart stitching and all-in-one free exposure.
- Power: Maximum Output Power 65kW or 80kW.



uDR 780i Pro



- Type: Fully Automatic Ceiling-mounted DR.
- Key Features: uVision remote technology for cross-room control, remote collimation, and real-time monitoring. Automatic Tube-detector Tracking System.
- Automatic Stitching Technology. One-key APR Positioning. Large Coverage Wireless HD Flat Panel Detector (17 inch by 17 inch).
- Built-in Detector Charging. Height-Adjustable Floating Table.



uDR 596i



- Type: Automatic Floor Mounted DR.
- Key Features: High performance imaging chain. Automatic Tube-detector Tracking System. Automatic Stitching Technology (optional). Automatic Light Field Collimator. Built-in Super-capacitor for uninterrupted exams. 9.7 inch tube-mounted touch screen display. All-in-one Intelligent Workstation (uExceed OS).



uDR 566i



- Type: Digital Medical X-ray Imaging System.
- Key Features: Robust system with flexible movement range for upright, supine, and free-exposure imaging. Automatic Tube-detector Tracking.
- Wireless Detector (17 inch by 17 inch, CsI-based) with High Resolution. Motorized Bucky wall stand and column stand. Built-in Detector Charging.
- All-in-one PC and remote control.



uDR 592h



- Type: High Definition Floor Mounted DR.
- Key Features: Manual-motorized integrated movement. Automatic Tube-detector Tracking. Omni-directional Tube Module for flexible manual steering.
- Tube Angle Display for precise imaging. Large Coverage Wireless HD Flat Panel Detector. Built-in Detector Charging.
- All-in-one Intelligent Workstation (uExceed OS).



uDR 266i



- Type: Fully Automatic U-arm DR.
- Key Features: Simplifies workflow with One-key APR Positioning function. Fully Automatic Operation. Multi-function Remote Control and cross-room console.
- Built-in Super-capacitor. High Endurance Components and Self-Diagnosis Platform. Large Coverage Wireless HD Flat Panel Detector (17 inch by 17 inch).



uDR 380i Pro



- Type: Next Generation Remote-Vision Mobile DR.
- Key Features: Highly mobile unit with ultra-narrow body (47 centimeter). Remote Vision and Control (collimator camera and remote tablet).
- Ultra-long Range (80 kilometer travel or 800 exposures per charge). Power Assistance System for easy maneuvering.
- 360 degrees Positioning Coverage via six-axis column. Lightweight Wireless Flat Panel Detector.



uAngio Aviva CX



- Type: Intelligent Angiography System (Ceiling-Mounted Robotic).
- Key Features: Intelligent Voice-Control (hands-free operation). Intelligent Vision (3 sensors, 3D patient/room modeling, digital twin space uSpace). Intelligent Movement (World-Leading 8-Axis Robotics) for full lab coverage and transverse movement.
- Intelligent Imaging (uVera IQ) for low radiation dose and low contrast media dose (AI-enabled Coronary Enhancement).
- Features include uSpace Auto Positioning, VeraCT HD, and Dynamic Coronary Roadmap (DCR).



uMammo 890i



- Type: Low Dose 3D Mammography System (Tomosynthesis).
- Key Features: HD Tomosynthesis with dose comparable to FFDM. Dual-angle Tomosynthesis (15 degrees or 40 degrees): 40 degrees wide angle for enhanced detection, 15 degrees narrow angle for fast screening (about 10 second scan-to-present).
- HD CMOS Detector (10.1 line pairs per millimeter resolution, 49.5 micrometer pixel size). uDose Full-panel AEC for accurate dose calculation.
- uStereo Biopsy System (plus or minus 1 millimeter accuracy, 180 degrees approach, quick installation). Features Intelligent Adaptive Compression and One-touch Positioning.



uMammo 590u



- Type: HD Low-Dose Full-Field Digital Mammography.
- Key Features: Automated Screening in under 5 minutes. 20 percent radiation dose reduction with uDose accurate exposure control (Full-panel AEC).
- One-Click to Position (C-arm auto moves to target angle). Smart Compression (foot switch control, stops at ideal force).
- Automated Exposure in 5 seconds.
- Features optional AI Diagnosis in 3 seconds (BI-RADS report). Small-pixel a-Si detector (76 micrometer).



uMammo 590i



- Type: HD Mammography.
- Key Features: ICMP Smart Compression System (intelligently adjusts force for comfort and image quality).
- One-touch Automatic Rapid Positioning (rotational, vertical, one-key axisymmetric/next protocol). High Performance Tungsten Target X-ray Tube. uDose dose control technology.
- Low Dose Flat Panel Detector (a-Si, high spatial resolution). Smart Positioning Indicator.



uMC 560i



- Type: Low Dose CMOS Mobile C-arm.
- Features: RealSense Detector with 152 micrometer pixel size. Two Million Pixels imaging chain (uRealView). Micro Pixel Structure (3.3 line pairs per millimeter spatial resolution).
- Extended 85 centimeter C-arm Opening.
- Dual Synchronized Touchable Control Panel. uFree Dose Management (object recognition, metal artifact reduction).



uMC Reveal



- Type: Next-Generation Mobile C-arm.
- Features: Proprietary Tissue of Interest (TOI) imaging algorithm. Up to 58 percent dose reduction (Innovative ABS Technology).
- Smart Metal Correction (20 percent Average CNR increase). Large 30 centimeter by 30 centimeter detector (125 percent Field of View increase). Ultra-Lightweight System (260 kilograms).
- 850 millimeter Free Space.



uRT-Linac 506c



- Type: Integrated CT-Linac.
- Features: Fully Integrated Design (Coaxial diagnostic CT and Linac). Supports Online Adaptive Radiotherapy (ART).
- High-Quality CT-IGRT (Gold Standard Dose Calculation, On-line Target Monitoring). High-performance Linac (1400 Monitor Units per minute FFF Dose Rate, 0.5 millimeter Isocenter Accuracy, 120-leaf Dynamic MLC).
- Intelligent Radiotherapy Platform (Intelligent Auto-Contouring, Autoplan, Intelligent EPID QA). Supports UARC, SIMRT, DIMRT, 4D-CT.



uRT-Linac 306



- Type: Intelligent Linac.
- Features: High Guidance Accuracy (Two beams from same source share isocenter). Energy-adjustable kV Level CBCT Image.
- Leading Radiotherapy Performance (0.5 millimeter Isocenter Accuracy, 1400 Monitor Units per minute Dose Rate, 120-leaf MLC).
- High Level of Automation (Single click CBCT imaging, auto registration, collision avoidance). Unique Intelligent Platform (Intelligent Auto-Contouring, Autoplan, Intelligent QA).
- Supports uARC, SIMRT, DIMRT, 4D-CT, non-coplanar.

Supernova 1.5T



- Sterilizing course: Automatic sterilization controlled by computer, easy to operate.
- Supernova 1.5T MRI offers more than sharp images it delivers future-ready performance.
- Zero helium consumption - thanks to its 4K cold head system that liquefies and recycles helium.
- Ultra-fast gradient performance - for faster, more precise scans.
- Fiber-optic transmission - crystal-clear image quality.
- Reliable for neuro, MSK, spine and whole-body imaging.
- When it's about trust in diagnosis, Supernova makes no compromise.

Quantum CT Q560a



- Latest High-Definition Imaging Technology.
- Equipped with 1024 by 1024 large matrix reconstruction imaging, the arrangement number of micron pixel imaging units can be up to four times that of conventional 512 by 512 reconstruction matrix, which can further improve the spatial resolution and density resolution of the image.



SinoPower-S Syringe Kit (Single CT Injector)

- Syringe Size: 200 ml
- Standard Configuration:
 - 1 x 200 ml Syringe
 - 1 x 1500 mm Connecting Tube
 - 1 x Fill Tube



SinoPower-D Syringe Kit (Double CT Injector)

- Syringe Size: 200 ml (per syringe)
- Standard Configuration:
 - 2 x 200 ml Syringe
 - 1 x Connecting Tube
 - 2 x Fill Tube





Navigator 1000A / 3000A



- The unique streamline appearance design makes out appearance look more elegant.
- 2D, 3D and 2D plus 3D Combo Exposure Mode.
- It can reduce the radiation dose.
- It can be installed in the mobile vehicle for your flexible use.



Navigator DR Care



- Type: Full field digital mammography system.
- Detector/Target: Amorphous silicon (a-Si) large size flat-panel detector, Mo/W target.
- Imaging Performance: High MTF and High DQE for better image quality with lower dose.
- Dose Reduction: AAEC Patent technology and smart compression ensure minimum irradiation dose.
- Portability: Elegant integrated shape, suitable for both vehicle (mobile) application.
- Connectivity/Workflow: DICOM 3.0 protocol, seamless RIS, and PACS.



H20 Series IV Fluid Warmer



- Fast Warming: Quick warming and short preheating time.
- Modern and User Friendly Design: 8 inches big LCD screen. Touch screen design with real time monitoring.
- Flexible: Warming tube lengths 0.6 meters/1.2 meters/1.4 meters available. Single / Dual warming tube for choose.
- Smart: WIFI Optional function, Interconnection with HIS can be realized.
- Safe: 42 degrees Celsius / 43 degrees Celsius Dual Independent Protection.
- Multiple alarms of Temp limitation.



SN-H10 Infusion Pump Warmer



SN-H10 infusion warmer, also names iv pressure infuser, boasts of its patent for infusion pump tubes. The intelligent control of the temperature render patients a comfortable infusion experiences. It mainly features:

Safe: Smart CPU control allows real-time temperature display and produce alarm sound at abnormal condition rapidly.

Intelligent: 2 sets of independent temperature sensor are used to ensure safe infusion process.

It could be used as blood fluid warmer, or enflow blood warmer for some pumps. Besides, the portable design makes it suitable for veterinary and on ambulance.



SN-1600V(R) / SN-1800V(R) Vertical Infusion Pump



This is an electronic infusion device, which also names rapid infusion pump. Differed with horizontal model, the numeric keypads allows fast input experiences. 5 infusion modes could meet almost infusion requirements currently. It features:

Accurate: patent algorithm on smart pulsation compensation makes actual flow more stable

Comfortable: heating function makes process smooth and patients feel more comfortable

Secure: Dual-CPU monitoring design

5 modes supported: flow rate/body weight mode/drip mode/time mode/infusion plan.

Smart: with built-in WIFI function module.



SN-50C6T Single Channel Syringe Pump



Based on SN-50C6, SN-50C6T single channel top syringe pump offers more injection modes and distinguish with easy operation. It is equipped with 2 LCD screen and mainly features:

Accurate: Syringe sizes and installation would be auto calibrated and displayed on screen intuitively. The machine is open system for almost syringes brands from 10ml

Secure: Dual-CPU monitoring makes the injection process more secure

Multiple mode: Speed mode/body weight mode/time mode supported and Drug plan mode optional



AirRay PortableX-ray Generator

Developed with GEMSS Healthcare's outstanding technology for fast efficient diagnostic imaging.

Key Features Ultra-Light Portable X-ray Generator Provides high-quality X-ray imaging Designed for rapid and accurate medical services Low Dose for patient and user safety Great mobility and Portability For Human and Veterinary use Battery-powered operation Designed to interlock with PC (DR) systems

Technical Specifications

- Output Power: 1.6kW High Frequency

Generator

- Focal Spot: 1.0mm
- Max Tube Voltage: 90kV
- Max Tube Current: 20mA
- Weight: Ultra-Light weight (highly portable)
- Mobility: Great Mobility and Portability

AirRay-20 PortableX-ray Generator

The New Concept of X-ray Generator. The movement as light as air. Key Features Ultra-Light Portable X-ray Generator Hybrid Battery-powered Portable X-ray Generator Wireless Charger for Battery in carrying case Dual operation panel Main OP on Rear Mini OP on Top Remote Controller for Exposure DR and AI usable for image processing Low Dose for patient and user safety For Clinic Homecare Emergency Outdoor Military use For Human and Veterinary use Technical Specifications - Output Power: 1.6kW High Frequency

Generator

- Focal Spot: 1.0mm - Weight: 5kg (11lbs)
- Max Tube Voltage: 90kV
- Max Tube Current: 20mA
- Exposures Per Charge: 100 to

200 exposure

- Recharge Time: 1.5 to 2 hours

GEMSS
Healthcare



X-LITE PortableX-ray Generator

- Ultra-Light portable X-ray Generator with compact, modern design.
- Weight: 3.0 kilograms (6.4 pounds); features great portability and flexibility.
 - Output: 0.5 kW High Frequency; 10 mA Maximum Tube Current; 0.8 millimeter Focal Spot.
- Key Features: Low Dose by AI tech, over 50 percent reduced radiation exposure.
- User Convenience: Alarm feature (patient motion detection), laser distance indication.
- Additional: Bookmark feature for user convenience.

X-LITE DR Package (Digital Radiography Solution)

- A complete mobile healthcare system providing real-time digital imaging.
- Ideal for emergency or limited mobility settings and mobile healthcare.
- System includes: X-LITE Generator, DR Detector, Laptop, and AI S/W (Optional).
- Rapid Analysis: AI-powered diagnosis for 9 pulmonary diseases.
- Fast Diagnostics: Over 94 percent accuracy within 3 seconds.
- Generator Core Specs: 0.5 kW, 10 mA, 0.8 millimeter focal spot, 3.0 kilograms weight.

**GEMSS
Healthcare**



Mobile X-ray: XBILE

GEMSS
Healthcare

XBILE: The Movement as Light as Air.

The XBILE is the next evolution in mobile radiography, designed for truly effortless movement and unparalleled agility in any clinical setting. Its ultra-light chassis and advanced design transform patient-side imaging, minimizing physical exertion while delivering next-generation efficiency and high-quality results. XBILE sets a new standard for convenient, modern diagnostic imaging.



Fluoroscopy: KMC-650

GEMSS
Healthcare

KMC-650: Compact and Economical C-arm.

The KMC-650 offers advanced performance in a compact, economical package. This versatile C-arm is ideal for neurosurgery, pain management, and the emergency room. It features a high-dynamic 1K CCD camera and a powerful high-frequency generator (up to 4 kW). The KMC-650's wide C-arc and 135° orbital rotation increase patient access, while intuitive controls and dose-saving features like Virtual Collimator and Pulse Mode ensure efficient workflow and precise, high-resolution diagnosis.



Fluoroscopy: XPLUS 55FD

GEMSS
Healthcare

XPLUS 55FD: Next-Generation Surgical Imaging

The upcoming XPLUS 55FD is engineered to set a new standard in surgical digital X-ray. Featuring a large, high-resolution Flat Panel Detector (FPD), this C-arm will deliver superior image clarity and wide dynamic range. Designed for complex interventional procedures, the 55FD promises advanced dose control and a streamlined workflow, maximizing efficiency in the OR environment.

Fluoroscopy: XPLUS 35FD

GEMSS
Healthcare



XPLUS 35FD: FPD Clarity for Versatile Surgery.
The XPLUS 35FD is a high-performance mobile C-arm system featuring a high-resolution Flat Panel Detector (FPD) and a powerful 3.2 kW generator. It provides distortion-free imaging and a wide dynamic range at low doses. With advanced features like a 34-inch Ultra-wide Monitor option and 165° orbital movement, the XPLUS 35FD optimizes positioning and image viewing for precise output and efficient workflow across various clinical specialties.

Fluoroscopy: XPLUS 35

GEMSS
Healthcare



XPLUS 35: High-Resolution Precision and Mobility.

The XPLUS 35 is a robust mobile C-arm system designed for clinical versatility. It is powered by a 3.2 kW monoblock generator and utilizes a high-resolution 9" Image Intensifier (I.I) with a 1K camera. Features like the bi-directional Laser Guide and 135° orbital movement simplify positioning and enhance dose control. The compact design and intuitive color-coded operation ensure great usability and high-quality images for various surgical applications.

Fluoroscopy: SPINEL 3G

GEMSS
Healthcare



SPINEL 3G: 12 kW Power for Advanced Procedures.

The SPINEL 3G is a high-performance surgical C-arm built for demanding interventional and vascular procedures. It boasts a powerful 12 kW High-Frequency Generator and a rotating anode X-ray tube for extended, high-power usage, including a 20 mA Boost Mode. With 135° wide orbital rotation, a high-resolution 1K x 1K CCD camera, and a complete Angio Package (including DSA and Roadmap), SPINEL 3G provides superior image quality and advanced functionality with a focus on safety and minimized dose.



Radiography: XVISION UNIVERSAL

GEMSS
Healthcare

XVISION UNIVERSAL:

The Complete Digital Radiography Platform.

The XVISION UNIVERSAL is a dedicated solution built to optimize the entire general radiographic environment. As a true Universal Digital Radiography System, it provides a comprehensive platform that handles virtually any patient and projection need. It focuses on maximizing efficiency, improving workflow, and guaranteeing excellent image quality through advanced digital technology, ensuring your facility is equipped for the full spectrum of diagnostic demands.



Radiography: XVISION-525

GEMSS
Healthcare

XVISION-525: Extend Your Vision with Optimal Image Quality.

The XVISION-525 is a powerful, high-frequency radiography system that offers exceptional versatility, making it the most efficient choice for both digital and analogue environments. It features a powerful rotating anode tube with dual focal spots, and flexible movement via floor-mounted or floor-ceiling tube stands. Combined with a 4-way floating table and integrated APR (Anatomical Programmed Radiography), XVISION-525 delivers superb image quality for a faster, more confident diagnosis.



Radiography: EVA

GEMSS
Healthcare

EVA: Compact Power, Versatile Radiography. The EVA system introduces a new concept in high-performance conventional radiography. Designed for convenience and minimal space, it features a unique one-body integration of the X-ray control and high-voltage generator. The compact system is easy to install and move, while the innovative tube arm rotates 180° and the table top is flat, ensuring comprehensive, multi-positioned radiography that is more comfortable for the patient. EVA offers great expandability, making digital upgrades seamless and cost-effective.



AI Diagnostic Tool: AXIR-CX™

RadiSen

AXIR-CX™: Instant, Offline AI Diagnostics.


The AXIR-CX™ is a compact, built-in Artificial Intelligence computer providing instant, automatic analysis of chest X-rays. Trained on over 300,000 images, this high-performance system delivers diagnostic reports in just 10 seconds without requiring an internet connection. It ensures seamless integration with your existing PACS as a dedicated viewer, bringing powerful, rapid diagnostic support directly to your clinical workflow.



ALIE-PDo wLeigrehdt D Higiigtahl R Sapdieoleodgy H:

RadiSen

SmartPDX™: Portable X-ray with Integrated AI Intelligence. The SmartPDX™ system is a complete solution combining highly portable X-ray machines with on-board Artificial Intelligence capabilities. Designed for total mobility, this system includes a rechargeable battery and weighs only 45 kg (total weight including the tube stand), allowing deployment anywhere. It delivers X-ray images and AI-powered diagnostic readings instantly, eliminating the constraints of time and space, and maximizing efficiency in field, emergency, or bedside care.

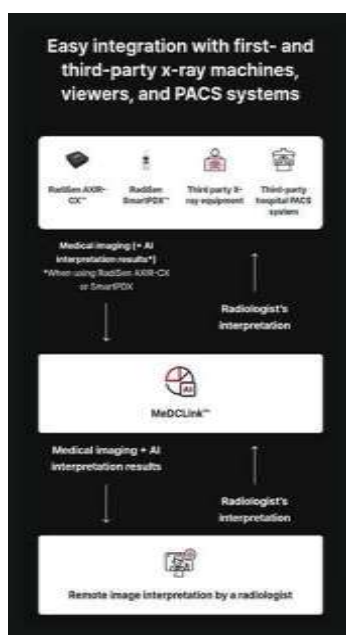

TSeeletr aodfi oLlogwy PSlaptefoermd : HMaenDCdLpiniek™ce

RadiSen

MeDCLink™: Cloud-Based PACS with Remote AI Interpretation. MeDCLink™ is a powerful cloud-based Teleradiology Platform designed to bridge the gap in medical imaging access by offering high-quality remote reading services, particularly to under-served areas. This system functions as a comprehensive Cloud PACS with integrated AI support. It facilitates easy DICOM sending and receiving, supports a wide range of image processing features, and enables radiologists to efficiently create remote interpretations, integrating seamlessly with both first- and third-party X-ray machines and PACS systems.



Mobile X-Ray Machine (5Kw)



- Deft and concise.
- 6 periods of digital LED display.
- 48 kinds of presupposed anatomy memory pattern choices.
- Accuracy control method of simulation and double digital loops.
- High precision control of tube voltage, tube current.
- Failure self-protection, self-diagnosis.



HXDCDR-100 X-RAY Machine



- Type of the detector: TFT monolithic amorphous silicon.
- Panel size of the detector: 430 millimeter times 430 millimeter.
- Efficient imaging size of the detector: 17 by 17 inch.
- Acquisition pixel matrix of the detector: 3072 times 3072.
- Pixel pitch of the detector: 146 micrometer.
- Spatial resolution of the detector: 3.7 Line Pairs per Millimeter.
- Pixel gray scale: 16 Bit.
- Time of image acquisition and transmission: 35



DYNAMIC UC ARM (DR) Digital X-ray Photography System



- High value system: multi-functional, space-saving, and easy to install.
- Features a digital intelligent UC arm with smooth, quiet, full-angle movement.
- Shooting without dead corners is ensured by full-angle rotation.
- Functions include photography, perspective, partial radiography, and whole body long bone splicing.
- Automated workflow with digital position control, parameter tracking, and on-screen display.
- Uses a high quality, high frequency X-ray generator and a high sensitivity, full-size detector.



UC ARM (DR) Digital X-ray Photography System



- High value system: multi-functional, space-saving, and easy

to install.

- Features a digital intelligent UC arm with smooth, quiet, full-angle movement.
- Shooting without dead corners is ensured by full-angle rotation.
- Functions include photography, perspective, partial radiography, and whole body long bone splicing.
- Automated workflow with digital position control, parameter tracking, and on-screen display.
- Uses a high quality, high frequency X-ray generator and a high sensitivity, full-size detector.



DOUBLE COLUMN (DR) Digital X-ray Photography System



- Features a double column design with ground rail for wide-

range projection area adjustment.

- Superior performance with broad range of movement for flexible and efficient projection.
- Detector: 17 inch by 17 inch high-resolution, high-sensitivity amorphous silicon flat panel.
- Benefits: Ultra-low dose, high dynamic range, and long-lasting stability.
- Features: Smart digital high-frequency X-ray generator for precise dose control.
- Full compliance with DICOM 3.0 for seamless connection to RIS/HIS/PACS.



DYNAMIC (DR) Digital X-ray Photography System



- A Digital X-ray fluoroscopy and photography system.

- Traditional and classical gastrointestinal design.
- Features dynamic large-size flat panel imaging and high-speed

real-time spot pieces.

- Functions include: Multiple mode selection and whole-body bone splicing.
- Image Management: Real-time preservation and playback of images.
- Overall: Wisdom in the core, excellent image, and flexible configuration.



MOBILE (DR) Digital X-ray Photography System



- Easy to operate, flexible to move, with powerful dual motor

drive.

- Automatic lifting columns shrink the system for clear path visibility during movement.
- Outstanding operation performance and flexible rotating expansion arm.
- Broad imaging area; tube rotates around the column for shooting without dead corners.
- High-power design with high-performance endurance, green and safe.
- Features a large touch screen for interactive human-computer dialogue and efficiency.



HXNOVA-P MOBILE FLAT C-ARM X-RAY MACHINE



- Mobile flat C-arm X-ray machine with precise full balance design.

- C-arm can be freely locked at any position for safe, easy operation.
- Large opening and high-strength C-arm design provides greater operating space.
- Professional tube design provides enough space for patient positioning.
- Provides various detector configuration options; non-distortion imaging.
- Split and integrated design; option for handheld iPad and various modes.



DIGITAL BONE AGE DETECTION SYSTEM



- High value system: multi-functional, space-saving, and easy to install.
- Features a digital intelligent UC arm with smooth, quiet, full-angle movement.
- Shooting without dead corners is ensured by full-angle rotation.
- Functions include photography, perspective, partial radiography.
- Functions include whole body long bone splicing.
- Automated workflow with digital position control, parameter tracking, and on-screen display.
- Uses a high quality, high frequency X-ray generator and a high sensitivity, full-size detector.



800D Full Digital PC-based 3D Ultrasound



- Laptop-sized, PC-based 3D ultrasound system; weighs less than 5 kilograms.
- 15-inch LED display, built-in battery provides 2 plus hours working time.
- Imaging Modes: 2D, B, 2B, 4B, B/M, M, and free-hand 3D.
- Multi-frequency probes: convex, linear, transvaginal, cardiac.
- Features DBF, THI, DFS (2.0 - 12.0MHz); supports DICOM 3.0.
- Auto-measure software for OB/GYN, cardiac, urology, small organs, and general specialties.



CW 4D COLOR DOPPLER



- Type/Dimensions: Portable CW 4D Color Doppler ultrasound. Equipment size: 365 millimeters by 300 millimeters by 75 millimeters.
- Weight/Power: Equipment weight is 5.5 kilograms. Power is DC 12.8 volts 3 amps, 50/60 Hertz.
- Connectivity: 2 Transducer ports, 2 Ethernet ports, DICOM 3.0 Compliant.
- Imaging Modes: B, M, Color, PD, PW, CW, 4D (via software), Duplex/Triplex.
- Advanced Tech: Panoramic Imaging, Speckle Reduction, Tissue Harmonic, IMT auto measurement.



3D 4D CW PW TROLLEY COLOR DOPPLER



- Type/Elements: Trolley-based 3D 4D CW PW Color Doppler. Supports 192 elements.
- Connectivity: 4 Transducer ports, 2 USB ports, 2 Ethernet ports.
- Imaging Modes: B, M, Color, PD, PW, CW, 4D (via software), Duplex/Triplex.
- Advanced Tech: Panoramic Imaging, Speckle Reduction, Tissue Harmonic, IMT auto measurements.
- Display/Storage: 15-inch LED Monitor with 1024 by 768 resolution. Cine Memory Maximum 1200 frames.



ULTRASOUND R700

VINNO

- Platform/Tech: VLucid plus RF platform for superior image quality and deep penetration.
- Displays: 23.8 inch large LED monitor plus 15.6 inch tiltable touchscreen.
- Ports/Ergonomics: 5 active ports, fully adjustable console, inbuilt gel warmer.
- Advanced Tools: Elastography (VShear), AMAS, Strain Imaging.
- AI Features: VAid Liver, VAid Thyroid, VAim OB, VAim Follicle.



ULTRASOUND R500

VINNO

- Platform: Next-generation equipment with advanced signal processing technology.
- Imaging Modes: High-resolution images, real-time Color Doppler.
- Advanced Imaging: Supports Elastography and 4D imaging.
- Applications: Indispensable tool for specialists in Radiology, Cardiology, and Gynecology.



ULTRASOUND R300

VINNO

- Platform/Monitor: VLucid plus platform. 21.5 - 22 inch LED high resolution monitor.
- Interface: 13.3 inch capacitive touch panel. User Friendly Key board.
- Ports/Power: 3 to 4 active probe ports. Built-in battery for up to 90 minutes of scanning.
- AI Features: UltraSense AI, VAid Thyroid, VAid Breast, VAim OB/GYN Series.



ULTRASOUND S300

VINNO

- Design/Portability: Cart-based system that is portable, light-weight, and compact.
- Image Quality: High-Resolution Imaging with exceptional clarity.
- Interface: User-Friendly Interface with intuitive touch-screen controls.
- Advanced Imaging: Features Doppler and Colour Flow Imaging to enhance diagnostics.
- Applications: Versatile for MSK, OB/GYN, Cardiology, Emergency and Critical Care.



ULTRASOUND V10

VINNO

- Platform/Weight: VLucid 2.0 platform. Portable solution weighing approximately 4 kilograms.
- Interface: Dual-Screen Interface: 15.6 inch HD main screen plus 8 inch touch panel.
- Transducers: Supports a wide range including convex, linear, phased array, and endocavity.
- Advanced Tech: VLucid with zone imaging, automatic needle enhancement.
- AI Tools: AI-powered automation, real-time shear wave elastography (VShear).



Electrolyte Analyzer

Eaglenos

- Maintenance-free, portable analyzer for K plus Na plus Cl minus iCa 2 plus iMg 2 plus (5 in 1).
- Uses a single-use dry chemistry cartridge; no fluidics, minimal maintenance.
- Whole blood results in under 5 minutes; 100 microliter sample volume.
- Integrated barcode scanner, printer, and auto-calibration.
- Accuracy R squared greater than 0.94 versus benchtop; battery supports 50 plus consecutive tests.
- Test Ranges (millimole per Liter): K 1 to 15, Na 100 to 200, Cl 65 to 160, iCa 0.25 to 4, iMg 0.2 to 1.5.



Eaglecare E-case



- Personal medication manager.
- Medication reminder customizes schedule provides smart reminders and records.
- Remote care shares medication record remotely.
- Waterproof and dustproof design.
- Protects drug quality and safety.
- Smart medication instruction by scanning the packaging.



Blood Gas Analyzer



- 34 parameters blood gases metabolites and electrolytes.
- 10 measured parameters K Na Cl iCa2 pH pCO2 PO2 Glu Lac Hct.
- Maintenance-free.
- No reagent packs required.
- Accurate results in approximately 5 minutes.
- Lightweight portable and versatile.



Multi-Functional Monitoring Meter



- Measures seven parameters (GLU LAC KET UA HCT Hb TC).
- Quick results.
- Smartphone app for easy data tracking.
- Safety one-click automatic ejection of test strips.
- Accurate measurements using gold electrode.
- Essential for monitoring and prevention of chronic metabolic diseases.



Blood Glucose and B-Ketone Meter



- Measures two parameters Glucose and B-Ketone.
- Quick results 5 seconds for glucose and 10 seconds for blood B-ketone.
- Accurate detection using 7 gold electrodes technology.
- Upgraded temperature and HCT compensation algorithms ensure accurate results.
- Smart coding using code chip.
- Effective monitoring of long-term complications in diabetes patients.

Blood Glucose and Uric Acid Meter



- Measures two parameters Glucose and uric acid.
- Quick results 5 seconds for blood glucose and 10 seconds for blood uric acid.
- Bluetooth transmission for easy data recording.
- Safety one-click automatic ejection of test strips.
- Accurate measurements using gold electrode.
- Blood glucose test strip uses FAD-GDH technology to avoid blood oxygen interference.

Blood Glucose and Lactate Meter



- Measures two parameters Glucose and lactate.
- Quick results 5 seconds for glucose and 10 seconds for blood lactic acid.
- Accurate detection using 7 gold electrodes technology.
- Requires microvolume of blood sample 0.8 microliter.
- Wide HCT range.
- Comprehensively upgraded temperature compensation algorithm ensures accurate results.



Dry Biochemical Analyzer



Dry Biochemical Analyzer: Rapid, Multi-Test Diagnostics. This fully automatic dry biochemical analyzer utilizes reflectance photometry to provide rapid, quantitative analysis of critical chemical components in whole blood, serum, or plasma. It features disposable consumables, a short testing time (≤ 3 minutes), a 4.3" touch screen, and a built-in lithium battery. This device is an indispensable tool for screening metabolic, liver, and kidney functions at the point of care.



Hemoglobin Analyzer



Hemoglobin Analyzer: Fast, Accurate Blood Testing (H7 Series). The Hemoglobin Analyzer (H7 series) provides ultra-fast and reliable measurement of Hemoglobin (Hb) and Hematocrit. Using unique Microfluidic technology, it requires only a tiny blood sample (7 μL) and delivers results in less than 3 seconds. Its portable design and large storage capacity make it ideal for quick, accurate blood checks in clinics and remote settings.



Immunofluorescence Analyzer (TRFIA)



Immunofluorescence Analyzer (TRFIA): Portable, Quantitative Immunoassay. This portable analyzer utilizes Time-resolved Fluorescence Immunoassay (TRFIA) technology to provide quantitative, non-subjective results comparable to lab-based analyzers. It is lightweight (2.9 kg), features a touch screen interface for ease of use, and can test multiple sample types (whole blood, serum, plasma, urine). This solution delivers high accuracy and broad detection capability for cardiovascular, renal, and inflammatory biomarkers.



White Blood Cell Analyzer



White WBC Analyzer:
Ultraportable Primary Care Blood Analysis.
 The White WBC Analyzer is an ultra-portable device specifically designed for primary medical departments. It uses a unique microfluidic chip and advanced optical inspection to provide accurate white blood cell counts in under 3 minutes from only a 10 μ L blood sample. Its built-in lithium battery, intuitive color screen, and robust design make immediate diagnostic information available closest to the patient.



Urine Analyzer



11 or 14 Parameters Urine Analyzer: Comprehensive Renal Screening.
 This compact, portable urine analyzer tests for 11 key parameters, providing comprehensive diagnostic information for general health screening and monitoring of metabolic or renal diseases. Utilizing a reflective photometric system, it offers accurate, multi-parameter urinalysis in a single, efficient process, supporting rapid assessment in any clinical setting.



Handheld Dry Biochemistry Analyzer



Compass 2800: Handheld Dry Biochemistry Analyzer.
 The Compass 2800 is a highly portable, semi-automatic dry biochemistry analyzer, measuring just 25 mm thick and weighing only 220g. This handheld device uses reflective photometry to quantitatively analyze blood chemistry components. Featuring a 3.5-inch touch screen, easy APP connection for paperless data management, and independent test codes for accuracy, it's an excellent tool for screening and monitoring chronic diseases.



Smart Electronic Stethoscope



- 1.3 inch OLED display.
 - 100 times audio amplification.
 - Real-time transmission via Bluetooth 4.0.
 - AEC Smartho-D2 noise reduction technology (80 percent noise canceling).
 - Both Bell and diaphragm mode optional for heart and lung auscultation.
 - 60 Hours continuous use per charge.
-



Smart Spirometer



- Portable pulmonary function monitor.
 - Measures PEF FEV1 FVC and FEV1/FVC.
 - Bluetooth or GSM model for wireless transmission.
 - Cloud based mobile App.
 - Predicted warning based on data trend.
 - Battery life up to 6 days on a single charge (3 uses per day).
-



Digital Weight Fat Scale



- Size 280 millimeters by 280 millimeters by 24 millimeters.
 - Capacity 11 to 396 pounds or 5 to 180 kilograms.
 - Division 0.2 pounds or 0.1 kilogram.
 - Measures in pound or kilogram unit (switchable via settings).
 - Uses 3 times 1.5 volt AAA batteries.
 - Ideal for checking body correlation coefficients (BMI).
-



US-200 URINE ANALYZER

motenu.

- Function: Automatic residual liquid suction and discharge system prevents cross contamination.
- Correction: Automatic correction of pH, specific gravity, and color effects.
- Alarms: Automatic fault detection and alarm system.
- Speed: 120 pieces per hour or 60 pieces per hour optional.
- Test Items: Measures White blood cells, urobilinogen, bilirubin, specific gravity, glucose, pH, protein, occult blood, nitrite, ketone bodies, vitamin C, microalbumin.



MTN-2000C ELECTROLYTE ANALYZER

motenu.

- Method: Ion Selective Electrode (ISE) direct method.
- Test Project: K, Na, Cl, Ca, PH, nCa, TCa (up to 7 parameters).
- Sample: Whole blood, plasma, and serum; Sample size: 100 microliter.
- Speed: Measurement time under 1 minute (including suction, rinsing, printing).
- Calibration: One-point/two-point automatic calibration; Automatic tracking of electrode status eliminates drift.



MTN-6000 AUTOMATIC ELECTROLYTE ANALYZER

motenu.

- Method: Ion Selective Electrode (ISE) direct method.
- Test Project: K, Na, Cl, Ca, nCa, TCa, Li, PH (up to 8 parameters).
- Automation: Fully automatic sampling with a 20-sample position sampler, unlimited sample addition.
- Speed: Measurement time under 1 minute.
- Sample Types: Serum, plasma, whole blood, cerebrospinal fluid, and diluted urine.
- Calibration: Automatic tracking, calibration, and correction of electrode status eliminates drift.



MTN-360 FULLY AUTOMATIC BIOCHEMICAL ANALYZER

motenu.

- Type: Fully automatic, discrete, STAT priority.
- Speed: Constant speed 280 Tests per Hour (without ISE).
- Test Methods: Colorimetry, turbidimetry (End-point, two-point, kinetics, fixed-time).
- Sample/Reagent Positions: 42 sample positions; 25 reagent positions.
- Refrigeration: 4 to 15 degrees Celsius, 24-hour non-stop refrigeration for reagents.
- Cuvettes: Rotating tray with 120 reusable cuvettes.
- Probes: Liquid level detection, remaining detection, collision protection.
- Optics: 8 wavelengths (340 to 700 nanometers); Resolution 0.0001 Abs.



MTN-II SEMI-AUTOMATIC COAGULATION ANALYZER

motenu.

- Test Items: Prothrombin time (PT), Activated partial thromboplastin time (APTT), Thrombin time (TT), Fibrinogen content (FIB).
- Channels: 2 test channels (37 degrees Celsius plus or minus 0.2 degrees Celsius).
- Preheating: 12 sample positions and 2 reagent positions preheat to 37 degrees Celsius.
- Operation: Liquid level automatic sensing for intelligent start; large screen English LCD display.
- Report: Built-in thermal printer automatically prints reports.
- Calculations: Calculates S, INR, R, grams per Liter.



MTN-31 FULLY AUTOMATIC HEMATOLOGY ANALYZER

motenu.

- Analysis: Fully automatic white blood cell three-part grouping with 23 parameters plus 3 histograms.
- Principle: Electrical impedance method; cyanide-free colorimetric HGB method.
- Speed: 70 tests per hour, 24-hour continuous operation.
- Sampling: Built-in diluter; double counting cell; minimal sample volume (9.6 microliter whole blood).
- Display/Screen: 8.4 inch touch screen LCD shows all parameters and histograms on one screen.



MS100 CHEMISTRY ANALYZER



- Principle: Photoelectric colorimetry.
- Sample Type/Volume: 140 microliter of whole blood, plasma, serum, or capillary blood.
- Test Time (TAT): Delivers results in 12 minutes.
- Operation: Easy, three-step process for fast POCT.
- Connectivity: Features LIS system connectivity and a built-in printer.



MS200 AUTOMATED CHEMISTRY ANALYZER



Product Type: PUSHKANG Automatic POCT Hematology

- Analyzer (CBC plus CRP/SAA).
- Technology: 3-part Hematology POCT analyzer using Impedance method for CBC.
- Sample Type/Volume: Minimal 20 microliter of whole blood or fingertip blood.
- Test Speed (TAT): One-step operation with a fast TAT in 4 minutes.
- Test Results: Provides 21 reportable parameters and 3 histograms.



MC100 COAGULATION ANALYZER



- Principle: Coagulation method, optical method, and immunoturbidimetry.
- Unique Feature: World's first automated APTT mixing study.
- Test Speed: Fast results with TAT of 12 minutes and PT speed of greater than or equal to 210 Tests per Hour.
- Sample Type/Volume: Uses venous whole blood or plasma.
- Sample Handling: Internal centrifuge for whole blood sampling.



MC550 AUTOMATED COAGULATION ANALYZER



- Product Type/Design: Portable POCT device weighing less

- than or equal to 3 kilograms.
- Sample Type/Volume: Uses whole blood or plasma; only 180 microliter required.
- Test Time (TAT): Rapid results with Test Time less than or equal to 12 minutes.
- Connection: Easy connection via WIFI and RS-232 to LIS/HIS system.



MX30 AUTOMATIC 3-PART HEMATOLOGY ANALYZER



- 3-Part Differential analysis.

- 21 parameters plus 3 Histograms (WBC, RBC, PLT).
- Throughput up to 60 samples per hour.
- Test Principle: Impedance method (WBC, RBC, PLT), Cyanide

- free reagent (HGB).
- Only 2 operational reagents and probe cleaner needed.
- Display: 10.4 inch touch screen.
- Data capacity: Up to 50,000 results.



MX60 AUTOMATIC 5-PART HEMATOLOGY ANALYZER



- 5-Part Differential analysis (CBC plus DIFF).

- 29 parameters plus 4 Scattergrams plus 2 Histograms.
- Throughput up to 60 samples per hour.
- Technology: Flow Cytometry (FCM) plus Laser light scatter

- plus Cytochemical staining (WBC).
- Dual acceleration flow cell system.
- Sample volume: 20 microliter.
- Display: 10.4 inch colour touch screen.
- Data capacity: 50,000 results memory.



PB30 AUTOMATIC POCT HEMATOLOGY ANALYZER +CRP/SAA



Principle: Photoelectric colorimetry.

- Sample Type/Volume: 140 microliter of whole blood, plasma, serum, or capillary blood.
- Test Time (TAT): Delivers results in 12 minutes.
- Operation: Easy, three-step process for fast POCT.
- Connectivity: Features LIS system connectivity and a built-in printer.



Fully Automated HbA1c Analyzer (LD-560)



- Methodology: HPLC.

- Sample Capacity: 20 tubes (Autoloader).
- Test Speed: Fast Mode: 90 seconds per test; Variant Mode: 140 seconds per test.
- Parameters: HbA1c, HbF, HbA2, HbS/C/D/E.
- Precision: CV equals 1.5 percent.
- Certification: NGSP, IFCC, CE.



HPLC Automated Hemoglobin Analyzer (LD-600)



- Methodology: HPLC.

- Sample Capacity: 110 Tubes (Autoloader).
- Test Speed: 65 Seconds per Test.
- Parameters: HbA1c, HbF, HbA2, HbS/C/D/E.
- Precision: IV equals 1.5 percent.
- Features: Fully Automated, 1 STAT Position.



Automated HPLC Analyzer (LD-500)

LABNOVATION

- Methodology: HPLC.
- Features: One Step Operation, Equipped with autoloader, Scientific reverse mixing, High precision (sample pre-heating, robot arm mixing), Real Walkaway System, Color touch screen, Minimal maintenance.



POCT HbA1c Analyzer (LD-100)

LABNOVATION

- Methodology: Boronate Affinity Method.
- Features: One-Step HbA1c Testing.
- Type: Point of Care Testing (POCT) Analyzer.



PC2000 AUTOMATIC LIQUID-BASED CYTOLOGY PROCESSING SYSTEM

maccura

- Function: Automatic operation from sample pretreatment to slide making and staining.
- Process: Eliminates manual errors and establishes a standard procedure.
- Pretreatment: Patent sample pretreatment technique to enrich effective cells; samples loaded directly.
- Diagnosis: Supports remote slide reading.



N32 AUTOMATIC EXTRACTION SYSTEM

maccura

- Speed: Extraction of 32 samples completed in 12 minutes.
- Operation: Automatic purification of nucleic acid samples.
- Safety: Ultraviolet sterilization and multiple fan convection exhaust prevent aerosol pollution.



N96 AUTOMATIC EXTRACTION SYSTEM

maccura

- Speed: Extraction of 1 to 96 samples completed in as short as 13 minutes.
- Operation: Automatic purification of nucleic acid samples (DNA/RNA extraction).
- Safety: Disposable consumables eliminate contamination; built-in UV disinfection function.



N904 REAL-TIME FLUORESCENCE QUANTITATIVE PCR ANALYZER

maccura

- Based on fluorescent polymerase chain reaction (PCR).
- Sample Size: 96 wells.
- Reaction Volume: 10 microliter to 50 microliter.
- Applicable Reagents: Open system, supporting third-party kits.
- Fluorescence Channel: 4 fluorescence channels.
- Used for quantitative and qualitative detection and melting curves.
- Covers pathogens and the human genome project.



D610 AUTOMATIC DIGITAL PCR SYSTEM

maccura

- Function: Integrates droplet generation, PCR amplification, and fluorescence detection.
- Speed: High throughput (e.g., 96 samples in three hours); fully automated process.
- Cost: Chip-free consumables; low cost (qPCR level).
- Accuracy: Absolute quantitative detection without a standard curve.



u350 SEMI-AUTOMATIC URINE ANALYZER

maccura

Efficient test speed, throughput is up to 120 Tests per Hour.

- Automatically correct the effect of uric acid alkalinity on specific gravity test results.
- New type of light sensor, high sensitivity, strong anti-interference.
- Compatible Reagents: 8 to 14 options available.
- Input mode: Press-button.
- Throughput: 120 Tests per Hour (fast mode), 60 Tests per Hour (slow mode), manual triggered.



u370 SEMI-AUTOMATIC URINE ANALYZER

maccura

Efficient test speed, throughput is up to 600 Tests per Hour.

- Automatically correct the effect of uric acid alkalinity on specific gravity test results.
- Built-in temperature detection system can correct the results according to the temperature.
- New type of light sensor, high sensitivity, strong anti-interference.
- Compatible Reagents: 8 to 14 options available.
- Input mode: Press-button.
- Data Storage Capacity: 2000 test reports.



u390 SEMI-AUTOMATIC URINE ANALYZER

maccura

- Efficient test speed, throughput is up to 600 Tests per Hour.
- Automatically correct the effect of uric acid alkalinity on specific gravity test results.
- Built-in temperature detection system can correct the results according to the temperature.
- New type of light sensor, high sensitivity, strong anti-interference.
- Compatible Reagents: 8 to 14 options available.
- Input mode: touch screen (LCD).
- Data Storage Capacity: 2000 test reports.



U2000 AUTOMATIC URINALYSIS ANALYZER SYSTEM

maccura

- Analysis: Integrates chemical, physical, and urinary sediment analysis.
- Throughput: Chemistry Mode: 240 Tests per Hour; All Mode: 120 Tests per Hour.
- Sediment ID: AI neural network deep learning; Planar Flow Image Technology.
- Sample Processing: No need for centrifugation or staining; supports continuous loading.



C1000 AUTOMATIC CHEMISTRY ANALYZER

maccura

- Constant 1000 Tests per Hour for single analytical unit.
- Up to 1600 Tests per Hour for single analytical unit with one ISE module.
- ZERO contamination by non-contact ultrasonic mixing.
- 37.0 degrees Celsius plus or minus 0.1 degree Celsius constant temperature control by water bath.
- Semi-permanent LED light source.
- Online reagent replacement without hesitation.
- Large capacity: 65 reagent positions and 100 sample positions.



C2000 AUTOMATIC CHEMISTRY ANALYZER

maccura

- Constant 2000 Tests per Hour for single analytical unit.
- Up to 2600 Tests per Hour for single analytical unit with one ISE module.
- Large capacity: 130 reagent positions and 200 sample positions.
- Enhanced 9-step washing system ensures carry-over less than 0.1 PPM.
- Multilevel ultrasound mixing system rather than mixer guarantee sensitivity.
- Integrated System: C2000 occupies only 2.7 square meters.



H3600 AUTOMATIC COAGULATION ANALYZER

maccura

- Occupies only 4.9 square meters.
- Throughput: PT: 360 tests per hour.
- Throughput: D-Dimer: 180 tests per hour.
- 36 reagent refrigerated positions and 2 room temperature positions.
- Sample position: 10 times 6 position by autoloader plus Random STAT position.
- Cuvette Capacity: 1000 cuvettes.
- Probe system: probe support close-lid puncture, avoiding sample contamination.



H-04 SEMI-AUTOMATIC COAGULATION ANALYZER

maccura

- Method: Dual magnetic bead method and optical method provided.
- Operation: Independent operation; fast and efficient.
- Interference: Effectively avoids interference (jaundice, hemolysis, chylo, air bubbles).



H5000 AUTOMATIC COAGULATION ANALYZER

maccura

- Detection principle: Coagulation method (Magnetic Bead Method) plus Immunoturbidimetry plus Chromogenic substrate method.
- Throughput: 500 Tests per Hour for PT.
- Throughput: 400 Tests per Hour for D-Dimer.
- Reagent positions: 42 refrigerated positions (also for automatic QC) plus 5 room temperature positions.
- Automatic identification of reagent if more than one reagent set is loaded.



LABAS MIX TLA MINI SOLUTION

maccura

- Supports different direct connection mode with sample handling system and multiple testing platforms.
- Achieves intelligence and efficiency in minimized footprint and cost-effective spends.
- Optimize and reduce TAT time.
- Can connect to: Sample input and output module, Hematology analyzer, HbA1c (HPLC) analyzer, Specific protein analyzer, Slider maker and stainer.




LABAS MIX SUPER SOLUTION

maccura

- Could support different devices connection by track system.
- Integrates most laboratory routine testing in TLA SUPER solution.
- "ALL IN ONE" solution is very compact with only less than 21 square meters for occupied area.
- Integrated testing types: Biochemistry, Coagulation, Hematology, Specific proteins, Immunoassay, HbA1c, Slider Maker.

LABAS MIX TLA CORE SOLUTION

maccura

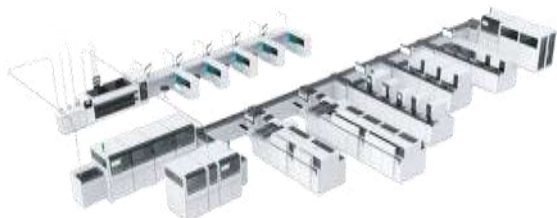

- Mainly for core laboratory.
- Could support different platforms and multiple devices connected by track system.
- Flexible to expand more modules and functions (pneumatic sample transfer, sample pretreatment, post-treatment, recapper, sample storage, etc.).
- Features: AI visual recognition, Sample input by dumping, First floor platform (Decapper, QC online storage), Sample rack loading, Low temperature centrifugation, Sample rack recycling.

LABAS MIX

maccura



- Minimized TLA system with more intelligence.
- Features: Less space requirement, Cost-effective, Flexible.
- Supports 240 tubes sample loading positions.
- Supports continuous sample loading.
- Supports Multiple devices connection.
- One tube blood for all tests (CBC plus HSCRP plus HbA1c plus Smear).

LABAS F9000

maccura



- Function: Fully automatic bloodline analysis system.
- Throughput: Up to 100 Tests per Hour single-machine analysis speed.
- Core Tech: Nucleic acid fluorescent staining and flow cytometry.

LABAS F9000X INTEGRATED SYSTEM **maccura**



- Function: Fully Automated Hematology Workstation.
- Throughput: Up to 100 tubes per hour.
- Integration: Integrates HEMATOLOGY, SPECIFIC PROTEIN, and HBA1C testing.
- Technology: Nucleic acid fluorescent staining and flow cytometry.

i800 AUTOMATIC CHEMILUMINESCENCE ANALYZER **maccura**



- Throughput: up to 200 Tests per Hour.
- Time to the first result: 14 minutes.
- Small size with touch screen.
- 20 reagent positions and 50 sample positions.
- Only 0.519 square meters for various application scenarios.
- Solid-liquid separation of waste cuvette to ensure biosafety.
- Intelligent maintenance to meet individual needs.

i1000 AUTOMATIC CHEMILUMINESCENCE ANALYZER **maccura**



- Throughput: up to 180 Tests per Hour.
- Time to the first result: 14 minutes.
- Full loaded unattended operation for 4 hours.
- Continuous reagents replacement and samples loading during the operation.
- 30 reagent positions with RFID technology.
- 50 sample positions with STAT freely.
- Dumping cuvettes randomly with 1200 pieces.



i6000 AUTOMATIC CHEMILUMINESCENCE ANALYZER

maccura

- Throughput: Single module runs up to 300 Tests per Hour.

- First result in 14 minutes.
- Operation: 6-hour unattended operation; automatic startup and shutdown.
- Safety: Accurate sampling system with liquid level, clot, bubble detection, and collision protection.
- Flexibility: Modular and flexible expansion capabilities.



LABAS H9000 INTEGRATED SYSTEM

maccura

- Supports 240 tubes sample loading positions.
- Supports continuous sample loading.
- Multiple H5000 series coagulation analyzers.
- Powerful and user-friendly software.



LABAS S9000 INTEGRATED SYSTEM

maccura

- Compact design for immune-chemistry analysis.
- Support 200 samples loading and recycling (IOM).
- Optional decapper with AI visual identify function (DQI).
- Support 200 positions for big sample volume (RWC).





F15 Series Fetal & Maternal Monitor



- 15.6 inch high resolution color TFT-LCD screen. - Touch screen provides great ease of use. - Fetal and maternal monitoring parameters both available. - Signals Overlap Verification to separate twins triplets FHR from MHR.
- Built-in long life thermal printer.
- Wired and wireless central monitoring solution.



F12 Series Fetal & Maternal Monitor



- Lightweight and compact design.
- 13.3 inch high resolution color TFT-LCD screen.
- Monitoring for twins and triplets.
- Touch screen improves ease of use.
- Signals Overlap Verification to separate twins triplets FHR from MHR.
- Over 3000 hours waveform storage and playback.



FTS-6 Central Monitoring System



- 21.5 inches all-in-one PC with optional touch screen.
- Centralized monitoring for up to six patients.
- 12-crystal wireless ultrasound transducer.
- Monitoring with Wi-Fi transducers for patients maximum flexibility.
- Powerful data management software for data recording analyzing saving and printing.
- Up to 16 monitoring windows displaying simultaneously.



F9 Series Fetal & Maternal Monitor



- 12.1 inch color TFT-LCD touch screen.
- Fetal and maternal monitoring parameters are both available.
- Signals Overlap Verification separates twins FHR from MHR.
- Professional CTG analysis system is included.
- 60 hours waveform storage and playback is available.
- Telemetry Transducer System compatibility is supported.



Full Solution with FTS-3



- Unique twins FHR monitoring is provided.
- Highly sensitive 12-crystal FHR probe.
- Cordless and waterproof probe for water delivery.
- Great freedom of movement for the patient.
- Long lasting rechargeable battery for the probe.
- Long lasting rechargeable battery for base station.
- Compatible with F6 F9 F9 Express F15 F15 Air monitors.



F6 Fetal & Maternal Monitor



- Highly sensitive 1MHz waterproof FHR transducer.
- 10.1 inch foldable color TFT-LCD screen.
- Signals Overlap Verification separates twins FHR.
- Professional CTG analysis system is included.
- 60 hours waveform storage and playback is available.
- Wired and wireless central monitoring solution is supported.



F2/F3 Fetal Monitor



- Brand new design with foldable screen.
- Enhanced functionality is provided.
- 5.6 inch foldable screen (color or black and white).
- Large numeric and graphic display for readability.
- Signals Overlap Verification separates twins FHR.
- 60 hours backup memory for seamless monitoring.
- Long life Li-ion battery guarantees the mobility.



MFM-CNS Central Monitoring System (OB/GYN)



- Brand new design with foldable screen.
- Enhanced functionality is provided.
- 5.6 inch foldable screen (color or black and white).
- Large numeric and graphic display for readability.
- Signals Overlap Verification separates twins FHR.
- 60 hours backup memory for seamless monitoring.
- Long life Li-ion battery guarantees the mobility.



FTS-6 Mobile Remote Fetal Monitor



- Landmark fetal monitor entering miniaturization era.
- Symbol of remote fetal monitoring.
- Extremely Portable device.
- Built-in Battery is included.
- IP28 waterproof rating.
- Android compatibility is available.



SD1 Ultrasonic Pocket Doppler



- ALL-IN-ONE compact handheld Doppler design.
- Digital display of FHR.
- 3MHz probe detects fetal heart beat.
- Touch panel for easy control.
- Uses normal AA batteries.
- Automatic power-off saves battery power.



SD3 Series Ultrasonic Pocket Doppler



- Excellent sensitivity and high durability.
- 3 MHz probe detects fetal heart beat.
- Detection starts as early as 9 weeks.
- 2 MHz probe gives deep penetration.
- Good for later pregnancy and larger patients.
- Bright OLED screen displays real-time FHR.
- Record and play with audio playback.
- Built-in Li-ion rechargeable battery works long.



SonoTrax Series Ultrasonic Pocket Doppler



- Most cost-effective routine obstetric and vascular solution.
- Large backlight LCD display.
- Interchangeable waterproof probe is included.
- Supports 2MHz to 8MHz waterproof probes.
- Accurate FHR detection uses high-fidelity sound.
- Built-in audio recorder.



SD5/SD6 Series Ultrasonic Tabletop Doppler



- Innovative Fetal Doppler category development.
- Advanced wireless technology brings freedom.
- Provides 2MHz and 3MHz probe.
- Accurate FHR calculation is provided.
- Eye-catching backlight LCD screen.
- Dual high-fidelity speakers.



PA4 Pro/PR4 Pro Biofeedback and Stimulation System



- PA4 Pro is a portable system. - PR4 Pro is computer-controlled.
- Dedicated to pelvic floor rehabilitation.
- 4 EMG STIM channels.
- 1 manometric channel is included.
- Integrated Android operating system (PA4 Pro).
- International standard assessment protocols are used.
- Intelligently generate treatment plan for individuals.



Video Colposcope



- LED cold lighting system assures real view.
- Advanced, fast auto-focusing ensures clear image.
- Real-time display of magnification.
- Electronic green filter enhances vascular image.
- Acetic acid and iodine reaction test timer.
- Powerful image display and data management software.



Acclarix AX8 Diagnostic Ultrasound System



- 15.6 inch high resolution LED monitor.
- Monitor supports wide angle tilting.
- 12.3 inch touch screen with gesture control.
- Magnesium alloy body is light weight.
- Weight is about 48 kilograms.
- ePower supports 8 hours continuous scanning.
- Leading Synsight platform for focused sonography.
- Smart cardiopulmonary and nephrology solutions.



Acclarix AX3 Diagnostic Ultrasound System



- 15 inch wide angle HD monitor.
- Monitor has 180 degrees rotation.
- Two removable built-in lithium-ion battery.
- Provides ultra-long continuous scanning.
- Magnesium alloy body is light weight.
- Weight is about 45 kilograms.
- Tissue Adaptive Imaging (TAI) optimizes imaging.
- Customizable 10 inch gesture-control touch screen.
- Personalize workflow with the touch screen.
- One-touch auto optimization for all modes.



Acclarix LX9 Diagnostic Ultrasound System



- 21.5 inch high resolution LCD monitor.
- Monitor uses a Z arm.
- 14 inch touch screen with gesture control.
- 5 Activated transducers sockets.
- Dual built-in batteries design supports long scanning.
- eTAI ESRI eView eBeam ePIH imaging technologies.
- Automatic measurement tools with intelligent algorithm.



Acclarix LX3 Diagnostic Ultrasound System



- 21.5 inch high resolution LCD monitor.
 - Monitor uses a C arm.
 - 14 inch touch screen with gesture control.
 - 5 Activated transducers sockets.
 - High fidelity high channel count architecture.
 - Tissue Adaptive Imaging (TAI) optimizes imaging.
 - One-touch auto optimization for all modes.
-



Acclarix LX8 Diagnostic Ultrasound System



- 21 inch HD wide-screen anti-glare LCD monitor.
 - Monitor can tilt and swivel.
 - Four active transducer ports.
 - High fidelity high channel count architecture.
 - Tissue Adaptive Imaging (TAI) optimizes imaging.
 - Customizable gesture-control touch screen personalizes workflow.
 - Comprehensive suite of 3D 4D rendering tools.
 - Comprehensive suite of 3D 4D editing tools.
-



Acclarix AX2 Diagnostic Ultrasound System



- 15 inch wide angle HD monitor.
 - Monitor has 180 degrees rotation.
 - Two removable built-in lithium-ion battery.
 - Provides ultra-long continuous scanning.
 - Magnesium alloy body is light weight.
 - Weight is about 45 kilograms.
 - High fidelity high channel count architecture.
 - Customizable 10 inch gesture-control touch screen.
 - Personalize workflow with the touch screen.
 - One-touch auto optimization for all modes.
-



U60 Diagnostic Ultrasound System



- 15 inch high resolution LCD screen.
- Compact, lightweight design aids mobility.
- Built-in battery enables flexible imaging.
- Tissue Harmonic Imaging is included.
- Spatial Compounding Imaging is included.
- Speckle Reduction Imaging is included.



U2 Diagnostic Ultrasound System



- Ergonomics design is a feature.
- 12.1 inch LCD screen is high resolution.
- 19 inch screen is optional.
- Four active transducer ports are present.
- Easy archiving using DICOM file storage.
- Rapid one button touch saves reports as PDF.
- CW Doppler identifies high-velocity jets.
- CW Doppler has excellent sensitivity.



iX15/iX12/iX10 Multi-Parameter Patient Monitor



- 15.6, 13.3, 10.1 inch color displays.
- Displays are high resolution TFT-LCD.
- Full touch screen operation is possible.
- Customizable shortcut menu is available.
- Widescreen anti-glare design aids observation.
- ISEAP ECG algorithm detects 33 ARR types.
- Continuous Non-invasive Blood Pressure (CNBP) monitoring.
- Ultra-wide 170 degrees observation angle.



iV15/iV12 Modular Patient Monitor



- 15.6, 13.3 inch high resolution displays.
- Resolution is 1920 by 1080 color.
- Plug-and-play module design.
- Full touch screen operation is possible.
- Customizable shortcut menu is available.
- Power-saving no-fan design.
- Continuous Non-invasive Blood Pressure (CNBP) monitoring.
- Interacts with HIS EMR via HL7.



Elite V8/V6/V5 Modular Patient Monitor



- 17, 15, 12.1 inch color displays.
- Displays are high resolution TFT-LCD.
- Full touch screen operation is possible.
- Customizable shortcut menu is available.
- Echo-friendly no-fan design.
- Built-in MEWS system.
- Non-volatile built-in memory is included.
- USB SD external storage is available



IM20 Transport Patient Monitor



- 5 inch high resolution color TFT-LCD display.
- Ambulatory design is waterproof and dustproof (IP44).
- 12 meter shock resistance.
- ISEAP ECG algorithm detects 33 ARR types.
- IMAT SpO2 algorithm resists motion.
- IMAT SpO2 algorithm resists low perfusion.
- Optional 2-channel invasive blood pressure.
- Built-in Wi-Fi is standard configuration.



MFM-CMS Central Monitoring System



- Centralized monitoring and data management for patients.
- Monitor 128 patients per sector simultaneously.
- Client terminal for remote visiting.
- Distributed Systems for cross applications.
- Monitoring data statistic and analysis.
- Drug dose calculation is supported.
- Hemodynamic calculation is supported.
- Oxygenation calculation is supported.
- Renal function calculation is supported.
- Ventilation calculation is supported.



iM80/iM70/iM60/iM50 Multi-Parameter Patient Monitor



- 15, 12.1, 10.4, 8.4 inch color displays.
- Displays are high resolution TFT-LCD.
- Full touch screen operation is possible.
- Customizable shortcut menu is available.
- Echo-friendly no-fan design.
- ISEAP ECG algorithm detects 33 ARR types.
- IMAT SpO2 algorithm resists motion.
- IMAT SpO2 algorithm resists low perfusion.
- Built-in MEWS system.



X12/X10/X8 Patient Monitor



- 12.1, 10.1, 8 inch color displays.
- Displays are high-resolution TFT.
- Full touch screen operation is possible.
- Customizable shortcut menu is available.
- Ultra slim design with carry handle.
- Water-proof silicon buttons with knob control.
- Unique NIBP clean mode is included.
- Dual dust filter design.
- Superior water trap with smart air channel.



iM3 Vital Signs Monitor



- 8 inch color TFT-LCD screen.
- Light weight ultra-slim design.
- Ergonomical design is featured.
- Full touch screen operation is possible.
- Customizable shortcut menu is available.
- Echo-friendly no-fan design.
- Unique cable-receiving carry handle.
- Plug and play module design.



iM3s Vital Signs Monitor



- 5 inch capacitive high resolution screen.
- Handheld design with tabletop expansion.
- Touch operation uses gesture control.
- Adaptive work modes for spot checks.
- Powerful data storage.
- IP44 waterproof and dustproof.



M3/M3A Vital Signs Monitor



- Lightweight and portable design.
- 5.6 inch color TFT-LCD screen (M3).
- 3.5 inch color TFT-LCD screen (M3A).
- Flexible configurations meet clinical needs.
- Auto Manual Continuous Average BP mode.
- Quick switch button for patient type.
- Bi-directional communication with MFM-CMS.



M3B Vital Signs Monitor



- 5.6 color TFT-LCD screen.
- Numeric and graphic display of capnography.
- Numeric and graphic display of plethysmogram.
- Powerful data storage capacity.
- USB flash disk is supported.
- Built-in rechargeable Li-ion battery.
- Bi-directional communication with MFM-CMS.
- Complete and flexible mounting solutions.



IT30/IT50 Telemetry Monitor



- 3.5 inch color touch-screen.
- Light-weight pocket-size compact device.
- IP67 (IT30) waterproof and dust-proof.
- IP44 (IT50) waterproof and dust-proof.
- Continuous Non-invasive Blood Pressure (CNBP) monitoring.
- ISEAP ECG algorithm detects 33 ARR types.
- Battery life as long as 72 hours.



H100B/H100N Handheld Pulse Oximeter



- LCD display with backlight control.
- Numeric display with plethysmogram.
- IP22 waterproof and dustproof.
- Nellcor OxiMax inside (H100N only).
- Powerful data storage up to 300 hours.
- Convenient AA size batteries.
- Batteries last up to 48 hours of work.



H10 Finger Oximeter



- Compact and lightweight design.
- SpO2 PR PI Bar Graph display.
- Plethysmogram display.
- 4-direction display with 4 display modes.
- Perfusion Index monitoring.
- 10-level adjustable brightness.
- Automatic power-off design.

H30 Pro 3-Part Hematology Analyzer



- Offers up to 23 parameters.
- Includes PLR and NLR parameters.
- Extending linearity range for WBC and PLT.
- Differentiating WBC RBC PLT with dynamic threshold.
- Small sample volume 10 microliter.
- Good for pediatric samples.
- Good for difficult draw samples.
- Lowering cost with two routine reagents.
- 120 days on-board stability.
- Managing reagent via RFID secures distributors.

iH30 Pro 3-Part Hematology Analyzer



- 21 reportable parameters.
- 2 RUO parameters (NLR PLR).
- Direct impedance method for counting.
- Counts WBC RBC and PLT.
- Cyanide free Lyse reagent for hemoglobin.
- Sample volume of 10 microliter.
- Uses whole blood mode.
- Uses capillary whole blood mode.
- Throughput of 60 samples per hour.
- 10.4 inch TFT color touch screen.
- Intuitive operating system.



ClariLight CL30



- Employs loop-mediated isothermal amplification (LAMP).
- Test time as quick as 15 minutes.
- 10.1 inch color touch screen.
- Operation is simplified.
- 6-channel design improves working efficiency.
- Integrated barcode scanner eases data entry.
- Barcode scanner reduces errors.
- Extraction-free procedure allows simple rapid tests.



H60S 5-Part Hematology Analyzer



- 25 reportable parameters.
- 8 RUO parameters.
- Continuous loading with 60 samples capacity.
- Automatic rotation and recognition of sample ID.
- Excellent abnormal sample flagging.
- Flagging includes NRBC IG.
- Reagent management via RFID card.
- 60 tests per hour.



H60 5-Part Hematology Analyzer



- High technology of laser flow cytometry.
- Technology includes impedance and colorimetric.
- Provides rapid and reliable test results.
- Requires blood sample as low as 16 microliters.
- Requires the least reagent numbers.
- 25 reportable parameters.
- 8 RUO parameters.
- Excellent abnormal sample flagging.
- Flagging includes NRBC IG.
- 60 tests per hour.



i15 Blood Gas and Chemistry Analysis System



- Portable easy to use POCT device.
- Small size and light weight.
- Built-in rechargeable battery.
- Complete maintenance free.
- Standby at any time.
- No reagent consumption while on standby.
- Auto sample aspiration and calibration.
- Ensures accuracy and reliability.
- Flexible tests combination on single cartridge.



i20 Blood Gas and Chemistry Analysis System



- Cartridge uses Microfluidics with biosensor.
- Biosensor uses photoluminescence.
- More than 40 parameters in one cartridge.
- Results in 60 seconds after sample aspiration.
- Innovative optical fluorescence microchip.
- Allows long storage life.
- Storage at room temperature.
- Small sample volume 65 to 95 microliters.
- 10.1 inch color touch screen.
- Resolution 1280 by 800.



SE-3 Three-channel ECG



- Portable and lightweight design.
- Foldable LCD screen.
- SEMIP interpretation tested with database.
- Database is authoritative CSE AHA MIT.
- 500 ECG recordings storage capacity.
- Support USB flash disk to extend memory.
- Support external printer via USB port.



SE-1202 Twelve-channel ECG



- 10 inch color touch screen.
- Screen has high resolution.
- Glass touch panel supports liquid cleaning.
- Complete digital filters resist interference.
- Filters resist baseline drift.
- Filters resist AC and EMG interference.
- 80000 Hertz sampling rate.
- Sampling rate is for Pacemaker detection.
- Wireless capability sends report to IT systems.
- Glasgow algorithm provides reliable diagnosis.



SE-1200 Pro/SE-1201 Pro Twelve-channel ECG



- 8 inch or 10.1 inch color touch screen.
- Screens have high resolution.
- Combines portability and top-industrial performance.
- Real-time ectopic heart beat detection.
- Detection uses color indication.
- ECG Comparison provides visual demonstration.
- Demonstration shows therapeutic progress.
- Wireless connection to IT systems.
- Bidirectional communication with HIS EMR PACS.



SE-18 18/15/12/9-lead ECG



- Supports 15 18-lead real-time sampling.
- Supports 15 18-lead real-time analyzing.
- Specialized for Myocardial Ischemia Infarction diagnosis.
- 15 color touch screen.
- Water-proof alphanumeric keyboard.
- Acquisition up to 30 minutes.
- Wireless capability sends report to IT systems.
- Glasgow algorithm provides reliable diagnosis.



iSE Series 18/12-lead ECG



- Looks and works like a tablet.
- Ultra-lightweight device less than 1 kilogram.
- 10.1 inch high resolution color touch screen.
- Multi-touch GUI.
- Supports 12-lead and 18-lead examination.
- Proprietary SEMIP algorithm is used.
- Algorithm includes Brugada Syndrome analysis.
- Fingerprint lock for data security.



SE-1515 Workstation



- PC based software integrates ECG functions.
- Functions: Sampling, Analyzing, Data Management.
- Functions include ECG Gateway.
- Automatic arrhythmia detection and indication.
- Supports final ECG report edit.
- Edit includes electronic signature.
- Optional Stress ECG is available.
- Optional Ambulatory ECG is available.
- Centralized ECG Management.
- HL7 DICOM protocol with worklist support.



Holter 2 in 1 Recorder SA-20



- Compact and lightweight (200 grams).
- Water-proof and Dust-proof.
- 3 12-lead digital recording.
- Pacemaker detection.
- Wide blood pressure measurement ranges.
- Up to 48 hours recording.
- Uses two AA battery.



Holter ECG Recorder SE-2003/2012(A)



- Recorder weighs only 50 or 75 grams.
- Water-proof and Dust-proof.
- 3 12-lead digital recording.
- Real-time waveform display.
- Up to 8 days recording.
- Uses one AAA battery.
- Pacemaker detection.



Holter BP Recorder SA-10 (ABPM)



- 24-hour ambulatory blood pressure monitor.
- Compact and lightweight (160 grams).
- Low Noise operation.
- Water-proof and Dust-proof.
- Overtime and Overpressure Protection.
- AAMI Validation is included.



SE-1200 Express Twelve-channel ECG



- 8 inch high resolution color touch-screen.
- Color-coded Signal Quality Indication.
- 800 ECG recordings storage capacity.
- Extend printing if arrhythmia is detected.
- Support laser printer via USB port.
- Glasgow ECG Interpretation.



SE-1201 Twelve-channel ECG



- Compact and portable design.
- 7 Color LCD display.
- Optional touch screen is available.
- Color-coded Signal Quality Indication.
- 800 ECG recordings storage capacity.
- Extend printing if arrhythmia is detected.
- Glasgow ECG Interpretation.



SE-301 Three-channel ECG



- Ultra-compact and lightweight design.
- 5 High resolution color touch screen.
- Complete digital filters resist interference.
- Filters resist baseline drift.
- Filters resist AC and EMG interference.
- 12-lead simultaneous acquisition.
- SEMIP interpretation tested with database.
- Database is authoritative CSE AHA MIT.
- Built-in rechargeable Li-ion battery.



SE-601 Series Six-channel ECG



- Compact and lightweight design.
- Alphanumeric keyboard.
- One-button operation.
- 800 ECG recordings storage capacity.
- Built-in rechargeable Li-ion battery.
- SEMIP interpretation tested with database.
- Database is authoritative CSE AHA MIT.
- Data transmits to PC via LAN Wi-Fi.



500 ELED Shadowless Operating Lamp

HFMED®

LED Surgery Light

The LED Surgery Light delivers brilliant, shadow-free illumination for precision operations with high-intensity LEDs (up to 140,000 Lux). Featuring adjustable color temperature (3800K–5000K), ultra-high CRI (≥ 93), and zero heat emission, this LED Surgery Light ensures accurate tissue visualization. Its sterile-compatible design and long lifespan (50,000 hours) make it ideal for modern ORs



500 LED Shadowless Operating Lamp

HFMED®

Surgery Lights LED

The Surgery Lights LED provide superior illumination for operating rooms with high-intensity, shadow-free lighting (up to 140,000 Lux). Featuring medical-grade LEDs with adjustable color temperature (3800K–5000K) and ultra-high CRI (≥ 93), these Surgery Lights LED ensure accurate tissue visualization. Their energy-efficient, sterile-compatible design supports long-term OR performance and surgical precision.



700 LED Shadowless Operating Lamp

HFMED®

Shadowless Light For Surgery

The Shadowless Light For Surgery provides ultra-uniform illumination (up to 160,000 Lux) with advanced multi-LED optics to eliminate shadows during operations. Featuring medical-grade color accuracy (CRI ≥ 96) and depth-adjustable brightness, this Shadowless Light For Surgery ensures optimal visibility for delicate procedures while reducing eye strain. Its sterilizable, anti-glare design meets strict OR hygiene standards.



500 500 LED Shadowless Operating Lamp

HFMED®

Procedure Light

The Procedure Light delivers precise, shadow-free illumination for medical examinations and minor surgeries. Featuring adjustable LED brightness (up to 140,000 Lux) and flexible positioning, it ensures optimal visibility in clinics, ERs, and operating rooms. With cool light technology and easy sterilization, this Procedure Light enhances safety and efficiency in clinical settings.



700 700 LED Shadowless Operating Lamp

HFMED®

Shadowless Operating Lamp

The Shadowless Operating Lamp delivers ultra-bright, uniform illumination (up to 160,000 Lux) for critical surgical procedures. Featuring multi-LED reflector technology, it eliminates shadows while maintaining natural color rendering ($CRI \geq 95$). With adjustable intensity and sterile-compatible design, this Shadowless Operating Lamp ensures precision visibility in operating rooms, enhancing safety and surgical accuracy.



HF-L4CLED Shadowless Operating Lamp

HFMED®

Ceiling Mounted OT Light

The Ceiling Mounted OT Light is a high-performance surgical lighting system designed for operating theaters. Featuring advanced LED technology, it delivers shadow-free illumination with adjustable brightness (up to 160,000 Lux) and optimal color rendering ($CRI \geq 96$). Its ceiling-mounted design saves space, while ergonomic controls ensure precise light positioning for surgical accuracy. Ideal for hospitals and clinics, this Ceiling Mounted OT Light offers long-lasting performance ($> 50,000$ hours) and complies with international medical standards.



SY02-LED3+5 (Adjust Color Temperature) (LED) Shadowless Operating Lamp

HFMED®

Surgical Led Light

Surgical LED Light – Our advanced Surgical LED Light delivers high-intensity illumination (140,000 lux) with adjustable color temperature (4500K) for precision surgery. Featuring shadow-free technology, energy-efficient LEDs, and a long lifespan (50,000+ hours), it ensures optimal visibility in operating rooms and clinics.

SY02-LED3+3 (Adjust Color Temperature) (LED) Shadowless Operating Lamp

HFMED®



Led Operating Lights

The LED Operating Lights are advanced surgical illumination systems designed for precision and efficiency in operating rooms. Featuring high-intensity LED technology (up to 150,000 lux), these LED Operating Lights offer adjustable color temperature (3800K-5000K), shadow-free performance, and true color rendering (CRI≥95). Energy-efficient with 50,000+ hour lifespan and sterile handles for infection control. Ideal for critical surgical applications.



SY02-LED5 (Adjust Color Temperature) (LED) Shadowless Operating Lamp

HFMED®

Surgical Led Light

Surgical LED Light – Our advanced Surgical LED Light delivers high-intensity illumination (140,000 lux) with adjustable color temperature (4500K) for precision surgery. Featuring shadow-free technology, energy-efficient LEDs, and a long lifespan (50,000+ hours), it ensures optimal visibility in operating rooms and clinics.



SY02-LED5+5 (Adjust Color Temperature) (LED) Shadowless Operating Lamp

HFMED®

LED Surgical OT Light

The LED Surgical OT Light is a high-performance medical lighting system designed for modern operating theaters. Featuring advanced LED technology with 140,000+ lux brightness and adjustable color temperature (3800K-5000K), this LED Surgical OT Light provides shadow-free, flicker-free illumination for precision surgeries. Energy-efficient with 50,000+ hour lifespan and sterile handles for optimal infection control in critical procedures.



SY02-LED5+5 (Adjust Color Temperature)-TV (LED) Shadowless Operating Lamp

HFMED®

Surgical Led Light With TV And Camera

Surgical LED Light with TV and Camera – Our advanced Surgical LED Light with TV and Camera integrates high-definition imaging with shadow-free LED illumination (140,000+ lux). Perfect for minimally invasive surgeries, it features real-time video recording, 2K display output, and adjustable color temperature for enhanced surgical precision and documentation. Ideal for modern ORs.



SY02-LED 3+5-TV (Adjust Color Temperature) (LED) Shadowless Operating Lamp

HFMED®

Surgical Lamp Led Camera

The Surgical Lamp LED Camera integrates advanced lighting and imaging technology for precision surgeries. Featuring high-intensity LED illumination (140,000+ lux) with 4K camera systems, this Surgical Lamp LED Camera enables real-time visualization, recording, and streaming of surgical procedures. Ideal for minimally invasive surgeries, training, and telemedicine applications, combining optimal lighting with HD documentation capabilities.



YD01A(LED)

HFMED®

YD01A(LED) Examination lamp - Illuminance: 30,000 Lux at 0.5 meters. - Illuminance: 5,000 Lux at 1 meter. - Color temperature: 4800 plus or minus 200 Kelvin. - Arm: 105 plus or minus centimeter articulated arm. - Arm is spring loaded. - Mobility: Easily moved from one location to another. - Compactness: Can be placed in front. - Does not obstruct the operator's sight. - Usage: Used for medical examinations. - Usage: Used for gynecological examinations. - Usage: Used for minor operations



HFMH3008AB Manual Hydraulic Operating Table

HFMED®

OT Table 3008

The OT Table 3008 is a versatile surgical table designed for precision and durability in modern operating rooms. Featuring adjustable height (760–1010mm), Trendelenburg/reverse Trendelenburg (22° each), and lateral tilt (20°), it ensures optimal patient positioning. Its high-density sponge padding enhances comfort, while optional detachable footplates improve surgical accessibility. Ideal for various procedures, this table combines stability with advanced functionality.



HFEOT99 Electric Operating Table

HFMED®

Electric Operating Table

The Electric Operating Table is a state-of-the-art medical device designed for precision and flexibility during surgeries. With adjustable height, tilt, and positioning, the Electric Operating Table ensures optimal patient placement and surgeon comfort. Its robust construction and smooth electric controls enhance efficiency in modern operating rooms. Ideal for various surgical procedures.



HFEOT99C Electro-Hydraulic Operating Table (Operation Theatre Table) **HFMED®**

Operation Theatre Table

The Operation Theatre Table is a premium surgical platform designed for precision and adaptability in modern operating rooms. Featuring motorized adjustments, radiolucent surfaces, and ergonomic controls, it supports diverse procedures from orthopedics to neurosurgery. With robust construction and easy sterilization, the Operation Theatre Table ensures optimal patient positioning and surgical efficiency for medical teams.



HFEOT99D Electro-Hydraulic Operating Table (Mobile Surgical Table) **HFMED®**

Mobile Surgical Table

The Mobile Surgical Table is a versatile and ergonomic solution for modern operating rooms. Designed for easy mobility, it offers adjustable height, stability, and precision for various surgical procedures. Its lightweight yet durable construction ensures seamless positioning, enhancing surgical efficiency. The Mobile Surgical Table is ideal for hospitals, clinics, and emergency setups.



HFEOT99X Electric Operating Table (Electric Mechanical Operating Table) **HFMED®**

Electric Mechanical Operating Table The Electric Mechanical Operating Table combines advanced electric controls with robust mechanical stability for precise surgical positioning. Featuring motorized height adjustment, multi-directional tilt functions, and removable tabletop sections, it accommodates diverse procedures. With high weight capacity (typically 300-500kg) and emergency manual backup, it ensures reliability in ORs. The antimicrobial surface and radiolucent options enhance functionality. Ideal for hospitals seeking modern, adaptable surgical solutions.



HFEOT2000 Manual Hydraulic Operating Table (Bariatric Operating Room Table)

HFMED®

Bariatric Operating Room Table

The Bariatric Operating Room Table is specially engineered to support larger patients with a high weight capacity (typically 250kg). Featuring an extra-wide, reinforced platform and stable hydraulic/electric adjustments, it ensures safety during bariatric surgeries. The Bariatric Operating Room Table offers superior durability, easy cleaning, and compatibility with various surgical positions for optimal patient care.



HFEPB99A Electric Obstetrics Table (Gynec OT Table)

HFMED®

Gynec OT Table The Gynec OT Table is a specialized surgical table designed for obstetric and gynecological procedures. Featuring adjustable leg holders, Trendelenburg positioning, and electric height control, it ensures optimal patient positioning and surgeon comfort. The split-back design allows flexible configuration for various surgeries, while high-load capacity guarantees stability. Made with antimicrobial upholstery for easy cleaning, this table is ideal for modern delivery rooms and gynecology operating theaters. Durable and ergonomic.



HFEPB99B Electric Operating Table (Electric Gynecological Operating Table)

HFMED®

Electric Gynecological Operating Table

The Electric Gynecological Operating Table is a specialized surgical table designed for obstetrics and gynecology procedures. Featuring electric height adjustment, Trendelenburg positioning, and lithotomy stirrups, it ensures optimal patient access and surgeon comfort. With a high-load capacity and ergonomic design, this table enhances efficiency in gynecological surgeries. Made from premium materials for durability and easy cleaning. Ideal for hospitals and clinics.

HFMH3008AB Manual Hydraulic Operating Table HFMED®

OT Table 3008

The OT Table 3008 is a versatile surgical table designed for precision and durability in modern operating rooms. Featuring adjustable height (760–1010mm), Trendelenburg/reverse Trendelenburg (22° each), and lateral tilt (20°), it ensures optimal patient positioning. Its high-density sponge padding enhances comfort, while optional detachable footplates improve surgical accessibility. Ideal for various procedures, this table combines stability with advanced functionality.

RO WATER PURIFICATION SYSTEM (CENTRALIZED)



- Compliance: Meets or exceeds U.S. AAMI standards.
- Purity: Supports Double Pass RO (ultrapure).
- Single/Double/Triple Pass options available.
- Operation: Automatic and manual control.
- PLC control system.
- Automatic rinse cycle during standby.
- Sanitization: Automatic cleaning.
- Automatic disinfection.
- Includes Media/Carbon/Softening filters.

PORTABLE RO WATER PURIFICATION SYSTEM



- Mobility: Highly mobile and compact.
- Integrated design for flexible movement.
- Designed for non-fixed locations.
- Suitable for ER, ICU, remote clinics.
- Output Capacity: 90 L per H or 150 L per H.
- Suitable for up to two dialysis machines.
- Purity: Double Pass Reverse Osmosis (RO).
- Online monitoring of water quality.
- Operation: One button simple operation.



CONCENTRATION CENTRAL DELIVERY SYSTEM (CCDS)



- Control: Centralized control for easy management.
- Concentrate Safety: Separate A and B liquid operation.
- Prevents cross-contamination.
- Mixing: Eddy current rotary mixing.
- Fully dissolves powder.
- Prevents bicarbonate loss.
- Safety: Multiple safety protection is included.
- Protection includes ion concentration monitoring.
- Protection includes endotoxin filter.
- Disinfection: Centralized disinfection in linkage.
- Disinfection is without blind spots.
- Fully automatic washing.



AUTOMATIC A/B POWDER MIXING SYSTEM



- Purpose: Automatically prepares A/B concentration.
- Control: PLC automatic control.
- 10-inch LCD touch screen.
- Mixing: Eddy current rotating mix.
- Fully dissolves powder A and B.
- Automation: Fully automatic liquid preparation program.
- Program includes water injection.
- Program includes timing mixing and filling.
- Disinfection: Fully automatic flushing.
- One-key disinfection procedures.
- Material: All valves and pipe fittings are anti-corrosion.
- Material is stainless steel 304 or 316L.
- Accuracy: Automatic water inlet deviation is less than 1 percent.



W-F168-A / W-F168-B



- Type: Fully automatic reprocessing machine.
- Double workstation.
- Speed: Reprocesses up to two dialyzers.
- Cycle time is approximately 12 minutes.
- Technique: Uses pulsating current oscillation.
- Oscillation is for rinse and UF.
- Resumes cell volume.
- Core Process: Automatic Rinse with RO water.
- Clean, TCV, Blood Leak Test.
- Disinfectant Affusion is performed.
- Safety: Automatic disinfectant dilution.
- Anti-cross infection control.
- Extra blood port header.
- Control: 7-inch LCD touch screen.



Hemodialysis Machine



- Supports HD, On-line HDF treatments.
 - Supports On-line HF dialysis treatments.
 - Operation: 15-inch LCD touch screen.
 - Intelligent operation system.
 - Control: Accurate ultrafiltration (UF) control.
 - Uses closed volume balance chamber.
 - Functions: One-key dialyzer priming plus.
 - Functions: One-key low speed UF.
 - Functions: CPR Quick Reset.
 - Sanitization: Intelligent automatic disinfection.
 - Automatic cleaning procedure.
-



Reclining Chair



- Materials: Stainless steel.
 - Internal filler: high-density foam.
 - Length 800 millimeters.
 - Width 1120 millimeters.
 - Height 1180 millimeters.
-



HAEMODIALYSIS BLOODLINES



- Construction: Made from biocompatible tubing materials.
 - Configuration: Consist of two lines.
 - Two lines are arterial and venous.
 - Connection: Typically use Luer Lock connectors.
 - Connection: Typically use Luer Slip connectors.
 - Safety: Pre-sterilized to prevent contamination.
-



A/V FISTULA NEEDLE



- Design: Siliconized, ultra-thin needle wall.
- Reduces resistance for optimal blood flow.
- Puncture: Perfected sharpness for a gentle puncture.
- Options: Available in various gauges.
- Available in various lengths.
- Various configurations are available (rotatable/fixed wings).
- Safety: Option of Safety AVF configuration.
- Protective guard against needle stick injuries.
- Sterilization: Sterilized by EO gas or radiation.



ACID HEMODIALYSIS CONCENTRATE (Part "A")



- Purpose: Part "A" concentrate.
- Contains electrolytes and acid.
- Quality: Accurate electrolyte concentration.
- Accurate pH value.
- Strict control of heavy metal content.
- Dilution: Further diluted by the machine.
- Diluted with water and Part "B".
- Part "B" is Bicarbonate concentrate.
- Efficiency: Reduced shipping costs.
- Reduced storage costs.
- Reduced handling costs.



SODIUM BICARBONATE CONCENTRATE (Part "B")



- Purpose: Part "B" concentrate.
- Principal component is Sodium Bicarbonate.
- Quality: Complies with EP, USP, BP standards.
- Usage: Practical alternative to liquid solution.
- Convenience: Easy-to-use by minimal product weight.
- Less storage volume.
- Compatibility: Compatible with various hemodialysis machines.



HEMODIALYZER (LOW/HIGH FLUX)



- Function: Filters waste and fluid.
- Uses a semi-permeable membrane.
- Types: Low-Flux (low water permeability).
- High-Flux (increased permeability).
- High-Flux for moderate-sized molecules.
- Adequacy: Measured by KT/V.
- Measured by URR (Urea Reduction Ratio).



High Flux HemoDialyzer



- Advantages: Membrane is PES (Polyethersulfone).
- PES has better stable properties.
- Better stable physical properties.
- Better stable chemical properties.
- Better than PS (Polysulfone).
- The product has Better bio-compatibility.
- It offers Excellent toxin clearance.
- Optimized product design.
- It is made with a PP shell.
- The product is BPA free.
- Results in a smaller blood volume.



Low Flux HemoDialyzer



- Membrane: PES.
- Shell material: PP.
- Sterilization method: Radiation sterilization.
- Indication: Hemodiafiltration or hemodialysis.
- For acute or chronic renal failure.
- For acute drug or toxic poisoning.

HJ-638A DENTAL UNIT

HAGER



- Power Input: AC 230V 50/60Hz.
- Tolerance is plus or minus 10 percent.
- Chair Load Capacity: Less than 150 kilograms.
- Backrest Movement: 116 to 185 degrees.
- Input Air Pressure: 0.4 to 0.8 MPa.
- Air flow rate: Greater than 10 NL per minute.
- Input Water Pressure: 0.2 to 0.4 MPa.
- Water flow rate: Greater than 50 ml per minute.
- Air Exhaust Volume: Greater than 55 L per minute.

LED LIGHT HIGH SPEED HANDPIECE

HAGER



- Standard Head Push Button.
- Type is 2 or 4 hole.
- Triple Spray Water.
- Stainless Bearing.
- Air Pressure: 180 to 250 KPa.
- Water Pressure: 198 KPa.
- Rotation Speed: 380,000 to 450,000 rpm.
- Noise: Less than 70 dB.

SET OF LOW SPEED HANDPIECE | DENTAL ULTRASOUND SCALER (UDS-N2 LED)

HAGER



Low Speed Handpiece

- Wrench chuck contra angle
- Straight Nose Cone
- 2 Hole / 4 Hole Air Motor

Ultrasound Scaler:

- Operating Frequency: 28 kHz plus or minus 3 kHz.
- Power Input (Host): 24V 50Hz 1.3A.
- Power Input (Main): 220V 50Hz.
- Input Power: 38 VA.
- Inlet Pressure: 0.1 to 5 bar.
- Weight (Host): 0.62 kilograms.
- Weight (Power): 1 kilogram.



DENTAL LED CURING LIGHT

HAGER

- Curing time: 5 seconds.
- Curing depth: 3 millimeters.
- Blue wavelength: 420 to 480 nm.
- Light intensity: 1200 to 2000 MW per square centimeter.
- LED technology produces no heat.
- High-capacity 2200 mAh battery.
- Standby time is over 90 days.
- Used over 200 times per charge.
- Intelligent battery detection.
- Automatically alarms and flashes when low.



PORTABLE DENTAL X-RAY UNIT

HAGER

- X-Ray Specs: 60 KV.
- X-Ray Specs: 2.0 Ma.
- Exposure time: 0.1 to 2.0 seconds.
- Focus: 0.8 millimeter.
- Battery: DC 2200 mAh.
- Frequency: 30 KHz.
- Net Weight: 2.1 kilograms.
- Charger input: AC 100V to 240V.



DT-2EW-32 AIR COMPRESSOR

HAGER

- Voltage: 110V to 240V.
- Voltage is 50Hz or 60Hz.
- Power: 840W.
- Airflow: 70 L per minute.
- Noise: 55 to 62 dB.
- Tank: 32 L (color is optional).
- Start Up Pressure: 0.5 MPa.
- Supply for 2 dental units.



TANGO M2 EXERCISE STRESS BP MONITOR



- Purpose: Non-invasive BP measurement.
- Used for stress test ECG systems.
- Technology: Proprietary K-sounds analysis.
- Ensures accuracy during high noise.
- Ensures accuracy during exercise.
- Measures and displays systolic BP.
- Measures and displays diastolic BP.
- Application: Used with treadmills or ergometers.
- Used for pharmacology stress testing.



Stress Test Treadmill TM-18



- Increases heart load during exercise.
- Observes ECG changes.
- For known or suspected cardiovascular disease.
- Important for coronary atherosclerotic heart disease.
- Simple and low cost.
- No trauma.
- Physiological condition.
- Relatively safe.



ECG Stress Test System



- Suitable for DMS exercise ECG workstation.
- Used in clinical treadmill exercise test.
- Provides reliable basis for diagnosis.
- Increases heart load during exercise.
- Observes ECG changes.
- For known or suspected cardiovascular disease.
- Simple and low cost.
- No trauma.



BIN-4000A/B/C



- LCD touch screen displays temperature.
- Screen displays humidity.
- Screen displays O2 concentration.
- 72 hours data record.
- Various self-check alarms.
- Double Walls Hood.
- Two side doors open.
- Monitor tray.
- Baby Scale range: 0.1 to 8 kilograms.



BIN-3000A



- Air and skin temperature servo-controlled.
- Various self-check alarms.
- Removable humidity reservoir.
- Reservoir is easy to clean.
- Greater than 37 degrees Celsius temperature setting.
- With transfusion shelf and tray.
- RS-232 connector.
- LED Phototherapy unit (option).



BIN-3000B



- Air and skin temperature servo-controlled.
- Various self-check alarms.
- Removable humidity reservoir.
- Reservoir is easy to clean.
- Greater than 37 degrees Celsius temperature setting.
- With transfusion shelf and tray.
- RS-232 connector.
- LED Phototherapy unit (option).



BRW-4000A/B



- LCD touch screen shows all data.
- Data includes temperatures.
- Data includes APGAR timer.
- Data includes phototherapy time.
- 72 hours data record.
- Various alarms.
- Infrared Ceramic Radiator.
- Explosion-proof, safety assurance.
- Mattress Tilting Adjust.
- Free-step adjustment plus/minus 12 degrees.



BBP 2000B(E) Phototherapy Unit



- Light intensity adjustment.
- Light life timer display.
- LED life time greater than 30,000 hours.
- Available angle adjustment 0, 30, 60 degrees.
- Wave length: 400 to 550 nm.
- Uniform light distribution.
- With white LED lights for examination.
- Fitted with any infant bed.
- Fitted with any incubator.



Electric Transfer Stretcher



- Functions achieved by electric motors.
- Functions achieved by gas springs.
- Backrest and Knee gatch use gas springs.
- Foot pedals adjust height.
- Foot pedals adjust Trendelenburg.
- Clear arrow symbols instruct the user.
- 4 corner bumpers prevent damage.
- Central lockable 360 degrees swivel castors.
- Retractable 5th wheel provides easy movement



Hydraulic Transfer Stretcher

HECAI⁺

- Hydraulic stretcher backrest tilting.
- Leg section adjusting functions use gas springs.
- Lifting and lowering controlled by hydraulic cylinder.
- Trendelenburg movements are controlled by foot pedals.
- Clear arrow symbols instruct the user.
- 4 corner bumpers prevent damage.
- Central lockable 360 degrees swivel castors.
- Retractable 5th wheel provides easy movement.



Orthopedic Traction Bed

HECAI⁺

- Material: Powder coated steel bed frame.
- Uses top class ABS and PP plastic.
- Overall dimension: 2235 by 970 millimeters.
- Bed board dimension: 1910 by 830 millimeters.
- Functions controlled by cranks.
- Collapsible 6-column aluminum protective railings.
- Detachable PP head and foot board.
- Stainless steel orthopedics frame.



Standard Manual Bed

HECAI⁺

- Material: Powder coated steel bed frame.
- Uses top class ABS and PP plastic.
- Overall dimension: 2145 by 1095 millimeters.
- Bed board dimension: 1860 by 900 millimeters.
- Two functions controlled by cranks.
- Backrest: 0 to 55 degrees.
- Knee gatch: 0 to 40 degrees.
- Height (from bed board): 490 millimeters.
- Damping PP protective railings.



TROLLEY LS-900-AI

HECAI⁺

- Material is ABS and PP plastic.
 - Overall size: 710 mm W by 450 mm D.
 - Overall size: 920 mm H.
 - Working surface size: 550 mm by 395 mm.
 - 4 universal castors.
 - Castors are 100 mm.
 - Net weight: 9 kg.
-



TROLLEY LS-900-BI

HECAI⁺

- Material is ABS and PP plastic.
 - Overall size: 710 mm W by 450 mm D.
 - Overall size: 960 mm H.
 - Working surface size: 550 mm by 395 mm.
 - 4 universal castors.
 - Castors are 100 mm
-



EMERGENCY TROLLEY LS-850EB

HECAI⁺

- Material: Aluminum-Alloy, ABS plastic.
 - Material includes Stainless steel.
 - Overall dimension: 850 mm W by 600 mm D.
 - Overall dimension: 1010 mm H.
 - Equipped with CPR board.
 - Equipped with oxygen cylinder holder.
 - Equipped with sliding board.
 - Equipped with transparent file box.
 - Equipped with IV pole.
 - 4 universal castors.
-



BEDSTAND/BEDSIDE CABINET LS-4908

HECAI⁺

- Overall size: 475 by 470 by 930 mm.
- Net weight: 12.4 kg.



OVER BED TABLE LS-MT01

HECAI⁺

- Material: Aluminum alloy supporting column.
- Wooden table board: 805 mm by 405 mm.
- Height adjusted by gas spring.
- Hi-low range: 640 mm to 925 mm.
- Castors: 4 pcs universal castors.
- 2 pcs are 25 mm.
- 2 pcs are 50 mm.



LS-EA185B ELECTRIC BED

HECAI⁺

- Functions: 2 function electric bed.
- Backrest: 0 to 70 degrees.
- Knee gatch: 0 to 40 degrees.
- Castor: 150 mm, central brake.
- Protective railing: Collapsible 6-column aluminum.
- Safe load capacity: Less than 250 kg.



LS-EA185C ELECTRIC BED

HECAI[®]

- Functions: 3 function electric bed.
- Backrest: 0 to 70 degrees.
- Knee gatch: 0 to 40 degrees.
- HI-LOW range: 700 mm to 490 mm.
- Castor: 125 mm, individual brake.
- Protective railing: Collapsible 6-column aluminum.



LS-EA185D ELECTRIC BED

HECAI[®]

- Functions: 3 function electric bed.
- Backrest: 0 to 70 degrees.
- Knee gatch: 0 to 40 degrees.
- HI-LOW range: 720 mm to 510 mm.
- Castor: 150 mm, central brake.
- Protective railing: Collapsible 6-column aluminum.



LS-MA185B MANUAL BED

HECAI[®]

- Functions: 2 Crank Manual Bed.
- Backrest: 0 to 70 degrees.
- Knee gatch: 0 to 40 degrees.
- Hip section: 0 to 10 degrees.
- Height: 480 mm (fixed height).
- Castor: 150 mm, central brake.



LS-MA185C MANUAL BED

HECAI⁺

- Functions: 3 Crank Manual Bed.
- Backrest: 0 to 70 degrees.
- Knee gatch: 0 to 40 degrees.
- Hip section: 0 to 10 degrees.
- HI-LOW range: 700 mm to 490 mm.
- Castor: 125 mm, individual brake.



LS-MA185D MANUAL BED

HECAI⁺

- Functions: 3 Crank Manual Bed.
- Backrest: 0 to 70 degrees.
- Knee gatch: 0 to 40 degrees.
- Hip section: 0 to 10 degrees.
- HI-LOW range: 710 mm to 495 mm.
- Castor: 150 mm, central brake.



LS-MA185E MANUAL BED

HECAI⁺

- Functions: 3 Crank Manual Bed.
- Backrest: 0 to 70 degrees.
- Knee gatch: 0 to 40 degrees.
- Hip section: 0 to 10 degrees.



LS-CH9003J PEDIATRIC BED

HECAI⁺

- Material: Powder coated steel bed frame.
- Detachable PP head and foot board.
- Functions: Two functions controlled by cranks.
- Backrest: 0 to 70 degrees.
- Knee gatch: 0 to 45 degrees.
- Protective railing: Sliding steel.
- Castors: 360 degrees swivel.
- Castors are 125 mm.



LS-850E2 ANAESTHETIC TROLLEY

HECAI⁺

- Material: Aluminum Alloy, ABS plastic.
- Material includes Stainless steel.
- Overall dimension: 850 mm W by 610 mm D.
- Overall dimension: 1540 mm H.
- Equipped with anaesthetic boxes.
- Equipped with CPR board.
- Equipped with oxygen cylinder holder.
- Equipped with IV pole.
- Equipped with garbage bins.
- Net weight: 70 kg.



LS-860J2 ANAESTHETIC TROLLEY

HECAI⁺

- Material: Aluminum-Alloy, ABS plastic.
- Material includes Stainless steel.
- Overall dimension: 855 mm W by 585 mm D.
- Overall dimension: 1430 mm H.
- Equipped with anaesthetic boxes.
- Equipped with CPR board.
- Equipped with oxygen cylinder holder.
- Equipped with IV pole.
- Equipped with infrared intelligent dustbin.
- Net weight: 78 kg.



LS-850EB EMERGENCY TROLLEY

HECAI⁺

- Material: Aluminum-Alloy, ABS plastic.
- Material includes Stainless steel.
- Overall dimension: 850 mm W by 600 mm D.
- Overall dimension: 1010 mm H.
- Equipped with CPR board.
- Equipped with oxygen cylinder holder.
- Equipped with sliding board.
- Equipped with transparent file box.
- Equipped with IV pole.
- 4 universal castors.



LS-860A EMERGENCY TROLLEY

HECAI⁺

- Material: Aluminum-Alloy, ABS plastic.
- Material includes Stainless steel.
- Overall dimension: 854 mm W by 588 mm D.
- Overall dimension: 1030 mm H.
- Equipped with CPR board.
- Equipped with oxygen cylinder holder.
- Equipped with IV pole.
- Equipped with transparent file box.
- Equipped with power device.
- Net weight: 69 kg.



RETIWAVE-1000 A/B SCAN

VisionStar

- Digital ultrasonic system for ophthalmology.
- Measures data for every part.
- Measures anterior chamber depth.
- Measures lens thickness.
- Measures axial length.
- Calculates IOL by axial length.
- Scanning anatomical form aids diagnosis.
- Detects and diagnoses cataract.
- Advanced intelligent digital software.



FA-6500A AUTO REFRACTOMETER



- 7 inch TFT LCD monitor.
- Motorized joystick with auto-tracing mode.
- Tilting screen function allows wide access.
- Auto focus function gets the value.
- Refractive measurement uses hexagon prism.
- Provides unmatched accuracy.
- Provides unmatched reliability.
- Chart: Follow-up Colorful Fogging Chart System.



ACP-1500 AUTO CHART PROJECTOR



- Precision optical instrument for accurate refraction.
- Provides 30 different charts.
- Provides 35 different masks.
- Programmable with 2 sets of programs.
- Each program contains up to 30 steps.
- Duochrome test charts check vision.
- Polarized charts check binocular vision.
- Automatically standby in 10 minutes.



CM-1900C FLAT SCREEN CHART MONITOR



- 23-inch high contrast display.
- Display is bright.
- Smooth and quiet operation.
- Wireless Remote control.
- Wide range of test types.
- Precise distance adjustment.
- Random test sequence.



OPHTHALMIC UNIT CT-500 COMBINED TABLE AND CHAIR



- Can hold Two Devices on the table.
- Human-oriented design.
- Complete functions make operation convenient.
- The chair could move up and down.
- Chair could rotate left and right.
- Chair has tiltable backrest.
- Table rotation range: 360 degrees.
- Chair loading ability: 200 to 250 kilograms.



AUTO LENSMETER JD-2600



- Sensitive touch LCD display screen.
- Measurement screen is easy to use.
- Recognizable icons are used.
- Progressive measurement graph helps operator.
- Helps improve accuracy and speed.
- Automatic recognition of single lens.
- Automatic recognition of progress lens.
- High Speed UV measurement.
- Built-in thermal printer.



RETICAM 3100 AUTOMATIC FUNDUS CAMERA



- One Key Click. Picture acquired automatically.
- Automatic chinrest adjusting.
- Automatic pupil searching.
- Automatic alignment.
- Non-mydratic, auto focus and exposure.
- DICOM and AL system are available.
- Supports Color Photography.
- Supports Anterior Segment imaging.



YZ-25C CHARGEABLE INDIRECT OPHTHALMOSCOPE



- LED Lamp, the light is uniformly bright.
- Brightness can be adjusted continuously.
- Imaging clearly.
- Strong dimensional sense.
- Large field of view range.
- Super lightweight design reduces strain.
- Equipped with color filter.
- Equipped with teaching mirror.
- Angle of View: 45 degrees plus or minus 5 degrees.
- Adjustable Range of the Head Frame: 520 mm to

640 mm.



S3 S5 SLIT LAMP



- Outstanding Optic Quality.
- Ensures the Comfortable View.
- Parallel type, Galilean system.
- LED Illumination, long life time.
- Haag-Streit type slit lamp.
- Has broad beam.
- Has wide field.
- Has high magnification.
- 3 step magnification (S3).
- 5 step magnification (S5).



S5D DIGITAL SLIT LAMP



- Outstanding Optic Quality.
- Precision Machining makes smooth movement.
- Movement is flexible.
- Professional and Multi-functional Software.
- Simple Humanized Human-computer Interface.
- Easy Operation.
- Has image capturing function.
- Has video capturing function.
- Image processing for better diagnosis.



ENT operating chair MR-6701



- Seat height range: 450 mm to 600 mm.
- Backrest adjust range: 90 degrees to 180 degrees.
- Headrest extension: 0 to 150 mm.
- Chair rotation: 360 degrees.
- Maximum loading: 250 kilograms.
- Power: 300W plus or minus 15 percent.
- Footrest: 90 degrees.



Clinical Height and Weight scale



- Maximum weighing capacity: 200 kilograms.
- Minimum weighing capacity: 0.2 kilograms.
- Division value: 10 grams or 100 grams.
- Height measurement range: 70 to 190 cm.
- Height division value: 0.5 cm.
- Load bearing panel size: 37 by 27 cm.
- Power supply: AC 100 to 240V DC 5V.
- Lithium battery standard version.



Mobile Aneroid Sphygmomanometer, Pedia



- Applications: Physical assessment and diagnosis.
- Measure scope: 0 to 300 mmHg.
- Accuracy: Plus or minus 3 mmHg.
- Sub-division: 2 mmHg.
- Bladder material is Latex-free.
- Bulb material is Latex-free.
- Wheels: 5 pcs wheels, moveable.
- Adjustable height: 85 cm to 125 cm.



Portable Auto-analysis 3 Channel ECG



- Simultaneous acquisition of 12 lead.
- Full screen displays 3 channel ECG.
- Push-button and touch operation.
- 7-inch colorful TFT-LCD display.
- Electrocardiogram automatic measurement.
- Automatic diagnostic and analysis.
- Lead off detection with sound indication.
- Real-time ECG waveform freezing.
- Multiple operation modes.
- Supports high-capacity SD memory.



EM-1201 Twelve-channel ECG



- Large Foldable LCD Display.
- Display is clear and intuitive.
- 10 inch TFT color display.
- Resolution is 800 by 480.
- 12 leads ECG displayed on screen.
- Built-in Lithium Battery.
- Local internal memory up to 1000 ECGs.
- Full alphanumeric keyboard with shortcut keys.
- Portable handle, easy to carry.
- Supports Roll and Z-fold paper.



Electrosurgical Generator YSESU-2000AI(LCD)



- Maximum 400W Electrosurgical Generator.
- Has mono-polar and bipolar function.
- Nine working modes.
- Wide clinical applications.
- Microprocessor controlled.
- LCD touch screen display.
- Audible and visual indicators.
- Return Electrode Monitoring system.
- Power Peak System minimizes tissue damage.



Pharmagem Inc.

All Rights Reserved.



SRF618B6 Fetal Monitor



- Measures Fetal Heart Rate (FHR).
- Measures Uterine Contractions (TOCO).
- Measures Fetal Movement (FM).
- Dual Monitoring: monitors two women simultaneously.
- Display: 10.2-inch TFT foldable screen.
- Shows CTG curve and numeric data.
- Professional CTG analysis system.
- Built-in thermal printer.
- Simplified Operation: shuttle button for control.
- Connectivity: USB port and network module.



Fetal Heart Rate Doppler (SRF618D)



- 10-Week to Delivery FHR monitoring.
- Waterproof Probe for water births.
- Digital LCD for accurate FHR display.
- Intellectual Signal Cancellation.
- Provides clean readings.
- Dual Power: rechargeable and AA batteries.
- Auto Shut-off after 2 minutes.



SRF618E (FETAL HEART RATE DOPPLER)



- Reliable Monitoring: Detects FHR.
- Detection from 10 weeks to delivery.
- Ultimate Accuracy: Auto-Gain Control.
- Intellectual Cancellation of erroneous FHR.
- 3 Smart Display Modes.
- Sync Display: FHR sound intensity.
- Convenient Waterproof USB probe.
- Built-in Speaker.
- LED Backlit Display.



N-180M Biological Microscope



- High Power Professional Compound Binocular Microscope.
- Great for viewing Biological Specimens on Slides.
- China Microscope with Great Quality Imaging.
- Available at a Super Low Price.
- Features a High Transmission Optical System.
- Combined base and arm design.
- Wide range of available accessories.
- Ideal for Laboratories and Clinics.



N-300M Biological Microscope



- Excellent image quality.
- Uses infinitive optical system.
- Comfortable operating with ergonomic structure.
- Better illumination.
- Uses sliding-in centerable condenser.
- Convenient phase contrast replacement.
- Convenient dark field condenser replacement.



VP3 Portable Volumetric Infusion Pump



- Large LCD display.
- Adjustable brightness.
- Five selectable work modes.
- Work modes: Rate, Time, Dose.
- Work modes: Sequential, Drug library.
- Manual or Automatic Bolus.
- Purge and KVO functions are available.
- Vertical and Horizontal mounting clamp.
- Anti-bolus system reduces flow surges.



Wheelchair



- Frame: High-quality steel.
- Frame has electroplated finish.
- Fixed footrests and handrails.
- Wheels: 7-inch solid front.
- Wheels: 24-inch solid rear.
- Steel elbow brake (low-set for easy transfer).
- Hand-operated parking brake.
- High-quality leather cushion and armrests.
- High-strength adjustable metal pedals.



NF-ED01 Extrication Device



- Material: Flexible slats.
- Used with cervical collar.
- Used with head immobilizer.
- Immobilizes the head, neck, and spine.
- Maintains maximum spine support.
- Used for short periods as extrication tool.
- X-ray translucent.
- Can be rolled up for storage.



NF-T1/T2 Traction Splint



- Model Size (NF-T1): 90 by 22 by 19 cm.
- Packing Size (NF-T1): 90 by 22 by 19 cm.
- Net Weight (NF-T1): 2.5 kg.
- Gross Weight (NF-T1): 3.5 kg.
- Model Size (NF-T2): 110 by 18 by 17 cm.
- Packing Size (NF-T2): 90 by 22 by 19 cm.
- Net Weight (NF-T2): 2.9 kg.
- Gross Weight (NF-T2): 4.0 kg.

VL3R/VL4R



Reusable Blade System (VL3R/VL4R)



- Primary Design: Built for durability.
- Built for long-term reuse.
- Blade: 316 Medical Stainless Steel.
- Blades can be used 1000 times.
- Cleaning: IPX8 waterproof grade.
- Supports immersion disinfection.
- 8 blade models available.
- 2.0 MP camera.
- Anti-Fog Lens.
- Built-in 8G storage.

VL3D/VL4D



Disposable Blade System (VL3D/VL4D)



- Primary Design: Built for infection control.
- Blade is disposable.
- Blade is sterile packaged.
- Single-use design avoids cross infection.
- 5 blade models available.
- Low cost per use.
- 3.5/4 inch rotating display.
- 2.0 MP camera.
- Anti-Microbial Handle.



10L Oxygen Concentrator



- Maximum Recommended Flow: 10 L per minute.
- Oxygen Concentration: Greater than 90 percent.
- Outlet Pressure: 30 to 60 kPa.
- Noise Level: Less than 60 dB(A).
- Users: 2 bottles for 2 users.
- Input Power: 750 VA.
- Power Supply: 220V 50Hz.
- Weight: 29.5 kilograms.



Adult Manual Resuscitator (RES-1111)



- Material: Latex-free medical silicone.
- Sterilization: Autoclavable to 134 degrees Celsius.
- Durability: Guaranteed for 5 years.
- Guaranteed for 20 autoclave cycles.
- Safety Valve: Built-in 60 cm H₂O relief valve.
- All-in-one intake valve.
- Connects to the oxygen reservoir bag.
- Built-in 30 mm exhale port.



Pediatric Manual Resuscitator (RES-1211)



- Material: Latex-free medical silicone.
- Sterilization: Autoclavable to 134 degrees Celsius.
- Durability: Guaranteed for 5 years.
- Guaranteed for 20 autoclave cycles.
- Safety Valve: Built-in 40 cm H₂O relief valve.
- All-in-one intake valve.
- Connects to the oxygen reservoir bag.
- Built-in 30 mm exhale port.



Portable Operating Microscope with video camera




- Primary Mirror: OLYMPUS original.
- 5X-20X electric stepless zoom.
- Assistant mirror has independent focus.
- Foot switch controls X-Y plane shifter.
- Working distance: Greater than 160 mm.
- Lighting: Double 150W OSRAM halogen lamp.
- Coaxial fiber lighting.



NF-C1 Scoop Stretcher



- Design separates into two pieces.
- Two pieces are left and right.
- Easy patient transfer.
- Uses two push-button hinges for separation.
- Allows patient transfer.
- No spinal column movement is required.
- Can be used with head immobilizer.
- Load capacity: 160 kilograms.
- Net Weight: 8 kilograms.
- Foldable for easy storage.

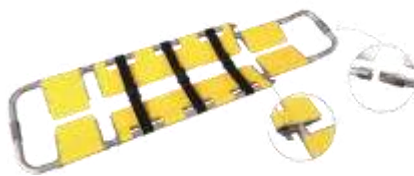

NF-C2 Scoop Stretcher



- Design separates into two pieces.
- Uses one push-button hinge.
- Uses one rotary lock.
- Allows patient transfer.
- No spinal column movement is required.
- Can be used with head immobilizer.
- Load capacity: 160 kilograms.
- Net Weight: 9 kilograms.
- Foldable for easy storage.



NF-C3 Scoop Stretcher



- Design features adjustable length.
- Precise extrication.
- Uses two rotary locks for separation.
- Profile designed for smooth sliding.
- Minimizes further injury.
- Can be used with head immobilizer.
- Load capacity: 160 kilograms.
- Net Weight: 9 kilograms.
- Foldable for easy storage.



IV Stand with wheels



- Material: Stainless steel IV stand.
- Equipped with 4 hooks.
- Stable base with nylon casters.
- Height Adjustment Range: 134 to 239 cm.
- Twist lock for easy height adjustment.



CM-350A ELECTROSURGICAL UNIT



- Stable suspended power supply.
- Has automatic compensation.
- 9 output modes.
- Supports Bipolar cut/closure.
- Does not require patient plate.
- Monopolar output via hand or foot.
- Three independent foot pedals.
- 10 user memory modes.
- Universal interface supports endoscopy.
- Patient plate contact quality detection.



HANDHELD PATIENT MONITOR



- Parameters: ECG, NIBP, SPO2, PR, Temp. - ETCO2 is optional.
- Display: 5.0 inch color TFT LCD.
- Display is a touch screen.
- Power: 7200mAh Li-battery.
- Up to 15 hours run time.
- Storage for 3888 groups





JouCPR Sensor



- Monitoring: Real-time feedback.
- Feedback covers Depth, Frequency, Rebound.
- Guidance: Voice prompts for errors.
- Vibration warning before analysis.
- Design: Pre-connected, waterproof, reusable sensor.
- Has detachable adapter.
- Data: Stores CPR data reports.
- Scope: For patients 8 years old and above.



Jousing AED-S2 Defibrillator



- Core Tech: Low-Energy BTE.
- Quick synchronized analysis/pre-charge.
- Accuracy: High interference immunity.
- Interface: 160-degree screen.
- Instant Child/Adult modes.
- Instant Language modes.
- CPR coaching.
- Management: Automated self-tests.
- Intelligent pad/battery management.



FCR15

Antuncle

- Full injection molding process.
- High-quality compressor cooling technology.
- Intelligent temperature control via Bluetooth APP.
- Intelligent temperature control via touch screen.
- Built-in lithium battery for power supply.
- Battery works after power failure.
- 3-level battery monitor for protection.
- Anti-shaking function is suitable for outdoor use.



FCR30

Antuncle

- Full injection molding process.
 - High-quality compressor cooling technology.
 - Intelligent temperature control via Bluetooth APP.
 - Intelligent temperature control via touch screen.
 - Built-in lithium battery for power supply.
 - Battery works after power failure.
 - 3-level battery monitor for protection.
 - Anti-shaking function is suitable for outdoor use.
-



FCR45

Antuncle

- Full injection molding process.
 - High-quality compressor cooling technology.
 - Intelligent temperature control via Bluetooth APP.
 - Intelligent temperature control via touch screen.
 - 3-level battery monitor protects battery.
 - Top-opening design reduces air loss.
 - Top-opening saves energy.
 - Anti-shaking function is suitable for outdoor use.
-



FCR50

Antuncle

- Full injection molding process.
 - High-quality compressor cooling technology.
 - Intelligent temperature control via Bluetooth APP.
 - Intelligent temperature control via touch screen.
 - Built-in lithium battery for power supply.
 - Battery works after power failure.
 - 3-level battery monitor protects battery.
 - Anti-shaking function is suitable for outdoor use.
-



Medical Waste Microwave Disinfection Equipment



(Mobile & Fixed Types)

Powerful & Reliable Sterilization

Uses microwave radiation with steam to reach $\geq 95^{\circ}\text{C}$ for ≥ 45 minutes, ensuring complete destruction of harmful pathogens.

Automated & Safe Operation

Minimal manual handling reduces operator exposure, with integrated shredding and disinfection in a closed system.

Flexible Setup Options

Mobile Units – Self-contained and relocatable, ideal for outdoor or distributed waste treatment.

Fixed Units – Larger capacity, perfect for centralized, high-volume facilities.

Environmentally Friendly Disposal

Treated waste can go directly to landfills or waste-to-energy plants—no harmful emissions from incineration.

Consistent Results Every Time

Uniform heating and steam injection guarantee reliable disinfection performance.