

technical specification

for hydraulic 90° rotary actuators submerged mounting

type:

HRA-D-2

function:

double acting

principle:

rack and pinion

control pressure:

105 - 135 bar

closing position

adjustable

open/close duration:

5-10 seconds

position indicator for mimic diagram:

VPI (volumetrical system) / electr. limit switch

design:

submerged mounting

hydraulic connection:




via connection block, which is outside wet area

blocking:

double checked non-return valve

emergency operation:

quick connection for hand pump at connection block, which has to be wall mounted.

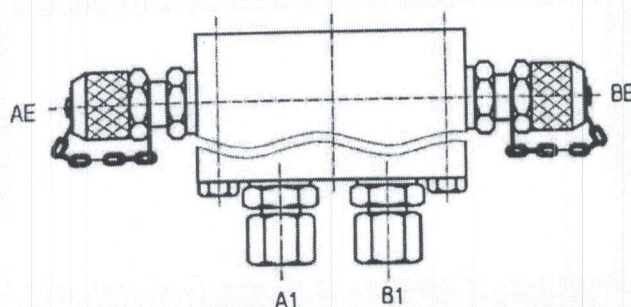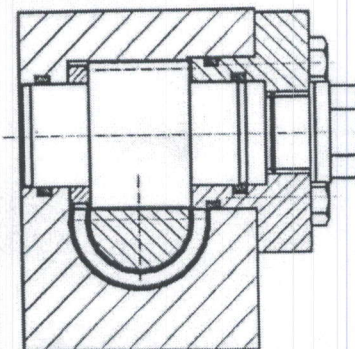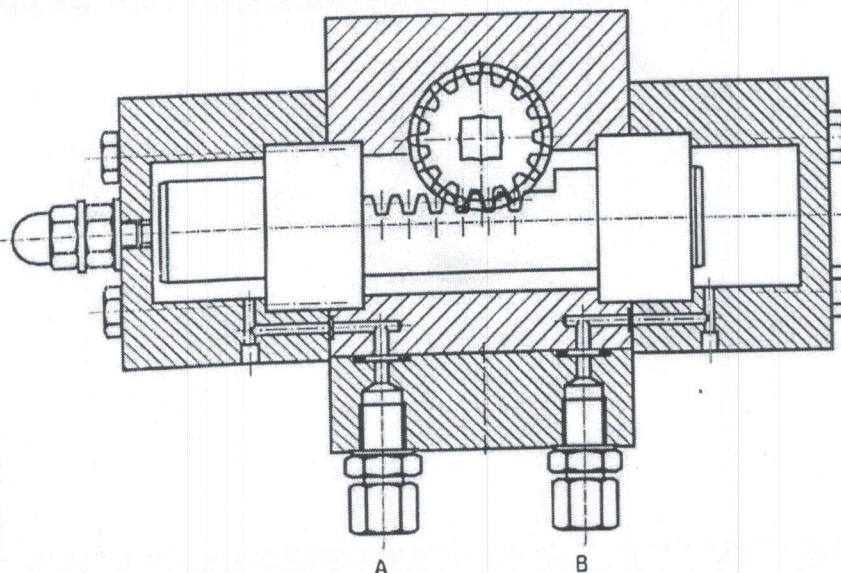

technical specification
for hydraulic 90° rotary actuators submersible mounting

type:	HRA-S-2
function:	single acting, pressure opening / spring closing
principle:	rack and pinion
control pressure:	105 - 135 bar
closing position:	adjustable
	a) mechanical, direct at actuator –covered by plug –to be screwed out
open/close duration:	5-10 seconds
position indicator at actuator:	submersible mounting
	direct at actuator with 1/4" connection for pipe diameter 8mm = standard (A = pressure opening)
design:	a) <u>hydraulically</u> , via 2. piston independent from main piston by portable hand pump – connection AE (AE = pressure opening emergency)
hydraulic connection:	b) <u>hydraulically</u> , via shuttle valve by portable hand pump
emergency operation:	
action:	quick opening slowly closing - actuator with installed throttle

