
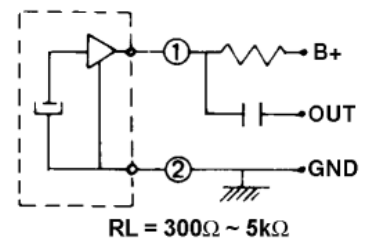


## ***ELECTRET MICROPHONE***

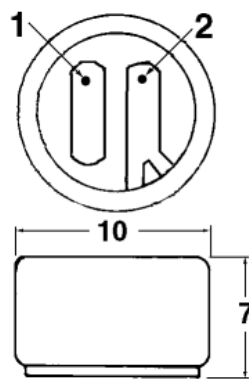

### **72-160-0**

Omni-directional electret cartridge.

Impedance:	same as load resistor ( $R_L$ )
Sensitivity:	-69db ( $V_{cc}=4.5V$ $R_L=1K\Omega$ )
Freq. response:	50Hz - 13KHz
Input voltage:	1.5V to 10V (Typ. 4.5V)
Current:	0.6mA maximum
S/N ratio:	over 40db

*Use -1 for Display Package*