



Cisco UCS C225 M8 SFF Rack Server

A printed version of this document is only a copy and not necessarily the latest version. Refer to the following link for the latest released version:

<https://www.cisco.com/c/en/us/products/servers-unified-computing/ucs-c-series-rack-servers/datasheet-listing.html>

CONTENTS

OVERVIEW	3
DETAILED VIEWS	4
Detailed Chassis Front View	4
Detailed Chassis Rear Views	5
Three Half-Height Risers	6
Two Full-Height Risers	8
BASE SERVER STANDARD CAPABILITIES and FEATURES	9
CONFIGURING the SERVER	12
STEP 1 VERIFY SERVER SKU	13
STEP 2 SELECT RISERS	14
STEP 3 SELECT CPU(s)	15
STEP 4 SELECT MEMORY (REQUIRED)	18
Memory configurations and mixing rules	20
STEP 5 SELECT DRIVE CONTROLLERS	21
RAID Volumes and Groups	21
STEP 6 SELECT DRIVES	24
STEP 7 SELECT OPTION CARD(s)	28
ORDER OPTIONAL PCIe OPTION CARD ACCESSORIES	30
STEP 8 ORDER GPU CARDS (OPTIONAL)	31
STEP 9 ORDER POWER SUPPLY	32
STEP 10 SELECT INPUT POWER CORD(s)	33
STEP 11 ORDER TOOL-LESS RAIL KIT AND OPTIONAL REVERSIBLE CABLE MANAGEMENT ARM	37
STEP 12 SELECT MANAGEMENT CONFIGURATION (OPTIONAL)	38
STEP 13 ORDER SECURITY DEVICES (OPTIONAL)	39
STEP 14 SELECT LOCKING SECURITY BEZEL (OPTIONAL)	40
STEP 15 ORDER M.2 SATA SSDs (OPTIONAL)	41
STEP 16 ORDER M.2 NVMe AND RAID CONTROLLER(OPTIONAL)	42
STEP 17 SELECT OPERATING SYSTEM	43
SUPPLEMENTAL MATERIAL	46
Chassis	46
Serial Port Details	48
KVM Cable	49
UPGRADING or REPLACING CPU and Memory	50
SPARE PARTS	51
TECHNICAL SPECIFICATIONS	61
Dimensions and Weight	61
Power Specifications	62
Environmental Specifications	66
Compliance Requirements	67
DISCONTINUED EOL PRODUCTS	68

OVERVIEW

The UCS C225 M8 SFF server extends the capabilities of Cisco's Unified Computing System portfolio in a 1U form factor, single-socket design, with the AMD EPYC™ CPUs. The Cisco UCS C225 M8 SFF server offers the following:

CPU:

- Single-socket 5th Gen. AMD EPYC™ CPUs with up to 160 cores per processor **or**
- Single-socket 4th Gen. AMD EPYC™ CPUs with up to 128 cores per processor

Memory:

- 12 x 256GB DDR5-6400 DIMMs, in a single-socket configuration with 5th Gen. AMD EPYC™ processors
- 12 x 128GB DDR5-5600 DIMMs, in a single-socket configuration with 4th Gen. AMD EPYC™ processors
- Up to 3 TB of capacity

mLOM: The UCS C225 M8 SFF server has a single 1GBE management port. A modular LAN on motherboard (mLOM)/OCP 3.0 module provides up to two 100GBE ports. A connector on the front of the chassis provides KVM functionality.

The Cisco UCS C225 M8 server can be used standalone, or as part of the Cisco Unified Computing System, which unifies computing, networking, management, virtualization, and storage access into a single integrated architecture enabling end-to-end server visibility, management, and control in both bare metal and virtualized environments.

NOTE: All options listed in the Spec Sheet are compatible with Intersight Managed Mode, UCSM Managed Mode, and Standalone configurations. To see the most recent list of components that are supported in Intersight Managed Mode, see [Supported Systems](#).

See [Figure 1 on page 3](#) for front and rear views of the UCS C225 M8 server.

Figure 1 Cisco UCS C225 M8 SFF Rack Server

Front View



Rear View (three half-height riser card version)



Rear View (two full-height riser card version - shown with riser blanks installed)




DETAILED VIEWS

Detailed Chassis Front View

Figure 2 shows the detailed front view of the Cisco UCS C225 M8 SFF Rack Server

Figure 2 Detailed Chassis Front View

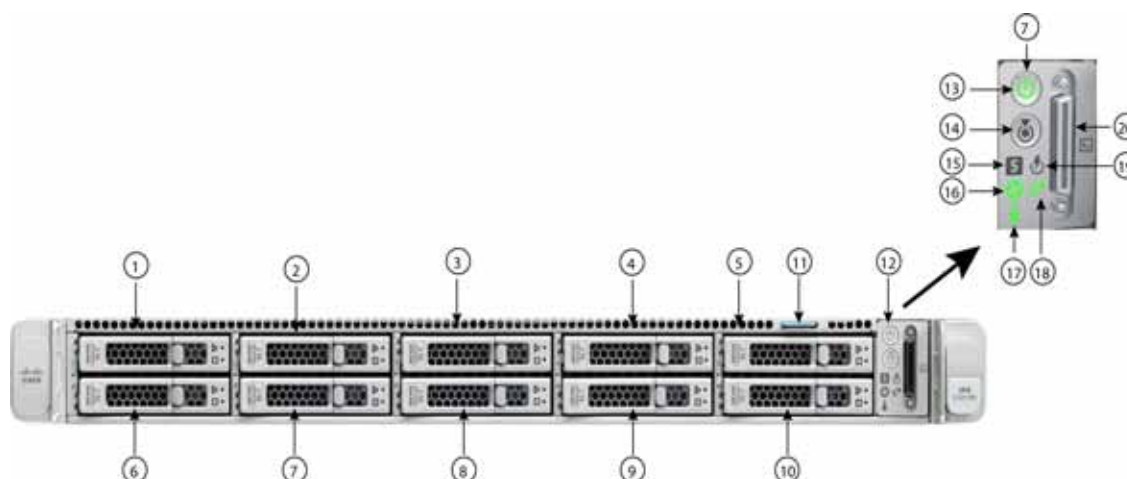

1 - 10	Option 1 UCSC-C225-M8S: ■ Drive bays 1 - 10 support SAS/SATA/NVMe drives and drives bays 1-4 also support direct attach NVMe. Option 2 UCSC-C225-M8N: ■ Drive bays 1 - 10 support only NVMe PCIe drives	16	Fan status LED
11	Asset tag location	17	Temperature status LED
12	Control panel	18	Network link activity LED
13	Power button/power status LED	19	Power supply status LED
14	Unit Identification button/LED	20	KVM connector (used with KVM cable that provides two USB 2.0, one VGA, and one serial connector)
15	System status LED	-	-


Detailed Chassis Rear Views

Figure 3 shows the details of the rear panel for the UCS C225 M8 with one rear half-height PCIe riser.

Figure 4 shows the details of the rear panel for the UCS C225 M8 with two rear full-height PCIe risers.

Three Half-Height Risers

Figure 3 Chassis Rear View (three half-height, 3/4 length PCIe risers)

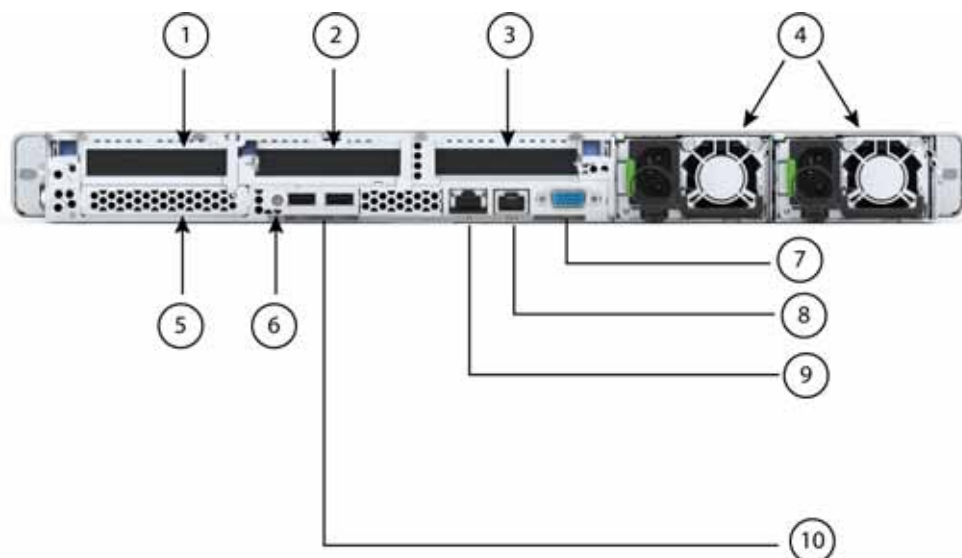


1	There are two half height riser 1 options: Riser 1A PCIe Gen4 ■ Supports one PCIe slot (slot 1) ■ Slot 1 is half-height, 3/4 length, x16, NCSI, Single Wide GPU Riser 1B PCIe Gen5 ■ Supports one PCIe slot (slot 1) ■ Slot 1 is half-height, 3/4 length, x16, NCSI, Single Wide GPU	6	System ID pushbutton/LED
2	There are two half height riser 2 options: Riser 2A PCIe Gen4 x16 ■ Supports one PCIe slot (slot 2) ■ Slot 2 is half-height, 3/4 length, x16, Single Wide GPU Riser 2B PCIe Gen5 x16 ■ Supports one PCIe slot (slot 2) ■ Slot 2 is half-height, 3/4 length, x16, Single Wide GPU	7	VGA display port (DB15 connector)
3	There is one half height riser 3 option: Riser 3A PCIe Gen4 x16 ■ Supports one PCIe slot (slot 3) ■ Slot 3 is half-height, 3/4 length, x16, NCSI, Single Wide GPU	8	COM port (RJ45 connector)

4	Power supplies (two, redundant as 1+1)	9	1GBE dedicated Ethernet management port
5	Modular LAN on motherboard (mLOM)/OCP 3.0 slot	10	USB 3.0 ports (two)

Two Full-Height Risers

Figure 4 Chassis Rear View (two full-height, 3/4-length PCIe risers)

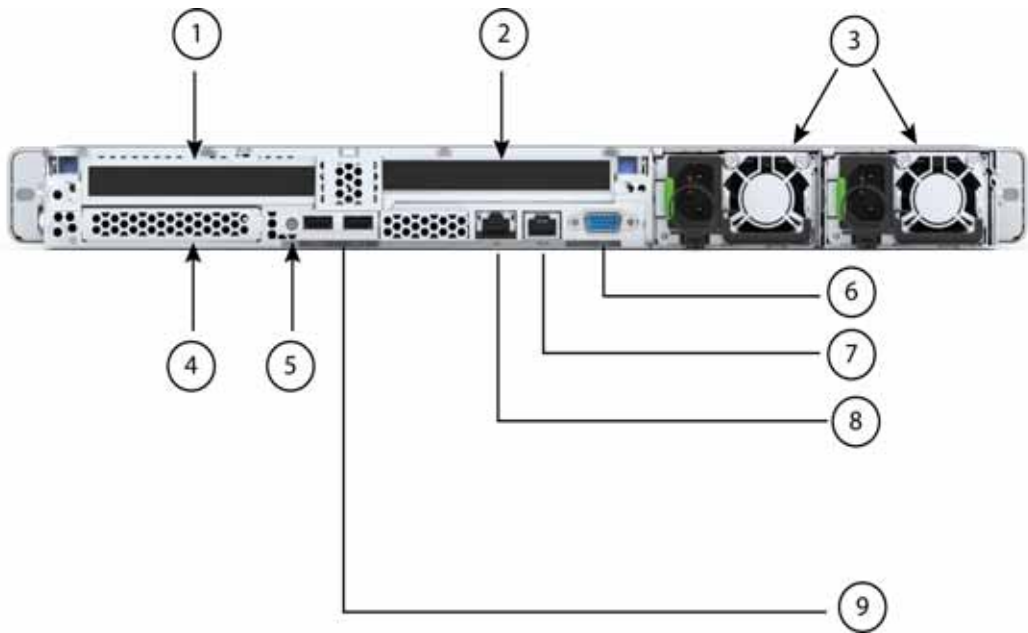

1	Riser 1C PCIe Gen5 ■ Supports one PCIe slot (slot 1) ■ Slot 1 is full-height, 3/4 length, x16,NCSI, Single Wide GPU	6	VGA display port (DB15 connector)
2	Riser 3C PCIe Gen5 x16 ■ Supports one PCIe slot (slot 3) ■ Slot 3 is Full-height, 3/4 length, x16, NCSI, Single Wide GPU	7	COM port (RJ45 connector)
3	Power supplies (two, redundant as 1+1)	8	1GBE dedicated Ethernet management port
4	Modular LAN on motherboard (mLOM)/OCP 3.0 slot	9	USB 3.0 ports (two)
5	System ID pushbutton/LED	-	-

BASE SERVER STANDARD CAPABILITIES and FEATURES

Table 1 lists the capabilities and features of the base server. Details about how to configure the server for a particular feature or capability (for example, number of processors, disk drives, or amount of memory) are provided in [CONFIGURING the SERVER, page 12](#).

Table 1 Capabilities and Features

Capability/Feature	Description
Chassis	One rack unit (1RU) chassis
CPU	■ One AMD EPYC 97x4, 9004 Series, and 9004 Series with 3D V-Cache™ Technology Processors or ■ One AMD EPYC™ 9005 Series Processors ■ Single-Socket Configuration
Memory	12 slots for registered DIMMs (RDIMMs)
Multi-bit Error Protection	This server supports multi-bit error protection.
Video	The Cisco Integrated Management Controller (CIMC) provides video using the Matrox G200e video/graphics controller: ■ Integrated 2D graphics core with hardware acceleration ■ Embedded DDR memory interface supports up to 512 MB of addressable memory (8 MB is allocated by default to video memory) ■ Supports display resolutions up to 1920 x 1200 16bpp @ 60Hz ■ High-speed integrated 24-bit RAMDAC ■ Single lane PCI-Express host interface running at Gen 1 speed
Power subsystem	Up to two of the following hot-swappable power supplies: ■ 1050 W (DC) ■ 1200 W (AC) ■ 1600 W (AC) ■ 2300 W (AC) One power supply is mandatory; one more can be added for 1 + 1 redundancy.
Expansion slots	■ Half-height riser slots (select up to three) • Riser 1A PCIe Gen4 x16 HH • Riser 1B PCIe Gen5 x16 HH • Riser 2A PCIe Gen4 x16 HH • Riser 2B PCIe Gen5 x16 HH • Riser 3A PCIe Gen4 x16 HH ■ Full-height riser slots (select up to two) • Riser 1C PCIe Gen5 x16 FH • Riser 3C PCIe Gen5 x16 FH

Table 1 Capabilities and Features (continued)

Capability/Feature	Description
Interfaces	■ Rear panel • One 1Gbase-T RJ-45 management port • One RS-232 serial port (RJ45 connector) • One DB15 VGA connector • Two USB 3.0 port connectors • One flexible modular LAN on motherboard (mLOM)/OCP 3.0 slot that can accommodate various interface cards ■ Front panel • One KVM console connector (supplies two USB 2.0 connectors, one VGA DB15 video connector, and one serial port (RS232) RJ45 connector)
Internal storage devices	Drive storage: Drives are installed into front-panel drive bays, which provide hot-swappable access for SAS/SATA or NVMe drives. The server is orderable in two different versions: ■ UCSC-C225-M8S (option 1): • Drive bays 1 - 10 support SAS/SATA/NVMe drives and drives bays 1,2, 3 and 4 also support direct attach NVMe. ■ UCSC-C225-M8N (option 2): • Up to 10 2.5-inch direct-attach NVMe SSDs only. Other storage: ■ A mini-storage module connector on the motherboard supports a boot-optimized RAID controller carrier that holds up to two SATA M.2 SSDs. ■ 8GB FlexMMC utility storage for staging of firmware and other user data. 8GB FlexMMC storage is built into the motherboard on M8.
Integrated management processor	Baseboard Management Controller (BMC) running Cisco Integrated Management Controller (CIMC) firmware. Depending on your CIMC settings, the CIMC can be accessed through the 1GE dedicated management port or a Cisco virtual interface card (VIC). CIMC manages certain components within the server, such as the Cisco 12G SAS HBA.
Front Panel	A front panel controller provides status indications and control buttons
ACPI	This server supports the advanced configuration and power interface (ACPI) version 6.5
Fans	Eight hot-swappable fans for front-to-rear cooling
Infiniband	The InfiniBand architecture is supported by the PCI slots.

Table 1 Capabilities and Features (continued)

Capability/Feature	Description
Storage controllers	Internal storage controllers: Only one of the raid controller at a time can be used. ■ Cisco Tri-Mode 24G SAS RAID Controller ■ 24G Tri-Mode M1 HBA for 16 Drives ■ 24G Tri-Mode M1 RAID Controller w/4GB FBWC 16Drv w/1U Brkt External storage controllers: ■ Cisco 12G 9500-8e 12G SAS HBA for external JBOD attach
Modular LAN on Motherboard (mLOM)/Open Compute Project (OCP) 3.0 slot	The dedicated mLOM/OCP 3.0 slot on the motherboard can flexibly accommodate the following cards: ■ Cisco Virtual Interface Cards ■ OCP 3.0 network interface card
Intersight	Intersight provides server management capabilities
Firmware standards	■ UEFI Spec 2.9 ■ ACPI 6.5 ■ SMBIOS Ver 3.6
CIMC	Cisco Integrated Management Controller 4.3(4) or later

CONFIGURING the SERVER

Follow these steps to configure the Cisco UCS C225 M8 SFF Rack Server:

- **STEP 1 VERIFY SERVER SKU, page 13**
- **STEP 2 SELECT RISERS, page 14**
- **STEP 3 SELECT CPU(s), page 15**
- **STEP 4 SELECT MEMORY (REQUIRED), page 18**
- **STEP 5 SELECT DRIVE CONTROLLERS, page 21**
- **STEP 6 SELECT DRIVES, page 24**
- **STEP 7 SELECT OPTION CARD(s), page 28**
- **STEP 8 ORDER GPU CARDS (OPTIONAL), page 31**
- **STEP 9 ORDER POWER SUPPLY, page 32**
- **STEP 10 SELECT INPUT POWER CORD(s), page 33**
- **STEP 11 ORDER TOOL-LESS RAIL KIT AND OPTIONAL REVERSIBLE CABLE MANAGEMENT ARM, page 37**
- **STEP 12 SELECT MANAGEMENT CONFIGURATION (OPTIONAL), page 38**
- **STEP 13 ORDER SECURITY DEVICES (OPTIONAL), page 39**
- **STEP 14 SELECT LOCKING SECURITY BEZEL (OPTIONAL), page 40**
- **STEP 15 ORDER M.2 SATA SSDs (OPTIONAL), page 41**
- **STEP 16 ORDER M.2 NVMe AND RAID CONTROLLER(OPTIONAL), page 42**
- **STEP 17 SELECT OPERATING SYSTEM, page 43**
- **SUPPLEMENTAL MATERIAL, page 46**

STEP 1 VERIFY SERVER SKU

Top level ordering product ID (PID) is shown in [Table 2](#)

Table 2 Top level ordering PID (major line bundle)

Product ID (PID)	Description
UCS-M8-MLB	UCS M8 Rack, Blade, Chassis MLB This major line bundle (MLB) consists of the Rack Server (UCSC-C225-M8S and UCSC-C225-M8N) with software PIDs. Use this PID to begin a new configuration.

Select server product ID (PID) from [Table 3](#).



CAUTION: This products may not be purchased outside of the approved bundles. (must be ordered under the MLB)

Table 3 PID of the C225 M8 SFF Rack Base Server

Product ID (PID)	Description
UCSC-C225-M8S ¹	Up to 10 SFF front drives with no CPU, memory, HDD, PCIe cards, or power supply. All drives can be SAS/SATA HDDs or SSDs or optionally any of bays 1, 2, 3 and 4 can be NVMe PCIe SSDs and the rest (bays 5 through 10) can be SAS/SATA HDDs or SSDs.
UCSC-C225-M8N ¹	Up to 10 SFF front drives (NVMe PCIe SSDs only) with no CPU, memory, HDD, PCIe cards, or power supply

Notes:

1. This product may not be purchased outside of the approved bundles (must be ordered under the MLB)

The Cisco UCS C225 M8 SFF server:

- Includes a 10-drive backplane
- Does not include power supply, CPU, memory DIMMs, hard disk drives (HDDs), solid-state drives (SSDs), NVMe drives, SD cards, riser 1, riser 2, riser 3, tool-less rail kit, or option cards.



NOTE: Use the steps on the following pages to configure the server with the components that you want to include.

STEP 2 SELECT RISERS

The riser PIDs are listed in [Table 4](#).



CAUTION:

- Full-height risers cannot be mixed with half-height risers.

Table 4 PIDs of the Risers and Riser Blanks

Product ID (PID)	Description
Riser 1 Option	
UCSC-RIS1A-225M8	UCS C-Series M8 1U Riser 1A PCIe Gen4 x16 HH ■ Half-height riser 1 ■ One x16 PCIe Gen4 riser, standard PCIe, supports Cisco VIC, half-height, 3/4 length
UCSC-RIS1B-225M8	UCS C-Series M8 1U Riser 1B PCIe Gen5 x16 HH ■ Half-height riser 1 ■ One x16 PCIe Gen5 riser, standard PCIe, supports Cisco VIC, half-height, 3/4 length
UCSC-RIS1C-225M8	UCS C-Series M8 1U Riser 1C PCIe Gen5 x16 FH ■ Full-height riser 1 ■ One x16 PCIe Gen5 riser, standard PCIe, supports Cisco VIC, full-height, 3/4 length
Riser 2 Option	
UCSC-RIS2A-225M8	UCS C-Series M8 1U Riser 2A PCIe Gen4 x16 HH ■ Half-height riser 2 ■ One x16 PCIe Gen4 riser, standard PCIe, half-height, 3/4 length
UCSC-RIS2B-225M8	UCS C-Series M8 1U Riser 2B PCIe Gen5 x16 HH ■ Half-height riser 2 ■ One x16 PCIe Gen5 riser, standard PCIe, half-height, 3/4 length
Riser 3 Option	
UCSC-RIS3A-225M8	UCS C-Series M8 1U Riser 3A PCIe Gen4 x16 HH ■ Half-height riser 3 ■ One x16 PCIe Gen4 riser, standard PCIe, supports Cisco VIC, half-height, 3/4 length
UCSC-RIS3C-225M8	UCS C-Series M8 1U Riser 3C PCIe Gen5 x16 FH ■ Full-height riser 3 ■ One x16 PCIe Gen5 riser, standard PCIe, supports Cisco VIC, full-height, 3/4 length
Accessories/spare included along with selected risers: ■ UCSC-FBRS2-C225M8 for riser 2 and UCSC-FBRS-C220-D riser filler blank for riser 3 is auto included, if riser 2 or riser 3 are not selected. UCSC-FBRSF-225M8 is auto included if only one full height riser is selected	

STEP 3 SELECT CPU(s)

- 5th Gen. AMD EPYC™ processors highlights are:
 - CPU-to-CPU communication using Infinity Fabric Interconnect
 - Cache size of up to 512 MB
 - Up to 160 cores
 - Power: Up to 400Watts
- 4th Gen. AMD EPYC™ processors highlights are:
 - CPU-to-CPU communication using Infinity Fabric Interconnect
 - Cache size of up to 768 MB
 - Up to 128 cores
 - Power: Up to 360Watts

Select CPUs

- The available 5th Gen. AMD EPYC™ processors are listed in [Table 5](#).
- The available 4th Gen. AMD EPYC™ processors are listed in [Table 6](#).



CAUTION: For systems configured with processors operating above 28° C [82.4° F], a fan fault or executing workloads with extensive use of heavy instructions sets may assert thermal and/or performance faults with an associated event recorded in the System Event Log (SEL).

Table 5 Available 5th Gen. AMD EPYC™ CPUs

Product ID (PID)	Maximum Socket	Core	CPU Base Frequency	CPU Boost Frequency	Default TDP	Cache Size	Highest DDR5 DIMM Clock
	(S)	(C)	(GHz)	(GHz)	(W)	(MB)	(MT/s) ¹
5th Gen EPYC 9005 Series Processors							
UCS-CPU-A9845	1S	160	2.10	3.70	390	320	6000
UCS-CPU-A9825	1S	144	2.20	3.70	390	384	6000
UCS-CPU-A9745	1S	128	2.40	3.70	400	256	6000
UCS-CPU-A9655	1S	96	2.60	4.50	400	384	6000
UCS-CPU-A9645	1S	96	2.30	3.70	320	256	6000
UCS-CPU-A9565	1S	72	3.15	4.30	400	384	6000
UCS-CPU-A9555	1S	64	3.20	4.40	360	256	6000
UCS-CPU-A9535	1S	64	2.40	4.30	300	256	6000
UCS-CPU-A9455	1S	48	3.15	4.40	300	256	6000
UCS-CPU-A9365	1S	36	3.40	4.30	300	192	6000
UCS-CPU-A9355	1S	32	3.55	4.40	280	256	6000
UCS-CPU-A9335	1S	32	3.00	4.40	210	128	6000

Table 5 Available 5th Gen. AMD EPYC™ CPUs

Product ID (PID)	Maximum Socket	Core	CPU Base Frequency	CPU Boost Frequency	Default TDP	Cache Size	Highest DDR5 DIMM Clock
	(S)	(C)	(GHz)	(GHz)	(W)	(MB)	(MT/s) ¹
UCS-CPU-A9255	1S	24	3.20	4.30	200	128	6000
UCS-CPU-A9135	1S	16	3.65	4.30	200	64	6000
UCS-CPU-A9115	1S	16	2.60	4.10	125	64	6000
UCS-CPU-A9015	1S	8	3.60	4.10	125	64	6000
UCS-CPU-A9575F	1S	64	3.30	5.00	400	256	6000
UCS-CPU-A9475F	1S	48	3.65	4.80	400	256	6000
UCS-CPU-A9375F	1S	32	3.80	4.80	320	256	6000
UCS-CPU-A9275F	1S	24	4.10	4.80	320	256	6000
UCS-CPU-A9175F	1S	16	4.20	5.00	320	512	6000
UCS-CPU-A9655P	1S	96	2.60	4.50	400	384	6000
UCS-CPU-A9555P	1S	64	3.20	4.40	360	256	6000
UCS-CPU-A9455P	1S	48	3.15	4.40	300	256	6000
UCS-CPU-A9355P	1S	32	3.55	4.40	280	256	6000

Notes:

1. If higher or lower speed DIMMs are selected than what is shown in [Table 9 on page 20](#) for a given CPU speed, the DIMMs will be clocked at the lowest common denominator of CPU clock and DIMM clock.

Table 6 Available 4th Gen. AMD EPYC™ CPUs

Product ID (PID)	Maximum Socket	Core	CPU Base Frequency	CPU Boost Frequency	Default TDP	Cache Size	Highest DDR5 DIMM Clock
	(S)	(C)	(GHz)	(GHz)	(W)	(MB)	(MT/s) ¹
4th Gen EPYC 97x4 Processors							
UCS-CPU-A9754	1S	128	2.25	3.10	360	256	4800
UCS-CPU-A9734	1S	112	2.20	3.00	340	256	4800
4th Gen EPYC 9004 Series Processor							
UCS-CPU-A9654	1S	96	2.40	3.70	360	384	4800
UCS-CPU-A9634	1S	84	2.25	3.70	290	384	4800
UCS-CPU-A9554	1S	64	3.10	3.75	360	256	4800
UCS-CPU-A9534	1S	64	2.45	3.70	280	256	4800
UCS-CPU-A9454	1S	48	2.75	3.80	290	256	4800
UCS-CPU-A9354	1S	32	3.25	3.80	280	256	4800
UCS-CPU-A9334	1S	32	2.70	3.90	210	128	4800
UCS-CPU-A9254	1S	24	2.90	4.15	200	128	4800
UCS-CPU-A9224	1S	24	2.50	3.70	200	64	4800
UCS-CPU-A9124	1S	16	3.00	3.70	200	64	4800

Table 6 Available 4th Gen. AMD EPYC™ CPUs

Product ID (PID)	Maximum Socket	Core	CPU Base Frequency	CPU Boost Frequency	Default TDP	Cache Size	Highest DDR5 DIMM Clock
	(S)	(C)	(GHz)	(GHz)	(W)	(MB)	(MT/s) ¹
UCS-CPU-A9474F	1S	48	3.60	4.10	360	256	4800
UCS-CPU-A9374F	1S	32	3.85	4.30	320	256	4800
UCS-CPU-A9274F	1S	24	4.05	4.30	320	256	4800
UCS-CPU-A9174F	1S	16	4.10	4.40	320	256	4800
UCS-CPU-A9654P	1S	96	2.40	3.70	360	384	4800
UCS-CPU-A9554P	1S	64	3.10	3.75	360	256	4800
UCS-CPU-A9454P	1S	48	2.75	3.80	290	256	4800
UCS-CPU-A9354P	1S	32	3.25	3.80	280	256	4800
4th Gen EPYC 9004 Series with 3D V-Cache™ Technology							
UCS-CPU-A9384X	1S	32	3.10	3.90	320	768	4800
UCS-CPU-A9184X	1S	16	3.55	4.20	320	768	4800

Notes:

1. If higher or lower speed DIMMs are selected than what is shown in [Table 8 on page 19](#) for a given CPU speed, the DIMMs will be clocked at the lowest common denominator of CPU clock and DIMM clock.


STEP 4 SELECT MEMORY (REQUIRED)

The [Table 7](#) below describes the main memory DIMM features supported on Cisco UCS C225 M8 rack server.

Table 7 C225 M8 Main Memory Features

Memory DIMM server technologies	Description
DDR5 memory clock speed	4th Gen. AMD EPYC™ CPUs: Up to 4800 MT/s 1DPC
	5th Gen. AMD EPYC™ CPUs: Up to 6000 MT/s 1DPC
Operational voltage	1.1 Volts
DRAM fab density	16Gb, 24Gb, and 32Gb
DRAM DIMM type	RDIMM (Registered DDR5 DIMM)
Memory DIMM organization	Twelve memory DIMM channels per CPU; 1 DIMM per channel only
Maximum number of DRAM DIMM per server	Up to 12 (1-Socket)
DRAM DIMM Densities and Ranks	Refer to Table 8 and Table 9
Maximum system capacity (DRAM DIMMs only)	3TB (12x256GB)

Figure 5 12-Channel Memory Organization

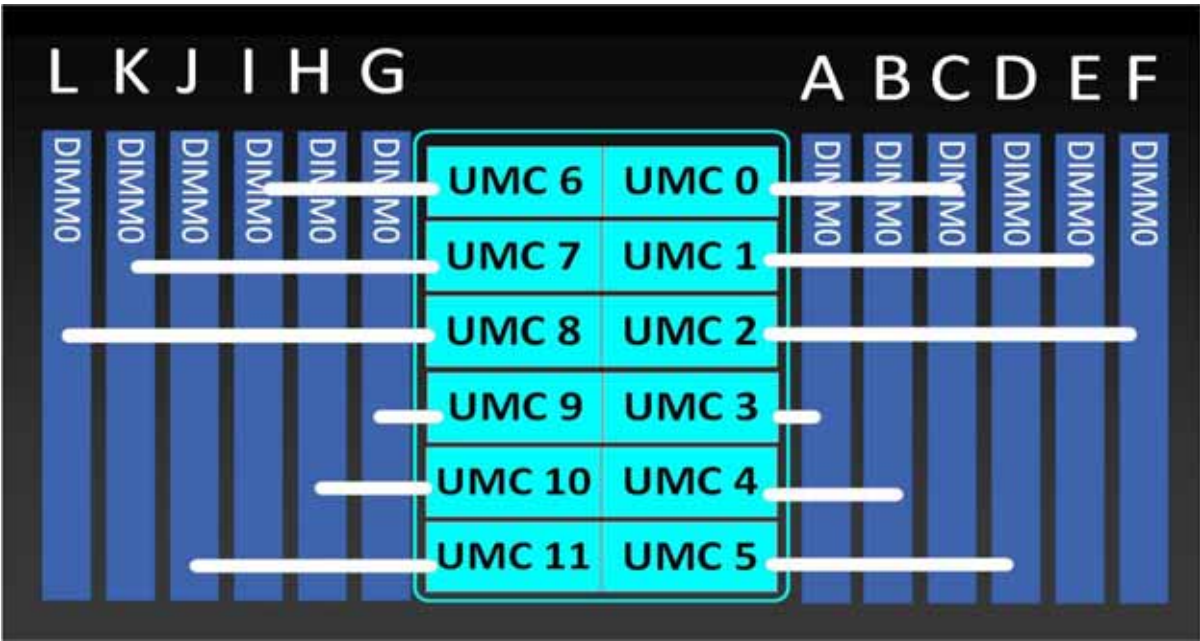

Select DIMMs

The supported memory DIMMs are listed in [Table 8](#) and [Table 9](#).



NOTE:

- When paired with 4th Gen. AMD EPYC™ CPUs, all memory DIMMs must be Cisco DDR5-5600 memory PIDs, although the memory will operate at the maximum speed of the 4th Gen. AMD EPYC™ CPUs memory controller, up to 4800 MT/s.
- When paired with 5th Gen. AMD EPYC™ CPUs, all memory DIMMs must be Cisco DDR5-6400 memory PIDs, although the memory will operate at the maximum speed of the 5th Gen. AMD EPYC™ CPUs memory controller, up to 6000 MT/s.



CAUTION: On C225 M8, when 256GB DIMMs are configured in the C225 server, ambient temperature is limited to a maximum of 30°C.

Table 8 Available DDR5 DIMMs for 4th Gen. AMD EPYC™ CPUs

Product ID (PID)	PID Description	Ranks/DIMM
DDR5-5600 MT/s PIDs list¹		
UCS-MR256G8RE3 ²	256GB DDR5-5600 RDIMM 8Rx4 (16Gb)	8
UCS-MR128G4RE3 ³	128GB DDR5-5600 RDIMM 4Rx4 (16Gb)	4
UCS-MR128G2RG3	128GB DDR5-5600 RDIMM 2Rx4 (32Gb)	2
UCS-MRX96G2RF3	96GB DDR5-5600 RDIMM 2Rx4 (24Gb)	2
UCS-MRX64G2RE3	64GB DDR5-5600 RDIMM 2Rx4 (16Gb)	2
UCS-MRX48G1RF3	48GB DDR5-5600 RDIMM 1Rx4 (24Gb)	1
DIMM Blank⁴		
UCS-DIMM-BLK	UCS DIMM Blank	

Notes:

1. If higher or lower speed DIMMs are selected than for a given CPU speed, the DIMMs will be clocked at the lowest common denominator of CPU clock and DIMM clock. check the [Table 6](#) column “**Highest DDR5 DIMM Clock Support**”.
2. 256GB 8Rx4 (16Gb) is now End-Of-Life and no longer orderable.
3. 128GB 4Rx4 (16Gb) is now End-Of-Life and is replaced by 128GB 2Rx4 (32Gb).
4. Any empty DIMM slot must be populated with a DIMM blank to maintain proper cooling airflow.

Table 9 Available DDR5 DIMMs for 5th Gen. AMD EPYC™ CPUs

Product ID (PID)	PID Description	Ranks/DIMM
DDR5-6400 MT/s PIDs list¹		
UCS-MR256G4RG5	256GB DDR5-6400 RDIMM 4Rx4 (32Gb)	4
UCS-MR128G2RG5	128GB DDR5-6400 RDIMM 2Rx4 (32Gb)	2
UCS-MRX96G2RF5	96GB DDR5-6400 RDIMM 2Rx4 (24Gb)	2
UCS-MRX64G2RE5	64GB DDR5-6400 RDIMM 2Rx4 (16Gb)	2
UCS-MRX32G1RE5	32GB DDR5-6400 RDIMM 1Rx4 (16Gb)	1
UCS-MRX16G1RE5	16GB DDR5-6400 RDIMM 1Rx8 (16Gb)	1
DIMM Blank²		
UCS-DIMM-BLK	UCS DIMM Blank	

Notes:

1. If higher or lower speed DIMMs are selected than for a given CPU speed, the DIMMs will be clocked at the lowest common denominator of CPU clock and DIMM clock. check the [Table 5](#) column “**Highest DDR5 DIMM Clock Support**”
2. Any empty DIMM slot must be populated with a DIMM blank to maintain proper cooling airflow.

Memory configurations and mixing rules

- System speed is dependent on the CPU DIMM speed support. Refer to [Available 4th Gen. AMD EPYC™ CPUs, page 16](#) for DIMM speeds.
- For full details on supported memory configurations, count rules, population rules and mixing rules see the [AMD M8 Memory Guide](#).

STEP 5 SELECT DRIVE CONTROLLERS

The following list summarizes how drives are controlled on the server:

- Up to 10 SAS/SATA/NVMe drives are controlled through a Cisco 24G Tri-mode RAID controller

RAID Volumes and Groups

When creating each RAID volume, follow these guidelines:

- Use the same capacity for each drive in each RAID volume
- For the Cisco 24G Tri-mode RAID controller, use either all SAS HDDs, or all SAS SSDs, or all SATA SSDs or NVMe SSDs in each RAID volume.



NOTE: 240 virtual drives (VDs) per controller, with up to 16 per disk group with the 24G Tri Mode Controller.

Select RAID Controller Options

Select the following:

- Cisco 24G Tri-mode RAID controller (see [Table 10](#))



NOTE:

- If the Cisco 24G Tri-mode RAID controller, it is factory-installed in a dedicated slot.
- There is no RAID support for direct-attach NVMe drives.

Table 10 Hardware Controller Options

Product ID (PID)	PID Description
Controllers for Internal Drives	
UCSC-RAID-M1L16 ^{1,2,3}	24G Tri-Mode M1 RAID Controller w/4GB FBWC 16Drv w/1U Brkt ■ This RAID controller supports up to 10, 2.5in (SFF) SAS/SATA HDD, SAS/SATA SSD, and U.3 NVMe operating at 3Gbps, 6Gbps, 12Gbps and 24Gbps. It includes a SuperCap and a 4GB flash-back write cache (FBWC). ■ Supports RAID0, 1, 5, 6, 10, 50, 60, and JBOD mode and supports mixed RAID and JBOD mode. ■ The RAID controller plugs directly into a dedicated slot. ■ For all self-encrypting drives (SED), standalone Management (CIMC/UCSM) is supported for configuring and managing local keys. For now, SED drives are managed with local key management only. Third-party key management will be supported (KMIP compliant).

Table 10 Hardware Controller Options (continued)

Product ID (PID)	PID Description
UCSC-RAID-HP ^{1,2,4}	Cisco Tri-Mode 24G SAS RAID Controller w/4GB Cache ■ This RAID controller supports up to 16 SAS HDDs and SAS/SATA/NVMe SSDs operating at 3Gbps, 6Gbps, 12Gbps and 24Gbps. It includes a SuperCap and a 4GB flash-back write cache (FBWC) ■ Supports RAID0, RAID00, 1, 5, 6, 10, 50, 60, and JBOD mode and supports mixed RAID and JBOD mode. ■ The RAID controller plugs directly into a dedicated slot. ■ For all self-encrypting drives (SED), standalone Management (CIMC/UCSM) is supported for configuring and managing local keys. For now, SED drives are managed with local key management only. Third-party key management will be supported (KMIP compliant).
UCSC-HBA-M1L16 ⁵	24G Tri-Mode M1 HBA for 16 Drives ■ This Tri-mode HBA supports up to 10 SAS HDDs and SAS/SATA/U.3 NVMe operating at 3Gbps, 6Gbps, 12Gbps and 24Gbps. ■ No RAID support ■ Supports JBOD or pass-through mode ■ The 24G Tri-mode HBA plugs directly into a dedicated slot.
Controllers for External Drives	
UCSC-9500-8E-D	9500 Series PCIe Gen 4.0 Tri-Mode Storage HBA 12Gb/s SAS/SATA/PCIe (NVMe) ■ External Storage HBA plugs in to PCIe slot ■ This controller is half-height half-length and can be installed in riser 1, 2, or 3.
Accessories/spare included with drive controller (For UCSC-C225-M8S): ■ UCS-SCAP-D, CBL-SCAP-C220-D and UCSC-HPBKT-225M8 are included with the selection of UCSC-RAID-HP drive controller. ■ UCSC-HPBKT-225M8 is auto included with Raid controller (UCSC-RAID-HP, or UCSC-RAID-M1L16 or UCSC-HBA-M1L16). ■ CBL-SAS-C225M8 is auto included with Raid controller (UCSC-RAID-HP, or UCSC-RAID-M1L16 or UCSC-HBA-M1L16). NOTE: If you are adding drive controller later as spare, you may need to order cables/supercap/super cables and controllers bracket with it.	

Notes:

1. When ordering this Tri-mode RAID controller, please note that mixing SAS/SATA and NVMe drives in a single RAID volume is not supported. Virtual drives can only be created with drives of the same type
2. U.3 NVMe drives selected with this Tri-mode RAID controller will be set to RAID attached as the factory default. The U.3 drives in slots 1-4 can however operate in U.2 mode, directly attached to the CPU. This mode can be changed from the Cisco IMC if desired.
3. Supported with 4th Gen and 5th Gen CPUs.
4. Only Supported with 4th Gen CPUs.
5. Only Supported with 4th Gen CPUs and will be supported with 5th Gen CPUs from CQ2'CY2025.

RAID Configuration Option

Select one of the RAID Configuration option from the following [Table 11](#).



CAUTION: All RAID options require drives of same sector size and media type. The smallest drive capacity will be used to calculate the RAID volume size.

Table 11 RAID Configuration Options

Product ID (PID)	PID Description
NOTE: Not available for Cisco 12G SAS HBA	
R2XX-SRAID0D	Enable single disk RAID 0 Setting.
R2XX-RAID0D	Factory preconfigured RAID striping option Enable RAID 0 Setting. Requires two or more drive.
R2XX-RAID00D	Factory preconfigured RAID striping option Enable RAID 00 Setting. Requires two or more drive.
R2XX-RAID1D	Factory preconfigured RAID mirroring option Enable RAID 1 Setting. Requires even number of drives (minimum of two).
R2XX-RAID5D	Factory preconfigured RAID option Enable RAID 5 Setting. Requires a minimum of three drives
R2XX-RAID6D	Factory preconfigured RAID option Enable RAID 6 Setting. Requires a minimum of four drives.
R2XX-RAID10D	Factory preconfigured RAID option Enable RAID 10 Setting. Requires even number of drives (minimum of 2 drives per span)
R2XX-RAID50D	Factory preconfigured RAID option Enable RAID 50 Setting. Requires minimum of three drives per span
R2XX-RAID60D	Factory preconfigured RAID option Enable RAID 60 Setting. Requires minimum of four drives per span.

Approved Configurations

Cisco UCS C225 M8 SFF server can be ordered as follows:

- UCSC-C225-M8S (10-drive SAS/SATA/NVMe backplane and optionally 4 of those can be direct-attach NVMe)
- UCSC-C225-M8N (10-drive direct-attach NVMe only)
- There is no RAID support for direct-attach NVMe drives.

STEP 6 SELECT DRIVES

The standard drive features are:

- 2.5-inch small form factor
- Hot-pluggable
- Drives come mounted in sleds

Select Drives

- The available NVMe SSDs drives for **UCSC-C225-M8N** is listed in [Table 12](#)
- The available SAS/SATA SSDs and HDDs drives for **UCSC-C225-M8S** is listed [Table 13](#)



CAUTION: Cisco uses solid state drives (SSDs) from a number of vendors. All solid state drives (SSDs) are subject to physical write limits and have varying maximum usage limitation specifications set by the manufacturer. Cisco will not replace any solid state drives (SSDs) that have exceeded any maximum usage specifications set by Cisco or the manufacturer, as determined solely by Cisco.

Table 12 Available NVMe drives for UCSC-C225-M8N

Product ID (PID)	PID Description	Drive Type	Capacity
PCIe/NVMe (2.5-inch) SFF drives			
UCS-NVB61T4M3L	61.4TB 2.5" U.2 15mm Micron 6550 HgPerf EcoEnd G4/5 <1X NVMe	U.2	61.4 TB
UCS-NVB30T7M3L	30.7TB 2.5in U.2 15mm Micron6550 HgPerf EcoEnd G4/5 <1X NVMe	U.2	30 TB
UCS-NVMEG4-M1536D	15.3TB 2.5in U.3 MicronP7450 NVMe High Perf Medium Endurance	U.3	15.3 TB
UCS-NVMEG4-M6400D	6.4TB 2.5in U.3 Micron P7450 NVMe High Perf High Endurance	U.3	6.4 TB
UCS-NVB960M1H	960GB 2.5in U.3 15mm Micron XTR Hg Perf Ext End 60X NVMe	U.3	960 GB
UCS-NVB1T9M1H	1.92TB 2.5in U.3 15mm Micron XTR Hg Perf Ext End 60X NVMe	U.3	1.9 TB
UCS-NVB3T8M2V9	3.8TB 2.5in U.3 15mm Micron 7500 HgPerf MedEnd 1X NVMe FIPS	U.3	3.8 TB
UCS-NVB1T9M2V9	1.9TB 2.5in U.3 15mm Micron 7500 HgPerf MedEnd 1X NVMe FIPS	U.3	1.9 TB
UCS-NVB7T6M2V9	7.6TB 2.5in U.3 15mm Micron 7500 HgPerf MedEnd 1X NVMe FIPS	U.3	7.6 TB
UCS-NVB15T3M2V9	15.3TB 2.5in U.3 15mm Micron 7500 HgPerf MedEnd 1X NVMe FIPS	U.3	15.3 TB
UCS-NVB960M2V	960GB 2.5in U.3 15mm Micron 7500 Hg Perf Med End 1X NVMe	U.3	960 GB
UCS-NVB1T9M2V	1.9TB 2.5in U.3 15mm Micron 7500 Hg Perf Med End 1X NVMe	U.3	1.9 TB

Table 12 Available NVMe drives (continued)for UCSC-C225-M8N

Product ID (PID)	PID Description	Drive Type	Capacity
UCS-NVB3T2M2P	3.2TB 2.5in U.3 15mm Micron 7500 Hg Perf Hg End 3X NVMe	U.3	3.2 TB
UCS-NVB3T8M2V	3.8TB 2.5in U.3 15mm Micron 7500 Hg Perf Med End 1X NVMe	U.3	3.8 TB
UCS-NVB12T8M2P	12.8TB 2.5in U.3 15mm Micron 7500 Hg Perf Hg End 3X NVMe	U.3	12.8 TB
UCS-NVB7T6M2V	7.6TB 2.5in U.3 15mm Micron 7500 Hg Perf Med End 1X NVMe	U.3	7.6 TB
UCS-NVB1T6M2P	1.6TB 2.5in U.3 15mm Micron 7500 Hg Perf Hg End 3X NVMe	U.3	1.6 TB
■ CBL-FNVME-C225M8 is auto included with selection of U.3 NVMe drives and Raid controller UCSC-RAID-HP			

Table 13 Available drives for UCSC-C225-M8S

Product ID (PID)	PID Description	Drive Type	Capacity
HDDs			
HDDs (10K RPM)			
UCS-HD600G10KJ4-D	600 GB 12G SAS 10K RPM SFF HDD	SAS	600 GB
UCS-HD12TB10KJ4-D	1.2 TB 12G SAS 10K RPM SFF HDD	SAS	1.2 TB
UCS-HD18TB10KJ4-D	1.8 TB 12G SAS 10K RPM SFF HDD (4K)	SAS	1.8 TB
UCS-HD24TB10KJ4-D	2.4 TB 12G SAS 10K RPM SFF HDD (4K)	SAS	2.4 TB
UCS-HDB1T8G510K4K	1.8TB 2.5in 12G SAS 10K RPM 4K HDD	SAS	1.8 TB
Enterprise Performance SAS/SATA SSDs (High endurance, supports up to 10X or 3X DWPD (drive writes per day))			
SATA			
UCS-SD19T63X-EP-D	1.9TB 2.5in Enterprise performance 6G SATA SSD(3X endurance)	SATA	1.9 TB
UCS-SD480GBM3XEPD	480GB 2.5in Enterprise Performance 6GSATA SSD(3X endurance)	SATA	480 GB
UCS-SD960GBM3XEPD	960GB 2.5in Enterprise performance 6GSATA SSD(3X endurance)	SATA	960 GB
UCS-SD19TBM3XEP-D	1.9TB 2.5in Enterprise performance 6GSATA SSD(3X endurance)	SATA	1.9 TB
UCS-SDB480OA1P	480GB 2.5in 15mm Solidigm S4620 Enter Perf 6G SATA 3X SSD	SATA	480 GB
UCS-SDB960OA1P	960GB 2.5in 15mm Solidigm S4620 Enter Perf 6G SATA 3X SSD	SATA	960 GB
UCS-SDB1T9OA1P	1.9TB 2.5in 15mm Solidigm S4620 Enter Perf 6G SATA 3X SSD	SATA	1.9 TB
SAS			
UCS-SD16TKA3XEP-D	1.6TB 2.5in Enter Perf 24G SAS Kioxia PM7 SSD (3X)	SAS	1.6 TB
UCS-SD32TKA3XEP-D	3.2TB 2.5in Enter Perf 24G SAS Kioxia PM7 SSD (3X)	SAS	3.2 TB
Enterprise Value SAS/SATA SSDs (Low endurance, supports up to 1X DWPD (drive writes per day))			
SATA			
UCS-SD240GBM1XEVD	240GB 2.5 inch Enterprise Value 6G SATA SSD	SATA	240 GB
UCS-SD480GBM1XEVD	480 GB 2.5 inch Enterprise Value 6G SATA SSD	SATA	480 GB
UCS-SD960GBM1XEVD	960GB 2.5 inch Enterprise Value 6G SATA SSD	SATA	960 GB

Table 13 Available drives for UCSC-C225-M8S

Product ID (PID)	PID Description	Drive Type	Capacity
UCS-SD16TBM1XEVD	1.6TB 2.5 inch Enterprise Value 6G SATA SSD	SATA	1.6 TB
UCS-SD19TBM1XEVD	1.9TB 2.5 inch Enterprise Value 6G SATA SSD	SATA	1.9 TB
UCS-SD38TBM1XEVD	3.8TB 2.5 inch Enterprise Value 6G SATA SSD	SATA	3.8 TB
UCS-SD76TBM1XEVD	7.6TB 2.5 inch Enterprise Value 6G SATA SSD	SATA	7.6 TB
UCS-SDB960SA1VD	960GB 2.5in 6G SATA Enter Value 1X Samsung G1PM893A SSD	SATA	960 GB
UCS-SDB1T9SA1VD	1.9TB 2.5in 6G SATA Enter Value 1X Samsung G1PM893A SSD	SATA	1.9 TB
UCS-SDB3T8SA1VD	3.8TB 2.5in 6G SATA Enter Value 1X Samsung G1PM893A SSD	SATA	3.8 TB
UCS-SDB7T6SA1VD	7.6TB 2.5in 6G SATA Enter Value 1X Samsung G1PM893A SSD	SATA	7.6 TB
UCS-SDB480OA1V	480GB 2.5in 15mm Solidigm S4520 Enter Value 6G SATA 1X SSD	SATA	480 GB
UCS-SDB3T8OA1V	3.8TB 2.5in 15mm Solidigm S4520 Enter Value 6G SATA 1X SSD	SATA	3.8 TB
SAS			
UCS-SD19TKA1XEVD	1.9TB 2.5in Enter Value 24G SAS Kioxia PM7 SSD	SAS	1.9 TB
UCS-SD38TKA1XEVD	3.8TB 2.5in Enter Value 24G SAS Kioxia PM7 SSD	SAS	3.8 TB
UCS-SD76TKA1XEVD	7.6TB 2.5in Enter Value 24G SAS Kioxia PM7 SSD	SAS	7.6 TB
UCS-SD15TKA1XEVD	15.3TB 2.5in Enter Value 24G SAS Kioxia PM7 SSD	SAS	15.3 TB
Self-Encrypted Drives (SED) (1X or 3X)			
SATA			
UCS-SD19TEM2NK9-D	1.9TB Enterprise value SATA SSD (1X , SED)	SATA	1.9 TB
UCS-SD38TEM2NK9-D	3.8TB Enterprise value SATA SSD (1X, SED)	SATA	3.8 TB
UCS-SD76TEM2NK9-D	7.6TB Enterprise value SATA SSD (1X, SED)	SATA	7.6 TB
UCS-SD960GM2NK9-D	960GB Enterprise value SATA SSD (1X, SED)	SATA	960 GB
SAS			
UCS-SD16TBKANK9-D	1.6TB 2.5" Enterprise performance 12GSAS SSD(3DWPD,SED-FIPS) FIPS140-2	SAS	1.6 TB
UCS-SD38TBKANK9-D	3.8TB 2.5" Enterprise value 12G SAS SSD (1DWPD, SED-FIPS) FIPS140-2	SAS	3.8 TB
UCS-SD76TBKANK9-D	7.6TB Enterprise value SAS SSD (1DWPD, SED-FIPS) FIPS140-2	SAS	7.6 TB
PCIe /NVMe (2.5-inch) SFF drives			
UCS-NVMEG4-M1536D	15.3TB 2.5in U.3 MicronP7450 NVMe High Perf Medium Endurance	U.3	15.3 TB
UCS-NVMEG4-M6400D	6.4TB 2.5in U.3 Micron P7450 NVMe High Perf High Endurance	U.3	6.4 TB
UCS-NVB960M1H	960GB 2.5in U.3 15mm Micron XTR Hg Perf Ext End 60X NVMe	U.3	960 GB
UCS-NVB1T9M1H	1.92TB 2.5in U.3 15mm Micron XTR Hg Perf Ext End 60X NVMe	U.3	1.9 TB
UCS-NVB3T8M2V9 ¹	3.8TB 2.5in U.3 15mm Micron 7500 HgPerf MedEnd 1X NVMe FIPS	U.3	3.8 TB
UCS-NVB1T9M2V9 ¹	1.9TB 2.5in U.3 15mm Micron 7500 HgPerf MedEnd 1X NVMe FIPS	U.3	1.9 TB
UCS-NVB7T6M2V9 ¹	7.6TB 2.5in U.3 15mm Micron 7500 HgPerf MedEnd 1X NVMe FIPS	U.3	7.6 TB
UCS-NVB15T3M2V9 ¹	15.3TB 2.5in U.3 15mm Micron 7500 HgPerf MedEnd 1X NVMe FIPS	U.3	15.3 TB
UCS-NVB960M2V	960GB 2.5in U.3 15mm Micron 7500 Hg Perf Med End 1X NVMe	U.3	960 GB

Table 13 Available drives for UCSC-C225-M8S

Product ID (PID)	PID Description	Drive Type	Capacity
UCS-NVB1T9M2V	1.9TB 2.5in U.3 15mm Micron 7500 Hg Perf Med End 1X NVMe	U.3	1.9 TB
UCS-NVB3T2M2P	3.2TB 2.5in U.3 15mm Micron 7500 Hg Perf Hg End 3X NVMe	U.3	3.2 TB
UCS-NVB3T8M2V	3.8TB 2.5in U.3 15mm Micron 7500 Hg Perf Med End 1X NVMe	U.3	3.8 TB
UCS-NVB12T8M2P	12.8TB 2.5in U.3 15mm Micron 7500 Hg Perf Hg End 3X NVMe	U.3	12.8 TB
UCS-NVB7T6M2V	7.6TB 2.5in U.3 15mm Micron 7500 Hg Perf Med End 1X NVMe	U.3	7.6 TB
UCS-NVB1T6M2P	1.6TB 2.5in U.3 15mm Micron 7500 Hg Perf Hg End 3X NVMe	U.3	1.6 TB
UCS-NVB61T4M3L	61.4TB 2.5" U.2 15mm Micron 6550 HgPerf EcoEnd G4/5 <1X NVMe	U.2	61.4 TB
Accessories/spare included with drives (For UCSC-C225-M8S): ■ CBL-FNVME-C220M7 is auto included with selection of U.3 NVMe drives and Raid controller UCSC-RAID-HP ■ CBL-SATA-C220-D is included with the selection of the SATA drives. ■ UCSC-BBLKD-M7 is included for the not selected front storage device. NOTE: If you are adding drive later as spare, you may need to order cables with it.			

Notes:

1. Micron 7500 SED-FIPS cannot be used for boot in direct attach mode. They can be used for boot via RAID controller.

Caveats

- With the UCSC-C225-M8:
 - You can choose only SATA HDDs when using AHCI with a SATA Interposer. The drives must be installed in slots 1-8.
 - You can mix HDDs and SSDs as long as you keep all HDDs in their own RAID volume and all SSDs in their own RAID volume.
 - SED drives can be mixed with the non-SED drives in [Table 13 on page 25](#).
- SFF NVMe drives are bootable in UEFI mode only.
- Only U.3 drives are allowed with RAID 24G Tri-mode RAID Controller and NVMe Hardware RAID.

STEP 7 SELECT OPTION CARD(s)

For up-to-date server compatibility, please check the Hardware and Software compatibility list (HCL) at <https://ucshcltool.cloudapps.cisco.com/public/>.

The standard card offerings are:

- Modular LAN on Motherboard (mLOM)
- Virtual Interface Cards (VICs)
- Network Interface Cards (NICs)
- Open Compute Project (OCP) 3.0 NIC
- Host Bus Adapters (HBAs)

Select Option Cards

The available option cards are listed in [Table 14](#).

Table 14 Available Option Cards

Product ID (PID)	PID Description	Location	Card Size ¹
Modular LAN on Motherboard (mLOM)/OCP			
UCSC-M-V5Q50GV2-D	Cisco UCS VIC 15427 Quad Port CNA MLOM with Secure Boot	mLOM	HHHL, SS
UCSC-M-V5D200GV2D	Cisco VIC 15237 2x 40/100/200G mLOM C-Series w/Secure Boot	mLOM	HHHL, SS
UCSC-O-ID10GC-D ²	Intel X710T2LOCPV3G1L 2x10GbE RJ45 OCP3.0 NIC	OCP	-
UCSC-O-N6CD100GFD	Cisco-NVDA MCX623436AC-CDAB CX6Dx 2x100G QSFP56 x16 OCP NIC	OCP	-
UCSC-O-N6CD25GFD	Cisco-NVDA MCX631432AC-ADAB CX6Lx 2x25G SFP28 x8 OCP NIC	OCP	-
UCSC-O-N6CD25GFO	NVIDIA OEM MCX631432AC-ADAB CX6Lx 2x25G SFP28 x8 OCP NIC	OCP	-
UCSC-O-N6CD100GFO	NVIDIA OEM MCX623436AC-CDAB CX6Dx 2x100G QSFP56 x16 OCP NIC	OCP	-
Virtual Interface Card (VICs)			
UCSC-P-V5Q50G-D	Cisco UCS VIC 15425 Quad Port 10/25/50G CNA PCIE	Riser 1 or 2	HHHL, SS
UCSC-P-V5D200G-D	Cisco UCS VIC 15235 Dual Port 40/100/200G CNA PCIE	Riser 1 or 2	HHHL, SS
Network Interface Cards (NICs)			
1 GbE NICs			
UCSC-P-IQ1GC	Cisco-Intel I710-T4L 4x1GBASE-T NIC	Riser 1, 2, or 3	HHHL, SS
10 GbE NICs			
UCSC-PCIEID10GF-D	Intel X710-DA2 Dual Port 10Gb SFP+ NIC	Riser 1, 2, or 3	HHHL, SS
UCSC-P-ID10GC-D	Cisco-Intel X710T2LG 2x10 GbE RJ45 PCIe NIC	Riser 1, 2, or 3	HHHL, SS
UCSC-P-IQ10GC-D	Cisco-Intel X710T4LG 4x10 GbE RJ45 PCIe NIC	Riser 1, 2, or 3	HHHL, SS

Table 14 Available Option Cards (continued)

Product ID (PID)	PID Description	Location	Card Size ¹
UCSC-PCIEIQ10GF-D	Intel X710 quad-port 10G SFP+ NIC	Riser 1, 2, or 3	HHHL, SS
25 GbE NICs			
UCSC-P-I8D25GF-D	Cisco-Intel E810XXVDA2 2x25/10 GbE SFP28 PCIe NIC	Riser 1, 2, or 3	HHHL, SS
UCSC-P-I8Q25GF-D	Cisco-Intel E810XXVDA4L 4x25/10 GbE SFP28 PCIe NIC	Riser 1 or 3	FHHL, SS
UCSC-P-N7Q25GF	MCX713104AS-ADAT: CX-7 4x25GbE SFP56 PCIe Gen4x16, VPI NIC	Riser 1, 2, or 3	HHHL, SS
UCSC-P-N6D25GF-D	Cisco-NVDA MCX631102AS-ADAT CX6Lx 2x25GbE SFP28 x8 PCIe NIC	Riser 1, 2, or 3	HHHL, SS
UCSC-P-N6D25GFO	NVIDIA OEM MCX631102AS-ADAT CX6Lx 2x25GbE SFP28 x8 PCIe NIC	Riser 1, 2, or 3	HHHL, SS
UCSC-P-N7Q25GFO	NVIDIA OEM CX713104AS-ADAT: 4x25GbE SFP56 Gen4x16, PCIe NIC	Riser 1, 2, or 3	HHHL, SS
100 GbE NICs			
UCSC-P-I8D100GF-D	Cisco-Intel E810CQDA2 2x100 GbE QSFP28 PCIe NIC	Riser 1, 2, or 3	HHHL, SS
UCSC-P-MCD100GF-D	Cisco-MLNX MCX623106AC-CDAT 2x100GbE QSFP56 PCIe NIC	Riser 1, 2, or 3	HHHL, SS
UCSC-P-M6DD100GFO	NVIDIA OEM MCX623106AS-CDAT, 2x100 GbE QSFP56 PCIe No Crypto	Riser 1, 2, or 3	HHHL, SS
UCSC-P-M6CD100GFO	NVIDIA OEM MCX623106AC-CDAT, 2x100 GbE QSFP56 PCIe Crypto	Riser 1, 2, or 3	HHHL, SS
200 GbE NICs			
UCSC-P-N3220L	Nvidia OEM BlueField-3 B3220L SuperNIC 2x200G	Riser 1 or 3	FHHL, SS
UCSC-P-NC3220L	Nvidia Crypto B3220L SuperNIC 2x200GbE/IB QSFP112 Gen5 FHHL	Riser 1 or 3	FHHL, SS
UCSC-P-N7D200GFO	NVIDIA OEM MCX755106AS-HEAT 2x200GbE QSFP112 PCIe Gen5 NIC	Riser 1, 2, or 3	HHHL, SS
Host Bus Adapters (HBAs)			
UCSC-P-Q6D32GF-D	Cisco-QLogic QLE2772 2x32GFC Gen 6 Enhanced PCIe HBA	Riser 1, 2, or 3	HHHL, SS
UCSC-P-B7D32GF-D	Cisco-Emulex LPe35002-M2-2x32GFC Gen 7 PCIe HBA	Riser 1, 2, or 3	HHHL, SS
UCSC-PCIEBD16GF-D	Emulex LPe31002 dual port 16G FC HBA	Riser 1, 2, or 3	HHHL, SS
UCSC-P-Q7D64GF	Cisco-QLogic QLE2872, 2x64GFC Gen 7 PCIe HBA	Riser 1, 2, or 3	HHHL, SS

Notes:

1. HHHL = half-height, half-length; HHHL = half-height, half-length; SS = single-slot; DS = double-slot
2. The UCSC-O-ID10GC is an OCP 3.0 adapter and fits in mLOM / OCP 3.0 slot using a special mechanical connector add-on. See the following link for installation instructions:
https://www.cisco.com/content/en/us/td/docs/unified_computing/ucs/c/hw/c225m6/install/c225m6.html

ORDER OPTIONAL PCIe OPTION CARD ACCESSORIES

- At the time of first launch, the 3rd Party Ethernet adapters were tested for interoperability with an initial selection of Optical Modules and Cables. Please check the Product Briefs for this initial list of interoperable optics and cables at <https://www.cisco.com/c/en/us/products/servers-unified-computing/third-party-adapters-listing.html>.
- For list of supported optics and cables for VIC 15428 and VIC 15238, refer to the VIC 15000 series data sheet at <https://www.cisco.com/c/en/us/products/collateral/interfaces-modules/unified-computing-system-adapters/ucs-vic-15000-series-ds.html>
- Cisco Transceiver Module Group (TMG) conducts tests with Cisco optics and cables and publishes the results in the TMG Compatibility Matrix. The latest compatibility with optical modules and DACs can be found at <https://tmgmatrix.cisco.com/>
- Refer to the these links for additional connectivity options.

Intel:
Product Guide
Speed White Paper

STEP 8 ORDER GPU CARDS (OPTIONAL)

Select GPU Options

The available GPU PCIe options are listed in [Table 15](#).

Table 15 Available PCIe GPU Cards¹

Product ID (PID)	PID Description	Card Size	Maximum cards Per node	Riser Compatibility
UCSC-GPU-L4	NVIDIA L4:70W, 24GB, 1-slot HHHL GPU	HHHL, single-wide	3	Gen 4 & Gen 5 Half Height and Full Height Riser

Notes:

1. Refer to [installation guide](#) for the more details.



NOTE:

- All GPU cards must be procured from Cisco as there is a unique SBIOS ID required by CIMC and UCSM
- GPUs cannot be mixed.

STEP 9 ORDER POWER SUPPLY

Power supplies share a common electrical and physical design that allows for hot-plug and tool-less installation into M6 C-series servers. Each power supply is certified for high-efficiency operation and offer multiple power output options. This allows users to “right-size” based on server configuration, which improves power efficiency, lower overall energy costs and avoid stranded capacity in the data center. Use the power calculator at the following link to determine the needed power based on the options chosen (CPU, drives, memory, and so on):

<http://ucspowercalc.cisco.com>



WARNING:

- Starting 1st January 2024, only Titanium rated PSUs are allowed to be shipped to European Union (EU), European Economic Area (EEA), United Kingdom (UK), Switzerland and other countries that adopted Lot 9 Regulation.
- DC PSUs are not impacted by Lot 9 Regulation and are EU/UK Lot 9 compliant

Table 16 Power Supply

Product ID (PID)	PID Description
PSU (Input High Line 210VAC)	
UCSC-PSU1-1200W-D	1200W Titanium power supply for C-Series Servers
UCSC-PSUV21050D-D ¹	Cisco UCS 1050W -48V DC Power Supply for Rack Server
UCSC-PSU1-1600W-D	UCS 1600W AC PSU Platinum (Not EU/UK Lot 9 Compliant)
UCSC-PSU1-2300W-D	Cisco UCS 2300W AC Power Supply for Rack Servers Titanium
PSU (Input Low Line 110VAC)	
UCSC-PSU1-1200W-D	1200W Titanium power supply for C-Series Servers
UCSC-PSU1-2300W-D	Cisco UCS 2300W AC Power Supply for Rack Servers Titanium

Notes:

1. If chosen, you must select from the available DC Power Cord PIDs.



NOTE: In a server with two power supplies, both power supplies must be identical.

STEP 10 SELECT INPUT POWER CORD(s)

Using [Table 17](#) and [Table 18](#), select the appropriate AC power cords. You can select a minimum of no power cords and a maximum of two. If you select the option R2XX-DMYPWRCORD, no power cord is shipped with the server.



NOTE: [Table 17](#) lists the power cords for servers that use power supplies less than 2300 W. [Table 18](#) lists the power cords for servers that use 2300 W power supplies. Note that the power cords for 2300 W power supplies use a C19 connector so they only fit the 2300 W power supply connector.

Table 17 Available Power Cords (for server PSUs less than 2300 W)

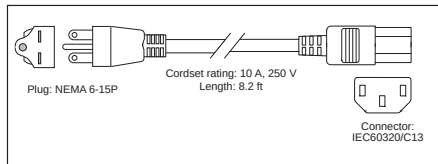
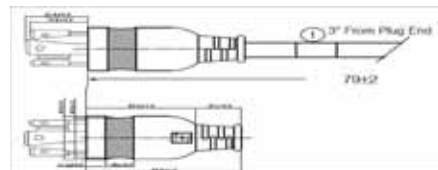
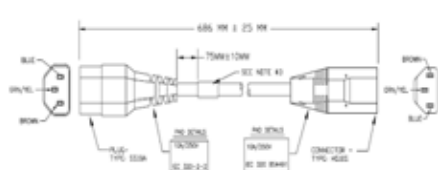
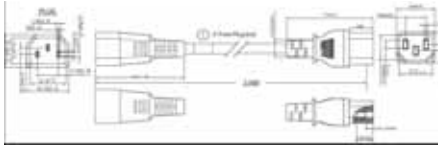
Product ID (PID)	PID Description	Images
NO-POWER-CORD	ECO friendly green option, no power cable will be shipped	
R2XX-DMYPWRCORD	No power cord (dummy PID to allow for a no power cord option)	Not applicable
CAB-48DC-40A-8AWG	C-Series -48VDC PSU Power Cord, 3.5M, 3 Wire, 8AWG, 40A	
CAB-N5K6A-NA	Power Cord, 200/240V 6A, North America	
CAB-AC-L620-C13	AC Power Cord, NEMA L6-20 - C13, 2M/6.5ft	
CAB-C13-CBN	CABASY,WIRE,JUMPER CORD, 27" L, C13/C14, 10A/250V	
CAB-C13-C14-2M	CABASY,WIRE,JUMPER CORD, PWR, 2 Meter, C13/C14,10A/250V	

Table 17 Available Power Cords (for server PSUs less than 2300 W)

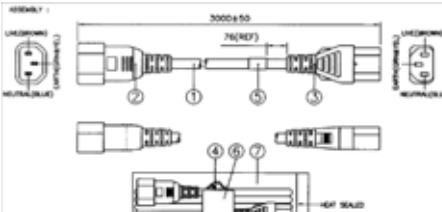
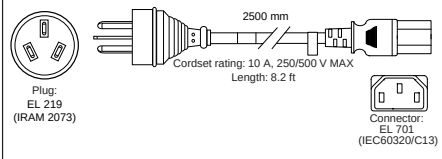
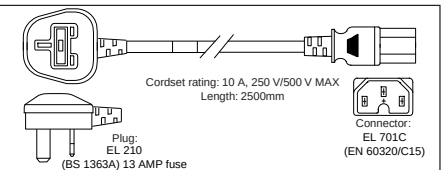

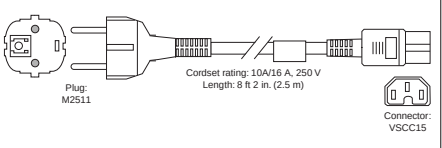
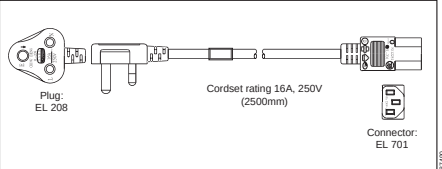
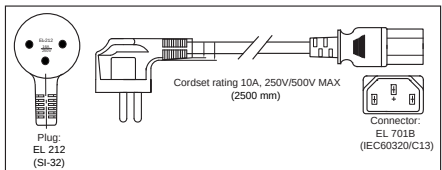
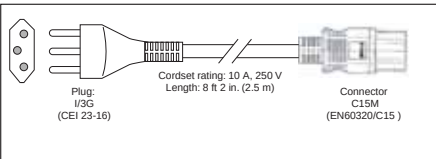
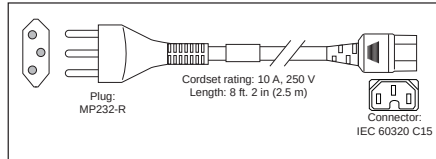
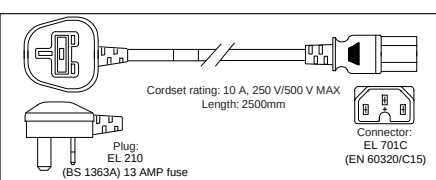
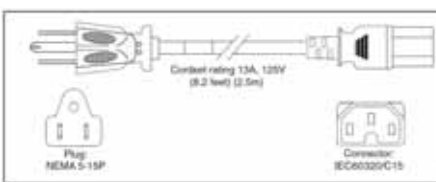
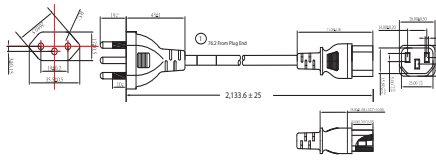
Product ID (PID)	PID Description	Images
CAB-C13-C14-AC	CORD,PWR,JMP,IEC60320/C14,IEC60320/C13, 3.0M	
CAB-250V-10A-AR	Power Cord, 250V, 10A, Argentina	
CAB-9K10A-AU	Power Cord, 250VAC 10A 3112 Plug, Australia	
CAB-250V-10A-CN	AC Power Cord - 250V, 10A - PRC	
CAB-9K10A-EU	Power Cord, 250VAC 10A CEE 7/7 Plug, EU	
CAB-250V-10A-ID	Power Cord, 250V, 10A, India	
CAB-C13-C14-3M-IN	Power Cord Jumper, C13-C14 Connectors, 3 Meter Length, India	Image not available
CAB-C13-C14-IN	Power Cord Jumper,C13-C14 Connectors,1.4 Meter Length, India	Image not available
CAB-250V-10A-IS	Power Cord, SFS, 250V, 10A, Israel	

Table 17 Available Power Cords (for server PSUs less than 2300 W)

Product ID (PID)	PID Description	Images
CAB-9K10A-IT	Power Cord, 250VAC 10A CEI 23-16/VII Plug, Italy	 Plug: 10A (CEI 23-16) Cordset rating: 10 A, 250 V Length: 8 ft. 2 in. (2.5 m) Connector: C15M (EN60320/C15)
CAB-9K10A-SW	Power Cord, 250VAC 10A MP232 Plug, Switzerland	 Plug: MP232-R Cordset rating: 10 A, 250 V Length: 8 ft. 2 in. (2.5 m) Connector: IEC 60320 C15
CAB-9K10A-UK	Power Cord, 250VAC 10A BS1363 Plug (13 A fuse), UK	 Cordset rating: 10 A, 250 V/500 V MAX Length: 2500mm Plug: EL 210 (BS 1363A) 13 AMP fuse Connector: EL 701C (EN 60320/C15)
CAB-9K12A-NA ¹	Power Cord, 125VAC 13A NEMA 5-15 Plug, North America	 Cordset rating: 13A, 125V (8.2 feet) (2.5m) Plug: NEMA 5-15P Connector: IEC60320/C15
CAB-250V-10A-BR	Power Cord - 250V, 10A - Brazil	 2.133.6 ± .25
CAB-C13-C14-2M-JP	Power Cord C13-C14, 2M/6.5ft Japan PSE mark	Image not available
CAB-9K10A-KOR ¹	Power Cord, 125VAC 13A KSC8305 Plug, Korea	Image not available
CAB-ACTW	AC Power Cord (Taiwan), C13, EL 302, 2.3M	Image not available
CAB-JPN-3PIN	Japan, 90-125VAC 12A NEMA 5-15 Plug, 2.4m	Image not available

Notes:

1. This power cord is rated to 125V and only supported for PSU rated at 1050W or less

Table 18 Available Power Cords (for servers with 2300 W PSUs)

Product ID (PID)	PID Description	Images
CAB-C19-CBN	Cabinet Jumper Power Cord, 250 VAC 16A, C20-C19 Connectors	Not applicable
CAB-S132-C19-ISRL	S132 to IEC-C19 14ft Israeli	Image not available
CAB-IR2073-C19-AR	IRSM 2073 to IEC-C19 14ft Argen	Image not available
CAB-BS1363-C19-UK	BS-1363 to IEC-C19 14ft UK	Image not available
CAB-SABS-C19-IND	SABS 164-1 to IEC-C19 India	Image not available
CAB-C14C19-10A-EU	Power Cord C14-C19 10A EU	Image is not available
CAB-C2316-C19-IT	CEI 23-16 to IEC-C19 14ft Italy	Image not available
CAB-L520P-C19-US	NEMA L5-20 to IEC-C19 6ft US	Image not available
CAB-US515P-C19-US	NEMA 5-15 to IEC-C19 13ft US	Image not available
CAB-US520-C19-US	NEMA 5-20 to IEC-C19 14ft US	Image not available
CAB-US620P-C19-US	NEMA 6-20 to IEC-C19 13ft US	Image not available

STEP 11 ORDER TOOL-LESS RAIL KIT AND OPTIONAL REVERSIBLE CABLE MANAGEMENT ARM

Select a Tool-less Rail Kit

Select a tool-less rail kit (or no rail kit) from [Table 19](#).

Table 19 Tool-less Rail Kit Options

Product ID (PID)	PID Description
UCSC-RAIL-D	Ball Bearing Rail Kit for M8 rack servers
UCSC-RAIL-NONE-D	No rail kit option



NOTE: Cisco recommends a minimum quantity of 1 Rail Kit.

Select an Optional Reversible Cable Management Arm

The reversible cable management arm mounts on either the right or left slide rails at the rear of the server and is used for cable management. Use [Table 20](#) to order a cable management arm.

Table 20 Cable Management Arm

Product ID (PID)	PID Description
UCSC-CMA-C220-D	Reversible CMA for M8 ball bearing rail kit

For more information about the tool-less rail kit and cable management arm, see the *Cisco UCS C225 M8 Installation and Service Guide* at this URL:

https://www.cisco.com/content/en/us/td/docs/unified_computing/ucs/c/hw/c225m8/install/c225m8.html



NOTE: If you plan to rackmount your UCS C225 M8 server, you must order a tool-less rail kit. The same rail kits and CMAs are used for M5 and M6 servers.

STEP 12 SELECT MANAGEMENT CONFIGURATION (OPTIONAL)

By default, the C225 M8 server NIC mode is configured to be Shared LOM Extended. This NIC mode allows any LOM port or adapter card port to be used to access the Cisco Integrated. In addition, the optional software PIDS listed in [Table 21 on page 38](#) can be ordered for setting the server to operate in various modes.



NOTE:

- There are no LOM ports on the C225 M8 servers. Servers ordered without a VIC or OCP card will ship in Dedicated network mode, unless otherwise specified by a configurable SW PID (**UCSC-CCARD-01**)

- For full details on all the NIC mode settings, see

https://www.cisco.com/c/en/us/td/docs/unified_computing/ucs/c/hw/c220m6/install/c220m7/m_maintaining_the_server.html?bookSearch=true

Table 21 Management Configuration Ordering Information

Product ID (PID)	PID Description
UCSC-DLOM-01-D	Dedicated Mode BIOS setting for C-Series Servers ■ To change the default NIC mode to Dedicated NIC mode, select this card ■ In Dedicated NIC mode, the CIMC can be accessed only through the dedicated management port. ■ See Chassis Rear View (two full-height, 3/4-length PCIe risers), page 8 for the location of the management port
UCSC-CCARD-01-D	Cisco Card Mode BIOS setting for C-Series Servers ■ To change the default NIC mode to Cisco Card Mode, select this card ■ If Cisco card selected, a VIC or MLOM must also be included in the configuration. if OCP card is included in the configuration, a VIC card must be selected. ■ In this mode, you can assign an IP address to the CIMC using DHCP and from there you can fully automate your deployment.

STEP 13 ORDER SECURITY DEVICES (OPTIONAL)

A Trusted Platform Module (TPM) is a computer chip (microcontroller) that can securely store artifacts used to authenticate the platform (server). These artifacts can include passwords, certificates, or encryption keys. A TPM can also be used to store platform measurements that help ensure that the platform remains trustworthy. Authentication (ensuring that the platform can prove that it is what it claims to be) and attestation (a process helping to prove that a platform is trustworthy and has not been breached) are necessary steps to ensure safer computing in all environments.

A chassis intrusion switch gives a notification of any unauthorized mechanical access into the server.

The security device ordering information is listed in [Table 22](#)



NOTE:

- The TPM module used in this system conforms to TPM v2.0, as defined by the Trusted Computing Group (TCG). It is also SPI-based.
- TPM installation is supported after-factory. However, a TPM installs with a one-way screw and cannot be replaced, upgraded, or moved to another server. If a server with a TPM is returned, the replacement server must be ordered with a new TPM.

Table 22 Security Devices

Product ID (PID)	PID Description
UCS-TPM2-002D-D	Trusted Platform Module 2.0 FIPS 140-2 and Windows 22 compliant for AMD M8 servers
UCSX-TPM-OPT-OUT-D	OPT OUT, TPM 2.0, TCG, FIPS140-2, CC EAL4+ Certified ¹
UCSC-INT-SW02-D	M8 Chassis Intrusion Switch

Notes:

1. Please note that Microsoft certification requires a TPM 2.0 for bare-metal or guest VM deployments. Opt-out of the TPM 2.0 voids the Microsoft certification

STEP 14 SELECT LOCKING SECURITY BEZEL (OPTIONAL)

An optional locking bezel can be mounted to the front of the chassis to prevent unauthorized access to the drives.

Select the locking bezel from [Table 23](#).

Table 23 Locking Bezel Option

Product ID (PID)	Description
UCSC-BZL-C220-D	Security Bezel

STEP 15 ORDER M.2 SATA SSDs (OPTIONAL)

- Up to two matching M.2 SATA SSDs from [Table 24](#) along with a boot-optimized RAID controller (see [Table 25](#)). See [Figure 6 on page 46](#) for the location of the module connector on the motherboard. The motherboard connector accepts the extender board and the extender board accepts the boot-optimized RAID controller. Each boot-optimized RAID controller can accommodate up to two SATA M.2 SSDs



NOTE:

- It is recommended that M.2 SATA SSDs be used as boot-only devices.
- Order one or two identical M.2 SATA SSDs for the boot optimized RAID controller
- You cannot mix M.2 SATA SSD capacities.

Table 24 M.2 SATA SSDs

Product ID (PID)	PID Description
UCS-M2-240G-D	240GB M.2 SATA Micron G2 SSD
UCS-M2-480G-D	480GB M.2 SATA SSD
UCS-M2-960G-D	960GB M.2 SATA Micron G2 SSD
UCS-M22400A1V	240GB M.2 Boot Solidigm S4520 SATA 1X SSD
UCS-M24800A1V	480GB M.2 Boot Solidigm S4520 SATA 1X SSD

- Order Cisco boot optimized M.2 RAID controller from [Table 25](#). The boot optimized RAID controller plugs into a extender board on the motherboard and holds up to two M.2 SATA drives.



NOTE:

- The Cisco boot optimized M.2 RAID controller supports Windows and Linux Operating Systems
- The Cisco boot optimized M.2 RAID controller supports RAID 1 and JBOD mode
- The Cisco boot optimized M.2 RAID controller is available only with 240GB, 480GB, and 960GB M.2 SSDs.
- CIMC is supported for configuring of volumes and monitoring of the controller and installed SATA M.2 drives
- The SATA M.2 drives can boot in UEFI mode only. Legacy boot mode is not supported
- Hot-plug replacement is not supported. The server must be powered off.

Table 25 Boot-Optimized RAID Controller

Product ID (PID)	PID Description
UCS-M2-HWRAID-D	Cisco Boot optimized M.2 RAID controller (holds up to two M.2 SATA SSDs)
Accessories/spare included with Boot-Optimized RAID Controller: ■ UCSC-M2EXT-240-D is included with the selection of this Boot-Optimized RAID Controller. NOTE: if you are adding later UCS-M2-HWRAID-D= as a spare you may need order UCSC-M2EXT-240-D= along with it	

STEP 16 ORDER M.2 NVMe AND RAID CONTROLLER(OPTIONAL)

- Order one or two matching M.2 NVMe from [Table 26](#) along with a boot-optimized RAID controller (see [Table 27](#)). See [Figure 6 on page 46](#) for the location of the module connector on the motherboard. This connector accepts the boot-optimized RAID controller. Each boot-optimized RAID controller can accommodate up to two M.2 NVMe.



NOTE:

- It is recommended that M.2 NVMe be used as boot-only devices.
- Order one or two identical M.2 NVMe for the boot optimized RAID controller
- You cannot mix M.2 NVMe capacities.
- The M.2 NVMe BOOT RAID Controller utilizes a PCIe slot and can be configured through Riser 1C, 2A and 2B
- The M.2 NVMe BOOT RAID Controller is not supported with 5th Gen CPUs.

Table 26 M.2 NVMe

Product ID (PID)	PID Description
UCS-NVM2-400GB	400GB M.2 Boot NVMe
UCS-NVM2-960GB	960GB M.2 Boot NVMe

- Order Cisco boot optimized M.2 NVMe RAID controller from [Table 27](#). The boot optimized RAID controller plugs into a connector on the motherboard and holds up to two M.2 NVMe drives.

Table 27 Boot-Optimized RAID Controller

Product ID (PID)	PID Description
UCS-M2-NVRAID	Cisco M.2 NVMe BOOT RAID Controller (HHHL)

STEP 17 SELECT OPERATING SYSTEM

Select

- Operating System ([Table 28](#))



NOTE:

- See this link for operating system guidance:
<https://ucshcltool.cloudapps.cisco.com/public/>

Table 28 Operating System

Product ID (PID)	PID Description
Microsoft Windows Server	
MSWS-25-ST16C	Windows Server 2025 Standard (16 Cores)
MSWS-25-ST16C-NS	Windows Server 2025 Standard (16 Cores) - No Cisco SVC
MSWS-25-ST24C	Windows Server 2025 Standard (24 Cores)
MSWS-25-ST24C-NS	Windows Server 2025 Standard (24 Cores) - No SVC
MSWS-25-DC16C	Windows Server 2025 Datacenter (16 Core)
MSWS-25-DC16C-NS	Windows Server 2025 DC (16 Cores) - No SVC
MSWS-25-DC24C	Windows Server 2025 Datacenter (24 Core)
MSWS-25-DC24C-NS	Windows Server 2025 Datacenter (24 Core) - No SVC
Red Hat	
RHEL-2S2V-1A	Red Hat Enterprise Linux (1-2 CPU,1-2 VN); 1-Yr Support Req
RHEL-2S2V-3A	Red Hat Enterprise Linux (1-2 CPU,1-2 VN); 3-Yr Support Req
RHEL-2S2V-5A	Red Hat Enterprise Linux (1-2 CPU,1-2 VN); 5-Yr Support Req
RHEL-VDC-2SUV-1A	RHEL for Virt Datacenters (1-2 CPU, Unlim VN) 1 Yr Supp Req
RHEL-VDC-2SUV-3A	RHEL for Virt Datacenters (1-2 CPU, Unlim VN) 3 Yr Supp Req
RHEL-VDC-2SUV-5A	RHEL for Virt Datacenters (1-2 CPU, Unlim VN) 5 Yr Supp Req
Red Hat Ent Linux/ High Avail/ Res Strg/ Scal	
RHEL-2S2V-1S	Red Hat Enterprise Linux (1-2 CPU,1-2 VN); Prem 1Yr SnS Reqd
RHEL-2S2V-3S	Red Hat Enterprise Linux (1-2 CPU,1-2 VN); Prem 3Yr SnS Reqd
RHEL-2S-HA-1S	RHEL High Availability (1-2 CPU); Premium 1-yr SnS Reqd
RHEL-2S-HA-3S	RHEL High Availability (1-2 CPU); Premium 3-yr SnS Reqd

Table 28 Operating System (continued)

Product ID (PID)	PID Description
RHEL-2S-RS-1S	RHEL Resilient Storage (1-2 CPU); Premium 1-yr SnS Req'd
RHEL-2S-RS-3S	RHEL Resilient Storage (1-2 CPU); Premium 3-yr SnS Req'd
RHEL-VDC-2SUV-1S	RHEL for Virt Datacenters (1-2 CPU, Unlim VN) 1 Yr SnS Req'd
RHEL-VDC-2SUV-3S	RHEL for Virt Datacenters (1-2 CPU, Unlim VN) 3 Yr SnS Req'd
Red Hat SAP	
RHEL-SAP-2S2V-1S	RHEL for SAP Apps (1-2 CPU, 1-2 VN); Prem 1-Yr SnS Req'd
RHEL-SAP-2S2V-3S	RHEL for SAP Apps (1-2 CPU, 1-2 VN); Prem 3-Yr SnS Req'd
RHEL-SAPSP-3S	RHEL SAP Solutions Premium - 3 Years
RHEL-SAPSS-3S	RHEL SAP Solutions Standard - 3 Years
SUSE	
SLES-2S2V-1A	SUSE Linux Enterprise Svr (1-2 CPU, 1-2 VM); 1-Yr Support Req
SLES-2S2V-3A	SUSE Linux Enterprise Svr (1-2 CPU, 1-2 VM); 3-Yr Support Req
SLES-2S2V-5A	SUSE Linux Enterprise Svr (1-2 CPU, 1-2 VM); 5-Yr Support Req
SLES-2S-LP-1A	SUSE Linux Live Patching Add-on (1-2 CPU); 1yr Support Req
SLES-2S-LP-3A	SUSE Linux Live Patching Add-on (1-2 CPU); 3yr Support Req
SLES-2SUVM-1A	SUSE Linux Enterprise Svr (1-2 CPU, Unl VM) LP; 1Y Supp Req
SLES-2SUVM-3A	SUSE Linux Enterprise Svr (1-2 CPU, Unl VM) LP; 3Y Supp Req
SLES-2SUVM-5A	SUSE Linux Enterprise Svr (1-2 CPU, Unl VM) LP; 5Y Supp Req
SLES-2S2V-1S	SUSE Linux Enterprise Svr (1-2 CPU, 1-2 VM); Prio 1-Yr SnS
SLES-2S2V-3S	SUSE Linux Enterprise Svr (1-2 CPU, 1-2 VM); Prio 3-Yr SnS
SLES-2S2V-5S	SUSE Linux Enterprise Svr (1-2 CPU, 1-2 VM); Prio 5-Yr SnS
SLES-2S-HA-1S	SUSE Linux High Availability Ext (1-2 CPU); 1yr SnS
SLES-2S-HA-3S	SUSE Linux High Availability Ext (1-2 CPU); 3yr SnS
SLES-2S-HA-5S	SUSE Linux High Availability Ext (1-2 CPU); 5yr SnS
SLES-2S-GC-1S	SUSE Linux GEO Clustering for HA (1-2 CPU); 1yr Sns
SLES-2S-GC-3S	SUSE Linux GEO Clustering for HA (1-2 CPU); 3yr SnS
SLES-2S-GC-5S	SUSE Linux GEO Clustering for HA (1-2 CPU); 5yr SnS
SLES-2S-LP-1S	SUSE Linux Live Patching Add-on (1-2 CPU); 1yr SnS Required
SLES-2S-LP-3S	SUSE Linux Live Patching Add-on (1-2 CPU); 3yr SnS Required

Table 28 Operating System (*continued*)

Product ID (PID)	PID Description
SLES-2SUV-1S	SUSE Linux Enterprise Svr (1-2 CPU,Unl VM) LP; Prio 1Y SnS
SLES-2SUV-3S	SUSE Linux Enterprise Svr (1-2 CPU,Unl VM) LP; Prio 3Y SnS
SLES-2SUV-5S	SUSE Linux Enterprise Svr (1-2 CPU,Unl VM) LP; Prio 5Y SnS
SLES and SAP	
SLES-SAP-2S2V-1S	SLES for SAP Apps (1-2 CPU, 1-2 VM); Priority 1-Yr SnS
SLES-SAP-2S2V-3S	SLES for SAP Apps (1-2 CPU, 1-2 VM); Priority 3-Yr SnS
SLES-SAP-2S2V-5S	SLES for SAP Apps (1-2 CPU, 1-2 VM); Priority 5-Yr SnS
SLES-SAP-2S2V-1A	SLES for SAP Apps w/ HA (1-2 CPU, 1-2 VM); 1-Yr Support Req'd
SLES-SAP-2S2V-3A	SLES for SAP Apps w/ HA (1-2 CPU, 1-2 VM); 3-Yr Support Req'd
SLES-SAP-2S2V-5A	SLES for SAP Apps w/ HA (1-2 CPU, 1-2 VM); 5-Yr Support Req'd

SUPPLEMENTAL MATERIAL

PCIe Port Assignment

UCSC-C225-M8S

Slots	CPU1
slot 1 (Riser 1)	Gen4 x16 / Gen5 x16
slot 2 (Riser 2)	Gen4 x16 / Gen5 x16)
slot 3 (Riser 3)	Gen4 x16 / Gen5 x16
mLOM / OCP	Gen5 x16
24G Tri-Mode RAID / HBA	Gen4 x16
Front NVMe (drives 1-4)	Gen4 x4 each
M.2 RAID*	Gen2 x2
M.2 NVMe RAID	Gen4 x8


UCSC-C225-M8N

Slots	CPU1
slot 1 (Riser 1)	Gen4 x16 / Gen5 x16
slot 2 (Riser 2)	Gen4 x16 / Gen5 x16)
slot 3 (Riser 3)	Gen4 x16 / Gen5 x16
mLOM / OCP	Gen5 x16
Front NVMe (drives 1-10)	Gen4 x4 each
M.2 RAID*	Gen2 x2
M.2 NVMe RAID	Gen4 x8


Chassis

Figure 6 and **Figure 7** shows the Internal views of the C225 M8 chassis with the top cover removed.

Figure 6 C225 M8 SFF With Top Cover Off (full-height, full-width PCIe cards)

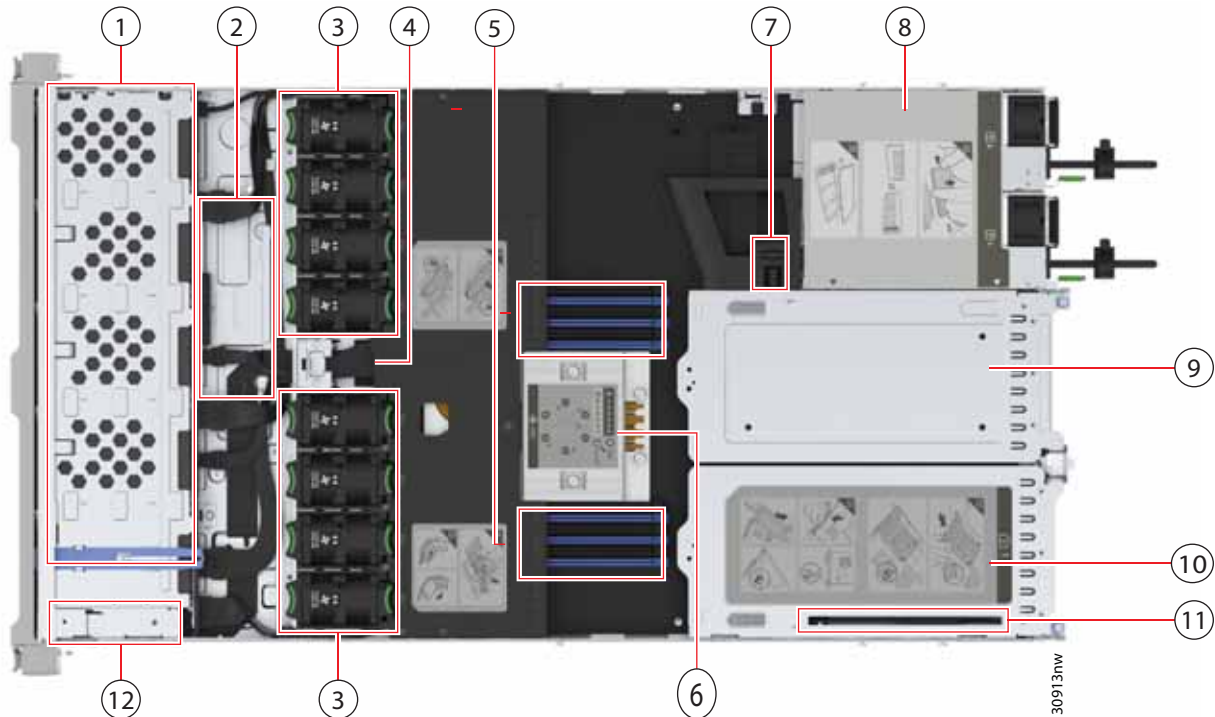

1	Front-loading drive bays	2	M8 modular RAID card (or SATA Interposer)
3	Cooling fan modules (eight) Each fan is hot-swappable	4	Supercap module mounting bracket
5	DIMM sockets on motherboard, 12 total.	6	Motherboard CPU socket
7	M.2 module connector, supporting a boot-optimized RAID controller with connectors for up to two SATA M.2 SSDs.	8	Two power supplies
9	PCIe riser 3 Accepts 1 full height, full width PCIe riser card	10	PCIe riser 1 Accepts 1 full height, full width PCIe riser card
11	Modular LOM (mLOM) card bay on chassis floor(x16 PCIe lane) Connector shown, but the card bay sits below PCIe riser 1.	12	Front Panel Controller board

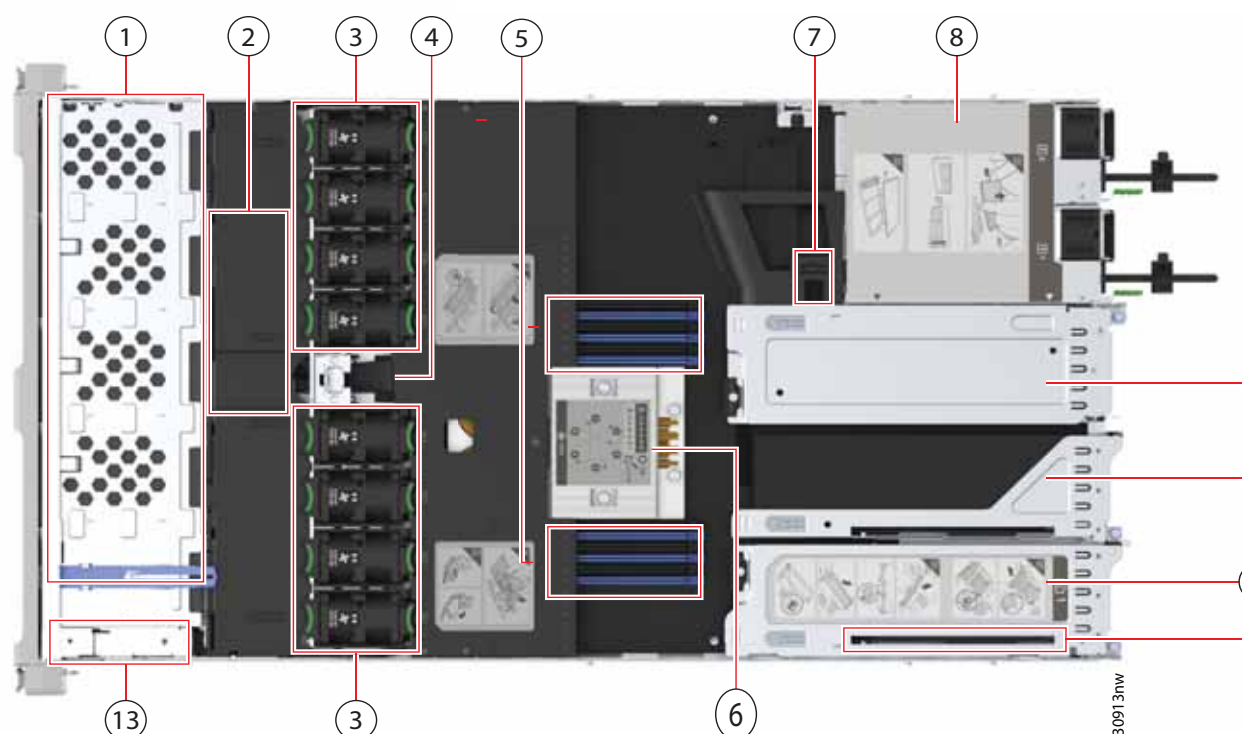Figure 7 C225 M8 SFF With Top Cover Off (full-height, half-width PCIe cards)


1	Front-loading drive bays	2	M8 modular RAID card (or SATA Interposer)
3	Cooling fan modules (eight) Each fan is hot-swappable	4	Supercap module mounting bracket
5	DIMM sockets on motherboard, 12 total.	6	Motherboard CPU socket
7	M.2 module connector, supporting a boot-optimized RAID controller with connectors for up to two SATA M.2 SSDs.	8	Two power supplies
9	PCIe riser 3 Accepts 1 half height, half width PCIe riser card	10	PCIe riser 2 Accepts 1 half height, half width PCIe riser card
11	PCIe riser 1 Accepts 1 half height, half width PCIe riser card	12	Modular LOM (mLOM)/OCP 3.0 card bay on chassis floor (x16 PCIe lane) Connector shown, but the card bay sits below PCIe riser slot 1.
13	Front Panel Controller board	-	-

Serial Port Details

The pinout details of the rear RJ-45 serial port connector are shown in [Figure 8](#).

Figure 8 Serial Port (Female RJ-45 Connector) Pinout

Serial Port (RJ-45 Female Connector)

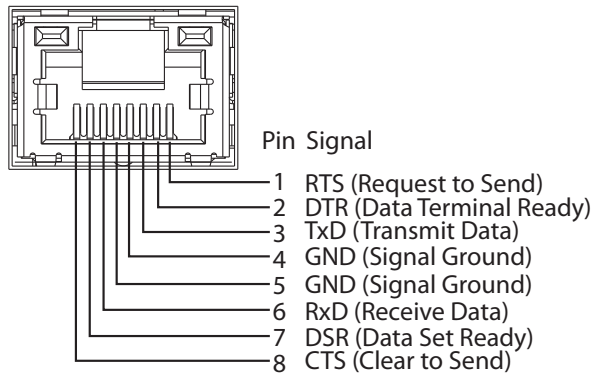

KVM Cable


The KVM cable provides a connection into the server, providing a DB9 serial connector, a VGA connector for a monitor, and dual USB ports for a keyboard and mouse. With this cable, you can create a direct connection to the operating system and the BIOS running on the server.

The KVM cable ordering information is listed in [Table 29](#).

Table 29 KVM Cable

Product ID (PID)	PID Description
N20-BKVM	KVM cable for UCS Server console port

Figure 9 KVM Cable

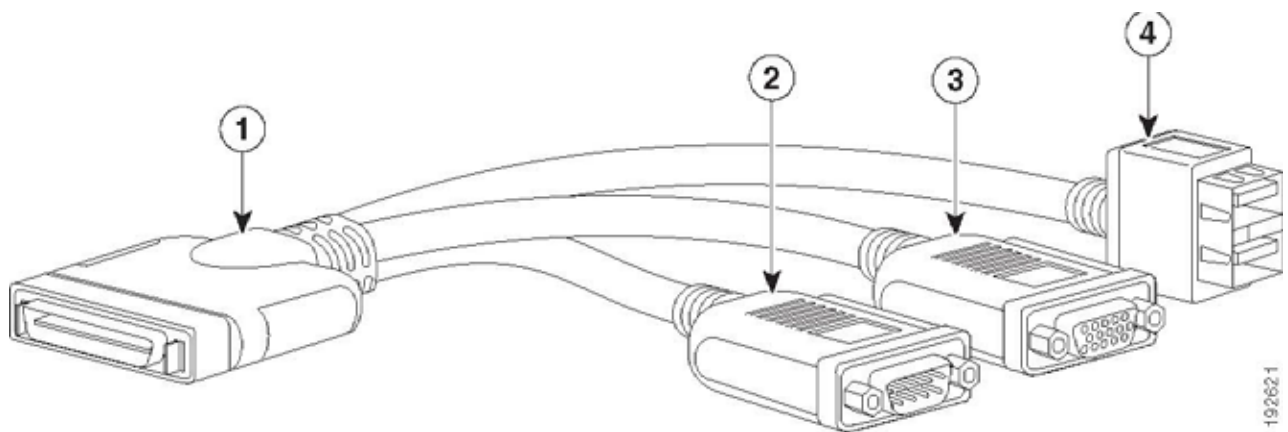

1	Connector (to server front panel)	3	VGA connector (for a monitor)
2	DB-9 serial connector	4	Two-port USB connector (for a mouse and keyboard)

Please refer to “Cisco UCS C225 M8 Server Installation and Service Guide” for installation procedures. See this link:

https://www.cisco.com/content/en/us/td/docs/unified_computing/ucs/c/hw/c225m6/install/c225m6.html

UPGRADING or REPLACING CPU and Memory

- Refer to [Cisco UCS C225 M8 Server Installation and Service Guide](#) to upgrading or replacing the CPU
- Refer to [Cisco UCS C225 M8 Server Installation and Service Guide](#) to upgrading or replacing the Memory

SPARE PARTS

This section lists the upgrade and service-related parts for the UCS C225 M8 server. Some of these parts are configured with every server.



NOTE: Some spare parts you order may also require accessories for full functionality. For example, drives or RAID controllers may need accompanying cables. CPUs may need heatsinks, thermal paste, and installation tools. The spares and their accessory parts are listed in [Table 30](#).

Table 30 Spare Parts

Product ID (PID)	Description
Fan	
UCSC-FAN-C225M8= or UCSC-FAN-C220M7	UCS C-Series M8 1U Fan
Risers	
Riser 1 Option	
UCSC-RIS1A-225M8=	C225 M8 1U Riser 1A PCIe Gen4 x16 HH
UCSC-RIS1B-225M8=	C225 M8 1U Riser 1B PCIe Gen5 x16 HH
UCSC-RIS1C-225M8=	C225 M8 1U Riser 1C PCIe Gen5 x16 FH
Riser 2 Option	
UCSC-RIS2A-225M8=	C225 M8 1U Riser 2A PCIe Gen4 x16 HH
UCSC-RIS2B-225M8=	C225 M8 1U Riser 2B PCIe Gen5 x16 HH
Riser 3 Option	
UCSC-RIS3A-225M8=	C225 M8 1U Riser 3A PCIe Gen4 x16 HH (CPU2)
UCSC-RIS3C-225M8=	C225 M8 1U Riser 3C PCIe Gen5 x16 FH (CPU2)
Riser Blank	
UCSC-FBRS2-C225M8=	C225 M8 Riser2 HH Filler Blank
UCSC-FBRS-C220-D=	C220M7/M8 HH Riser3 blank
UCSC-FBRSF-225M8=	C225 M8 Riser FH Filler Blank
CPUs	
Note: If you are ordering a second CPU, see the CPU Accessories section in this table for additional parts you may need to order for the second CPU.	
5th Gen. CPUs	
UCS-CPU-A9355=	AMD 9355 3.4GHz 280W 32C/256MB Cache DDR5 6000MT/s
UCS-CPU-A9135=	AMD 9135 3.5GHz 200W 16C/64MB Cache DDR5 6000MT/s
UCS-CPU-A9655P=	AMD 9655P 2.6GHz 400W 96C/384MB Cache DDR5 6000MT/s
UCS-CPU-A9555P=	AMD 9555P 3.2GHz 360W 64C/256MB Cache DDR5 6000MT/s
UCS-CPU-A9355P=	AMD 9355P 3.4GHz 280W 32C/256MB Cache DDR5 6000MT/s
4th Gen. CPUs	
UCS-CPU-A9754=	AMD 9754 2.25GHz 360W 128C/256MB Cache DDR5 4800MT/s

Table 30 Spare Parts

Product ID (PID)	Description
UCS-CPU-A9734=	AMD 9734 2.2GHz 340W 112C/256MB Cache DDR5 4800MT/s
UCS-CPU-A9124=	AMD 9124 2.6GHz 200W 16C/64MB Cache DDR5 4800MHz
UCS-CPU-A9224=	AMD 9224 2.15GHz 200W 24C/64MB Cache DDR5 4800MHz
UCS-CPU-A9254=	AMD 9254 2.4GHz 200W 24C/128MB Cache DDR5 4800MHz
UCS-CPU-A9334=	AMD 9334 2.5GHz 210W 32C/128MB Cache DDR5 4800MHz
UCS-CPU-A9354=	AMD 9354 2.75GHz 280W 32C/256MB Cache DDR5 4800MHz
UCS-CPU-A9454=	AMD 9454 2.25GHz 290W 48C/256MB Cache DDR5 4800MHz
UCS-CPU-A9534=	AMD 9534 2.3GHz 280W 64C/256MB Cache DDR5 4800MHz
UCS-CPU-A9554=	AMD 9554 2.7GHz 360W 64C/256MB Cache DDR5 4800MHz
UCS-CPU-A9634=	AMD 9634 2GHz 290W 84C/384MB Cache DDR5 4800MHz
UCS-CPU-A9654=	AMD 9654 2.05GHz 360W 96C/384MB Cache DDR5 4800MHz
UCS-CPU-A9174F=	AMD 9174F 3.6GHz 320W 16C/256MB Cache DDR5 4800MHz
UCS-CPU-A9274F=	AMD 9274F 3.4GHz 320W 24C/256MB Cache DDR5 4800MHz
UCS-CPU-A9374F=	AMD 9374F 3.3GHz 320W 32C/256MB Cache DDR5 4800MHz
UCS-CPU-A9474F=	AMD 9474F 3.2GHz 360W 48C/256MB Cache DDR5 4800MHz
UCS-CPU-A9354P=	AMD 9354P 2.75GHz 280W 32C/256MB Cache DDR5 4800MHz
UCS-CPU-A9454P=	AMD 9454P 2.25GHz 290W 48C/256MB Cache DDR5 4800MHz
UCS-CPU-A9554P=	AMD 9554P 2.7GHz 360W 64C/256MB Cache DDR5 4800MHz
UCS-CPU-A9654P=	AMD 9654P 2.05GHz 360W 96C/384MB Cache DDR5 4800MHz
UCS-CPU-A9384X=	AMD 9384X 3.1GHz 320W 32C/768MB Cache DDR5 4800MT/s
UCS-CPU-A9184X=	AMD 9184X 3.55GHz 320W 16C/768MB Cache DDR5 4800MT/s
CPU Accessories	
UCSC-HSLP-C225M8=	UCS C225 M8 Heatsink
 Note: Order this Heatsink, if you are adding additional CPU/spare CPU	
UCSC-FAN-C22XM7=	UCS C-Series M7 1U Fan
Available DDR5 DIMMs for 4th Gen. AMD EPYC™ CPUs	
UCS-MR128G4RE3=	128GB DDR5-5600 RDIMM 4Rx4 (16Gb)
UCS-MRX96G2RF3=	96GB DDR5-5600 RDIMM 2Rx4 (24Gb)
UCS-MRX64G2RE3=	64GB DDR5-5600 RDIMM 2Rx4 (16Gb)
UCS-MRX48G1RF3=	48GB DDR5-5600 RDIMM 1Rx4 (24Gb)
Available DDR5 DIMMs for 5th Gen. AMD EPYC™ CPUs	
UCS-MR256G4RG5=	256GB DDR5-6400 RDIMM 4Rx4 (32Gb)
UCS-MR128G2RG5=	128GB DDR5-6400 RDIMM 2Rx4 (32Gb)
UCS-MRX96G2RF5 =	96GB DDR5-6400 RDIMM 2Rx4 (24Gb)

Table 30 Spare Parts

Product ID (PID)	Description
UCS-MRX64G2RE5=	64GB DDR5-6400 RDIMM 2Rx4 (16Gb)
UCS-MRX32G1RE5=	32GB DDR5-6400 RDIMM 1Rx4 (16Gb)
UCS-MRX16G1RE5=	16GB DDR5-6400 RDIMM 1Rx8 (16Gb)
UCS-DIMM-BLK=	UCS DIMM Blank
 Note: Order this DIMM Blank, if you are not using DIMM slots. Any empty DIMM slot must be populated with a DIMM blank to maintain proper cooling airflow.	
RAID Controllers	
 Note: When ordering additional RAID controllers, you may need to order a cable/supercap to connect from the RAID controller to the motherboard. (note: Accessories only required if it is not in the system configuration. Must select all option within a single accessory or OPTOUT PID.)	
UCSC-RAID-HP=	Cisco Tri-Mode 24G SAS RAID Controller w/4GB Cache
UCSC-HBA-M1L16=	24G Tri-Mode M1 HBA for 16 Drives
UCSC-RAID-M1L16=	24G Tri-Mode M1 RAID Controller w/4GB FBWC 16Drv w/1U Brkt
Controller for External Drives	
UCSC-9500-8E-D=	9500 Series PCIe Gen 4.0 Tri-Mode Storage HBA 12Gb/s SAS/SATA/PCIe (NVMe)
Drives	
 Note: When ordering additional SAS/SATA or NVMe front or rear drives, you may need to order a cable to connect from the drive to the motherboard. See the Drive Cables section in this table.	
HDDs	
HDDs (10K RPM)	
UCS-HD600G10KJ4-D=	600 GB 12G SAS 10K RPM SFF HDD
UCS-HD12TB10KJ4-D=	1.2 TB 12G SAS 10K RPM SFF HDD
UCS-HD18TB10KJ4-D=	1.8 TB 12G SAS 10K RPM SFF HDD (4K)
UCS-HD24TB10KJ4-D=	2.4 TB 12G SAS 10K RPM SFF HDD (4K)
UCS-HDB1T8GS10K4K=	1.8TB 2.5in 12G SAS 10K RPM 4K HDD
Enterprise Performance SAS/SATA SSDs (High endurance, supports up to 10X or 3X DWPD (drive writes per day))	
SATA	
UCS-SD19T63X-EP-D=	1.9TB 2.5in Enterprise performance 6G SATA SSD(3X endurance)
UCS-SD480GBM3XEPD=	480GB 2.5in Enterprise Performance 6GSATA SSD(3X endurance)
UCS-SD960GBM3XEPD=	960GB 2.5in Enterprise performance 6GSATA SSD(3X endurance)
UCS-SD19TBM3XEP-D=	1.9TB 2.5in Enterprise performance 6GSATA SSD(3X endurance)

Table 30 Spare Parts

Product ID (PID)	Description
UCS-SDB4800A1P=	480GB 2.5in 15mm Solidigm S4620 Enter Perf 6G SATA 3X SSD
UCS-SDB9600A1P=	960GB 2.5in 15mm Solidigm S4620 Enter Perf 6G SATA 3X SSD
UCS-SDB1T90A1P=	1.9TB 2.5in 15mm Solidigm S4620 Enter Perf 6G SATA 3X SSD
SAS	
UCS-SD16TKA3XEP-D=	1.6TB 2.5in Enter Perf 24G SAS Kioxia PM7 SSD (3X)
UCS-SD32TKA3XEP-D=	3.2TB 2.5in Enter Perf 24G SAS Kioxia PM7 SSD (3X)
Enterprise Value SAS/SATA SSDs (Low endurance, supports up to 1X DWPD (drive writes per day))	
SATA	
UCS-SD240GBM1XEVD=	240GB 2.5 inch Enterprise Value 6G SATA SSD
UCS-SD480GBM1XEVD=	480 GB 2.5 inch Enterprise Value 6G SATA SSD
UCS-SD960GBM1XEVD=	960GB 2.5 inch Enterprise Value 6G SATA SSD
UCS-SD16TBM1XEV-D=	1.6TB 2.5 inch Enterprise Value 6G SATA SSD
UCS-SD19TBM1XEV-D=	1.9TB 2.5 inch Enterprise Value 6G SATA SSD
UCS-SD38TBM1XEV-D=	3.8TB 2.5 inch Enterprise Value 6G SATA SSD
UCS-SD76TBM1XEV-D=	7.6TB 2.5 inch Enterprise Value 6G SATA SSD
UCS-SDB960SA1VD=	960GB 2.5in 6G SATA Enter Value 1X Samsung G1PM893A SSD
UCS-SDB1T9SA1VD=	1.9TB 2.5in 6G SATA Enter Value 1X Samsung G1PM893A SSD
UCS-SDB3T8SA1VD=	3.8TB 2.5in 6G SATA Enter Value 1X Samsung G1PM893A SSD
UCS-SDB7T6SA1VD=	7.6TB 2.5in 6G SATA Enter Value 1X Samsung G1PM893A SSD
UCS-SDB4800A1V=	480GB 2.5in 15mm Solidigm S4520 Enter Value 6G SATA 1X SSD
UCS-SDB3T80A1V=	3.8TB 2.5in 15mm Solidigm S4520 Enter Value 6G SATA 1X SSD
SAS	
UCS-SD19TKA1XEV-D=	1.9TB 2.5in Enter Value 24G SAS Kioxia PM7 SSD
UCS-SD38TKA1XEV-D=	3.8TB 2.5in Enter Value 24G SAS Kioxia PM7 SSD
UCS-SD76TKA1XEV-D=	7.6TB 2.5in Enter Value 24G SAS Kioxia PM7 SSD
UCS-SD15TKA1XEV-D=	15.3TB 2.5in Enter Value 24G SAS Kioxia PM7 SSD
Self-Encrypted Drives (SED) (1X or 3X)	
SATA	
UCS-SD19TEM2NK9-D=	1.9TB Enterprise value SATA SSD (1X , SED)
UCS-SD38TEM2NK9-D=	3.8TB Enterprise value SATA SSD (1X, SED)
UCS-SD76TEM2NK9-D=	7.6TB Enterprise value SATA SSD (1X, SED)
UCS-SD960GM2NK9-D=	960GB Enterprise value SATA SSD (1X, SED)
SAS	
UCS-SD16TBKANK9-D=	1.6TB 2.5" Enterprise performance 12GSAS SSD(3DWPD, SED-FIPS) FIPS140-2
UCS-SD38TBKANK9-D=	3.8TB 2.5" Enterprise value 12G SAS SSD (1DWPD, SED-FIPS) FIPS140-2
UCS-SD76TBKANK9-D=	7.6TB Enterprise value SAS SSD (1DWPD, SED-FIPS) FIPS140-2
PCIe /NVMe (2.5-inch) SFF drives	
UCS-NVMEG4-M1536D=	15.3TB 2.5in U.3 MicronP7450 NVMe High Perf Medium Endurance

Table 30 Spare Parts

Product ID (PID)	Description
UCS-NVMEG4-M6400D=	6.4TB 2.5in U.3 Micron P7450 NVMe High Perf High Endurance
UCS-NVB960M1H=	960GB 2.5in U.3 15mm Micron XTR Hg Perf Ext End 60X NVMe
UCS-NVB1T9M1H=	1.92TB 2.5in U.3 15mm Micron XTR Hg Perf Ext End 60X NVMe
UCS-NVB3T8M2V9=	3.8TB 2.5in U.3 15mm Micron 7500 HgPerf MedEnd 1X NVMe FIPS
UCS-NVB1T9M2V9=	1.9TB 2.5in U.3 15mm Micron 7500 HgPerf MedEnd 1X NVMe FIPS
UCS-NVB7T6M2V9=	7.6TB 2.5in U.3 15mm Micron 7500 HgPerf MedEnd 1X NVMe FIPS
UCS-NVB15T3M2V9=	15.3TB 2.5in U.3 15mm Micron 7500 HgPerf MedEnd 1X NVMe FIPS
UCS-NVB960M2V=	960GB 2.5in U.3 15mm Micron 7500 Hg Perf Med End 1X NVMe
UCS-NVB1T9M2V=	1.9TB 2.5in U.3 15mm Micron 7500 Hg Perf Med End 1X NVMe
UCS-NVB3T2M2P=	3.2TB 2.5in U.3 15mm Micron 7500 Hg Perf Hg End 3X NVMe
UCS-NVB3T8M2V=	3.8TB 2.5in U.3 15mm Micron 7500 Hg Perf Med End 1X NVMe
UCS-NVB12T8M2P=	12.8TB 2.5in U.3 15mm Micron 7500 Hg Perf Hg End 3X NVMe
UCS-NVB61T4M3L=	61.4TB 2.5" U.2 15mm Micron 6550 HgPerf EcoEnd G4/5 <1X NVMe
UCS-NVB7T6M2V=	7.6TB 2.5in U.3 15mm Micron 7500 Hg Perf Med End 1X NVMe
UCS-NVB1T6M2P=	1.6TB 2.5in U.3 15mm Micron 7500 Hg Perf Hg End 3X NVMe
Drive Cables	
CBL-FNVME-C225M8=	C225M8 NVME Cable, Mainboard to backplane
 Note: You may need to order this cable if you are adding a front NVMe drive to UCSC-C225-M8S	
Drive Blanking Panel	
UCSC-BBLKD-M8=	UCS C-Series M6 & M8 SFF drive blanking panel
PCIe Cards	
Modular LAN on Motherboard (mLOM)/OCP	
UCSC-M-V5Q50GV2-D	Cisco UCS VIC 15427 Quad Port CNA MLOM with Secure Boot
UCSC-M-V5D200GV2D	Cisco VIC 15237 2x 40/100/200G mLOM C-Series w/Secure Boot
UCSC-O-ID10GC ¹	Intel X710T2LOCPV3G1L 2x10GbE RJ45 OCP3.0 NIC
UCSC-O-N6CD100GFD	Cisco-NVDA MCX623436AC-CDAB CX6Dx 2x100G QSFP56 x16 OCP NIC
UCSC-O-N6CD25GFD	Cisco-NVDA MCX631432AC-ADAB CX6Lx 2x25G SFP28 x8 OCP NIC
Virtual Interface Card (VICs)	
UCSC-P-V5Q50G-D	Cisco UCS VIC 15425 Quad Port 10/25/50G CNA PCIE
UCSC-P-V5D200G-D	Cisco UCS VIC 15235 Dual Port 40/100/200G CNA PCIE
Network Interface Cards (NICs)	
1 GbE NICs	
UCSC-P-IQ1GC=	Cisco-Intel I710-T4L 4x1GBASE-T NIC

Table 30 Spare Parts

Product ID (PID)	Description
10 GbE NICs	
UCSC-PCIEID10GF-D=	Intel X710-DA2 Dual Port 10Gb SFP+ NIC
UCSC-P-ID10GC-D=	Cisco-Intel X710T2LG 2x10 GbE RJ45 PCIe NIC
UCSC-P-IQ10GC-D=	Cisco-Intel X710T4LG 4x10 GbE RJ45 PCIe NIC
UCSC-PCIEIQ10GF-D=	Intel X710 quad-port 10G SFP+ NIC
25 GbE NICs	
UCSC-P-I8D25GF-D=	Cisco-Intel E810XXVDA2 2x25/10 GbE SFP28 PCIe NIC
UCSC-P-I8Q25GF-D=	Cisco-Intel E810XXVDA4L 4x25/10 GbE SFP28 PCIe NIC
UCSC-P-N7Q25GF=	MCX713104AS-ADAT: CX-7 4x25GbE SFP56 PCIe Gen4x16, VPI NIC
UCSC-P-N6D25GF-D=	Cisco-NVDA MCX631102AS-ADAT CX6Lx 2x25GbE SFP28 x8 PCIe NIC
100 GbE NICs	
UCSC-P-I8D100GF-D=	Cisco-Intel E810CQDA2 2x100 GbE QSFP28 PCIe NIC
UCSC-P-MCD100GF-D=	Cisco-MLNX MCX623106AC-CDAT 2x100GbE QSFP56 PCIe NIC
200 GbE NICs	
UCSC-P-N3220L=	Nvidia OEM BlueField-3 B3220L SuperNIC 2x200G
Host Bus Adapters (HBAs)	
UCSC-P-Q6D32GF-D=	Cisco-QLogic QLE2772 2x32GFC Gen 6 Enhanced PCIe HBA
UCSC-P-B7D32GF-D=	Cisco-Emulex LPe35002-M2-2x32GFC Gen 7 PCIe HBA
UCSC-PCIEBD16GF-D=	Emulex LPe31002 dual port 16G FC HBA
UCSC-P-Q7D64GF=	Cisco-QLogic QLE2872, 2x64GFC Gen 7 PCIe HBA
External Storage HBA	
UCSC-9500-8E-D=	9500 Series PCIe Gen 4.0 Tri-Mode Storage HBA 12Gb/s SAS/SATA/PCIe (NVMe)
GPU	
UCSC-GPU-L4=	NVIDIA L4:70W, 24GB, 1-slot HHHH GPU
Power Supply	
PSU (Input High Line 210VAC)	
UCSC-PSU1-1200W-D=	1200W Titanium power supply for C-Series Servers
UCSC-PSUV21050D-D=	Cisco UCS 1050W -48V DC Power Supply for Rack Server
UCSC-PSU1-1600W-D=	UCS 1600W AC PSU Platinum (Not EU/UK Lot 9 Compliant)
UCSC-PSU1-2300W-D=	Cisco UCS 2300W AC Power Supply for Rack Servers Titanium
PSU (Input Low Line 110VAC)	
UCSC-PSU1-1200W-D=	1200W Titanium power supply for C-Series Servers
UCSC-PSU1-2300W-D=	Cisco UCS 2300W AC Power Supply for Rack Servers Titanium
Power Cords	
NO-POWER-CORD=	ECO friendly green option, no power cable will be shipped
R2XX-DMYMPWRCORD=	No power cord (dummy PID to allow for a no power cord option)
CAB-48DC-40A-8AWG=	C-Series -48VDC PSU Power Cord, 3.5M, 3 Wire, 8AWG, 40A
CAB-N5K6A-NA=	Power Cord, 200/240V 6A, North America

Table 30 Spare Parts

Product ID (PID)	Description
CAB-AC-L620-C13=	AC Power Cord, NEMA L6-20 - C13, 2M/6.5ft
CAB-C13-CBN=	CABASY,WIRE,JUMPER CORD, 27" L, C13/C14, 10A/250V
CAB-C13-C14-2M=	CABASY,WIRE,JUMPER CORD, PWR, 2 Meter, C13/C14,10A/250V
CAB-C13-C14-AC=	CORD,PWR,JMP,IEC60320/C14,IEC6 0320/C13, 3.0M
CAB-250V-10A-AR=	Power Cord, 250V, 10A, Argentina
CAB-9K10A-AU=	Power Cord, 250VAC 10A 3112 Plug, Australia
CAB-250V-10A-CN=	AC Power Cord - 250V, 10A - PRC
CAB-9K10A-EU=	Power Cord, 250VAC 10A CEE 7/7 Plug, EU
CAB-250V-10A-ID=	Power Cord, 250V, 10A, India
CAB-C13-C14-3M-IN=	Power Cord Jumper, C13-C14 Connectors, 3 Meter Length, India
CAB-C13-C14-IN=	Power Cord Jumper,C13-C14 Connectors,1.4 Meter Length, India
CAB-250V-10A-IS=	Power Cord, SFS, 250V, 10A, Israel
CAB-9K10A-IT=	Power Cord, 250VAC 10A CEI 23-16/VII Plug, Italy
CAB-9K10A-SW=	Power Cord, 250VAC 10A MP232 Plug, Switzerland
CAB-9K10A-UK=	Power Cord, 250VAC 10A BS1363 Plug (13 A fuse), UK
CAB-9K12A-NA=	Power Cord, 125VAC 13A NEMA 5-15 Plug, North America
CAB-250V-10A-BR=	Power Cord - 250V, 10A - Brazil
CAB-C13-C14-2M-JP=	Power Cord C13-C14, 2M/6.5ft Japan PSE mark
CAB-9K10A-KOR=	Power Cord, 125VAC 13A KSC8305 Plug, Korea
CAB-ACTW=	AC Power Cord (Taiwan), C13, EL 302, 2.3M
CAB-JPN-3PIN=	Japan, 90-125VAC 12A NEMA 5-15 Plug, 2.4m
CAB-C19-CBN=	Cabinet Jumper Power Cord, 250 VAC 16A, C20-C19 Connectors
CAB-S132-C19-ISRL=	S132 to IEC-C19 14ft Israeli
CAB-IR2073-C19-AR=	IRSM 2073 to IEC-C19 14ft Argen
CAB-BS1363-C19-UK=	BS-1363 to IEC-C19 14ft UK
CAB-SABS-C19-IND=	SABS 164-1 to IEC-C19 India
CAB-C14C19-10A-EU=	Power Cord C14-C19 10A EU
CAB-C2316-C19-IT=	CEI 23-16 to IEC-C19 14ft Italy
CAB-L520P-C19-US =	NEMA L5-20 to IEC-C19 6ft US
CAB-US515P-C19-US=	NEMA 5-15 to IEC-C19 13ft US
CAB-US520-C19-US=	NEMA 5-20 to IEC-C19 14ft US
CAB-US620P-C19-US=	NEMA 6-20 to IEC-C19 13ft US
Rail Kit and CMA	
UCSC-RAIL-D=	Ball Bearing Rail Kit for M8 rack servers
UCSC-RAIL-NONE-D=	No rail kit option
UCSC-CMA-C220-D=	Reversible CMA for M8 ball bearing rail kit
Management Configuration	

Table 30 Spare Parts

Product ID (PID)	Description
UCSC-DLOM-01-D=	Dedicated Mode BIOS setting for C-Series Servers
UCSC-CCARD-01-D=	Cisco Card Mode BIOS setting for C-Series Servers
Security Devices	
UCS-TPM2-002D-D=	Trusted Platform Module 2.0 FIPS 140-2 and Windows 22 compliant for AMD M8 servers
UCSX-TPM-OPT-OUT-D=	OPT OUT, TPM 2.0, TCG, FIPS140-2, CC EAL4+ Certified ²
UCSC-INT-SW02-D=	M8 Chassis Intrusion Switch
Bezel	
UCSC-BZL-C220-D=	Security Bezel
M.2 SATA SSD and M.2 RAID controller	
UCS-M2-240G-D=	240GB M.2 SATA Micron G2 SSD
UCS-M2-480G-D=	480GB M.2 SATA SSD
UCS-M2-960G-D=	960GB M.2 SATA Micron G2 SSD
UCS-M2-HWRAID-D	Cisco Boot optimized M.2 RAID controller (holds up to two M.2 SATA SSDs)
M.2 NVMe and M.2 RAID controller	
UCS-NVM2-400GB=	400GB M.2 Boot NVMe
UCS-NVM2-960GB=	960GB M.2 Boot NVMe
UCS-M2-NVRAID=	Cisco M.2 NVMe BOOT RAID Controller (HHHL)
Operating system and Software	
Microsoft Windows Server	
MSWS-22-ST16CD=	Windows Server 2022 Standard (16 Cores/2 VMs)
MSWS-22-ST16CD-NS=	Windows Server 2022 Standard (16 Cores/2 VMs) - No Cisco SVC
MSWS-22-DC16CD=	Windows Server 2022 Data Center (16 Cores/Unlimited VMs)
MSWS-22-DC16CD-NS=	Windows Server 2022 DC (16 Cores/Unlim VMs) - No Cisco SVC
Red Hat	
RHEL-2S2V-D1A=	Red Hat Enterprise Linux (1-2 CPU,1-2 VN); 1-Yr Support Req
RHEL-2S2V-D3A=	Red Hat Enterprise Linux (1-2 CPU,1-2 VN); 3-Yr Support Req
RHEL-2S2V-D5A=	Red Hat Enterprise Linux (1-2 CPU,1-2 VN); 5-Yr Support Req
RHEL-VDC-2SUV-D1A=	RHEL for Virt Datacenters (1-2 CPU, Unlim VN) 1 Yr Supp Req
RHEL-VDC-2SUV-D3A=	RHEL for Virt Datacenters (1-2 CPU, Unlim VN) 3 Yr Supp Req
RHEL-VDC-2SUV-D5A=	RHEL for Virt Datacenters (1-2 CPU, Unlim VN) 5 Yr Supp Req
Red Hat Ent Linux/ High Avail/ Res Strg/ Scal	
RHEL-2S2V-D1S=	Red Hat Enterprise Linux (1-2 CPU,1-2 VN); Prem 1Yr SnS Reqd
RHEL-2S2V-D3S=	Red Hat Enterprise Linux (1-2 CPU,1-2 VN); Prem 3Yr SnS Reqd
RHEL-2S-HA-D1S=	RHEL High Availability (1-2 CPU); Premium 1-yr SnS Reqd
RHEL-2S-HA-D3S=	RHEL High Availability (1-2 CPU); Premium 3-yr SnS Reqd
RHEL-2S-RS-D1S=	RHEL Resilient Storage (1-2 CPU); Premium 1-yr SnS Reqd
RHEL-2S-RS-D3S=	RHEL Resilient Storage (1-2 CPU); Premium 3-yr SnS Reqd
RHEL-VDC-2SUV-D1S=	RHEL for Virt Datacenters (1-2 CPU, Unlim VN) 1 Yr SnS Reqd
RHEL-VDC-2SUV-D3S=	RHEL for Virt Datacenters (1-2 CPU, Unlim VN) 3 Yr SnS Reqd

Table 30 Spare Parts

Product ID (PID)	Description
Red Hat SAP	
RHEL-SAP-2S2V-D1S=	RHEL for SAP Apps (1-2 CPU, 1-2 VN); Prem 1-Yr SnS Reqd
RHEL-SAP-2S2V-D3S=	RHEL for SAP Apps (1-2 CPU, 1-2 VN); Prem 3-Yr SnS Reqd
RHEL-SAPSP-D3S=	RHEL SAP Solutions Premium - 3 Years
RHEL-SAPSS-D3S=	RHEL SAP Solutions Standard - 3 Years
SUSE	
SLES-2S2V-D1A=	SUSE Linux Enterprise Svr (1-2 CPU,1-2 VM); 1-Yr Support Req
SLES-2S2V-D3A=	SUSE Linux Enterprise Svr (1-2 CPU,1-2 VM); 3-Yr Support Req
SLES-2S2V-D5A=	SUSE Linux Enterprise Svr (1-2 CPU,1-2 VM); 5-Yr Support Req
SLES-2SUV-M-D1A=	SUSE Linux Enterprise Svr (1-2 CPU,Unl VM) LP; 1Y Supp Req
SLES-2SUV-M-D3A=	SUSE Linux Enterprise Svr (1-2 CPU,Unl VM) LP; 3Y Supp Req
SLES-2SUV-M-D5A=	SUSE Linux Enterprise Svr (1-2 CPU,Unl VM) LP; 5Y Supp Req
SLES-2S-LP-D1A=	SUSE Linux Live Patching Add-on (1-2 CPU); 1yr Support Req
SLES-2S-LP-D3A=	SUSE Linux Live Patching Add-on (1-2 CPU); 3yr Support Req
SLES-2S2V-D1S=	SUSE Linux Enterprise Svr (1-2 CPU,1-2 VM); Prio 1-Yr SnS
SLES-2S2V-D3S=	SUSE Linux Enterprise Svr (1-2 CPU,1-2 VM); Prio 3-Yr SnS
SLES-2S2V-D5S=	SUSE Linux Enterprise Svr (1-2 CPU,1-2 VM); Prio 5-Yr SnS
SLES-2SUV-M-D1S=	SUSE Linux Enterprise Svr (1-2 CPU,Unl VM) LP; Prio 1Y SnS
SLES-2SUV-M-D3S=	SUSE Linux Enterprise Svr (1-2 CPU,Unl VM) LP; Prio 3Y SnS
SLES-2SUV-M-D5S=	SUSE Linux Enterprise Svr (1-2 CPU,Unl VM) LP; Prio 5Y SnS
SLES-2S-HA-D1S=	SUSE Linux High Availability Ext (1-2 CPU); 1yr SnS
SLES-2S-HA-D3S=	SUSE Linux High Availability Ext (1-2 CPU); 3yr SnS
SLES-2S-HA-D5S=	SUSE Linux High Availability Ext (1-2 CPU); 5yr SnS
SLES-2S-GC-D1S=	SUSE Linux GEO Clustering for HA (1-2 CPU); 1yr Sns
SLES-2S-GC-D3S=	SUSE Linux GEO Clustering for HA (1-2 CPU); 3yr SnS
SLES-2S-GC-D5S=	SUSE Linux GEO Clustering for HA (1-2 CPU); 5yr SnS
SLES-2S-LP-D1S=	SUSE Linux Live Patching Add-on (1-2 CPU); 1yr SnS Required
SLES-2S-LP-D3S=	SUSE Linux Live Patching Add-on (1-2 CPU); 3yr SnS Required
SLES and SAP	
SLES-SAP-2S2V-D1S=	SLES for SAP Apps (1-2 CPU, 1-2 VM); Priority 1-Yr SnS
SLES-SAP-2S2V-D3S=	SLES for SAP Apps (1-2 CPU, 1-2 VM); Priority 3-Yr SnS
SLES-SAP-2S2V-D5S=	SLES for SAP Apps (1-2 CPU, 1-2 VM); Priority 5-Yr SnS
SLES-SAP2SUV-M-D1S=	SLES for SAP Apps (1-2 CPU, Unl VM) LP; Priority 1Y SnS
SLES-SAP2SUV-M-D3S=	SLES for SAP Apps (1-2 CPU, Unl VM) LP; Priority 3Y SnS
SLES-SAP2SUV-M-D5S=	SLES for SAP Apps (1-2 CPU, Unl VM) LP; Priority 5Y SnS
SLES-SAP-2S2V-D1A=	SLES for SAP Apps w/ HA (1-2 CPU, 1-2 VM); 1-Yr Support Reqd
SLES-SAP-2S2V-D3A=	SLES for SAP Apps w/ HA (1-2 CPU, 1-2 VM); 3-Yr Support Reqd
SLES-SAP-2S2V-D5A=	SLES for SAP Apps w/ HA (1-2 CPU, 1-2 VM); 5-Yr Support Reqd
SLES-SAP2SUV-M-D1A=	SLES for SAP Apps w/ HA (1-2 CPU, Unl VM) LP; 1Y Supp Reqd
SLES-SAP2SUV-M-D3A=	SLES for SAP Apps w/ HA (1-2 CPU, Unl VM) LP; 3Y Supp Reqd
SLES-SAP2SUV-M-D5A=	SLES for SAP Apps w/ HA (1-2 CPU, Unl VM) LP; 5Y Supp Reqd

Notes:

1. The UCSC-O-ID10GC is an OCP 3.0 adapter and fits in mLOM /OCP 3.0 slot using a special mechanical connector add-on. See the following link for installation instructions:
https://www.cisco.com/content/en/us/td/docs/unified_computing/ucs/c/hw/c225m6/install/c225m6.html
2. Please note that Microsoft certification requires a TPM 2.0 for bare-metal or guest VM deployments. Opt-out of the TPM 2.0 voids the Microsoft certification

TECHNICAL SPECIFICATIONS

Dimensions and Weight

Table 31 UCS C225 M8 Dimensions and Weight

Parameter	Value
Height	1.70 in. (4.3 cm)
Width (including slam latches)	16.9 in.(42.9 cm)
Depth	30 in. (76.2 cm)
Weight	
Weight with following options and no rail kit: 1*HDD, 1*CPU(with Heat Sink), 1*DIMM, 1*1600W PSU, mLOM card, 3HH rear wall, 3HH riser cage1, 3HH riser cage2, 3HH riser cage3, Raid tray, BBU module (with holder)	15.05 kgs = 33.18 lbs (3HH SKU)
Weight with following options and no rail kit: 1*HDD, 1*CPU(with Heat Sink), 1*DIMM, 1*1600W PSU, mLOM card, 2FH rear wall, 2FH riser cage1, 2FH riser cage2, Raid tray, BBU module (with holder)	15.1 kgs = 33.29 lbs (2FH SKU)
Weight with following options and including rail kit: 1*HDD, 1*CPU(with Heat Sink), 1*DIMM, 1*1600W PSU, mLOM card, 3HH rear wall, 3HH riser cage1, 3HH riser cage2, 3HH riser cage3, Raid tray, BBU module (with holder)	18.8 kgs = 41.45 lbs (3HH SKU)
Weight with following options and including rail kit: 1*HDD, 1*CPU(with Heat Sink), 1*DIMM, 1*1600W PSU, mLOM card, 2FH rear wall, 2FH riser cage1, 2FH riser cage2, Raid tray, BBU module (with holder),	18.85 kgs = 41.56 lbs (2FH SKU)

Power Specifications

The server is available with the following types of power supplies:

- 1050 W V2 (DC) power supply (see [Table 32](#)).
- 1200 W (AC) power supply (see [Table 33](#))
- 1600 W (AC) power supply (see [Table 34](#))
- 2300 W (AC) power supply (see [Table 35](#))

Table 32 UCS C225 M8 SFF Power Specifications (1050 W V2 DC power supply)

Parameter	Specification
Input Connector	Molex 42820
Input Voltage Range (V rms)	-48
Maximum Allowable Input Voltage Range (V rms)	-40 to -72
Frequency Range (Hz)	NA
Maximum Allowable Frequency Range (Hz)	NA
Maximum Rated Output (W)	1050
Maximum Rated Standby Output (W)	36
Nominal Input Voltage (V rms)	-48
Nominal Input Current (A rms)	24
Maximum Input at Nominal Input Voltage (W)	1154
Maximum Input at Nominal Input Voltage (VA)	1154
Minimum Rated Efficiency (%) ¹	91
Minimum Rated Power Factor ¹	NA
Maximum Inrush Current (A peak)	15
Maximum Inrush Current (ms)	0.2
Minimum Ride-Through Time (ms) ²	5

Notes:

1. This is the minimum rating required to achieve 80 PLUS Platinum certification, see test reports published at <http://www.80plus.org/> for certified values
2. Time output voltage remains within regulation limits at 100% load, during input voltage dropout

Table 33 UCS C225 M8 1200 W (AC) Power Supply Specifications

Parameter	Specification			
Input Connector	IEC320 C14			
Input Voltage Range (Vrms)	100 to 240			
Maximum Allowable Input Voltage Range (Vrms)	90 to 264			
Frequency Range (Hz)	50 to 60			
Maximum Allowable Frequency Range (Hz)	47 to 63			
Maximum Rated Output (W) ¹	1100		1200	
Maximum Rated Standby Output (W)	48			
Nominal Input Voltage (Vrms)	100	120	208	230
Nominal Input Current (Arms)	12.97	10.62	6.47	5.84
Maximum Input at Nominal Input Voltage (W)	1300	1264	1343	1340
Maximum Input at Nominal Input Voltage (VA)	1300	1266	1345	1342
Minimum Rated Efficiency (%) ²	90	90	91	91
Minimum Rated Power Factor ²	0.97	0.97	0.97	0.97
Maximum Inrush Current (A peak)	20			
Maximum Inrush Current (ms)	0.2			
Minimum Ride-Through Time (ms) ³	12			

Notes:

1. Maximum rated output is limited to 1100W when operating at low-line input voltage (100-127V)
2. This is the minimum rating required to achieve 80 PLUS Titanium certification, see test reports published at <http://www.80plus.org/> for certified values
3. Time output voltage remains within regulation limits at 100% load, during input voltage dropout

Table 34 UCS C225 M8 1600 W (AC) Power Supply Specifications

Parameter	Specification			
Input Connector	IEC320 C14			
Input Voltage Range (V rms)	200 to 240			
Maximum Allowable Input Voltage Range (V rms)	180 to 264			
Frequency Range (Hz)	50 to 60			
Maximum Allowable Frequency Range (Hz)	47 to 63			
Maximum Rated Output (W)	1600			
Maximum Rated Standby Output (W)	36			
Nominal Input Voltage (V rms)	100	120	208	230
Nominal Input Current (A rms)	NA	NA	8.8	7.9
Maximum Input at Nominal Input Voltage (W)	NA	NA	1778	1758
Maximum Input at Nominal Input Voltage (VA)	NA	NA	1833	1813
Minimum Rated Efficiency (%) ¹	NA	NA	90	91
Minimum Rated Power Factor ²	NA	NA	0.97	0.97
Maximum Inrush Current (A peak)	30			
Maximum Inrush Current (ms)	0.2			
Minimum Ride-Through Time (ms) ²	12			

Notes:

1. This is the minimum rating required to achieve 80 PLUS Platinum certification, see test reports published at <http://www.80plus.org/> for certified values
2. Time output voltage remains within regulation limits at 100% load, during input voltage dropout

Table 35 UCS C225 M8 2300 W (AC) Power Supply Specifications

Parameter	Specification			
Input Connector	IEC320 C20			
Input Voltage Range (Vrms)	100 to 240			
Maximum Allowable Input Voltage Range (Vrms)	90 to 264			
Frequency Range (Hz)	50 to 60			
Maximum Allowable Frequency Range (Hz)	47 to 63			
Maximum Rated Output (W) ¹	2300			
Maximum Rated Standby Output (W)	36			
Nominal Input Voltage (Vrms)	100	120	208	230
Nominal Input Current (Arms)	13	11	12	10.8
Maximum Input at Nominal Input Voltage (W)	1338	1330	2490	2480
Maximum Input at Nominal Input Voltage (VA)	1351	1343	2515	2505
Minimum Rated Efficiency (%) ²	92	92	93	93
Minimum Rated Power Factor ²	0.99	0.99	0.97	0.97
Maximum Inrush Current (A peak)	30			
Maximum Inrush Current (ms)	0.2			
Minimum Ride-Through Time (ms) ³	12			

Notes:

1. Maximum rated output is limited to 1200W when operating at low-line input voltage (100-127V)
2. This is the minimum rating required to achieve 80 PLUS Titanium certification, see test reports published at <http://www.80plus.org/> for certified values
3. Time output voltage remains within regulation limits at 100% load, during input voltage dropout



NOTE: For configuration-specific power specifications, use the Cisco UCS Power Calculator at this URL: <http://ucspowercalc.cisco.com>

Environmental Specifications

The environmental specifications for Cisco UCS C225 M8 SFF server are listed in [Table 36](#).

Table 36 UCS C225 M8 Environmental Specifications

Parameter	Minimum
Operating Temperature	5 °C to 35 °C (supports ASHRAE Class A4 and/or Class A3 and/or Class A2). ASHRAE Class A3 will be generic test profile unless otherwise specified by product engineering. System shall continue to operate with a single fan failure (one failed impeller in dual impeller housings) across the ASHRAE recommended operating range of 18 °C to 27 °C. While undesired, increased power consumption and/or acoustic noise is permitted during a fan fail event.
Non-Operating Temperature	Dry bulb temperature of -40 °C to 65 °C (-40 °F to 149 °F)
Operating Relative Humidity	8% to 90% relative humidity, non-condensing, with maximum wet bulb 28 °C (82.4 °F) within operational temperature range of 5 °C to 50 °C (41 °F to 122 °F)
Non-Operating Relative Humidity	5% to 93% relative humidity, non-condensing, with a maximum wet bulb temperature of 28 °C across the 20 °C to 40 °C dry bulb range.
Maximum Operating Duration	Unlimited
Operating Altitude	A maximum elevation of 3050 meters (10,006 ft)
Non-Operating Altitude	An elevation of 0 to 12,000 meters (39,370 ft)
Sound Power level, Measure A-weighted per ISO7779 LWAd (Bels) Operation at 23 °C (73 °F)	2RU: 5.8B Racked product: 6.8B
Sound Pressure level, Measure A-weighted per ISO7779 LpAm (dBA) Operation at 23 °C (73 °F)	2RU: 43dB Racked product: 55dB

Compliance Requirements

The regulatory compliance requirements for C-Series servers are listed in [Table 37](#)

Table 37 UCS C-Series Regulatory Compliance Requirements

Parameter	Description
Regulatory Compliance	Products should comply with CE Markings per directives 2014/30/EU and 2014/35/EU
Safety	UL 60950-1/62368-1 CAN/CSA-C22.2 No. 60950-1/62368-1 IEC/EN 60950-1/62368-1 AS/NZS 62368.1 GB 4943.1-2022 CNS 15598-1:2020
EMC - Emissions	47CFR Part 15 (CFR 47) Class A AS/NZS CISPR32 Class A CISPR32 Class A EN55032 Class A ICES003 Class A VCCI-CISPR32 Class A EN61000-3-2 EN61000-3-3 KS C 9832 Class A EN 300386 Class A
EMC - Immunity	EN55035 EN55024 CISPR24/35 EN300386 KS C 9835 IEC/EN61000-6-1

DISCONTINUED EOL PRODUCTS

Below is the list of parts were previously available for this product and are no longer sold. Please refer to the EOL Bulletin Links via table below to determine if still supported.

Table 38 EOS

Product ID	Description	EOL/EOS link
UCS-SD960G63XEP-D	960GB 2.5in Enter Perf 6G SATA Intel SSD (3X)	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/select-ucs-accessories-eol15502.html
UCS-MR128G4RE3	128GB DDR5-5600 RDIMM 4Rx4 (16Gb)	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/select-ucs-accessories-eol15570.html
UCS-NVME4-15360-D	15.3TB 2.5in U.2 15mm P5520 Hg Perf Med End NVMe	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/select-ucs-accessories-eol15502.html
UCS-NVME4-1600-D	1.6TB 2.5in U.2 15mm P5620 Hg Perf Hg End NVMe (3X)	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/select-ucs-accessories-eol15502.html
UCS-NVME4-3840-D	3.8TB 2.5in U.2 15mm P5520 Hg Perf Med End NVMe	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/select-ucs-accessories-eol15502.html
UCS-NVME4-7680-D	7.6TB 2.5in U.2 15mm P5520 Hg Perf Med End NVMe	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/select-ucs-accessories-eol15502.html
UCS-SD38T63X-EP-D	3.8TB 2.5in Enter Perf 6G SATA Intel SSD (3X)	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/select-ucs-accessories-eol15502.html
UCS-M2-I480GB-D	480GB SATA M.2 SSD	
UCS-NVME4-1920-D	1.9TB 2.5in U.2 15mm P5520 Hg Perf Med End NVMe	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/select-ucs-accessories-eol15502.html
UCS-NVME4-6400-D	6.4TB 2.5in U.2 15mm P5620 Hg Perf Hg End NVMe (3X)	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/select-ucs-accessories-eol15502.html
UCS-SD480G63XEP-D	480GB 2.5in Enter Perf 6G SATA Intel SSD (3X)	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/select-ucs-accessories-eol15502.html
UCS-NVME4-M1920D	1.9TB 2.5in U.3 15mm P7450 Hg Perf Med End NVMe	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/select-ucs-ucsx-hci-accessories-eol15818.html
UCS-NVME4-M3200D	3.2TB 2.5in U.3 15mm P7450 Hg Perf Hg End NVMe (3X)	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/select-ucs-ucsx-hci-accessories-eol15818.html
UCS-NVME4-M3840D	3.8TB 2.5in U.3 15mm P7450 Hg Perf Med End NVMe	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/select-ucs-ucsx-hci-accessories-eol15818.html
UCS-NVME4-M960-D	960GB 2.5in U.3 15mm P7450 Hg Perf Med End NVMe	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/select-ucs-ucsx-hci-accessories-eol15818.html

Table 38 EOS

UCSC-P-MDD100GF-D	Cisco-MLNX MCX623106AS-CDAT 2x100GbE QSFP56 PCIe NIC	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/select-ucs-accessories-eol15715.html
UCSC-P-N7D200GF	MCX755106AS-HEAT: CX-7 2x200GbE QSFP112 PCIe Gen5x16, VPI NIC	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/select-ucs-ucsx-hci-accessories-eol15818.html
UCS-M2-I240GB-D	240GB M.2 Boot SATA Intel SSD	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/select-ucs-accessories-eol15502.html
UCSC-P-M6DD100GF	Cisco-MLNX MCX623106AS-CDAT 2x100GbE QSFP56 PCIe NIC	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/select-ucs-accessories-eol15715.html
UCSC-P-MDD100GF-D	Cisco-MLNX MCX623106AS-CDAT 2x100GbE QSFP56 PCIe NIC	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/select-ucs-accessories-eol15715.html
UCSC-P-N7D200GF	MCX755106AS-HEAT: CX-7 2x200GbE QSFP112 PCIe Gen5x16, VPI NIC	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/select-ucs-ucsx-hci-accessories-eol15818.html
UCS-MRX48G1RF5	48GB RDIMM 1Rx4 1.1Volts(24Gb)	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/select-ucs-ucsx-hci-accessories-eol15910.html
UCS-MR256G8RE3	256GB DDR5-5600 RDIMM 8Rx4 (16Gb)	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/ucs-accessories_eol.html
UCS-MR128G4RE3	128GB DDR5-5600 RDIMM 4Rx4 (16Gb)	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/select-ucs-accessories-eol15570.html
UCS-NVMEG4-M1600D	1.6TB 2.5in U.3 15mm P7450 Hg Perf Hg End NVMe (3X)	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/select-ucs-ucsx-hci-accessories-eol15818.html
UCS-NVMEG4-M7680D	7.6TB 2.5in U.3 15mm P7450 Hg Perf Med End NVMe	https://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs-c-series-rack-servers/select-ucs-accessories-eol15875.html
UCS-MRX16G1RE3	16GB DDR5-5600 RDIMM 1Rx8 (16Gb)	Due to Material Shortage



Americas Headquarters
Cisco Systems, Inc.
San Jose, CA

Asia Pacific Headquarters
Cisco Systems (USA) Pte. Ltd.
Singapore

Europe Headquarters
Cisco Systems International BV Amsterdam,
The Netherlands

Cisco has more than 200 offices worldwide. Addresses, phone numbers, and fax numbers are listed on the Cisco Website at www.cisco.com/go/offices.

Cisco and the Cisco Logo are trademarks of Cisco Systems, Inc. and/or its affiliates in the U.S. and other countries. A listing of Cisco's trademarks can be found at www.cisco.com/go/trademarks. Third party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a