"High Frequency Ceramic Solutions"

900 MHz Balun P/N 0900BL18B200 Page 1 of 2 Detail Specification: 09/27/11

General Specifications

Part Number	0900BL18B200	
Frequency (MHz)	800 - 1000	
Unbalanced Impedence	50 Ω	
Differential Balanced Imp.	200 Ω	
Insertion Loss	1.0 dB max.	
Return Loss	9.5 dB min.	


Operating Temperature	-40 to +85°C
Reel Quanity	3,000
Power Capacity	3 Watts max.
Phase Difference (degree)	180 ± 10
Amplitude Difference	2.0 dB max.

	Packaging	Bulk	Suffix = S	Eg. 0900BL18B200S
	Style	T&R	Suffix = E	Eg. 0900BL18B200E
	Termination Style	100% Tin	Suffix = None	Eg. 0900BL18B200(E or S)
	Evaluation Board	0900BL18B200	-EB1SMA	

Mechanical Dimensions

	ln	mm
L	0.126 ± 0.006	3.20 ± 0.15
W	0.063 ± 0.006	1.60 ± 0.15
Т	0.033 ± 0.004	0.85 ± 0.10
а	0.022 ± 0.006	0.55 ± 0.15
b	0.014 ± 0.006	0.35 ± 0.15
С	0.012 +.004/008	0.30 +0.1/-0.2
g	0.016 ± 0.006	0.40 ± 0.15
р	0.039 ± 0.004	1.00 ± 0.10
Р	0.000 1 0.004	1.00 1 0.10

Mount these devices with brown mark facing up.




Terminal Configuration

Torrinia Connigaration			
No.	Function		
1	GND or DC feed		
2	Unbalanced Port (1)		
3	GND or DC feed		
4	Balanced Port (2)		
5	NC		
6	Balanced Port (3)		
	3 2 1		
	4 5 6		

Mounting Considerations

* Line width should be designed to provide proper impedance matching characteristics. Units: mm

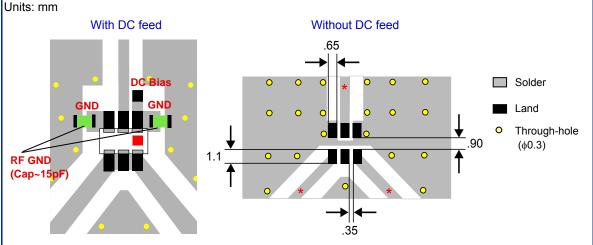

Johanson Technology, Inc. reserves the right to make design changes without notice. All sales are subject to Johanson Technology, Inc. terms and conditions.




"High Frequency Ceramic Solutions"

 900 MHz Balun
 P/N 0900BL18B200

 Detail Specification: 09/27/11
 Page 2 of 2

Typical Electrical Performance (T=25°C)

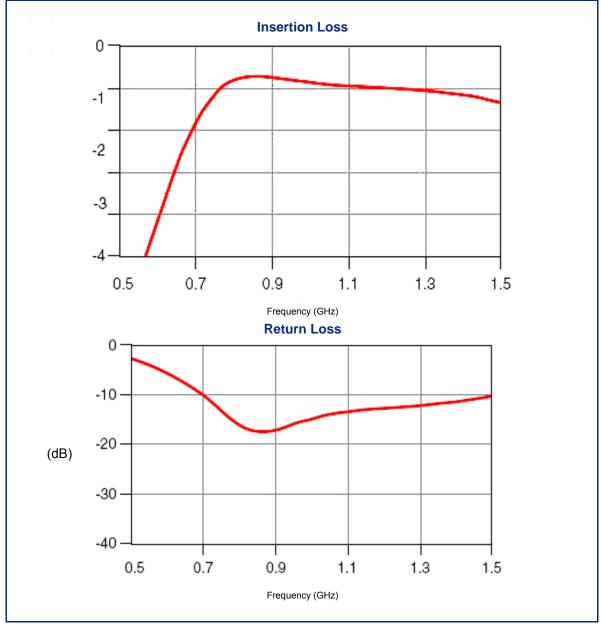

Johanson Technology, Inc. reserves the right to make design changes without notice. All sales are subject to Johanson Technology, Inc. terms and conditions.

