




## USB

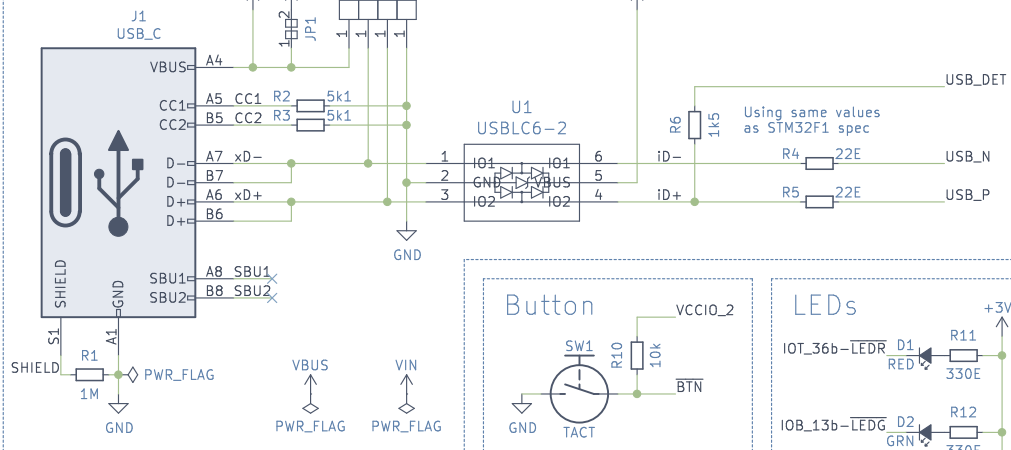

## 3V3 VReg

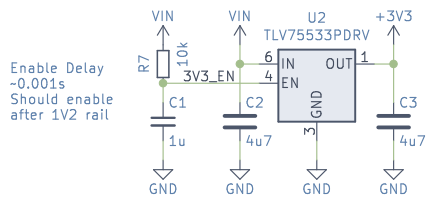


## 1V2 VReg




## Flash/RAM


JP3: Remove jumper when only programming ICE  
Replace jumper for programming Flash and for normal operation

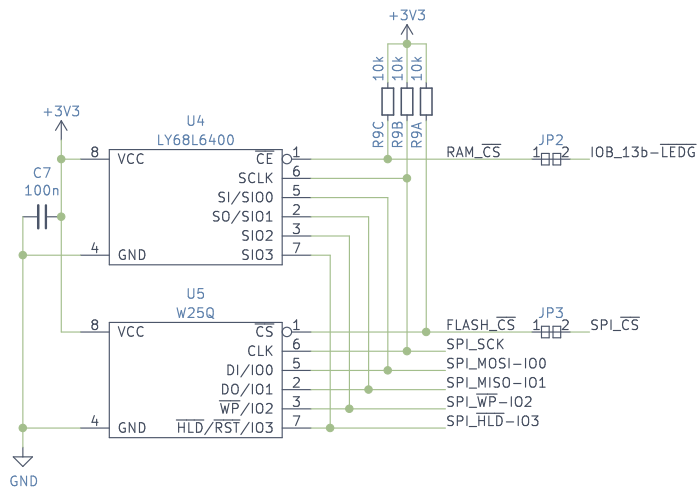


## LEDs

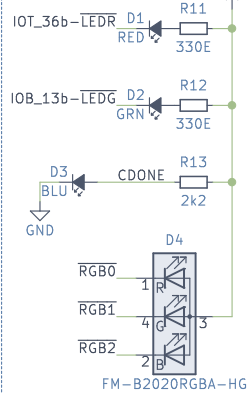


## Clock




## QSPI/Programming



## FPGA

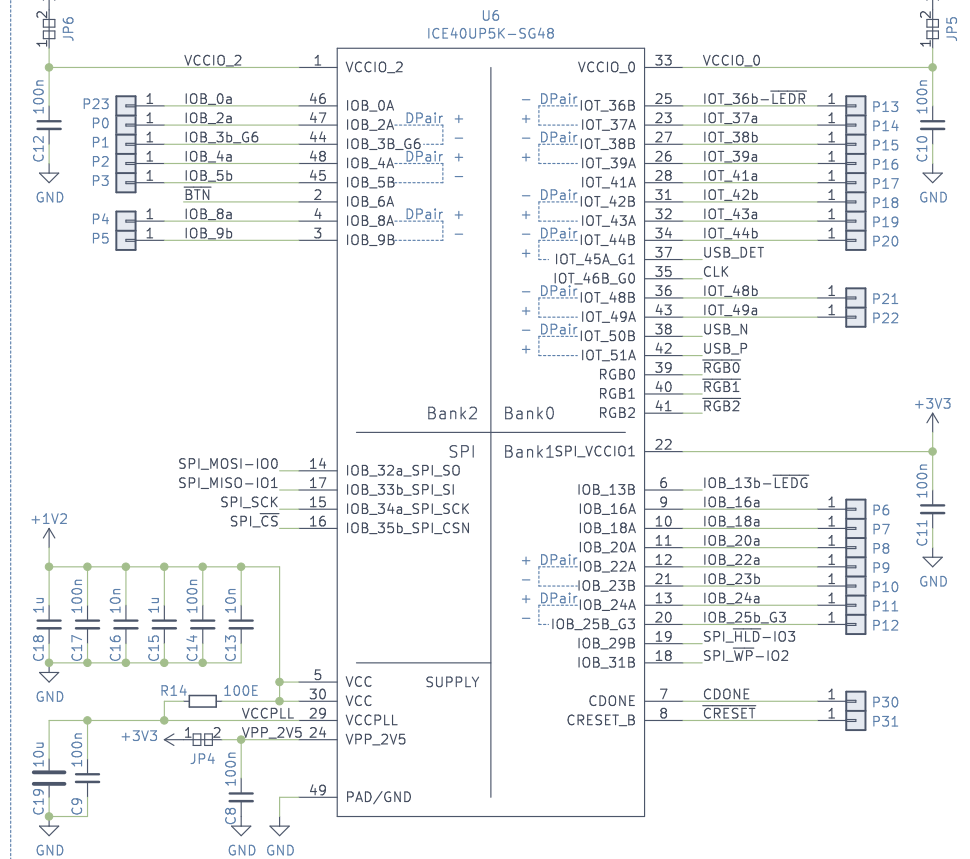

## Power Pins



License: CC BY-SA 4.0  
© 2020 Jordi Pakey-Rodriguez <jordi@0xdec.im>  
© 2018-2020 Piotr Esden-Tempski <piotr@esden.net>  
© 2018-2020 1BitSquared <info@1bitsquared.com>

**1BitSquared**

Sheet: /  
File: icebreaker-bitsy.sch

**Title: ICEBreaker-bitsy**

Size: A4 Date: 2020-06-10

KiCad E.D.A. kicad (5.1.6)-1

Rev: v1.0a

Id: 1/1