






Warning: Always use DC blocks when connecting to the RX inputs with Bias-Ts, if the equipment cannot tolerate a DC voltage. This is because, by default, the Bias-Ts are enabled on transceiver reset!

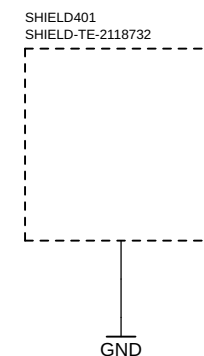

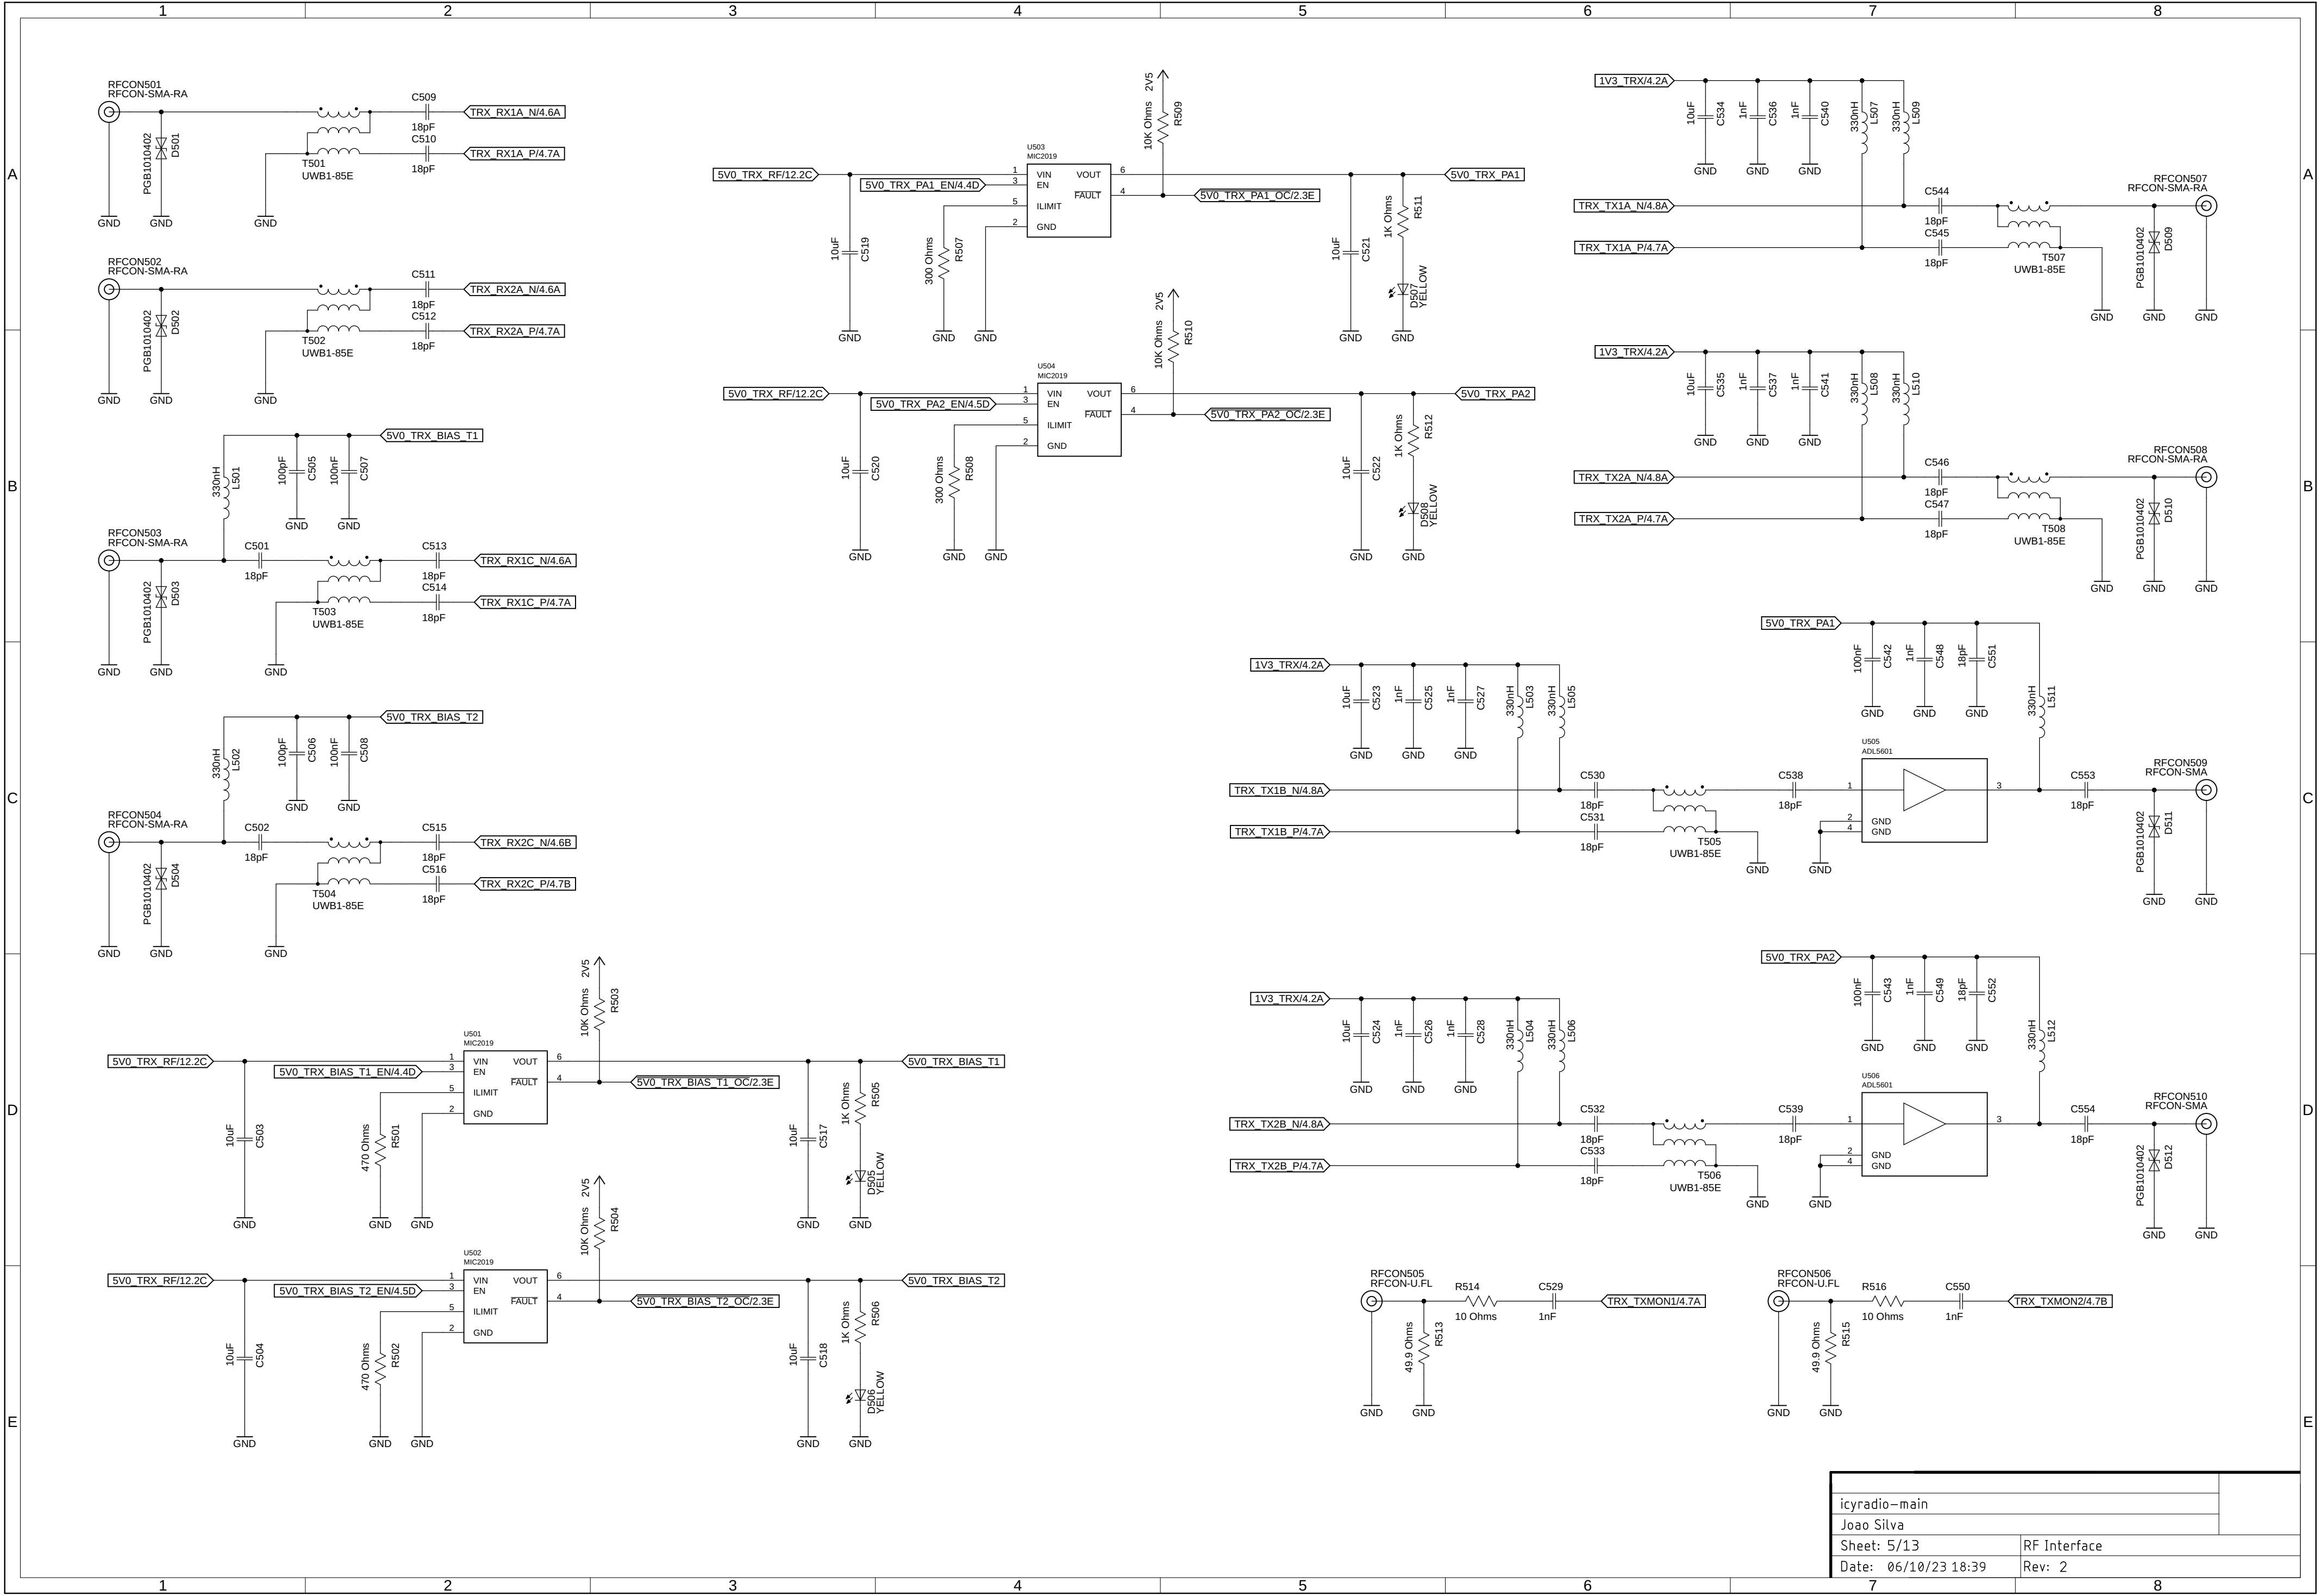

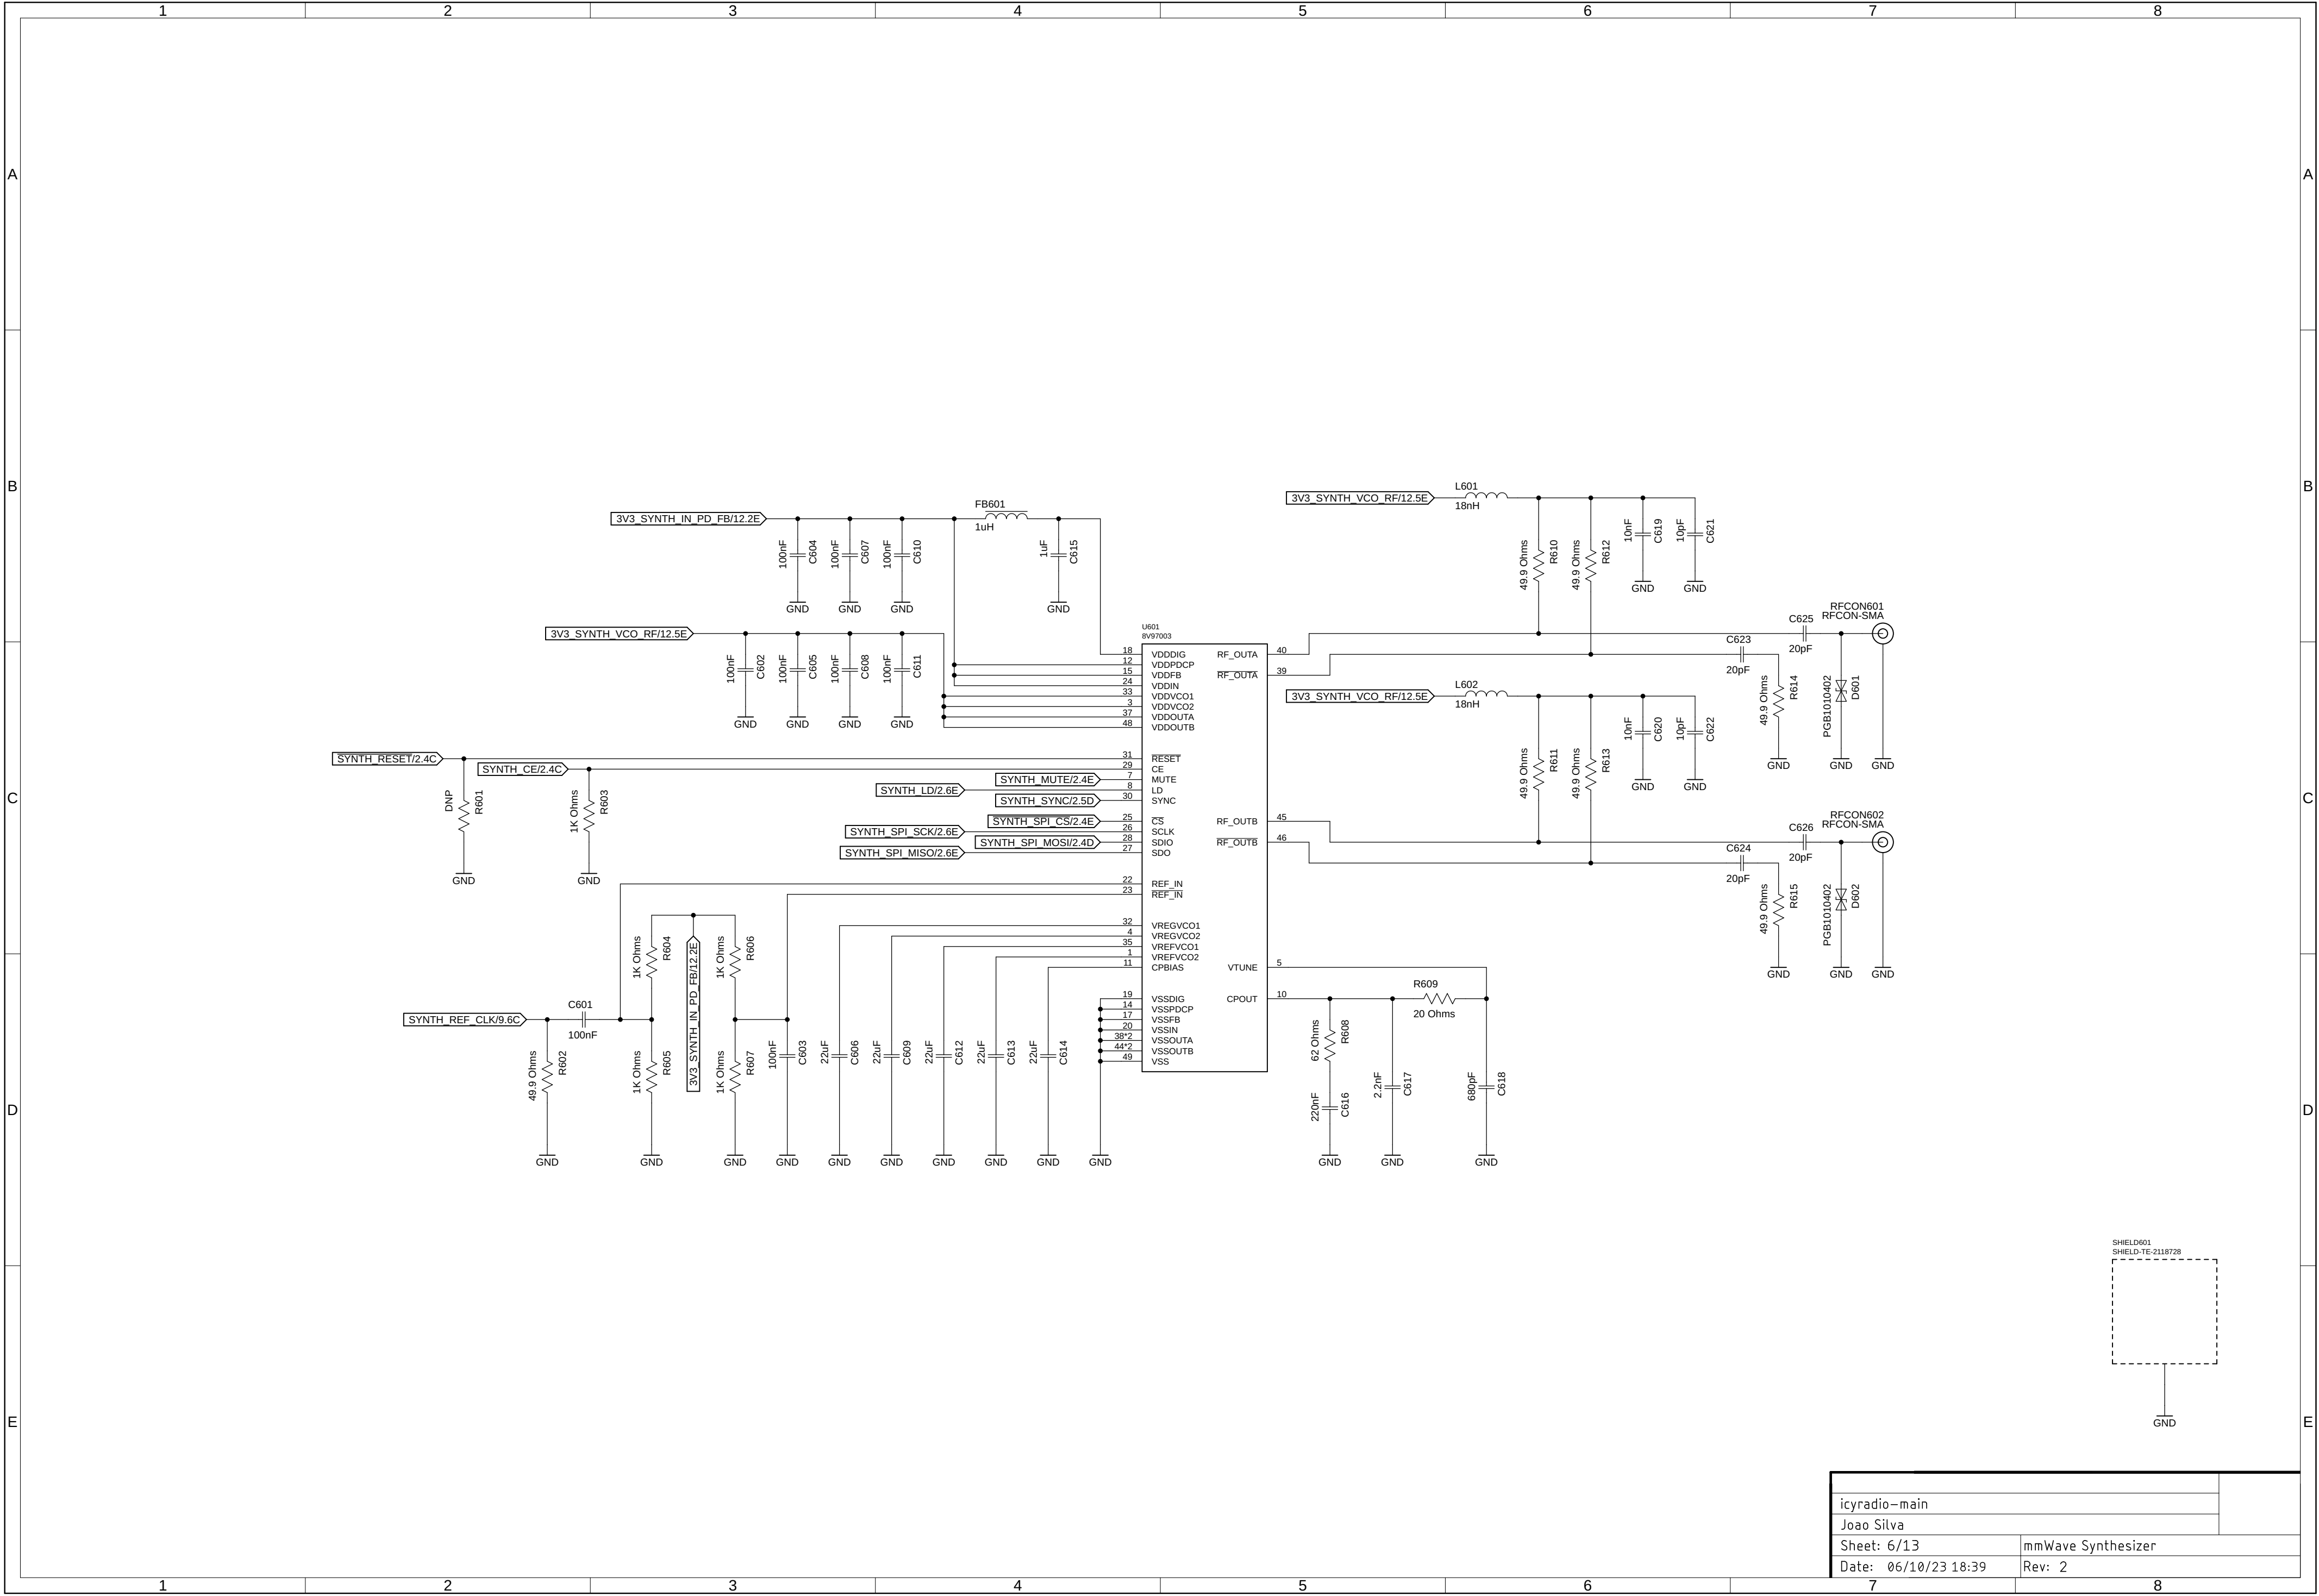

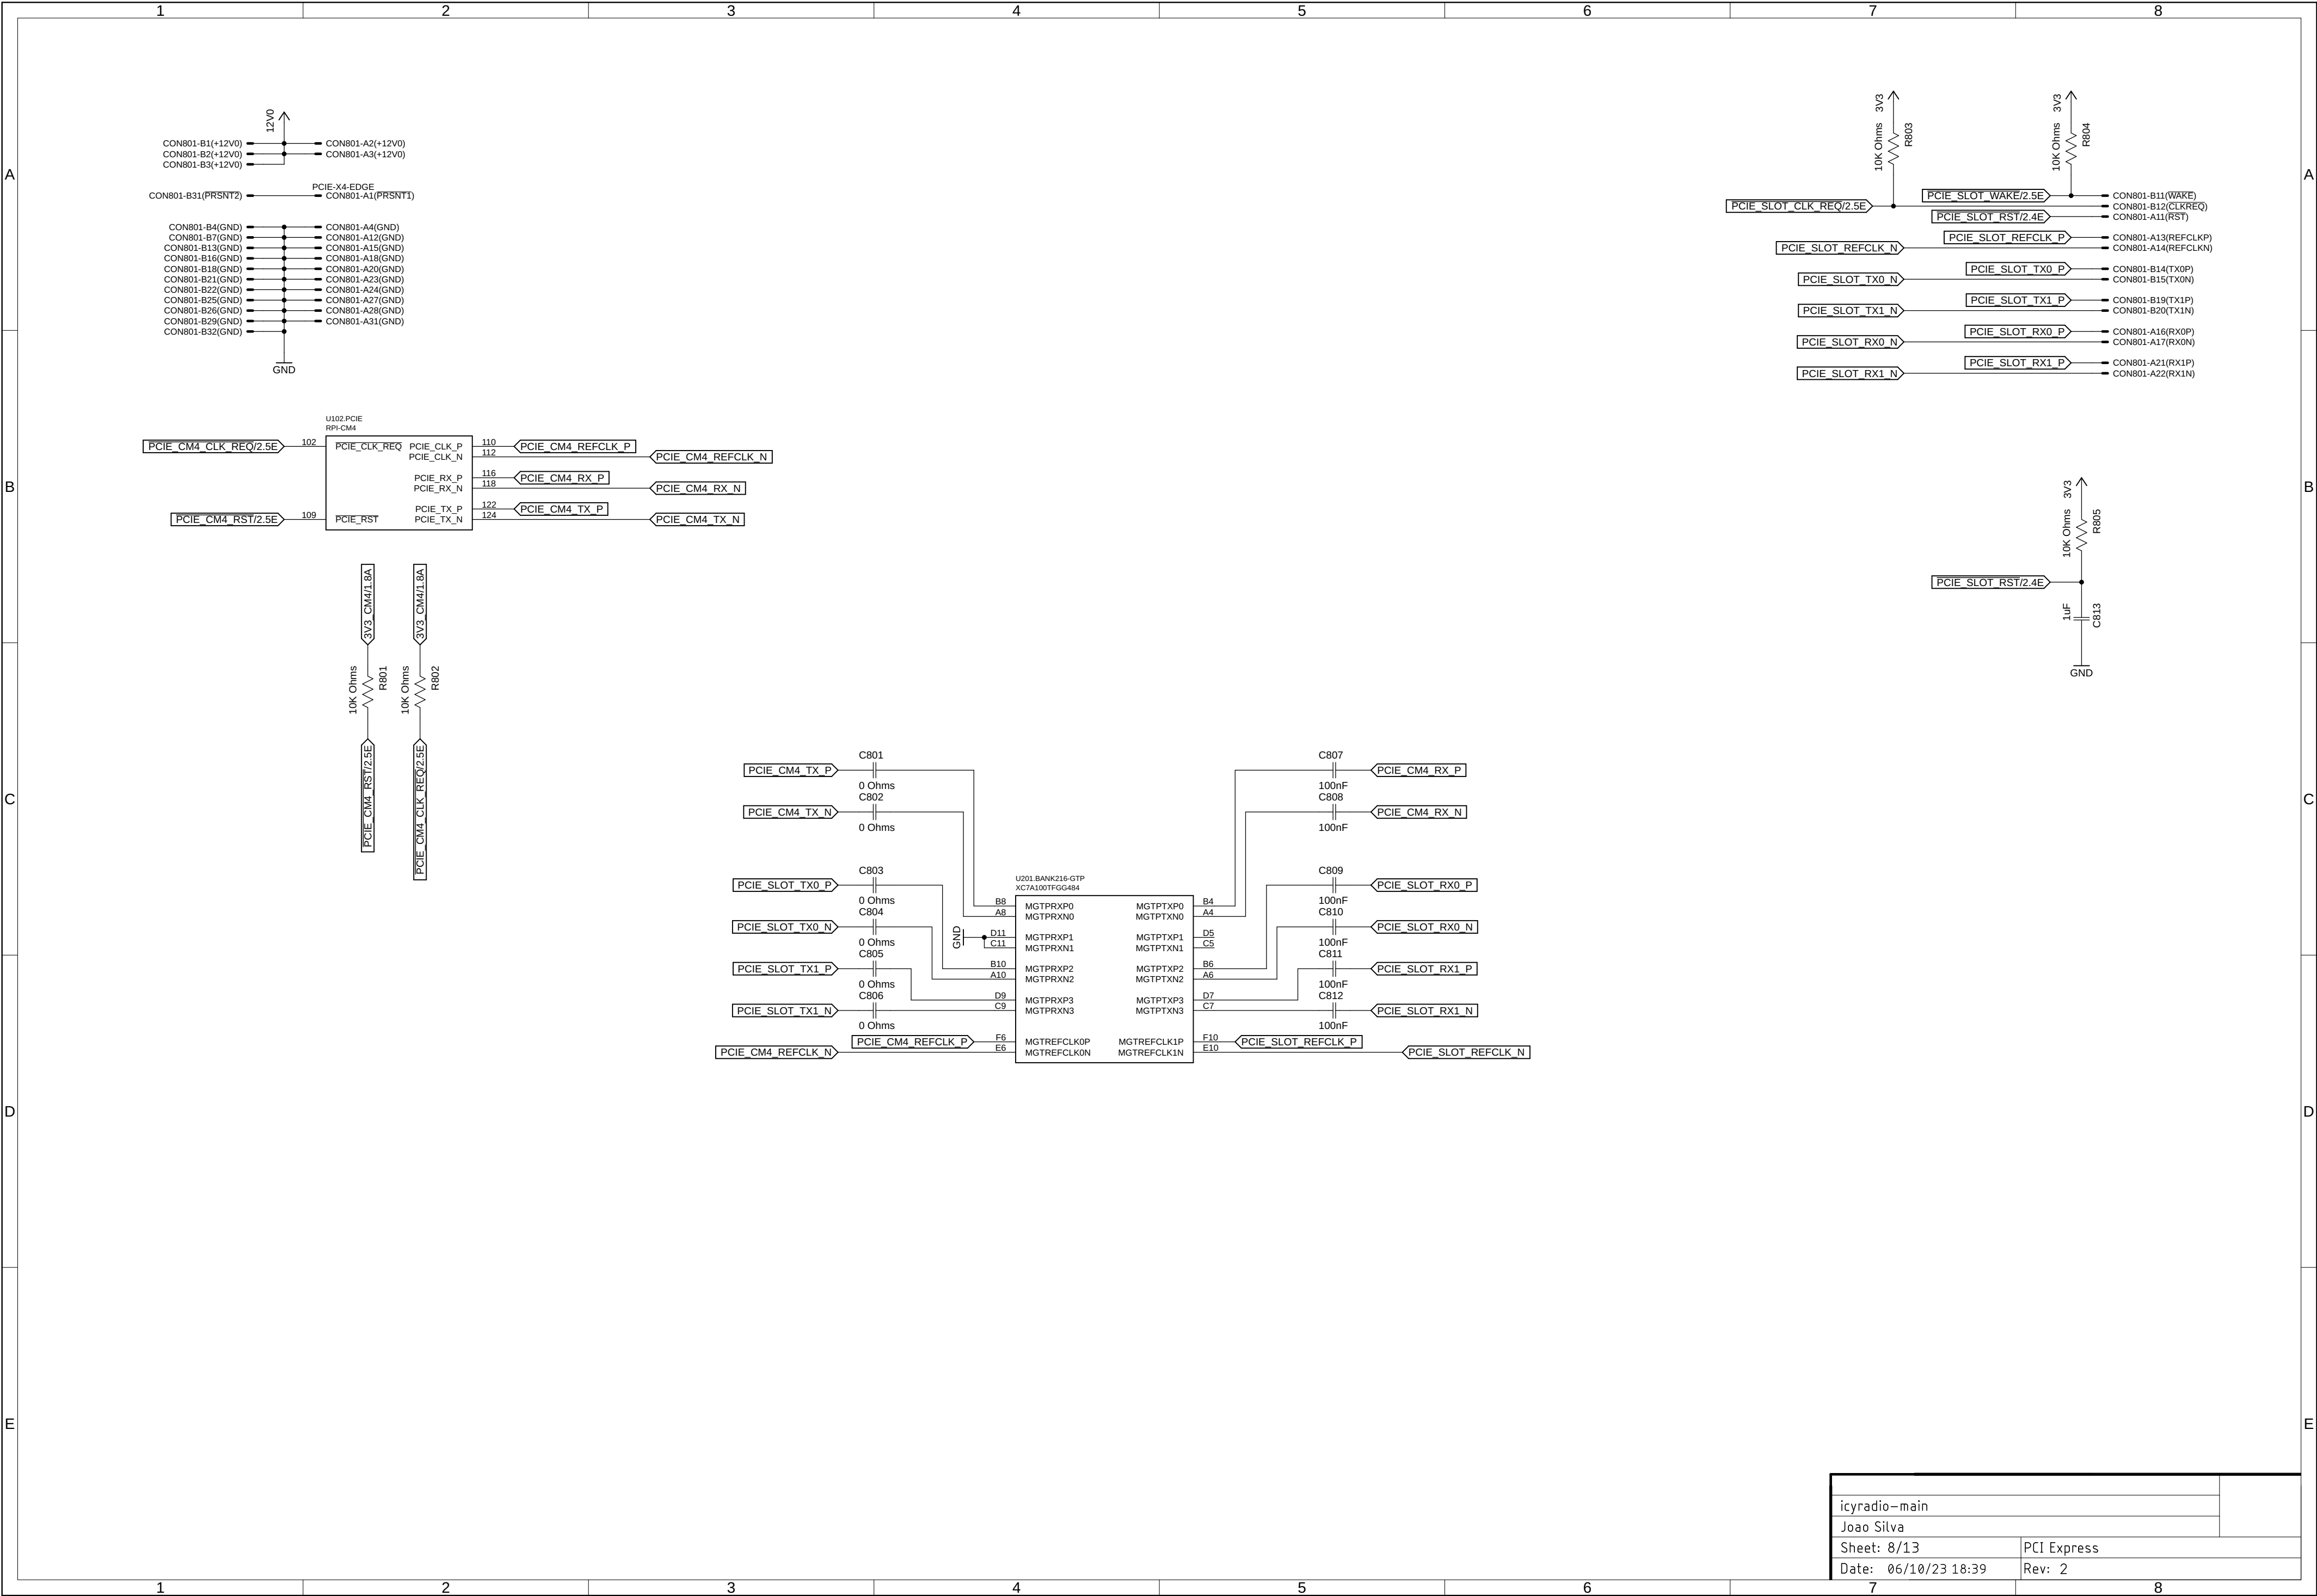

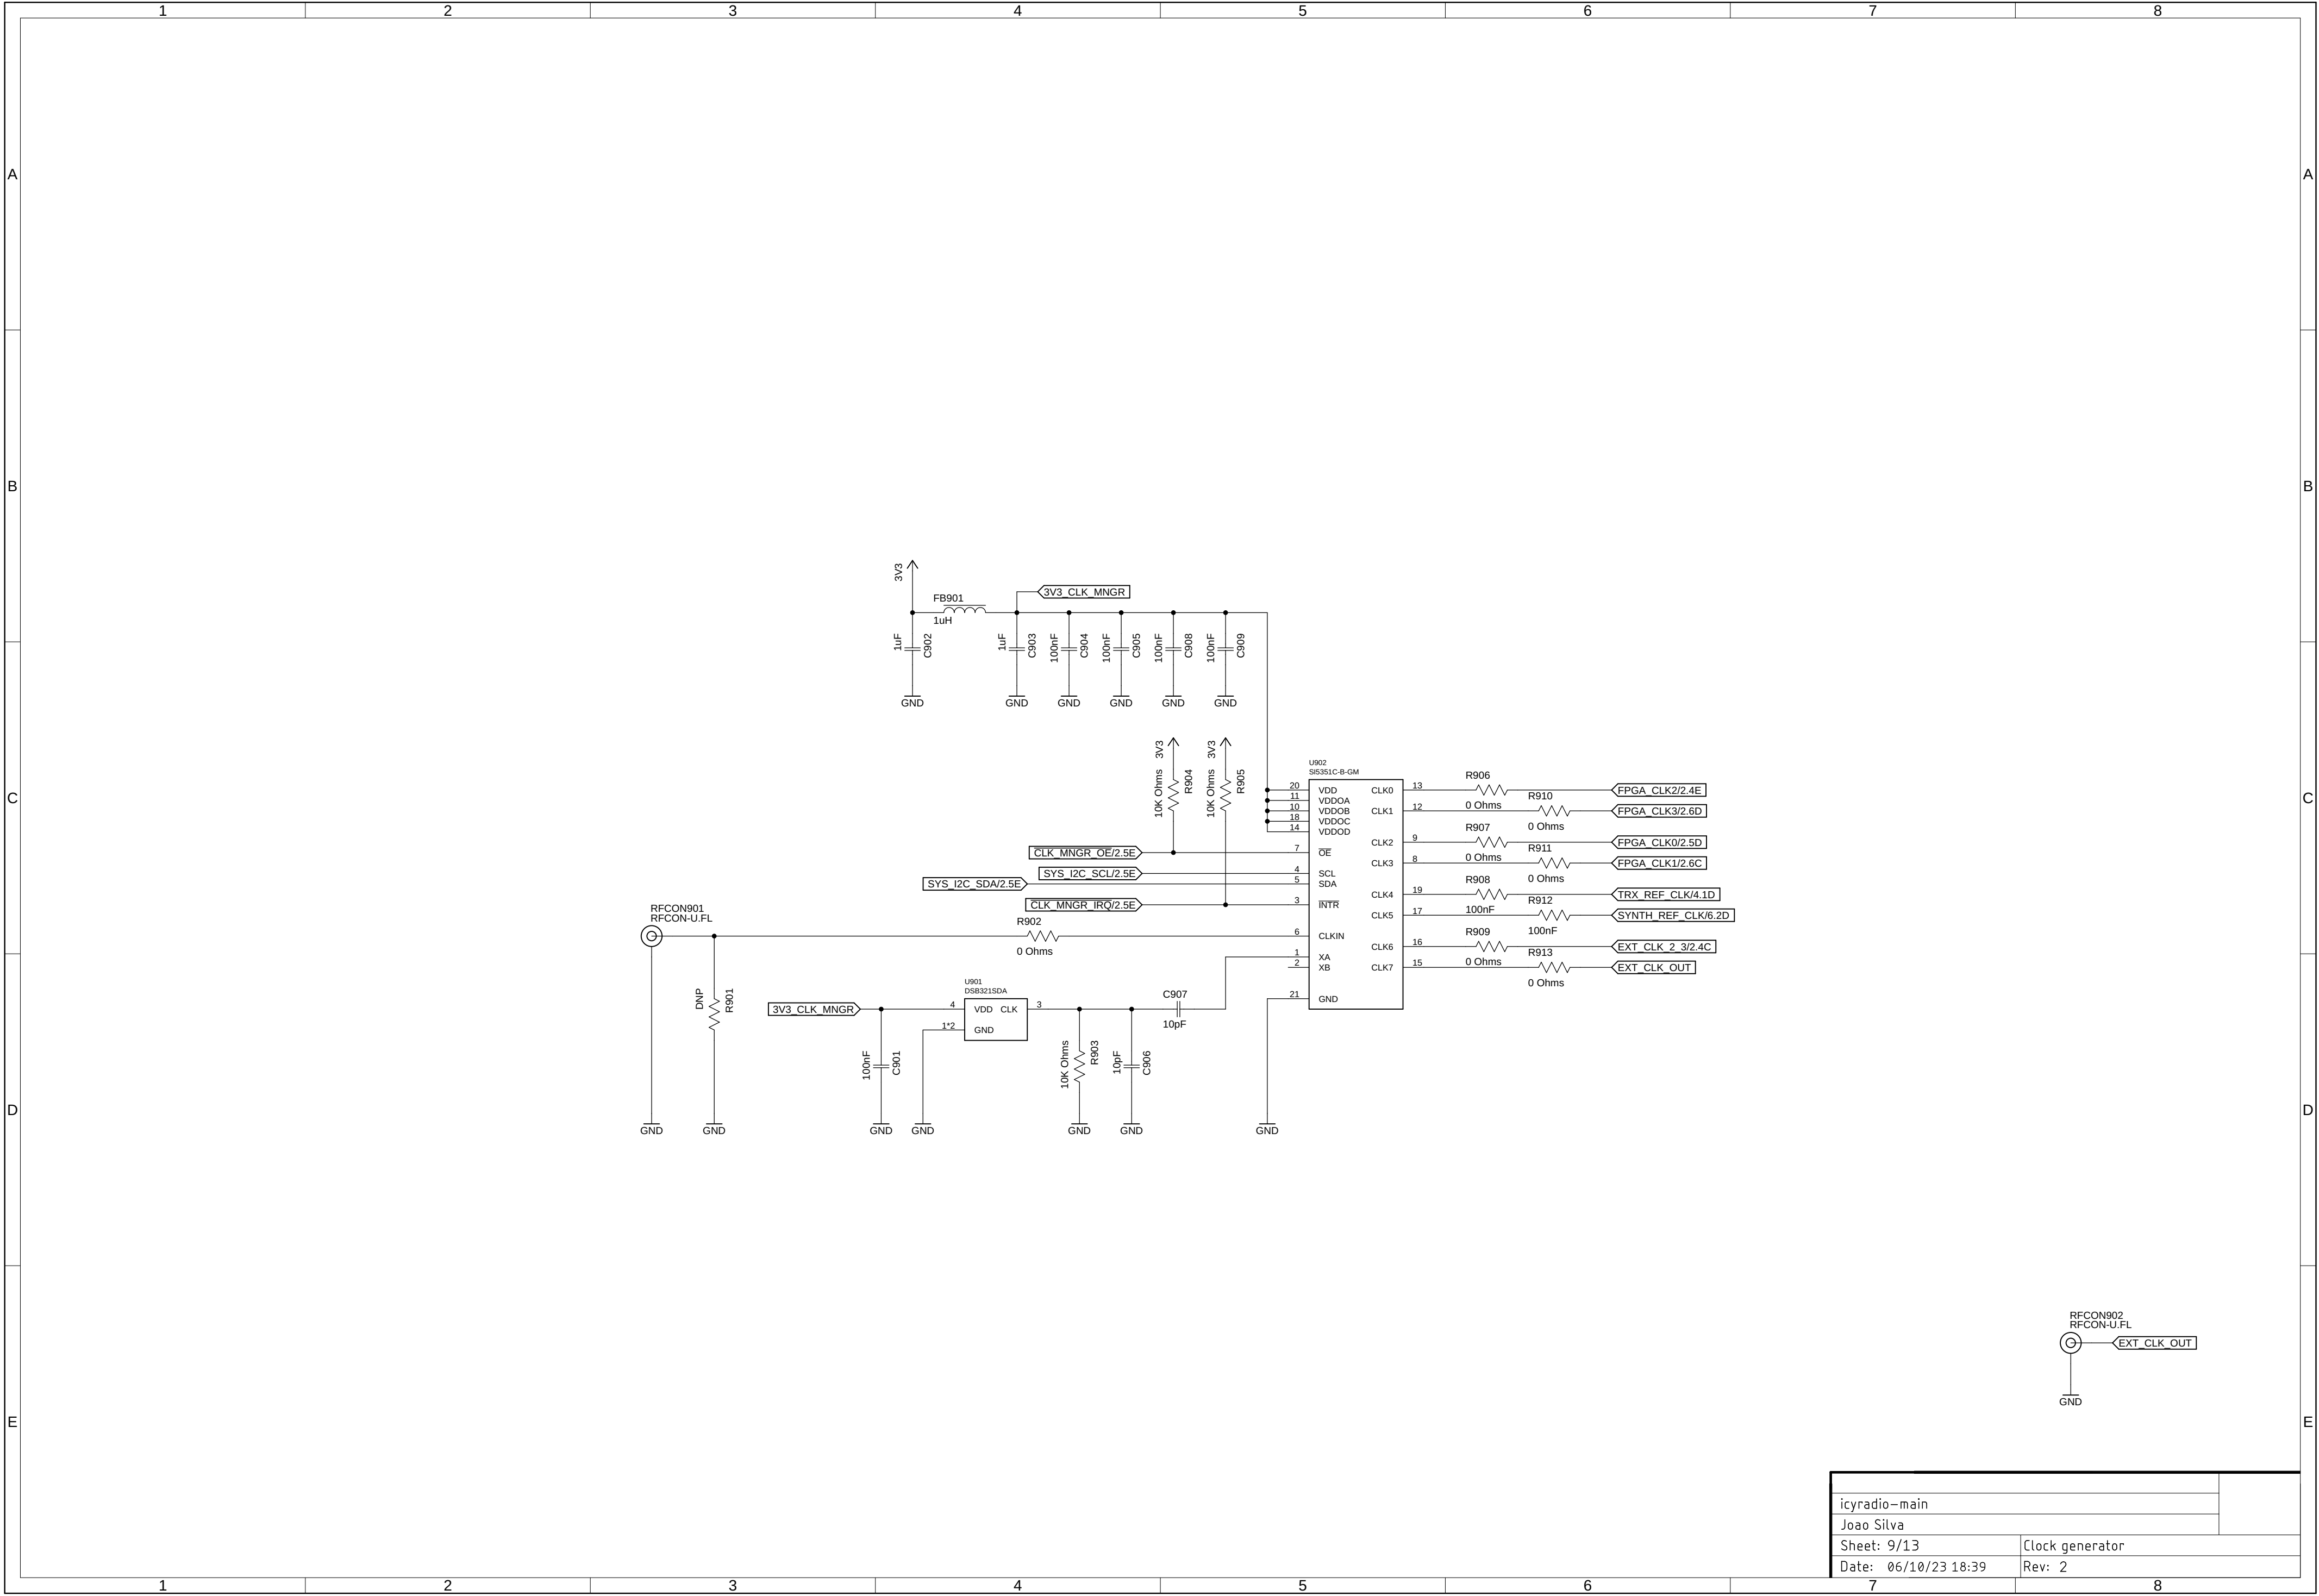

icyradio-main	
Joao Silva	
Sheet: 9/13	Clock generator
Date: 06/10/23 18:39	Rev: 2

