


- HI Signal on CTL Input:
- +12VDC on Noise Output
- +5VDC on CTL Signal for 4 Noise Switches

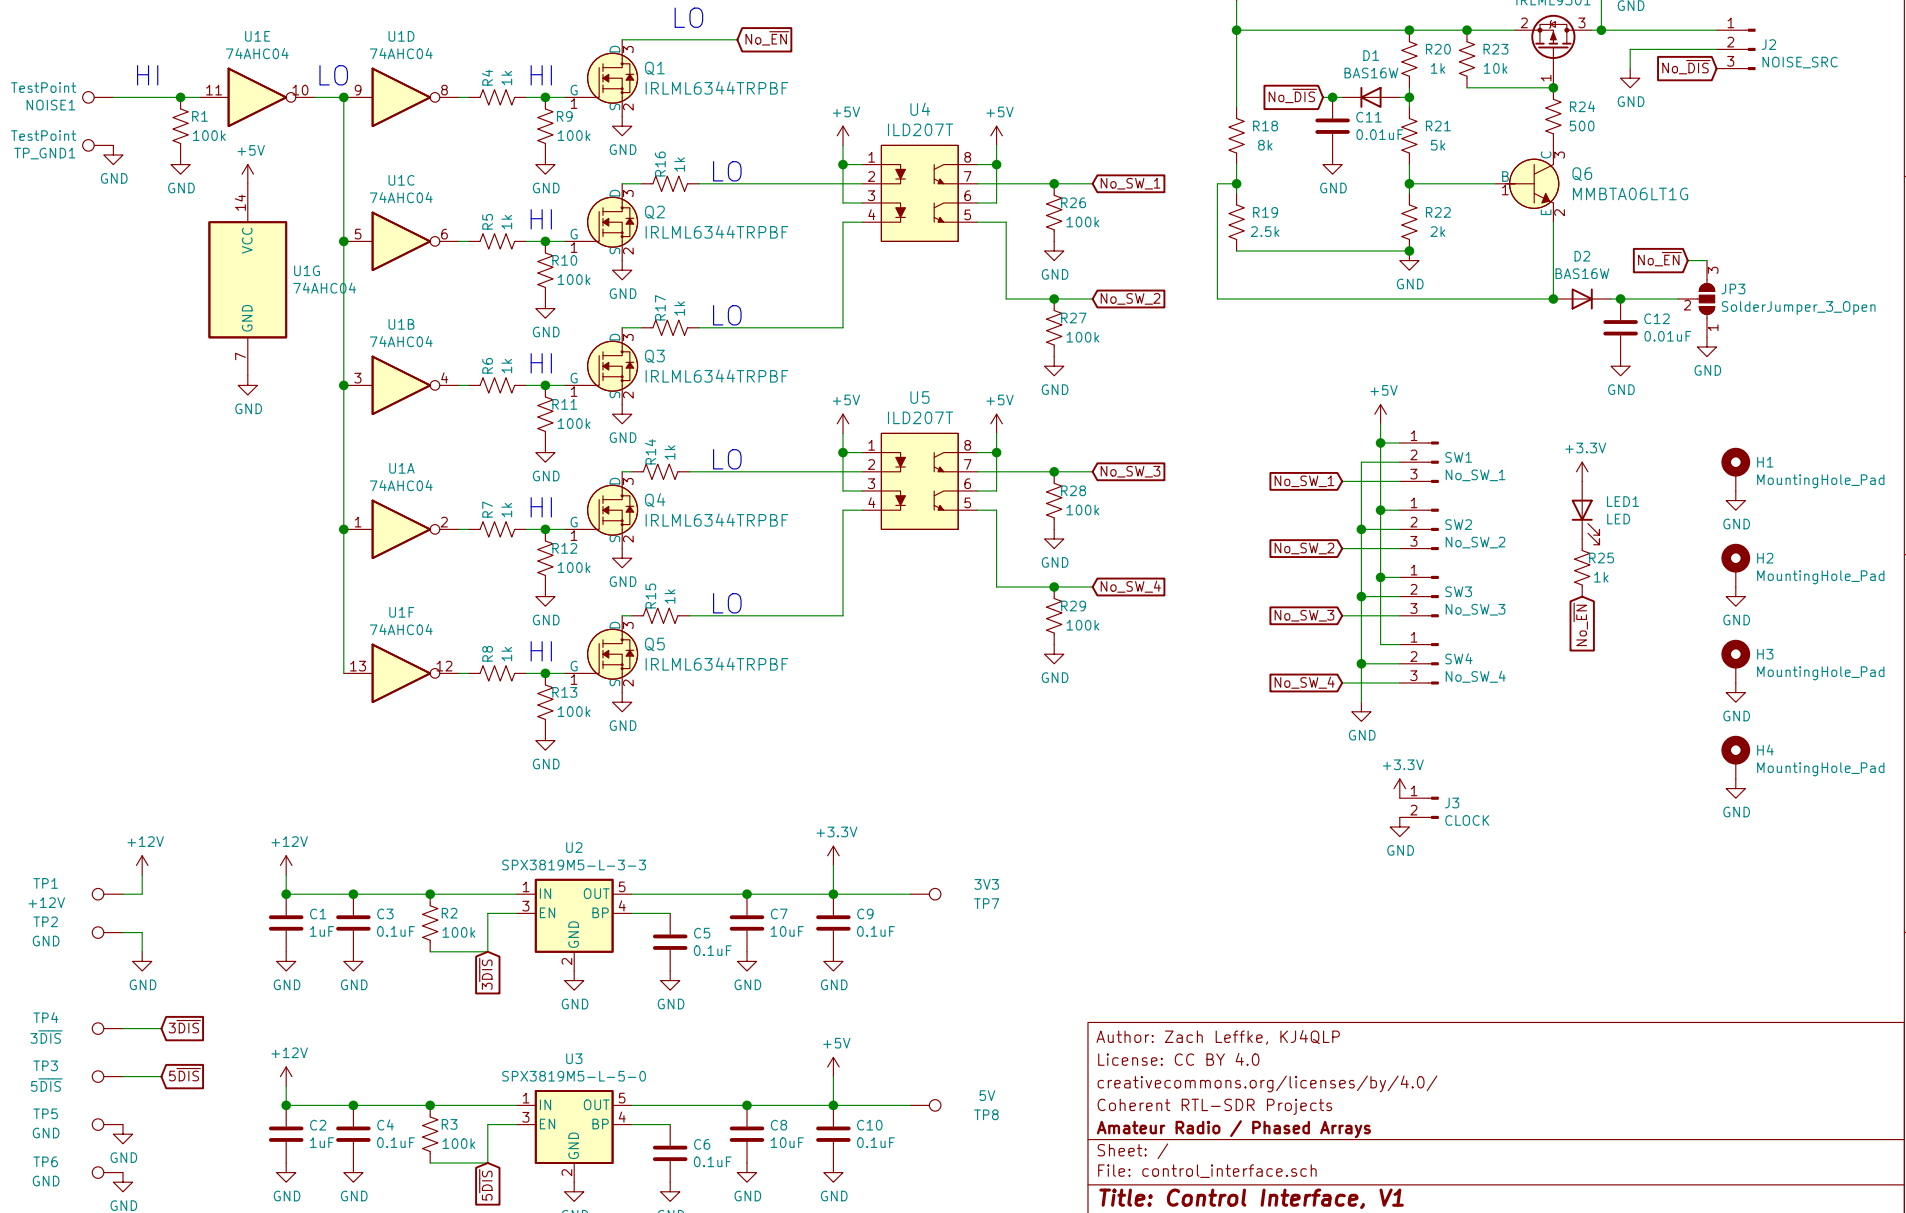

Author: Zach Leffke, KJ4QLP
License: CC BY 4.0
creativecommons.org/licenses/by/4.0/
Coherent RTL-SDR Projects

Amateur Radio / Phased Arrays

Sheet: /
File: control_interface.sch

Title: Control Interface, V1

Size: USLetter	Date: 2021-09-19
----------------	------------------

```
KiCad E.D.A. kicad 5.1.10-88a1d61d5890ubuntu20.04.1
```

Rev: –
Id: 1/1