



**Hochschule
Augsburg** University of
Applied Sciences

The *ParaNut* Processor

Architecture Description and Reference Manual

Gundolf Kiefer

Hochschule Augsburg – University of Applied Sciences

`gundolf.kiefer@hs-augsburg.de`

Version 0.2.1

December 16, 2015



This work is licensed under the Creative Commons Attribution-ShareAlike 3.0 Unported License. To view a copy of this license, visit <http://creativecommons.org/licenses/by-sa/3.0/> or send a letter to Creative Commons, 171 Second Street, Suite 300, San Francisco, California, 94105, USA.

Document History

| Version | Date | Description |
|---------|------------|---|
| 0.2.0 | 2015-02-19 | Initial public release |
| 0.2.1 | 2015-12-16 | Add local CPU identification register, LL/SC instructions |
| | | |
| | | |

Contents

| | |
|---|-----------|
| 1. Introduction | 1 |
| 2. The <i>ParaNut</i> Architecture | 2 |
| 2.1. Instruction Set Architecture | 2 |
| 2.2. Structural Organisation | 2 |
| 2.3. Execution Modes and Capabilities | 4 |
| 2.4. SIMD Vectorization | 5 |
| 2.5. Multi-Threading | 5 |
| 3. Instruction Set Reference | 7 |
| 3.1. Instructions | 7 |
| 3.1.1. ALU Instructions | 7 |
| 3.1.2. Load & Store Instructions | 23 |
| 3.1.3. Control Flow Instructions | 27 |
| 3.1.4. Special Instructions | 32 |
| 3.1.5. <i>ParaNut</i> Extensions | 34 |
| 3.2. Special-Purpose Registers | 35 |
| 3.2.1. Supervision Register (SR) | 36 |
| 3.2.2. Version Register (VR) | 36 |
| 3.2.3. Unit Present Register (UPR) | 36 |
| 3.2.4. CPU Configuration Register (CPUCFGR) | 36 |
| 3.2.5. Data Cache Configuration Register (DCCFGR) | 36 |
| 3.2.6. <i>ParaNut</i> Extensions | 41 |
| 3.3. Exceptions | 43 |
| Bibliography | 46 |
| Index | 47 |

1. Introduction

The goal of the *ParaNut* project is to develop an open, scalable and practically usable multi-core processor architecture for embedded systems. Scalability is given by supporting parallelism at thread and data level based on multiple processing cores while keeping the design of the individual core itself as simple as possible.

ParaNut introduces a unique concept for SIMD (single instruction, multiple data) vectorization. Whereas SIMD extensions for workstation processors or embedded systems frequently contain specialized instructions leading to an inherently bad compiler support, SIMD code for the *ParaNut* can be programmed in a high-level language according to a paradigm very similar to thread programming.

The instruction set is kept compatible to the OpenRISC 1000 specification. Hence, the OpenRISC GCC tool chain and libraries/operation systems (newlib, Linux with some necessary extensions) can be used with the *ParaNut*.

To date, the *ParaNut* project is still work in progress, and new contributors from industry and academia are welcome. An informal project overview including the implementation status and very promising benchmark results can be found in [1].

2. The *ParaNut* Architecture

2.1. Instruction Set Architecture

The *ParaNut* instruction set architecture is compatible with the OpenRISC 1000 specification. The OpenRISC 1000 architecture is a 32-bit load and store RISC architecture designed with the purpose to support a spectrum of chip and system implementations [2]. Scalability is achieved by defining a minimalistic basic instruction set (ORBIS32) together with optional extensions including a floating-point unit (FPU) or a memory management unit (MMU). Furthermore, the basic architecture offers configuration options such as different register file sizes or optional arithmetic instructions.

ParaNut processors implement all mandatory instructions according to the ORBIS32 specification. Features unique to *ParaNut* require some additional *ParaNut*-specific instructions. These will be encapsulated in a small support library, so that they are still usable without compiler modifications. For software development, the GCC tool chain from the OpenRISC project can be used without any modifications. A cycle-accurate SystemC model can be used as an instructions set simulator. To date, an operating environment based on the "newlib" C library allows to compile and run software both in the simulator and on real hardware.

2.2. Structural Organisation

The general structure of *ParaNut* is depicted in Figure 2.1. The core contains one *Central Processing Unit (CePU)* and a number of *Co-Processing Units (CoPU)*. The CePU is a full-featured CPU, whereas the CoPUs are CPUs with a more or less reduced functionality and complexity. Depending on the mode of execution (see below), the CoPUs may either be inactive (sequential code), execute a part of a vector operation, or execute a thread. In the sequel, the term CPU refers to any of a CePU or a CoPU.

All the CPUs are connected to a central *Memory Unit (MemU)*. The MemU contains the cache(s) and means to support synchronisation primitives. It provides a single bus interface to the main system bus, and independent read and write ports for each CPU. It is optimized to support parallel accesses by different CPUs. In particular, multiple read accesses to the same address can be served in parallel and run no slower than a single access, and accesses to neighboring addresses can mostly be served in parallel. These two properties are particularly important for the SIMD-like mode.

Each CPU contains an ALU, a register file and some control logic which together form the *Execution Unit (ExU)*. The *Instruction Fetch Unit (IFU)* is responsible for fetching instructions from the memory subsystem and contains a small buffer for prefetching instructions. The *Load-Store Unit (LSU)* is responsible for performing the data memory accesses of load and store operations. It contains a small store buffer and implements write combining and store forwarding mechanisms as well as mechanisms to support atomic op-

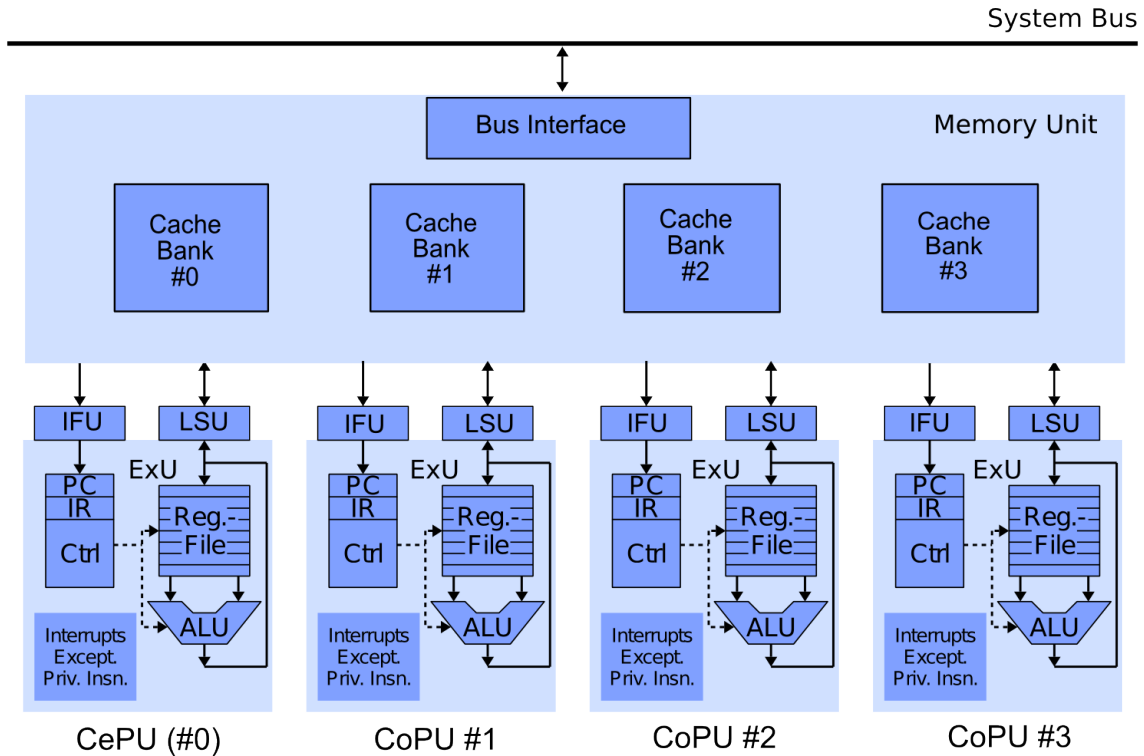


Figure 2.1.: A *ParaNut* instance with 4 cores

erations.

The Execution Unit is designed and optimized for a best-case throughput of one instruction in two clock cycles ($CPI \sim 2$, $CPI = \text{"clocks per instruction"}$). This is slower than modern pipeline designs targeting a best-case CPI value of 1. However, it allows to better optimize the execution unit for area, since no pipeline registers or extra components for the detection and resolution of pipeline conflicts are required. Furthermore, in a multi-core system, the performance is likely to be limited by bus and memory contention effects anyway, so that an *average* CPI value of 1 is expected to be hardly achievable in practice. In the *ParaNut* design, several measures help to maintain an average-case throughput very close to the best-case value of $CPI \sim 2$, even for multi-core implementations.

The design of the memory interface and cache organization is very critical for the scalability of many-core systems. In a *ParaNut* system, the Memory Unit (MemU) contains the cache, the system bus interface, and a multitude of read and write ports for the processor cores. Each core is connected to the MemU by two independent read ports for instructions and data and one write port for data. The cache memory logically operates as a shared cache for all cores and is organized in independent banks with switchable paths from each bank to each read and write port. Tag data is replicated to allow arbitrary concurrent lookups. Parallel cache data accesses by different ports can be performed concurrently if their addresses a) map to different banks or b) map to the same memory word in the same bank. Furthermore, by using dual-ported Block-RAM cells, each bank can be equipped with two ports, so that up to two conflicting accesses (i.e. same bank, different addresses) are possible in parallel. Hence, even for many cores, the likelihood of contention can be arbitrarily reduced by increasing the number of banks, which is configurable at synthesis time.

The cache can be configured to be 1/2/4-way set associative with configurable replacement strategies (e.g. pseudo-random or least-recently used). The Memory Unit implements mechanisms for uncached memory accesses (e.g. for I/O ports) and support for atomic operations. All transactions to and from the system bus are handled by a bus interface unit, which presently supports the Wishbone bus standard, but can easily be replaced to support other busses such as AXI.

2.3. Execution Modes and Capabilities

A CPU in the *ParaNut* architecture can run in 4 different modes:

Mode 0 (Halted): The CPU is inactive.

Mode 1 (Linked): The CPU does not fetch instructions, but executes the instruction stream fetched by the CPU.


Mode 2 (Unlinked): The CPU fetches and executes its own instructions. Exceptions trigger an exception of the controlling CePU and put this CPU into Mode 0. The CePU can later put this CPU into Mode 2 again, and the code execution continues as if the exception has been handled by this CPU.

Mode 3 (Autonomous): The CPU executes its own instructions. Exceptions and interrupts can be handled by this CPU.

Typically, the CePU always runs in Mode 3. The mode of the CoPUs is controlled by the CePU. Depending on the application, the CoPUs can be customized that they only support a subset of the 4 modes. For example, if only SIMD vectorization and no multi-threading is required, all the logic required for modes 2 and 3 can be stripped off. Now, the CoPU does not require much more area than a vector slice of a normal SIMD unit would. In general, a CoPU is customized for a *capability level* of m , meaning that all modes $\leq m$ are supported.

- A Capability-1-CoPU only contains very little logic besides the ALU and the register file. Hence, a *ParaNut* with only Capability-1-CoPUs does not require much more area than a normal SIMD processor.
- A Capability-2-CoPU additionally contains an instruction fetch unit and eventually one more read port to the Memory Unit (MemU) for it.
- A Capability-3-CoPU is basically a full-featured CePU. It contains logic to handle interrupts and exceptions and has its own set of special registers. This is not needed for multi-threading, but for multi-processing, where each CoPU is managed by the operating system as an individual CPU.

Figure 2.2 illustrates the active/required hardware for the 4 modes. The following sections briefly illustrate how SIMD vectorization or multi-threading can be performed. Further informal explanations and examples can be found in [1].

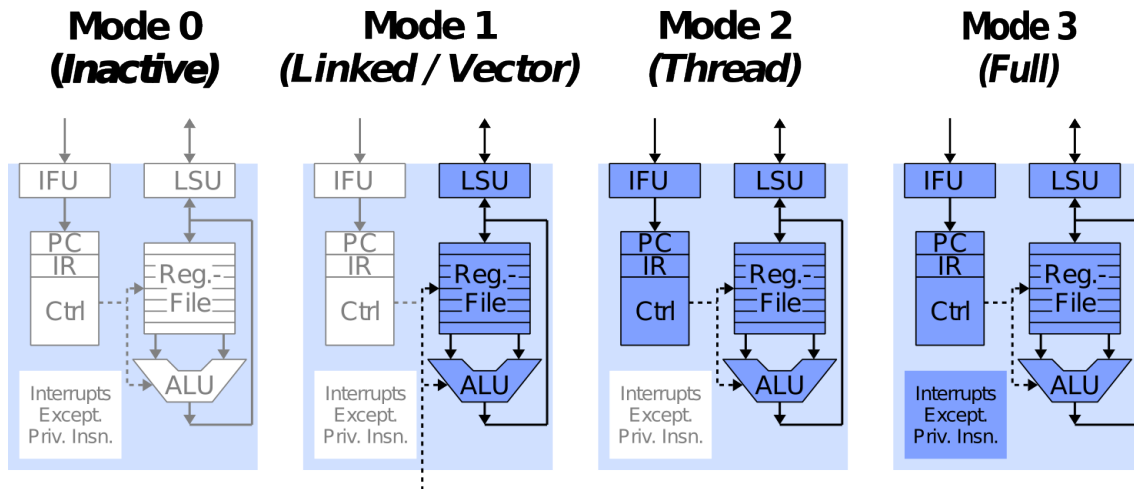Figure 2.2.: *ParaNut* modes and required logic

2.4. SIMD Vectorization

In Mode 1, the CoPU performs exactly the same instructions as the CePU. This is the SIMD mode. All registers of the CePU can be regarded as a slice of a big vector register. Since all CPUs perform the same operation at a time, the memory bandwidth required for instruction fetching is reduced considerably and equivalent to the bandwidth of a single-core processor.

From a software perspective, the code on a CoPU executes almost normally, just like multi-threaded code. There is only a single, well-defined exception: Conditional branches and jump instructions with variable target addresses are executed based on target address determined by the CePU. In the C language, such critical instructions can be generated out of “if” statements, “case” statements and loop constructs. As long as the conditions always evaluate equally on all CPUs, SIMD code can be easily written using a standard compiler and a thread-like programming model. Figure 2.3 shows an example of a vectorized loop. The macros ‘pn_begin_linked’ and ‘pn_end_linked’ open and close a parallel code section, respectively. Since the body of the “for” loop does not contain any conditional branches and the loop end condition “ $n < 100$ ” always evaluates equally on all CPUs, this code is executable on an SIMD-based processor variant.

2.5. Multi-Threading

To perform classical simultaneous multi-threading, the CoPUs are put into Mode 2. In this mode, all exceptions and interrupts are handled by the CePU. This is somewhat a limitation compared to Mode 3, in which the CPUs operate more autonomously. However, Mode 2 is sufficient for all typical applications, in which multi-threading is used as an acceleration measure.


```
int a[100], b[100], s[100];

void add_arrays_sequential () {
    for (n = 0; n < 100; n += 1)
        s[n] = a[n] + b[n];
}

void add_arrays_parallel () {
    int n, cpu_no;

    // Activate 3 (=4-1) CoPUs in the "Linked" state and
    // get the number of this CPU...
    pn_begin_linked (4);
    cpu_no = pn_get_cpu_no();

    for (n = 0; n < 100; n += 4)
        s[n + cpu_no] = a[n + cpu_no] + b[n + cpu_no];
        // performs 4 additions in parallel

    // End linked mode, deactivate the CoPUs...
    pn_end_linked ();
}
```

Figure 2.3.: Example of a vectorized loop

3. Instruction Set Reference

This chapter contains the complete instruction set reference for the *ParaNut* architecture. For completeness, the descriptions of the OpenRISC 1000 (OR1k) instructions and registers implemented by *ParaNut* have been copied from the specification manual [2]. Clarifications and deviations from the OR1k specification are marked as such in the following sections.

3.1. Instructions

3.1.1. ALU Instructions

l.add – Add

Code:

| | | | | | | | | | | | | | | |
|--------|-------|-------|-------|----|----|------|------|----|---|---|---|---|---|---|
| 31 | 26 | 25 | 21 | 20 | 16 | 15 | 11 | 10 | 9 | 8 | 7 | 4 | 3 | 0 |
| 111000 | ddddd | aaaaa | bbbbb | - | 00 | ---- | 0000 | | | | | | | |

Format: **l.add rD, rA, rB**

Description: The contents of the general-purpose registers rA and rB are added. The result is placed into rD.

Operation: **rD <- rA + rB**
 SR[CY] <- Carry
 SR[OV] <- Overflow

Exceptions: Range Exception

l.addc – Add with Carry

Code:

| | | | | | | | | | | | | | |
|--------|------|-------|--------|----|----|------|------|----|-----|---|---|---|---|
| 31 | 26 | 25 | 21 | 20 | 16 | 15 | 11 | 10 | 9 8 | 7 | 4 | 3 | 0 |
| 111000 | dddd | aaaaa | bbbbbb | - | 00 | ---- | 0001 | | | | | | |

Format: `l.addc rD, rA, rB`

Description: The contents of the general-purpose registers rA, rB, and the carry flag are added. The result is placed into rD.

Operation: `rD <- rA + rB + SR[CY]`
 `SR[CY] <- Carry`
 `SR[OV] <- Overflow`

Exceptions: Range Exception

l.sub – Subtract

Code:

| | | | | | | | | | | | | | | |
|--------|------|-------|--------|----|----|------|------|----|---|---|---|---|---|---|
| 31 | 26 | 25 | 21 | 20 | 16 | 15 | 11 | 10 | 9 | 8 | 7 | 4 | 3 | 0 |
| 111000 | dddd | aaaaa | bbbbbb | - | 00 | ---- | 0010 | | | | | | | |

Format: `l.sub rD, rA, rB`

Description: The contents of the general-purpose register rB is subtracted from rA. The result is placed into rD.

Note: The OR1k specification does not clearly specify whether the carry flag is affected or not.

Operation: `rD <- rA - rB`
 `SR[CY] <- Carry`
 `SR[OV] <- Overflow`

Exceptions: Range Exception

l.and – Logical AND

Code:

| | | | | | | | | | | | | | | |
|--------|------|-------|--------|----|----|------|------|----|---|---|---|---|---|---|
| 31 | 26 | 25 | 21 | 20 | 16 | 15 | 11 | 10 | 9 | 8 | 7 | 4 | 3 | 0 |
| 111000 | dddd | aaaaa | bbbbbb | - | 00 | ---- | 0011 | | | | | | | |

Format: l.and rD, rA, rB

Description: A bit-wise logical AND operation is performed on the contents of the general-purpose registers rA and rB. The result is placed into rD.

Operation: rD <- rA and rB

Exceptions: None

l.or – Logical OR

Code:

| | | | | | | | | | | | | | | |
|--------|------|-------|--------|----|----|------|------|----|---|---|---|---|---|---|
| 31 | 26 | 25 | 21 | 20 | 16 | 15 | 11 | 10 | 9 | 8 | 7 | 4 | 3 | 0 |
| 111000 | dddd | aaaaa | bbbbbb | - | 00 | ---- | 0100 | | | | | | | |

Format: l.or rD, rA, rB

Description: A bit-wise logical OR operation is performed on the contents of the general-purpose registers rA and rB. The result is placed into rD.

Operation: rD <- rA or rB

Exceptions: None

l.xor – Logical XOR

Code:

| | | | | | | | | | | | | | | |
|--------|------|-------|--------|----|----|------|------|----|---|---|---|---|---|---|
| 31 | 26 | 25 | 21 | 20 | 16 | 15 | 11 | 10 | 9 | 8 | 7 | 4 | 3 | 0 |
| 111000 | dddd | aaaaa | bbbbbb | - | 00 | ---- | 0101 | | | | | | | |

Format: l.xor rD, rA, rB

Description: A bit-wise logical XOR operation is performed on the contents of the general-purpose registers rA and rB. The result is placed into rD.

Operation: rD <- rA xor rB

Exceptions: None

l.sll – Shift Left Logical

Code:

| | | | | | | | | | | | | | |
|--------|------|-------|--------|----|----|------|------|----|-----|---|---|---|---|
| 31 | 26 | 25 | 21 | 20 | 16 | 15 | 11 | 10 | 9 8 | 7 | 4 | 3 | 0 |
| 111000 | dddd | aaaaa | bbbbbb | - | 00 | 00-- | 1000 | | | | | | |

Format: `l.sll rD, rA, rB`

Description: The contents of register rA are shifted left by the number of bit positions specified in register rB. Low-order bits are filled with 0. The result is placed into rD.

Operation: `rD[31:rB[4:0]] <- rA[31-rB[4:0]:0]`
 `rD[rB[4:0]-1:0] <- 0`

Exceptions: None

l.srl – Shift Right Logical

Code:

| | | | | | | | | | | | | | |
|--------|------|-------|--------|----|----|------|------|----|-----|---|---|---|---|
| 31 | 26 | 25 | 21 | 20 | 16 | 15 | 11 | 10 | 9 8 | 7 | 4 | 3 | 0 |
| 111000 | dddd | aaaaa | bbbbbb | - | 00 | 01-- | 1000 | | | | | | |

Format: `l.srl rD, rA, rB`

Description: The contents of register rA are shifted right by the number of bit positions specified in register rB. High-order bits are filled with 0. The result is placed into rD.

Operation: `rD[31-rB[4:0]:0] <- rA[31:rB[4:0]]`
 `rD[31:32-rB[4:0]] <- 0`

Exceptions: None

l.sra – Shift Right Arithmetic

Code:

| | | | | | | | | | | | | | |
|--------|------|-------|--------|----|----|------|------|----|-----|---|---|---|---|
| 31 | 26 | 25 | 21 | 20 | 16 | 15 | 11 | 10 | 9 8 | 7 | 4 | 3 | 0 |
| 111000 | dddd | aaaaa | bbbbbb | - | 00 | 10-- | 1000 | | | | | | |

Format: `l.sra rD, rA, rB`

Description: The contents of register rA are shifted right by the number of bit positions specified in register rB. High-order bits are filled with rA[31]. The result is placed into rD.

Operation: `rD[31-rB[4:0]:0] <- rA[31:rB[4:0]]`
 `rD[31:32-rB[4:0]] <- rA[31]`

Exceptions: None

l.cmov – Conditional Move

Code:

| | | | | | | | | | | | | | |
|--------|------|-------|--------|----|----|------|------|----|-----|---|---|---|---|
| 31 | 26 | 25 | 21 | 20 | 16 | 15 | 11 | 10 | 9 8 | 7 | 4 | 3 | 0 |
| 111000 | dddd | aaaaa | bbbbbb | - | 00 | ---- | 1110 | | | | | | |

Format: `l.cmov rD, rA, rB`

Description: If SR[F] is set, general-purpose register rA is placed into register rD. Otherwise, register rB is placed into rD.

Operation: `rD[31:0] < - SR[F] ? rA[31:0] : rB[31:0]`

Exceptions: None

I.mul – Multiply Signed

Code:

| | | | | | | | | | | | | | |
|--------|------|-------|--------|----|----|------|------|----|-----|---|---|---|---|
| 31 | 26 | 25 | 21 | 20 | 16 | 15 | 11 | 10 | 9 8 | 7 | 4 | 3 | 0 |
| 111000 | dddd | aaaaa | bbbbbb | - | 11 | ---- | 0110 | | | | | | |

Format: `l.mul rD, rA, rB`

Description: The contents of registers rA and rB are multiplied. The result is truncated to 32 bit and placed into register rD. Both operands are treated as *signed* integers.

None (*Note:* In contrast to the OR1k specification, the flags CY and OV are not affected, and no range exception can be generated.)

Operation: `rD <- rA * rB`

Exceptions: None (OR1k: Range Exception)

I.mulu – Multiply Unsigned

Code:

| | | | | | | | | | | | | | |
|--------|------|-------|--------|----|----|------|------|----|-----|---|---|---|---|
| 31 | 26 | 25 | 21 | 20 | 16 | 15 | 11 | 10 | 9 8 | 7 | 4 | 3 | 0 |
| 111000 | dddd | aaaaa | bbbbbb | - | 11 | ---- | 1011 | | | | | | |

Format: `l.mulu rD, rA, rB`

Description: The contents of registers rA and rB are multiplied. The result is truncated to 32 bit and placed into register rD. Both operands are treated as *unsigned* integers.

None (*Note:* In contrast to the OR1k specification, the flags CY and OV are not affected.)

Operation: `rD <- rA * rB`

Exceptions: None (OR1k: Range Exception)

l.sfeq – Set Flag if Equal

Code:

| | | | | | | | | | | | | | | |
|--------|----|-------|----|-------|----|-------|----|----|----|---|------|---|------|---|
| 31 | 26 | 25 | 21 | 20 | 16 | 15 | 11 | 10 | 9 | 8 | 7 | 4 | 3 | 0 |
| 111001 | | 00000 | | aaaaa | | bbbbb | | - | -- | | ---- | | ---- | |

Format: **l.sfeq rA, rB**

Description: The contents of registers rA and rB are compared. The flag SR[F] is set, if they are equal, and unset otherwise.

Operation: SR[F] <- (rA == rB)

Exceptions: None

l.sfne – Set Flag if Not Equal

Code:

| | | | | | | | | | | | | | | |
|--------|----|-------|----|-------|----|-------|----|----|----|---|------|---|------|---|
| 31 | 26 | 25 | 21 | 20 | 16 | 15 | 11 | 10 | 9 | 8 | 7 | 4 | 3 | 0 |
| 111001 | | 00001 | | aaaaa | | bbbbb | | - | -- | | ---- | | ---- | |

Format: **l.sfne rA, rB**

Description: The contents of registers rA and rB are compared. The flag SR[F] is set, if they are different, and unset otherwise.

Operation: SR[F] <- (rA != rB)

Exceptions: None

l.sfgtu – Set Flag if Greater Than Unsigned

Code:

| | | | | | | | | | | | | | | |
|--------|----|-------|----|-------|----|-------|----|----|----|---|------|---|------|---|
| 31 | 26 | 25 | 21 | 20 | 16 | 15 | 11 | 10 | 9 | 8 | 7 | 4 | 3 | 0 |
| 111001 | | 00010 | | aaaaa | | bbbbb | | - | -- | | ---- | | ---- | |

Format: **l.sfgtu rA, rB**

Description: The contents of registers rA and rB are interpreted as unsigned numbers and compared. The flag SR[F] is set, if rA > rB, and unset otherwise.

Operation: SR[F] <- (rA > rB)

Exceptions: None

l.sfgeu – Set Flag if Greater or Equal Unsigned

Code:

| | | | | | | | | | | | | | | |
|--------|----|-------|----|-------|----|-------|----|----|----|---|------|---|------|---|
| 31 | 26 | 25 | 21 | 20 | 16 | 15 | 11 | 10 | 9 | 8 | 7 | 4 | 3 | 0 |
| 111001 | | 00011 | | aaaaa | | bbbbb | | - | -- | | ---- | | ---- | |

Format: `l.sfgeu rA, rB`

Description: The contents of registers rA and rB are interpreted as unsigned numbers and compared. The flag SR[F] is set, if $rA \geq rB$, and unset otherwise.

Operation: `SR[F] <- (rA >= rB)`

Exceptions: None

l.sftu – Set Flag Less Than Unsigned

Code:

| | | | | | | | | | | | | | | |
|--------|-------|-------|-------|----|----|------|------|----|---|---|---|---|---|---|
| 31 | 26 | 25 | 21 | 20 | 16 | 15 | 11 | 10 | 9 | 8 | 7 | 4 | 3 | 0 |
| 111001 | 00100 | aaaaa | bbbbb | - | -- | ---- | ---- | | | | | | | |

Format: `l.sftu rA, rB`

Description: The contents of registers rA and rB are interpreted as unsigned numbers and compared. The flag SR[F] is set, if $rA < rB$, and unset otherwise.

Operation: `SR[F] <- (rA < rB)`

Exceptions: None

l.sfleu – Set Flag if Less or Equal Unsigned

Code:

| | | | | | | | | | | | | | | |
|--------|-------|-------|-------|----|----|------|------|----|---|---|---|---|---|---|
| 31 | 26 | 25 | 21 | 20 | 16 | 15 | 11 | 10 | 9 | 8 | 7 | 4 | 3 | 0 |
| 111001 | 00101 | aaaaa | bbbbb | - | -- | ---- | ---- | | | | | | | |

Format: `l.sfleu rA, rB`

Description: The contents of registers rA and rB are interpreted as unsigned numbers and compared. The flag SR[F] is set, if $rA \leq rB$, and unset otherwise.

Operation: `SR[F] <- (rA <= rB)`

Exceptions: None

l.sfgts – Set Flag if Greater Than Signed

Code:

| | | | | | | | | | | | | | | |
|--------|-------|-------|-------|----|----|------|------|----|---|---|---|---|---|---|
| 31 | 26 | 25 | 21 | 20 | 16 | 15 | 11 | 10 | 9 | 8 | 7 | 4 | 3 | 0 |
| 111001 | 01010 | aaaaa | bbbbb | - | -- | ---- | ---- | | | | | | | |

Format: `l.sfgts rA, rB`

Description: The contents of registers rA and rB are interpreted as signed numbers and compared. The flag SR[F] is set, if $rA > rB$, and unset otherwise.

Operation: `SR[F] <- (rA > rB)`

Exceptions: None

l.sfges – Set Flag if Greater or Equal Signed

Code:

| | | | | | | | | | | | | | | |
|--------|-------|-------|-------|----|----|------|------|----|---|---|---|---|---|---|
| 31 | 26 | 25 | 21 | 20 | 16 | 15 | 11 | 10 | 9 | 8 | 7 | 4 | 3 | 0 |
| 111001 | 01011 | aaaaa | bbbbb | - | -- | ---- | ---- | | | | | | | |

Format: `l.sfges rA, rB`

Description: The contents of registers rA and rB are interpreted as signed numbers and compared. The flag SR[F] is set, if $rA \geq rB$, and unset otherwise.

Operation: `SR[F] <- (rA >= rB)`

Exceptions: None

l.sflts – Set Flag Less Than Signed

Code:

| | | | | | | | | | | | | | | |
|--------|-------|-------|-------|----|----|------|------|----|---|---|---|---|---|---|
| 31 | 26 | 25 | 21 | 20 | 16 | 15 | 11 | 10 | 9 | 8 | 7 | 4 | 3 | 0 |
| 111001 | 01100 | aaaaa | bbbbb | - | -- | ---- | ---- | | | | | | | |

Format: `l.sflts rA, rB`

Description: The contents of registers rA and rB are interpreted as signed numbers and compared. The flag SR[F] is set, if $rA < rB$, and unset otherwise.

Operation: `SR[F] <- (rA < rB)`

Exceptions: None

l.sfles – Set Flag if Less or Equal Signed

| | | | | | | | | | | | | | | | |
|--------------|---|----|-------|----|-------|----|-------|----|----|----|---|------|---|------|---|
| Code: | 31 | 26 | 25 | 21 | 20 | 16 | 15 | 11 | 10 | 9 | 8 | 7 | 4 | 3 | 0 |
| | 111001 | | 01101 | | aaaaa | | bbbbb | | - | -- | | ---- | | ---- | |
| Format: | l.sfles rA, rB | | | | | | | | | | | | | | |
| Description: | The contents of registers rA and rB are interpreted as signed numbers and compared. The flag SR[F] is set, if $rA \leq rB$, and unset otherwise. | | | | | | | | | | | | | | |
| Operation: | SR[F] \leftarrow (rA \leq rB) | | | | | | | | | | | | | | |
| Exceptions: | None | | | | | | | | | | | | | | |

l.addi – Add Immediate

| | | | | | | | | | | | | | | | |
|--------------|---|----|------|----|-------|----|------|----|----|----|---|------|---|------|---|
| Code: | 31 | 26 | 25 | 21 | 20 | 16 | 15 | 11 | 10 | 9 | 8 | 7 | 4 | 3 | 0 |
| | 100111 | | dddd | | aaaaa | | iiii | | i | ii | | iiii | | iiii | |
| Format: | l.addi rD, rA, I | | | | | | | | | | | | | | |
| Description: | The contents of the general-purpose registers rA and the sign-extended immediate value I are added. The result is placed into rD. | | | | | | | | | | | | | | |
| Operation: | rD \leftarrow rA + exts(I) SR[CY] \leftarrow Carry SR[OV] \leftarrow Overflow | | | | | | | | | | | | | | |
| Exceptions: | None | | | | | | | | | | | | | | |

l.addic – Add Immediate with Carry

| | | | | | | | | | | | | | | | |
|--------------|--|----|------|----|-------|----|------|----|----|----|---|------|---|------|---|
| Code: | 31 | 26 | 25 | 21 | 20 | 16 | 15 | 11 | 10 | 9 | 8 | 7 | 4 | 3 | 0 |
| | 101000 | | dddd | | aaaaa | | iiii | | i | ii | | iiii | | iiii | |
| Format: | l.addic rD, rA, I | | | | | | | | | | | | | | |
| Description: | The contents of the general-purpose registers rA, the sign-extended immediate value I, and the carry flag are added. The result is placed into rD. | | | | | | | | | | | | | | |
| Operation: | rD \leftarrow rA + exts(I) + SR[CY] SR[CY] \leftarrow Carry SR[OV] \leftarrow Overflow | | | | | | | | | | | | | | |
| Exceptions: | None | | | | | | | | | | | | | | |

l.andi – Logical AND with Immediate Half Word

Code:

| | | | | | | | | | | | | | | |
|--------|------|-------|-------|----|----|------|------|----|---|---|---|---|---|---|
| 31 | 26 | 25 | 21 | 20 | 16 | 15 | 11 | 10 | 9 | 8 | 7 | 4 | 3 | 0 |
| 101001 | dddd | aaaaa | iiiii | i | ii | iiii | iiii | | | | | | | |

Format: `l.andi rD, rA, I`

Description: A bit-wise logical AND operation is performed on the contents of the general-purpose registers rA and the zero-extended immediate value I. The result is placed into rD.

Operation: `rD <- rA and extz(I)`

Exceptions: None

l.ori – Logical OR with Immediate Half Word

Code:

| | | | | | | | | | | | | | |
|--------|------|-------|-------|----|----|------|------|----|-----|---|---|---|---|
| 31 | 26 | 25 | 21 | 20 | 16 | 15 | 11 | 10 | 9 8 | 7 | 4 | 3 | 0 |
| 101010 | dddd | aaaaa | iiiii | i | ii | iiii | iiii | | | | | | |

Format: `l.ori rD, rA, I`

Description: A bit-wise logical OR operation is performed on the contents of the general-purpose registers rA and the zero-extended immediate value I. The result is placed into rD.

Operation: `rD <- rA or extz(I)`

Exceptions: None

l.xori – Logical XOR with Immediate Half Word

Code:

| | | | | | | | | | | | | | |
|--------|------|------|------|----|----|------|------|----|-----|---|---|---|---|
| 31 | 26 | 25 | 21 | 20 | 16 | 15 | 11 | 10 | 9 8 | 7 | 4 | 3 | 0 |
| 101011 | dddd | aaaa | iiii | i | ii | iiii | iiii | | | | | | |

Format: `l.xori rD, rA, I`

Description: A bit-wise logical XOR operation is performed on the contents of the general-purpose registers `rA` and the sign-extended immediate value `I`. The result is placed into `rD`.

Note: In the OR1200 implementation, the immediate value is zero-extended, whereas *ParaNut* sticks to the original OR1k specification. This allows a 32-bit NOT operation to be implemented as `l.xori rA, rB, -1`.

Operation: `rD <- rA xor exts(I)`

Exceptions: None

l.muli – Multiply Immediate Signed

Code:

| | | | | | | | | | | | | | | |
|--------|------|------|------|----|----|------|------|----|---|---|---|---|---|---|
| 31 | 26 | 25 | 21 | 20 | 16 | 15 | 11 | 10 | 9 | 8 | 7 | 4 | 3 | 0 |
| 101100 | dddd | aaaa | iiii | i | ii | iiii | iiii | | | | | | | |

Format: `l.muli rD, rA, I`

Description: The contents of the register `rA` and the immediate value `I` are multiplied. The result is truncated to 32 bit and placed into register `rD`. Both operands are treated as signed integers.

None (*Note:* In contrast to the OR1k specification, the flags `CY` and `OV` are not affected, and no range exception can be generated).

Operation: `rD <- rA * exts(I)`

Exceptions: None (OR1k: Range Exception)

l.sfeqi – Set Flag if Equal Immediate

Code:

| | | | | | | | | | | | | | | |
|--------|-------|-------|-------|----|----|------|------|----|---|---|---|---|---|---|
| 31 | 26 | 25 | 21 | 20 | 16 | 15 | 11 | 10 | 9 | 8 | 7 | 4 | 3 | 0 |
| 101111 | 00000 | aaaaa | iiiii | i | ii | iiii | iiii | | | | | | | |

Format: `l.sfeqi rA, I`

Description: The contents of the register `rA` and the immediate value `I` are compared. The flag `SR[F]` is set, if they are equal, and unset otherwise.

Operation: `SR[F] <- (rA == I)`

Exceptions: None

l.sfnei – Set Flag if Not Equal Immediate

Code:

| | | | | | | | | | | | | | | |
|--------|----|-------|----|-------|----|-------|----|----|----|---|------|---|------|---|
| 31 | 26 | 25 | 21 | 20 | 16 | 15 | 11 | 10 | 9 | 8 | 7 | 4 | 3 | 0 |
| 101111 | | 00001 | | aaaaa | | iiiii | | i | ii | | iiii | | iiii | |

Format: `l.sfnei rA, I`

Description: The contents of the register `rA` and the immediate value `I` are compared. The flag `SR[F]` is set, if they are different, and unset otherwise.

Operation: `SR[F] <- (rA != I)`

Exceptions: None

l.sfgtui – Set Flag if Greater Than Unsigned Immediate

Code:

| | | | | | | | | | | | | | | |
|--------|----|-------|----|-------|----|-------|----|----|----|---|------|---|------|---|
| 31 | 26 | 25 | 21 | 20 | 16 | 15 | 11 | 10 | 9 | 8 | 7 | 4 | 3 | 0 |
| 101111 | | 00010 | | aaaaa | | iiiii | | i | ii | | iiii | | iiii | |

Format: `l.sfgtui rA, I`

Description: The contents of the register `rA` and the immediate value `I` are interpreted as unsigned numbers and compared. The flag `SR[F]` is set, if `rA > I`, and unset otherwise.

Operation: `SR[F] <- (rA > I)`

Exceptions: None

l.sfgeui – Set Flag if Greater or Equal Unsigned Immediate

Code:

| | | | | | | | | | | | | | |
|--------|-------|-------|-------|----|----|------|------|----|-----|---|---|---|---|
| 31 | 26 | 25 | 21 | 20 | 16 | 15 | 11 | 10 | 9 8 | 7 | 4 | 3 | 0 |
| 101111 | 00011 | aaaaa | iiiii | i | ii | iiii | iiii | | | | | | |

Format: `l.sfgeui rA, I`

Description: The contents of the register `rA` and the immediate value `I` are interpreted as unsigned numbers and compared. The flag `SR[F]` is set, if `rA >= I`, and unset otherwise.

Operation: `SR[F] <- (rA >= I)`

Exceptions: None

l.sfltui – Set Flag Less Than Unsigned Immediate

Code:

| | | | | | | | | | | | | | |
|--------|-------|-------|-------|----|----|------|------|----|-----|---|---|---|---|
| 31 | 26 | 25 | 21 | 20 | 16 | 15 | 11 | 10 | 9 8 | 7 | 4 | 3 | 0 |
| 101111 | 00100 | aaaaa | iiiii | i | ii | iiii | iiii | | | | | | |

Format: `l.sfltui rA, I`

Description: The contents of the register `rA` and the immediate value `I` are interpreted as unsigned numbers and compared. The flag `SR[F]` is set, if `rA < I`, and unset otherwise.

Operation: `SR[F] <- (rA < I)`

Exceptions: None

l.sfleui – Set Flag if Less or Equal Unsigned Immediate

Code:

| | | | | | | | | | | | | | |
|--------|-------|-------|-------|----|----|------|------|----|-----|---|---|---|---|
| 31 | 26 | 25 | 21 | 20 | 16 | 15 | 11 | 10 | 9 8 | 7 | 4 | 3 | 0 |
| 101111 | 00101 | aaaaa | iiiii | i | ii | iiii | iiii | | | | | | |

Format: `l.sfleui rA, I`

Description: The contents of the register `rA` and the immediate value `I` are interpreted as unsigned numbers and compared. The flag `SR[F]` is set, if `rA <= I`, and unset otherwise.

Operation: `SR[F] <- (rA <= I)`

Exceptions: None

l.sfgtsi – Set Flag if Greater Than Signed Immediate

Code:

| | | | | | | | | | | | | | |
|--------|-------|-------|-------|----|----|------|------|----|-----|---|---|---|---|
| 31 | 26 | 25 | 21 | 20 | 16 | 15 | 11 | 10 | 9 8 | 7 | 4 | 3 | 0 |
| 101111 | 01010 | aaaaa | iiiii | i | ii | iiii | iiii | | | | | | |

Format: `l.sfgtsi rA, I`

Description: The contents of the register `rA` and the immediate value `I` are interpreted as signed numbers and compared. The flag `SR[F]` is set, if `rA > I`, and unset otherwise.

Operation: `SR[F] <- (rA > I)`

Exceptions: None

l.sfgesi – Set Flag if Greater or Equal Signed Immediate

Code:

| | | | | | | | | | | | | | |
|--------|-------|-------|-------|----|----|------|------|----|-----|---|---|---|---|
| 31 | 26 | 25 | 21 | 20 | 16 | 15 | 11 | 10 | 9 8 | 7 | 4 | 3 | 0 |
| 101111 | 01011 | aaaaa | iiiii | i | ii | iiii | iiii | | | | | | |

Format: `l.sfgesi rA, I`

Description: The contents of the register `rA` and the immediate value `I` are interpreted as signed numbers and compared. The flag `SR[F]` is set, if `rA >= I`, and unset otherwise.

Operation: `SR[F] <- (rA >= I)`

Exceptions: None

l.sfltsi – Set Flag Less Than Signed Immediate

Code:

| | | | | | | | | | | | | | |
|--------|-------|-------|-------|----|----|------|------|----|-----|---|---|---|---|
| 31 | 26 | 25 | 21 | 20 | 16 | 15 | 11 | 10 | 9 8 | 7 | 4 | 3 | 0 |
| 101111 | 01100 | aaaaa | iiiii | i | ii | iiii | iiii | | | | | | |

Format: `l.sfltsi rA, I`

Description: The contents of the register `rA` and the immediate value `I` are interpreted as signed numbers and compared. The flag `SR[F]` is set, if `rA < I`, and unset otherwise.

Operation: `SR[F] <- (rA < I)`

Exceptions: None

l.sflesi – Set Flag if Less or Equal Signed Immediate

Code:

| | | | | | | | | | | | | | |
|--------|-------|-------|-------|----|----|------|------|----|-----|---|---|---|---|
| 31 | 26 | 25 | 21 | 20 | 16 | 15 | 11 | 10 | 9 8 | 7 | 4 | 3 | 0 |
| 101111 | 01101 | aaaaa | iiiii | i | ii | iiii | iiii | | | | | | |

Format: **l.sflesi rA, I**

Description: The contents of the register rA and the immediate value I are interpreted as signed numbers and compared. The flag SR[F] is set, if $rA \leq I$, and unset otherwise.

Operation: $SR[F] \leftarrow (rA \leq I)$

Exceptions: None

l.movhi – Move Immediate High

Code:

| | | | | | | | | | | | | | |
|--------|------|------|----|-------|----|----|------|------|-----|---|---|---|---|
| 31 | 26 | 25 | 21 | 20 | 16 | 15 | 11 | 10 | 9 8 | 7 | 4 | 3 | 0 |
| 000110 | dddd | ---- | 0 | iiiii | i | ii | iiii | iiii | | | | | |

Format: **l.movhi rD, I**

Description: The immediate value I is placed into the high-order 16 bits of register rD. The low-order bits of rD are cleared.

Operation: $rD[31:16] \leftarrow I$
 $rD[15:0] \leftarrow 0$

Exceptions: None

3.1.2. Load & Store Instructions

l.lwz – Load Word and Extend with Zero

Code:

| | | | | | | | | | | | | | | |
|--------|------|------|------|----|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| 31 | 26 | 25 | 21 | 20 | 16 | 15 | 11 | 10 | 9 | 8 | 7 | 4 | 3 | 0 |
| 100001 | dddd | aaaa | iiii | i | ii | iii | iii | iii | iii | iii | iii | iii | iii | iii |

Format: `l.lwz rD, I(rA)`

Description: A word is loaded from memory and placed into register rD. The effective address is determined by adding the contents of rA to the sign-extended immediate value I.

Note: For *ParaNut*, the instructions l.lwz and l.lws are equivalent.

Operation: `rD <- Mem (rA + exts(I)) [31:0]`

Exceptions: Alignment
TLB miss
Page fault
Bus error

l.lws – Load Word and Extend with Sign

Code:

| | | | | | | | | | | | | | | |
|--------|------|------|------|----|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| 31 | 26 | 25 | 21 | 20 | 16 | 15 | 11 | 10 | 9 | 8 | 7 | 4 | 3 | 0 |
| 100010 | dddd | aaaa | iiii | i | ii | iii | iii | iii | iii | iii | iii | iii | iii | iii |

Format: `l.lws rD, I(rA)`

Description: A word is loaded from memory and placed into register rD. The effective address is determined by adding the contents of rA to the sign-extended immediate value I.

Note: For *ParaNut*, the instructions l.lwz and l.lws are equivalent.

Operation: `rD <- Mem (rA + exts(I)) [31:0]`

Exceptions: Alignment
TLB miss
Page fault
Bus error

l.lbz – Load Byte and Extend with Zero

Code:

| | | | | | | | | | | | | | |
|--------|------|-------|-------|----|----|------|------|----|-----|---|---|---|---|
| 31 | 26 | 25 | 21 | 20 | 16 | 15 | 11 | 10 | 9 8 | 7 | 4 | 3 | 0 |
| 100011 | dddd | aaaaa | iiiii | i | ii | iiii | iiii | | | | | | |

Format: `l.lbz rD, I(rA)`

Description: A single byte is loaded from memory, zero-extended, and then placed into register rD. The effective address is determined by adding the contents of rA to the sign-extended immediate value I.

Operation: `rD <- extz (Mem (rA + exts(I)) [7:0])`

Exceptions: TLB miss
 Page fault
 Bus error

Exceptions: None

l.lbs – Load Byte and Extend with Sign

Code:

| | | | | | | | | | | | | | | |
|--------|------|-------|-------|----|----|------|------|----|---|---|---|---|---|---|
| 31 | 26 | 25 | 21 | 20 | 16 | 15 | 11 | 10 | 9 | 8 | 7 | 4 | 3 | 0 |
| 100100 | dddd | aaaaa | iiiii | i | ii | iiii | iiii | | | | | | | |

Format: `l.lbs rD, I(rA)`

Description: A single byte is loaded from memory, sign-extended, and then placed into register rD. The effective address is determined by adding the contents of rA to the sign-extended immediate value I.

Operation: `rD <- exts (Mem (rA + exts(I)) [7:0])`

Exceptions: TLB miss
 Page fault
 Bus error

I.lhz – Load Half Word and Extend with Zero

Code:

| | | | | | | | | | | | | | | |
|--------|------|------|------|----|----|-----|-----|----|---|---|---|---|---|---|
| 31 | 26 | 25 | 21 | 20 | 16 | 15 | 11 | 10 | 9 | 8 | 7 | 4 | 3 | 0 |
| 100101 | dddd | aaaa | iiii | i | ii | iii | iii | | | | | | | |

Format: 1.lhz rD, I(rA)

Description: A half word is loaded from memory, zero-extended, and then placed into register rD. The effective address is determined by adding the contents of rA to the sign-extended immediate value I.

Operation: $rD \leftarrow \text{extz} (\text{Mem} (rA + \text{exts}(I)) [15:0])$

Exceptions: Alignment
TLB miss
Page fault
Bus error

I.lhs – Load Half Word and Extend with Sign

Code:

| | | | | | | | | | | | | | |
|--------|------|------|------|----|----|-----|-----|----|-----|---|---|---|---|
| 31 | 26 | 25 | 21 | 20 | 16 | 15 | 11 | 10 | 9 8 | 7 | 4 | 3 | 0 |
| 100110 | dddd | aaaa | iiii | i | ii | iii | iii | | | | | | |

Format: 1.lhs rD, I(rA)

Description: A half word is loaded from memory, sign-extended, and then placed into register rD. The effective address is determined by adding the contents of rA to the sign-extended immediate value I.

Operation: $rD \leftarrow \text{exts} (\text{Mem} (rA + \text{exts}(I)) [15:0])$

Exceptions: Alignment
TLB miss
Page fault
Bus error

I.sw – Store Word

Code:

| | | | | | | | | | | | | | | |
|--------|------|------|------|----|----|-----|-----|----|---|---|---|---|---|---|
| 31 | 26 | 25 | 21 | 20 | 16 | 15 | 11 | 10 | 9 | 8 | 7 | 4 | 3 | 0 |
| 110101 | iiii | aaaa | bbbb | i | ii | iii | iii | | | | | | | |

Format: `l.sw I(rA), rB`

Description: The contents of register rB are stored as a word. The effective address is determined by adding the contents of rA to the sign-extended immediate value I.

Operation: `Mem (rA + exts(I)) <- rB`

Exceptions: Alignment
TLB miss
Page fault
Bus error

I.sb – Store Byte

Code:

| | | | | | | | | | | | | | |
|--------|------|------|------|----|----|-----|-----|----|-----|---|---|---|---|
| 31 | 26 | 25 | 21 | 20 | 16 | 15 | 11 | 10 | 9 8 | 7 | 4 | 3 | 0 |
| 110110 | iiii | aaaa | bbbb | i | ii | iii | iii | | | | | | |

Format: `l.sb I(rA), rB`

Description: The low-order bits of register rB are stored as a byte. The effective address is determined by adding the contents of rA to the sign-extended immediate value I.

Operation: `Mem (rA + exts(I)) <- rB[7:0]`

Exceptions: TLB miss
Page fault
Bus error

I.sw – Store Half Word

| | | | | | | | | | | | | | | | |
|--------------|---|------|------|------|----|----|-----|-----|----|---|---|---|---|---|---|
| Code: | 31 | 26 | 25 | 21 | 20 | 16 | 15 | 11 | 10 | 9 | 8 | 7 | 4 | 3 | 0 |
| | 110111 | iiii | aaaa | bbbb | i | ii | iii | iii | | | | | | | |
| Format: | l.sh I(rA), rB | | | | | | | | | | | | | | |
| Description: | The low-order bits of register rB are stored as a half word. The effective address is determined by adding the contents of rA to the sign-extended immediate value I. | | | | | | | | | | | | | | |
| Operation: | Mem (rA + exts(I)) <- rB[15:0] | | | | | | | | | | | | | | |
| Exceptions: | Alignment TLB miss Page fault Bus error | | | | | | | | | | | | | | |

3.1.3. Control Flow Instructions**I.j – Jump**

| | | | | | | | | | | | | | | | |
|--------------|--|------|------|------|----|----|------|------|----|---|---|---|---|---|---|
| Code: | 31 | 26 | 25 | 21 | 20 | 16 | 15 | 11 | 10 | 9 | 8 | 7 | 4 | 3 | 0 |
| | 000000 | nnnn | nnnn | nnnn | n | nn | nnnn | nnnn | | | | | | | |
| Format: | l.j N | | | | | | | | | | | | | | |
| Description: | The instruction jumps unconditionally with a delay of one instruction. The target address is determined by adding an immediate constant offset to the current PC, which refers the address of the jump instruction. The immediate offset is determined by multiplying the sign-extended 26-bit immediate value I by 4. | | | | | | | | | | | | | | |
| Operation: | PC <- PC + 4 * exts(N) | | | | | | | | | | | | | | |
| Exceptions: | None | | | | | | | | | | | | | | |

I.jal – Jump and Link

Code:

| | | | | | | | | | | | | | | |
|--------|-------|-------|-------|----|----|------|------|----|---|---|---|---|---|---|
| 31 | 26 | 25 | 21 | 20 | 16 | 15 | 11 | 10 | 9 | 8 | 7 | 4 | 3 | 0 |
| 000001 | nnnnn | nnnnn | nnnnn | n | nn | nnnn | nnnn | | | | | | | |

Format: 1.jal N

Description: The instruction jumps unconditionally with a delay of one instruction, and the address of the instruction after the delay slot is placed into the link register. The target address is determined by adding an immediate constant offset to the current PC, which refers the address of the jump instruction. The immediate offset is determined by multiplying the sign-extended 26-bit immediate value I by 4.

Operation: LR <- PC + 8
 R9 <- PC + 4 * exts(N)

Exceptions: None

I.bnf – Branch if No Flag

Code:

| | | | | | | | | | | | | | | |
|--------|-------|-------|-------|----|----|------|------|----|---|---|---|---|---|---|
| 31 | 26 | 25 | 21 | 20 | 16 | 15 | 11 | 10 | 9 | 8 | 7 | 4 | 3 | 0 |
| 000011 | nnnnn | nnnnn | nnnnn | n | nn | nnnn | nnnn | | | | | | | |

Format: 1.bnf N

Description: If the flag SR[F] is not set, the instruction jumps with a delay of one instruction. The target address is determined by adding an immediate constant offset to the current PC, which refers the address of the jump instruction. The immediate offset is determined by multiplying the sign-extended 26-bit immediate value I by 4.

Operation: if (SR[F] == 0) PC <- PC + 4 * exts(N)

Exceptions: None

l.bnf – Branch if Flag

Code:

| | | | | | | | | | | | | | | |
|--------|-------|-------|-------|----|----|------|------|----|---|---|---|---|---|---|
| 31 | 26 | 25 | 21 | 20 | 16 | 15 | 11 | 10 | 9 | 8 | 7 | 4 | 3 | 0 |
| 000100 | nnnnn | nnnnn | nnnnn | n | nn | nnnn | nnnn | | | | | | | |

Format: **l.bf** N

Description: If the flag SR[F] is set, the instruction jumps with a delay of one instruction. The target address is determined by adding an immediate constant offset to the current PC, which refers the address of the jump instruction. The immediate offset is determined by multiplying the sign-extended 26-bit immediate value I by 4.

Operation: if (SR[F] == 1) PC <- PC + 4 * exts(N)

Exceptions: None

l.nop – No Operation

Code:

| | | | | | | | | | | | | | |
|--------|-------|-------|-------|----|----|------|------|----|-----|---|---|---|---|
| 31 | 26 | 25 | 21 | 20 | 16 | 15 | 11 | 10 | 9 8 | 7 | 4 | 3 | 0 |
| 000101 | 01--- | ----- | kkkkk | k | kk | kkkk | kkkk | | | | | | |

Format: **l.nop** K

Description: In general, the instruction does nothing. However, the OR1K simulator, certain values for K may trigger special actions.

The instruction *l.nop 1* is handled as a HALT instruction.

Note: Different from the OR1k specification, the execution time may also be zero.

Operation: (None)

Exceptions: None

I.jr – Jump Register

Code:

| | | | | | | | | | | | | | | |
|--------|-------|-------|--------|----|----|-------|-------|----|---|---|---|---|---|---|
| 31 | 26 | 25 | 21 | 20 | 16 | 15 | 11 | 10 | 9 | 8 | 7 | 4 | 3 | 0 |
| 010001 | ----- | ----- | bbbbbb | - | -- | ----- | ----- | | | | | | | |

Format: 1.jr rB

Description: The instruction jumps unconditionally with a delay of one instruction.
 The contents of general-purpose register rB are used as the target address.

Operation: PC <- rB

Exceptions: None

I.jalr – Jump and Link Register

Code:

| | | | | | | | | | | | | | | |
|--------|-------|-------|--------|----|----|-------|-------|----|---|---|---|---|---|---|
| 31 | 26 | 25 | 21 | 20 | 16 | 15 | 11 | 10 | 9 | 8 | 7 | 4 | 3 | 0 |
| 010010 | ----- | ----- | bbbbbb | - | -- | ----- | ----- | | | | | | | |

Format: 1.jalr rB

Description: The instruction jumps unconditionally with a delay of one instruction,
 and the address of the instruction after the delay slot is placed into the
 link register. The contents of general-purpose register rB are used as the
 target address.

Operation: R9 <- PC + 8
 PC <- rB

Exceptions: None

I.sys – System Call

Code:

| | | | | | | | | | | | | | | |
|--------|-------|-------|-------|----|----|------|------|----|---|---|---|---|---|---|
| 31 | 26 | 25 | 21 | 20 | 16 | 15 | 11 | 10 | 9 | 8 | 7 | 4 | 3 | 0 |
| 001000 | 00000 | 00000 | kkkkk | k | kk | kkkk | kkkk | | | | | | | |

Format: `l.sys K`

Description: Execution of this instruction results in the system call exception. The system calls exception is a request to the operating system to provide operating system services. The immediate value can be used to specify which system service is requested, alternatively a GPR defined by the ABI can be used to specify system service.

Operation: `EPCR <- NPC`
`ESR <- SR`
`PC <- 0xc00`

Exceptions: System call

I.rfe – Return from Exception

Code:

| | | | | | | | | | | | | | | |
|--------|----|-------|----|-------|----|-------|----|----|----|---|-------|---|------|---|
| 31 | 26 | 25 | 21 | 20 | 16 | 15 | 11 | 10 | 9 | 8 | 7 | 4 | 3 | 0 |
| 001001 | | ----- | | ----- | | ----- | | - | -- | | ----- | | ---- | |

Format: `l.rfe`

Description: Execution of this instruction partially restores the state of the processor prior to the exception. This instruction does not have a delay slot.

Operation: `PC <- EPCR`
`SR <- ESR`

Exceptions: None

3.1.4. Special Instructions

l.mfspr – Move from Special Purpose Register

Code:

| | | | | | | | | | | | | | | |
|--------|------|------|------|----|----|------|------|----|---|---|---|---|---|---|
| 31 | 26 | 25 | 21 | 20 | 16 | 15 | 11 | 10 | 9 | 8 | 7 | 4 | 3 | 0 |
| 101101 | dddd | aaaa | kkkk | k | kk | kkkk | kkkk | | | | | | | |

Format: **l.mfspr** rD, rA, K

Description: The contents of the special register, defined by contents of register rA logically ORed with the immediate value, are moved into register rD.

Operation: rD <- SR(rA or K)

Exceptions: None

l.mtspr – Move to Special Purpose Register

Code:

| | | | | | | | | | | | | | | |
|--------|-------|-------|--------|----|----|------|------|----|---|---|---|---|---|---|
| 31 | 26 | 25 | 21 | 20 | 16 | 15 | 11 | 10 | 9 | 8 | 7 | 4 | 3 | 0 |
| 110000 | kkkkk | aaaaa | bbbbbb | k | kk | kkkk | kkkk | | | | | | | |

Format: **l.mtspr** rA, rB, K

Description: The contents of the general-purpose register rB are moved into the special register defined by contents of register rA logically ORed with the immediate value.

Operation: SR(rA or K) <- rD

Exceptions: None

l.lwa – Load Word Atomic (Load-Link)

Code:

| | | | | | | | | | | | | | |
|--------|------|------|------|----|----|------|------|----|-----|---|---|---|---|
| 31 | 26 | 25 | 21 | 20 | 16 | 15 | 11 | 10 | 9 8 | 7 | 4 | 3 | 0 |
| 011011 | dddd | aaaa | iiii | i | ii | iiii | iiii | | | | | | |

Format: `l.lwa rD, I(rA)`

Description: A word is loaded from memory and placed into register rD. The effective address is determined by adding the contents of rA to the sign-extended immediate value I.

A *link* is kept for the effective address, and a later *l.swa* instruction can only succeed if this address has not been modified by a different CPU core in the meantime.

l.lwa and *l.swa* implement the operations commonly known as 'load-link' and 'store-conditional' (LL, SC) with weak semantics. SC may eventually fail even if the word was not modified. Nested LL/SC pairs are not allowed, the outer SC may always fail in this case.

Operation: `EA <- rA + exts(I)`
`rD <- Mem (EA)`
`Link (EA) <- 1`

Exceptions: Alignment
TLB miss
Page fault
Bus error

l.swa – Store Word Atomic (Store-Conditional)

Code:

| | | | | | | | | | | | | | |
|--------|------|------|------|----|----|-----|-----|----|-----|---|---|---|---|
| 31 | 26 | 25 | 21 | 20 | 16 | 15 | 11 | 10 | 9 8 | 7 | 4 | 3 | 0 |
| 110011 | iiii | aaaa | bbbb | i | ii | iii | iii | | | | | | |

Format: `l.swa I(rA), rB`

Description: If a *link* obtained by a previous *l.swa* instruction is still valid, the contents of register rB are stored as a word. The effective address is determined by adding the contents of rA to the sign-extended immediate value I.

The flag register F is set, depending on whether the store operation was performed or not.

l.lwa and *l.swa* implement the operations commonly known as 'load-link' and 'store-conditional' (LL, SC) with weak semantics. SC may eventually fail even if the word was not modified. Nested LL/SC pairs are not allowed, the outer SC may always fail in this case.

Operation: `EA <- rA + exts(I)`
`if Link (EA) = 1: SR[F] <- 1, Mem (EA) <- rB`
`else: SR[F] <- 0`

Exceptions: Alignment
TLB miss
Page fault
Bus error

3.1.5. ParaNut Extensions**p.cinvalidate – Invalidate cache line**

Code:

| | | | | | | | | | | | | | |
|--------|------|------|-------|----|----|-----|-----|----|-----|---|---|---|---|
| 31 | 26 | 25 | 21 | 20 | 16 | 15 | 11 | 10 | 9 8 | 7 | 4 | 3 | 0 |
| 111110 | iiii | aaaa | ---01 | i | ii | iii | iii | | | | | | |

Format: `p.cinvalidate I(rA)`

Description: The contents of rA are added to the sign-extended immediate value I to obtain an effective address. If the memory block containing this address is stored in the cache, it is removed from the cache. An eventually modified cache block is not written back.

Exceptions: TLB miss
Page fault
Bus error

p.cwriteback – Write back cache line

| | | | | | | | | | | | | | | | |
|-------|--------|--------|--------|-------|----|----|------|------|----|---|---|---|---|---|---|
| Code: | 31 | 26 | 25 | 21 | 20 | 16 | 15 | 11 | 10 | 9 | 8 | 7 | 4 | 3 | 0 |
| | 111110 | iiiiii | aaaaaa | ---10 | i | ii | iiii | iiii | | | | | | | |

Format: `p.cwriteback I(rA)`

Description: The contents of rA are added to the sign-extended immediate value I to obtain an effective address. If the memory block containing this address is stored in the cache and modified, it is written back to main memory.

Exceptions: TLB miss
Page fault
Bus error

p.cflush – Flush cache line

| | | | | | | | | | | | | | | | |
|-------|--------|--------|--------|-------|----|----|------|------|----|---|---|---|---|---|---|
| Code: | 31 | 26 | 25 | 21 | 20 | 16 | 15 | 11 | 10 | 9 | 8 | 7 | 4 | 3 | 0 |
| | 111110 | iiiiii | aaaaaa | ---11 | i | ii | iiii | iiii | | | | | | | |

Format: `p.cflush I(rA)`

Description: The contents of rA are added to the sign-extended immediate value I to obtain an effective address. If the memory block containing this address is stored in the cache, it is written back to main memory (if modified) and then removed from the cache.

Exceptions: TLB miss
Page fault
Bus error

3.2. Special-Purpose Registers

The special-purpose reregisters as supported by the *ParaNut* architecture are listed in Table 3.1. Shifting the group number *GRP* 11 bits left and adding the register number *REG* computes the address of each special-purpose register. All registers are 32 bits wide from software perspective. The columns *CePU* and *CoPU* specify the valid access types for each register in a *CePU* and a *CoPU* (modes 1 and 2), respectively. “R” stands for read access and “W” stands for write access. CoPUs supporting mode 3 implement the same registers as CePUs.

Presently, a protected user mode is not defined. Illegal accesses according to the tables do not generate exceptions. They are either ignored (write accesses) or may return senseless data (read accesses).

Different from OR1200, *ParaNut* does not implement the cache writeback/invalidate/flush registers. Instead, to allow a smaller hardware implementation, the new in-

structions *p.cwriteback*, *p.cinvalidate*, and *p.cflush* implement the same functionality in the group of load/store operations (see Section 3.1).

3.2.1. Supervision Register (SR)

The fields of the Supervision Register (SR) are listed in Table 3.2.

3.2.2. Version Register (VR)

The Version Register (VR) can be read to determine the core version according to the OpenRISC specification. The fields of the register are listed in Table 3.3. The configuration field is presently not used. The *ParaNut* -specific configuration, such as the number of CePUs and their supported modes, can be determined through the *ParaNut* -specific registers.

3.2.3. Unit Present Register (UPR)

The fields of the Unit Present Register (UPR) are listed in Table 3.4.

3.2.4. CPU Configuration Register (CPUCFGR)

The fields of the CPU Configuration Register (CPUCFGR) are listed in Table 3.5. The *ParaNut* can be configured to have either 16 or 32 general purpose registers per CPU. If CGF=1, the number of registers is exactly 16 (this is different from the OR1k specification, which just states that the number of registers is less than 32).

3.2.5. Data Cache Configuration Register (DCCFGR)

The fields of the Data Cache Configuration Register (DCCFGR) are listed in Table 3.5. Since the *ParaNut* has a unified cache for data and instructions, the Instruction Cache Configuration Registers (ICCFGR) as specified by the OR1k architecture is mapped to the DCCFGR.

| <i>GRP</i> | <i>REG</i> | <i>Name</i> | <i>CePU</i> | <i>CoPU</i> | <i>Description</i> |
|------------|--|---------------|-------------|-------------|--|
| 0 | 0 | VR | R | – | Version register |
| 0 | 1 | UPR | R | – | Unit Present register |
| 0 | 2 | CPUCFGR | R | – | CPU Configuration register |
| 0 | 3 | DMMUCFGR | R | – | Data MMU Configuration register |
| 0 | 4 | IMMUCFGR | R | – | Instruction MMU Configuration register |
| 0 | 5 | DCCFGR | R | – | Data Cache Configuration register |
| 0 | 6 | ICCFGR | R | – | Instruction Cache Configuration register |
| 0 | 7 | DCFGR | R | – | Debug Configuration register |
| 0 | 8 | PCCFGR | R | – | Performance Counters Configuration register |
| 0 | 16 | PC | R | – | PC mapped to SPR space (<i>Note:</i> According to the OR1k specification, NPC should go here! The OR1200 uses PC.) |
| 0 | 17 | SR | RW | RW | Supervision Register |
| 0 | 18 | PPC | R | – | PPC (Previous PC) mapped to SPR space |
| 0 | 19 | FPCSR | R | – | FP Control/Status Register |
| 0 | 32..47 | EPCR0..EPCR15 | R | – | Exception PC Registers (all mapped to a single register) |
| 0 | 48..63 | EEAR0..EEAR15 | R | – | Exception EA Registers (all mapped to a single register) |
| 0 | 64..79 | ESR0..ESR15 | R | – | Exception SR Registers (all mapped to a single register) |
| 0 | 1024..1055 | GPR0..GPR31 | RW | – | GPRs mapped to SPR space |
| 3 | 0 | DCCR | R | – | (Data) Cache Control Register |
| 3 | 2 | DCBFR | – | – | DC Block Flush Register |
| 3 | 3 | DCBIR | – | – | DC Block Invalidate Register |
| 3 | 4 | DCBWR | – | – | DC Block Write-back Register |
| 4 | (all registers are mapped to the corresponding registers of group 3) | | | | |
| 24 | <i>ParaNut</i> -specific: see table 3.7 | | | | |

Table 3.1.: Special-purpose registers

| <i>Bit(s)</i> | <i>Name</i> | <i>CePU</i> | <i>CoPU</i> | <i>Reset Value</i> | <i>Description</i> |
|---------------|-------------|-------------|-------------|--------------------|---|
| 0 | SM | R | – | 1 | Supervisor Mode |
| 1 | TEE | R | – | 0 | Tick Timer Exception Enabled (<i>Note:</i> This bit cannot be set, a tick timer interrupt is not supported) |
| 2 | IEE | RW | – | 0 | Interrupt Exception Enabled |
| 3 | DCE | RW | – | 0 | Data Cache Enable |
| 4 | ICE | RW | – | 0 | Instruction Cache Enable <i>Note:</i> This bit is mapped to DCE. To activate the common cache, both DCE and ICE have to be set. |
| 5 | DME | R | – | 0 | Data MMU Enable |
| 6 | IME | R | – | 0 | Instruction MMU Enable |
| 7 | LEE | R | – | 0 | Little Endian Enable |
| 8 | CE | R | – | 0 | CID and shadow register enable |
| 9 | F | RW | RW | 0 | Flag (for conditional branches) |
| 10 | CY | RW | RW | 0 | Carry flag |
| 11 | OV | RW | RW | 0 | Overflow flag |
| 12 | OVE | R | – | 0 | Overflow Exception Enable |
| 13 | DSX | R | – | – | Delay Slot Exception 0: EPCR points to instruction outside a delay slot 1: EPCR points to instruction in a delay slot |
| 14 | EPH | R | – | 0 | Exception Prefix High 0: Exceptions vectors are located in memory area starting at 0x0 1: Exception vectors are located in memory area starting at 0xF0000000 |
| 15 | FO | R | R | 1 | Fixed One (this bit is always set) |
| 16 | SUMRA | R | – | 0 | SPRs User Mode Read Access 0: All SPRs are inaccessible in user mode 1: Certain SPRs can be read in user mode |
| 31:28 | CID | R | – | 0 | Context ID (optional) |

Table 3.2.: Supervision Register (SR)

| <i>Bit(s)</i> | <i>Name</i> | <i>Mode</i> | <i>Value</i> | <i>Description</i> |
|---------------|-------------|-------------|--------------|---|
| 0 | UP | R | 0x1f | Version (0x1f = <i>ParaNut</i>) |
| 23:16 | CFG | R | 0 | Configuration (reserved for future use) |
| 15:6 | – | R | 0 | (reserved) |
| 5:0 | REV | R | 0..63 | Revision |

Table 3.3.: Version Register (VR)

| <i>Bit(s)</i> | <i>Name</i> | <i>Mode</i> | <i>Reset value</i> | <i>Description</i> |
|---------------|-------------|-------------|--------------------|---|
| 0 | UP | R | 1 | UPR Present |
| 1 | DCP | R | 1 | Data Cache Present |
| 2 | ICP | R | 1 | Instruction Cache Present |
| 3 | DMP | R | 0 | Data MMU Present |
| 4 | IMP | R | 0 | Instruction MMU Present |
| 5 | MP | R | 0 | MAC Present |
| 6 | DUP | R | 0..1 | Debug Unit Present |
| 7 | PCUP | R | 0 | Performance Counters Unit Present |
| 8 | PMP | R | 0..1 | Power Management Present |
| 9 | PICP | R | 0..1 | Programmable Interrupt Controller Present |
| 10 | TTP | R | 0..1 | Tick Timer Present |
| 31:24 | CUP | R | 0 | Custom Units Present |

Table 3.4.: Unit Present Register (UPR)

| <i>Bit(s)</i> | <i>Name</i> | <i>Mode</i> | <i>Value</i> | <i>Description</i> |
|---------------|-------------|-------------|--------------|---|
| 3:0 | NSGF | R | 0 | Number of Shadow GPR Files |
| 4 | CGF | R | 0..1 | Custom GPR File 0: GPR file has 32 registers 1: GPR file has 16 registers |
| 5 | OB32S | R | 1 | ORBIS32 Supported |
| 6 | OB64S | R | 0 | ORBIS64 Supported |
| 7 | OF32S | R | 0 | ORFPX32 Supported |
| 8 | OF64S | R | 0 | ORFP64P Supported |
| 9 | OV64S | R | 0 | ORVDX64 Supported |

Table 3.5.: CPU Configuration Register (CPUCFGR)

| <i>Bit(s)</i> | <i>Name</i> | <i>Mode</i> | <i>Value</i> | <i>Description</i> |
|---------------|-------------|-------------|--------------|---|
| 2:0 | NCW | R | 0..2 | Number of Cache Ways 0: Cache is direct-mapped (one-way) 1: Cache is 2-way set-associative 2: Cache is 4-way set-associative |
| 6:3 | NCS | R | 0..15 | Number of Cache Sets (cache blocks per way) 0: Cache has one set 15: Cache has $2^{15} = 32768$ sets |
| 7 | BS | R | 0..1 | Cache Block Size 0: Cache block has 16 <i>or fewer</i> bytes (<i>OR1k: exactly 16</i>) 1: Cache block has 32 <i>or more</i> bytes (<i>OR1k: exactly 32</i>) |
| 8 | CWS | R | 1 | Cache Write Strategy 0: Write-through 1: Write-back |
| 9 | CCRI | R | 0 | Cache Control Register Implemented |
| 10 | CBIRI | R | 0 | Cache Block Invalidate Register Implemented |
| 11 | CBPRI | R | 0 | Cache Block Prefetch Register Implemented |
| 12 | CBLRI | R | 0 | Cache Block Lock Register Implemented |
| 13 | CBFRI | R | 0 | Cache Block Flush Register Implemented |
| 14 | CBWBRI | R | 0 | Cache Block Write-Back Register Implemented |

Table 3.6.: Data Cache Configuration Register (DCCFGR)

3.2.6. *ParaNut* Extensions

Table 3.7 shows the *ParaNut* registers, which are used to query the hardware configuration and to set and query the status of the CPU array:

| | |
|-------------|--|
| PNCPUS | Number of CPUs (including the CePU). |
| PNLID | Local CPU identification. Bits 9..0 store the number of the local CPU, the other bits are reserved for future extensions (e.g. local capability level, other features). |
| PNM2CAP n | Each bit corresponds to one CPU. If the bit is set, the respective CPU supports Mode 2 (thread mode) or higher. If unset, the respective CPU supports only Mode 0 (halt) and Mode 1 (linked). |
| PNCE n | Each bit corresponds to one CPU. Bit 0 represents the CePU and cannot be set to 0. By writing into this register, the CePU can activate or deactivate CoPUs. By reading the register, the CePU can determine whether the CoPU is actually (in)active. Both activation and deactivation may take some time until the CoPU moves into a stable state. |
| PNLM n | Each bit corresponds to one CPU. If the bit is set for CoPU, the CoPU is in linked state (Mode 1). If the bit is unset, it is in unlinked state (Mode 2 or 3). By writing into this register, the CePU can switch the mode of the CoPUs. Mode switching is allowed only if the CoPU is inactive and not presently activated. If a bit is changed in the PNLM register and the respective PNCE bit is 1, undefined behavior may result. |
| PNX n | Each bit corresponds to one CPU. If set, an exception condition has occurred. The bits are reset automatical when the register is read. |
| PNXID n | The exception ID of CoPU # n . For the CePU(s), the register content is undefined. |

| <i>GRP</i> | <i>REG</i> | <i>Name</i> | <i>CePU</i> | <i>CoPU</i> | <i>Description</i> |
|------------|------------|-------------------|-------------|-------------|--|
| 24 | 0 | PNCPUS | R | – | <i>ParaNut</i> : Number of CPUs |
| 24 | 16 | PNLID | R | R | <i>ParaNut</i> : Local CPU Identification Register |
| 24 | 32 | PNM2CAP0 | R | – | <i>ParaNut</i> : Mode-2 Capability Mask (CPUs 0..31) |
| ... | ... | ... | ... | ... | ... |
| 24 | 63 | PNM2CAP31 | R | – | <i>ParaNut</i> : Mode-2 Capability Mask (CPUs 992..1023) |
| 24 | 64 | PNCE0 | RW | – | <i>ParaNut</i> : CPU Enable (CPUs 0..31) |
| ... | ... | ... | ... | ... | ... |
| 24 | 64 | PNCE31 | RW | – | <i>ParaNut</i> : CPU Enable (CPUs 992..1023) |
| 24 | 96 | PNLM0 | RW | – | <i>ParaNut</i> : Linked Mode (CPUs 0..31) |
| ... | ... | ... | ... | ... | ... |
| 24 | 96 | PNLM31 | RW | – | <i>ParaNut</i> : Linked Mode (CPUs 992..1023) |
| 24 | 128 | PNX0 | R | – | <i>ParaNut</i> : Exception triggered (CPUs 0..31) |
| ... | ... | ... | ... | ... | ... |
| 24 | 128 | PNX31 | R | – | <i>ParaNut</i> : Exception triggered (CPUs 992..1023) |
| 24 | 1024..2047 | PNXID0..PNXID1023 | R | – | <i>ParaNut</i> : Exception ID |

Table 3.7.: *ParaNut* -specific special-purpose registers

3.3. Exceptions

Table 3.8 lists the exceptions supported by the *ParaNut* architecture. Exceptions labelled “(optional)” may not be supported by a particular implementation. The column CoPU indicates whether the exception can occur inside a CoPU. The *ParaNut* does not support fast context switching. Hence, only one set of exception registers (EPCR, EEAR, ESR) exists.

If an exception occurs in the CePU, the following steps are performed:

1. The return address is stored in register EPCR. If an instruction causes an exception, it has either completed (e. g. in the case of a system call) or can be restarted (e. g. in the case of a page fault). Depending on this, either the address of the instruction, or its successor are stored. Special care has to be taken in the following cases:
 - If the exception is caused by an instruction in a delay slot, either the branch target address (completed instruction) or the address of the branch instruction (restartable instruction) is stored in EPCR.
 - In the case of an “Illegal Instruction” exception, the address of the offending instruction is placed into EEAR, and EPCR points to the next instruction to be executed.
2. In the case of a page fault, the effective address is stored in EEAR.
3. The current SR is stored in ESR.
4. Interrupts are disabled: $SR[IEE] = 0$.
5. All CoPUs change into the “halt” mode ($PNME = 1$, only the CePU remains active), and the CePU waits until they actually stop.
6. Execution is continued at the address given by the exception ID multiplied by $0x100$.

If an exception occurs inside a CoPU, the following steps occur:

1. If any of the CoPUs is in linked mode (Mode 1), all Mode-1-CoPUs and the CePU must be designed such that they either all complete their current instruction or all of them abort it. If this is not ensured, the interrupted code is not restartable. [[TBD: Instead of “abort” we may also specify: are restartable. This is easier to implement, e. g. loads which may for some CoPUs cause a page fault and for the other would then be executed twice without harm.]]
2. Inside the CoPU, the registers EPCR (not necessary for mode 1), EEAR and ESR are set as described above.
3. The exception ID is placed into the PN Exception ID register ($PNXID_n$).
4. The ParaNut Mode Enable register PNME is saved in EPNME.
5. All CoPUs change into the “halt” mode ($PNME = 1$, only the CePU remains active), and the CePU waits until they actually stop.

6. A CoPU exception is triggered for the CePU.

The exception handler ends by restoring the state of the PNME register and executing the *l.rfe* instruction. This former instruction lets all CPUs start from the CePU's current PC position. Now, they all concurrently execute *l.rfe* and return to the place where they were interrupted.

| <i>Name</i> | <i>ID</i> | <i>CoPU</i> | <i>Restartable</i> | <i>Description</i> |
|------------------------|-----------|-------------|--------------------|---|
| Reset | 0x1 | – | – | Caused by hardware reset. |
| Bus Error | 0x2 | ✓ | ✓ | The causes are implementation-specific, but typically they are related to bus errors and attempts to access invalid physical address. <i>Note:</i> This exception is never asserted in the present version of <i>ParaNut</i> . |
| Data Page Fault | 0x3 | ✓ | ✓ | (<i>optional, requires MMU</i>) No matching page table entry found or page protection violation for load/store operations |
| Instruction Page Fault | 0x4 | ✓ | ✓ | (<i>optional, requires MMU</i>) No matching page table entry found or page protection violation for instruction fetch operations |
| Tick Timer | 0x5 | – | ✓ | (<i>optional</i>) Tick timer interrupt asserted. (OR1200: Low priority external interrupt) |
| Alignment | 0x6 | ✓ | – | Load/store access to naturally not aligned location. |
| Illegal Instruction | 0x7 | ✓ | ✓ | Illegal instruction in the instruction stream. |
| External Interrupt | 0x8 | – | ✓ | External interrupt asserted. (OR1200: High priority external interrupt) |
| D-TLB Miss | 0x9 | ✓ | ✓ | (<i>optional, requires MMU</i>) No matching entry in DTLB (DTLB miss). |
| I-TLB Miss | 0xA | ✓ | ✓ | (<i>optional, requires MMU</i>) No matching entry in ITLB (ITLB miss). |
| Range | 0xB | ✓ | – | (<i>optional</i>) Asserted, if a) an Overflow occurred and SR[OVE] was set, or b) a non-existing general-purpose register has been accessed, if less than 32 GPRs exist. |
| System Call | 0xC | – | ✓ | System call initiated by software. |
| Trap | 0xE | ✓ | ✓ | (<i>optional</i>) Caused by the l.trap instruction or by debug unit. |
| CoPU | 0xF | – | (sometimes) | An exception occurred inside a CoPU. |

Table 3.8.: Supported Exceptions

Bibliography

- [1] Gundolf Kiefer, Michael Seider, and Michael Schaeferling: “*ParaNut* – An Open, Scalable, and Highly Parallel Processor Architecture for FPGA-based Systems”, Proceedings of the *embedded world Conference*, Nuernberg, Feb. 24-26, 2015
- [2] opencores.org: “OpenRISC 1000 Architecture Manual”, 2014, www.opencores.org
- [3] John. L. Hennessy, David A. Patterson: “Computer Architecture: A Quantitative Approach”, 5th edition, Elsevier, 2012

Index

l.add, 7
l.addc, 8
l.addi, 16
l.addic, 16
l.and, 9
l.andi, 17
l.bnf, 28, 29
l.cmov, 11
l.j, 27
l.jal, 28
l.jalr, 30
l.jr, 30
l.lbs, 24
l.lbz, 24
l.lhs, 25
l.lhz, 25
l.lwa, 33
l.lws, 23
l.lwz, 23
l.mfspr, 32
l.movhi, 22
l.mul, 12
l.muli, 18
l.mulu, 12
l.nop, 29
l.or, 9
l.ori, 17
l.rfe, 31
l.sb, 26
l.sfeq, 13
l.sfeqi, 19
l.sfges, 15
l.sfgesi, 21
l.sfgeu, 14
l.sfgeui, 20
l.sfgts, 15
l.sfgtsi, 21
l.sfgtu, 13
l.sfgtui, 19
l.sfles, 16
l.sflési, 22
l.sfleu, 14
l.sfleui, 20
l.sflts, 15
l.sfltsi, 21
l.sfltu, 14
l.sfltui, 20
l.sfne, 13
l.sfnei, 19
l.sll, 10
l.sra, 11
l.srl, 10
l.sub, 8
l.sw, 26, 27
l.swa, 34
l.sys, 31
l.xor, 9
l.xori, 18
p.cflush, 35
p.cinvalidate, 34
p.cwriteback, 35