


Copyright ZSCircuits Electronic Systems Pvt Ltd ( 2020 )

This documentation describes Open Hardware and is licensed under the  
CERN OHL v. 1.2.

You may redistribute and modify this documentation under the terms of the  
CERN OHL v.1.2. (<http://ohwr.org/cernohl>). This documentation is distributed  
WITHOUT ANY EXPRESS OR IMPLIED WARRANTY, INCLUDING OF  
MERCHANTABILITY, SATISFACTORY QUALITY AND FITNESS FOR A  
PARTICULAR PURPOSE. Please see the CERN OHL v.1.2 for applicable  
conditions

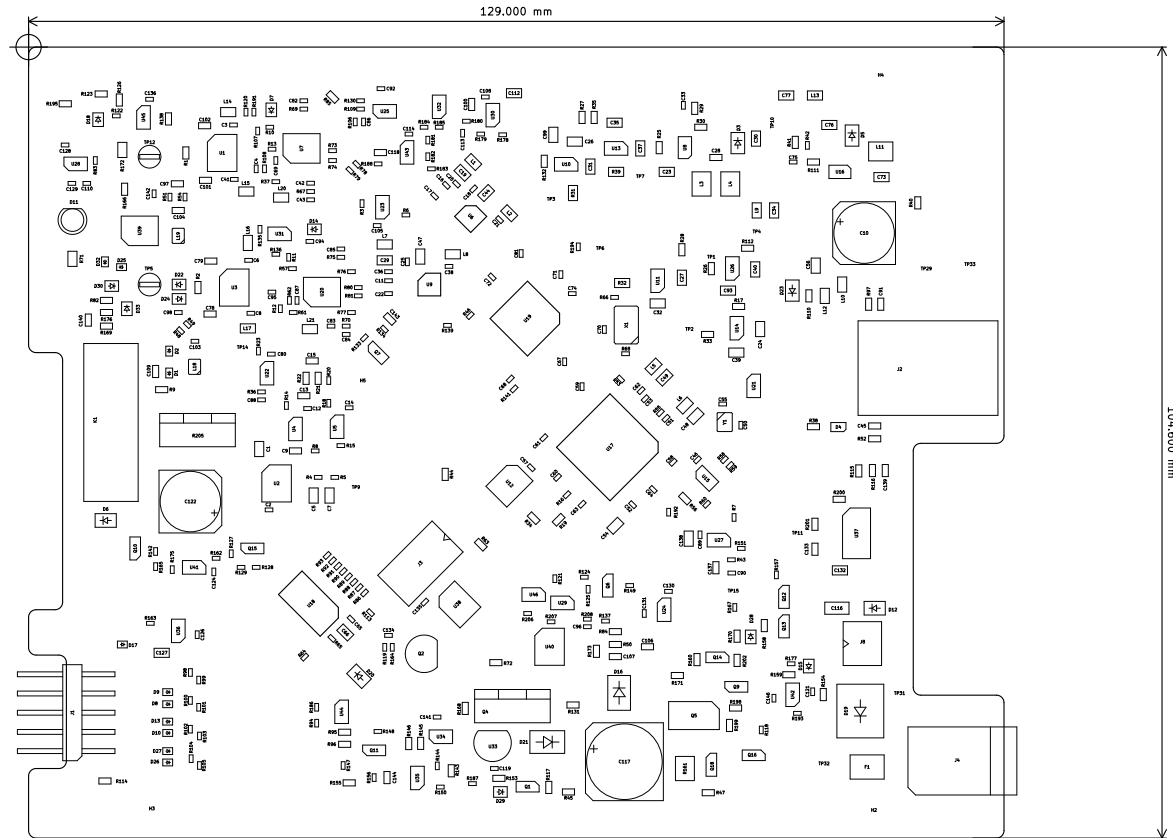

## FAB NOTES

No of Layers	= 4
Material	= FR4
Overall thickness	= 1.6mm (+/- 0.1mm)
Surface Finish	= ENIG
Solder Mask	= GREEN
Silk Colour	= WHITE
Size of PCB	= 129 x 104.6 (mm)
Copper Thickness	= 0.5oz

Note :  
1. U33 and Q2 should have 10mm long leads above the PCB  
2. Mount the through hole LED Q11 at right angle. Bent outside  
3. J3 and J8 should be mounted at the end. Please confirm orientation.

Prajay Madhavan  
ZSCircuits

Sheet:  
File: PC-1100X.kicad\_pcb

**Title: PC-1100X-04**

Size: A4 Date: 2020-05-31  
KiCad E.D.A. kicad (5.1.5)-3

**Rev: 4**  
Id: 1/1