

Addressable Analog Device Controller

3-AADC1(-E)

Overview

The 3-AADC1 Addressable Analog Circuit Module is a local rail module used on the EST3 system. The module requires one connection on the rail chassis. The module can support 99 addressable analog sensors and 99 addressable analog modules. The controller also features a hinged front panel for a Control Display Module, which are available in a variety of LED and/or switch configurations. The 3-AADC1 is a direct replacement for the 3-AADC and 100% backward compatible.

The microprocessor based 3-AADC1 provides internal test and diagnostic functions for troubleshooting. The controller contains nonvolatile memory that stores the operating system software and data file which is downloaded from a PC. The System Definition Utility Program accomplishes data file programming including the device type, address, description, sensitivity, verification, and wiring configuration. The 3-AADC1 continuously checks the output value of each device, reporting status to the cabinet CPU. The module can isolate ground faults to a specific addressable loop.

All field wiring connections to the module are made via plug-in connectors, permitting termination of field wiring without the module installed in the enclosure. The plug-in connectors and snap rivet module mounting facilitate rapid remove and replace troubleshooting without the use of tools.

Standard Features

- Class A or Class B
- Continuous monitoring of analog device values
- Ground fault detection by loop
- Removable field wiring terminals
- Fully backward compatible with the 3-AADC
- Listed for fire and security

Application 1

The 3-AADC1 is ideal for EST3 systems being installed in retrofit applications where there is a quantity of existing analog devices installed. The 3-AADC1 is compatible with:

Sensors 3

- 1551F ionization
- 2551F photoelectric
- 2551TF(B) photoelectric/thermal
- 5251F(B) thermal
- DH200PF photoelectric duct detector
- RZB12-6 Remote Zone Interface Module
- 1251F(B) ionization
- 2251F(B) photoelectric
- 5551F thermal
- 5551FR fixed/ROR thermal

Modules 5


- M400MF(B) monitor
- M500CFS control
- M500XF isolator
- UIO-12 Universal Input/Output Module
- M501MF monitor
- M500SF control
- M500RF relay

NOTES: Relay bases, isolator bases, sounder bases, are NOT supported.

The 3-AADC1 is fully backward compatible with the 3-AADC. When connecting RZB12-6 to 3-AADC1, a 3-RZBCAP is required at each RZB. Please refer to the latest RZB installation instructions (part number 387591).

The Addressable Analog circuit cable must be a minimum of 18 gauge twisted pair with 6 twists per foot. This cable may be unshielded or shielded as required. Shielded cable is recommended where electrical noise might interfere with data transmission. If shielded wire is used, it must be used through the entire length of the circuit. Distance limits are determined using the maximum allowable circuit resistance and capacitance, and manufacturer's cable specifications.

Typical Wiring 10

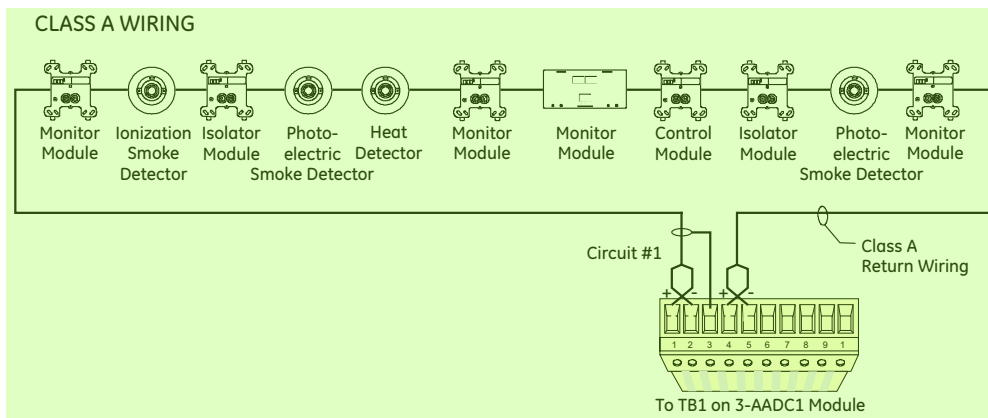

Engineering Specification 1

The control panel shall provide an addressable analog interface module to directly connect to the existing addressable analog sensors and modules. The interface shall be capable of supporting 99 analog sensors and 99 input/control modules, and identifying

ground faults by loop. The module shall be capable of accommodating both Class A and Class B wiring. All field wiring terminations shall be made to removable connectors for ease of installation and troubleshooting.

Specifications 4

Installation	1 LRM Space
Module Configuration	1 Addressable Analog Circuit
Operating Current*	Standby 175 mA Alarm 205 mA
Addressable Circuit Capacitance	0.5µF, max., all branches
Addressable Circuit Resistance	50 Ohms, max (NO RZB12-6 or UIO-12 modules or relay bases permitted) 36 Ohms when using RZB12-6 or UIO12 (No Relay bases permitted)
Addressable Circuit Configuration	Class A or Class B
Addressable Circuit Capacity	Sensors 99 sensors per circuit Modules 99 modules per circuit
Ground Fault Limits	10K Ohms, min.
Isolator Limits	# Isolator modules per circuit 6 Maximum # Devices between two isolators 25 Maximum # Devices between panel and first isolator 25 Maximum # Devices between last isolator and panel (Class A) 25 Maximum Max. resistance from device to panel 25 Ohms
Maximum Wire Size	12 AWG (2.5 mm ²)
Termination	Removable plug-in terminal strip on LRM
Operating Environment	32°F (0°C) to 120°F (49°C) 93% RH, non-condensing
Agency Listing	UL, ULC, CE, EN 54-2: 1997 + A1: 2006, EN 54-4: 1997 + A1: 2002 + A2: 2006, and EN 54-16: 2008

*Note: Currents include full loop of devices 6

Ordering Information 7

Catalog Number	Description	Shipping Wt., lb (kg)
3-AADC1	Addressable Analog Module	0.5 (.23)
3-AADC1-E*	Addressable Analog Module	0.5 (.23)
3-RZBCAP	RZB Communications	
3-FP	Filler Plate, order separately when no LED or LED/Switch module installed.	0.1 (0.05)

*EN 54-2: 1997 + A1: 2006, EN 54-4: 1997 + A1: 2002 + A2: 2006, and EN 54-16: 2008 9