


Technical Sheet

# **Tweeter**



- Beryllium inverted dome
- Flush mounting support included

# FREQUENCY RESPONSE/IMPEDANCE

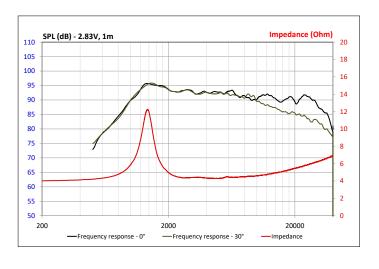


#### **SPECIFICATIONS**


Nominal power	I5W	
Maximum power	150W	
Sensitivity (2.83V/1m)	94dB	
Nom. impedance	4Ω	
Dome	Pure Beryllium	
Surround	Poron	
DC resistance	4Ω	
VC diameter	20mm 0	13/1611
Former	Kapton	
Layers	2	
Wire	Alu	
Net weight	150g 0	.1lbs


### **PARAMETERS**

Rac	4Ω	
Fs	1,350Hz	

### **MECHANICAL DRAWING**









# UTOPIA 165W-XP

Technical Sheet




- 'W' cone sandwich
- 'TMD' surround
- · Aluminium basket

### **SPECIFICATIONS**

Nominal power	100W	
Maximum power	200W	
Sensitivity (2.83V/1m)	93dB	
Nom. impedance	2Ω	
Cone	'W'	
Surround	Butyl	
DC resistance	1.8Ω	
VC diameter	32mm	11/4"
Former	Kapton	
Layers	2	
Wire	CCAW	
Net weight	1,400g	3.1lbs

# FREQUENCY RESPONSE/IMPEDANCE

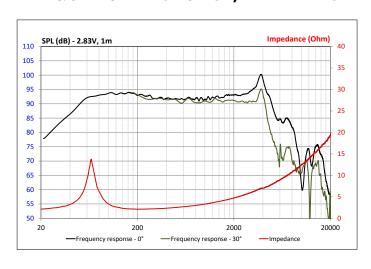

## **PARAMETERS**

Rdc	1,9Ω	
Fs	58.5Hz	
Mms	16.3g	
Cms	0.454mm/N	
Vas	11.311	
Qts	0.6	
Qes	0.665	
Qms	5.52	
BxI	4.19N/A	
Sd	132.73cm <sup>2</sup>	
SPL	89dB	
Xmax	4.5mm	

### **MECHANICAL DRAWING**

