

# AIRGO<sup>®</sup>

When you need maximum airflow on the move, you need AirGo. Featuring Big Ass Fans' patented HVLS technology in durable, portable frame, it delivers targeted airflow on a massive scale. Simply dial in the exact level of cooling you need and let AirGo improve conditions on the factory floor, in the service bay, or on the sidelines.



## KEY FEATURES

- ▶ **Six aluminum airfoils** with winglets in an OSHA-compliant cage
- ▶ **Quiet, efficient EC motor** with variable speed control
- ▶ **Full 360° tilt** with 16 lockable positions
- ▶ **Locking swivel casters** allow for optimal maneuverability
- ▶ **Powerful airflow** provides coverage up to 120 feet (37 meters) away
- ▶ **Indoor or outdoor** operation for cooling that goes anywhere

### DIAMETER

**8 FEET**  
(2.4 METERS)

### FRAME

**OSHA-COMPLIANT  
STEEL CAGE ON CASTERS**

### VOLTAGE

**110-125 OR 200-240  
SINGLE PHASE VAC**

### WARRANTY

**UP TO  
5 YEARS**



**BIG ASS FANS<sup>®</sup>**




**EXCEPTIONALLY  
ENGINEERED**

## DISCOVER MORE ABOUT AIRGO

Learn more at [bigassfans.com/airgo](https://bigassfans.com/airgo)  
or call **877.BIG.FANS** for a free custom quote.

# AIRGO

AIR. ON THE GO. NOW!

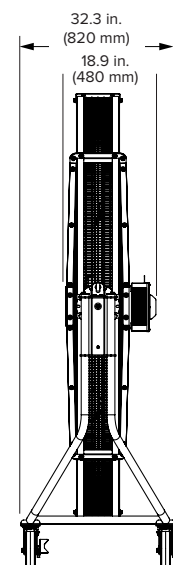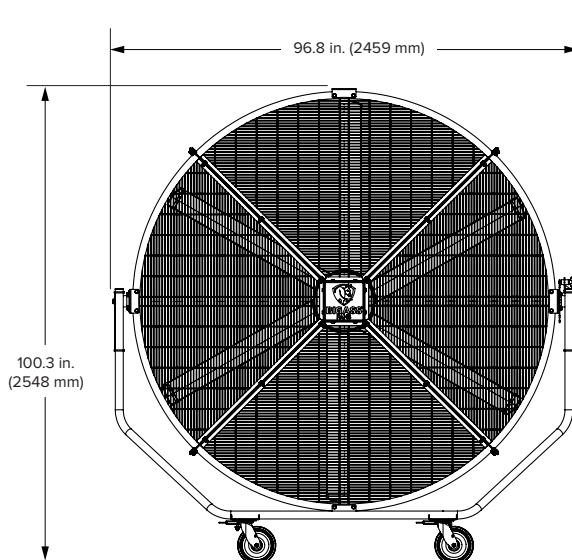
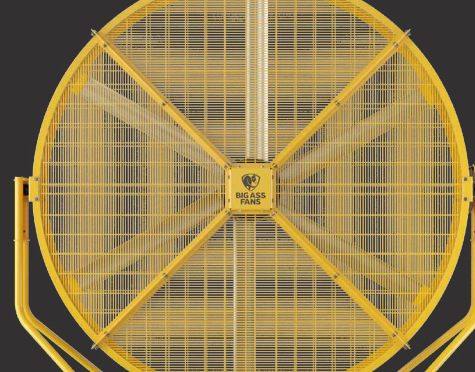


## Technical Specifications

| Input power and required breaker | Amperage  | Wattage | Operating Temperature            | Sound at max speed <sup>1</sup> | Weight             |
|----------------------------------|-----------|---------|----------------------------------|---------------------------------|--------------------|
| 110–125 VAC, 50/60 Hz, 1 Φ, 15 A | 7.7–7.0 A | 481 W   | -4°F to 131°F<br>(-20°C to 55°C) | 64 dBA                          | 425 lb<br>(193 kg) |
| 200–240 VAC, 50/60 Hz, 1 Φ, 10 A | 5.6–4.7 A | 469 W   |                                  |                                 |                    |

## Construction Features

| Cage and Frame                                               | Motor and Controller                             | Power Supply                                                                                   | Environment <sup>2</sup>                                | Certifications                                                                                                                                                                                                              | Colors                                     | Accessories      |
|--------------------------------------------------------------|--------------------------------------------------|------------------------------------------------------------------------------------------------|---------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------|------------------|
| Preassembled 8 ft (2.4 m) steel frame<br>OSHA-compliant cage | Direct drive ECM motor<br>Variable speed control | 25 ft (7.6 m) cord with plug fits standard power outlet<br>Optional 10 ft (3 m) cord available | IPX5 for indoor or outdoor use<br>Washdown construction |  UL Standard 507 and CSA Standard 22.2 No. 113<br> | Yellow or white<br>Custom colors available | Protective cover |

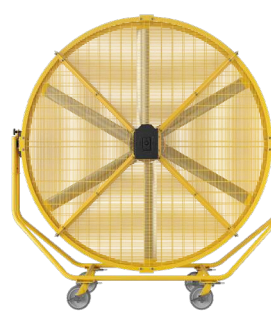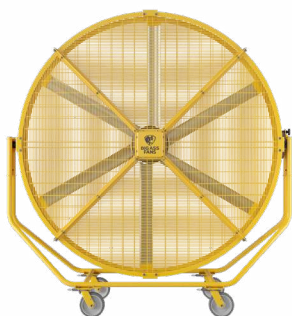


<sup>1</sup> Fans are sound tested at maximum speed in a laboratory environment. Actual results in field conditions may vary due to sound reflecting surfaces and environmental conditions.  
<sup>2</sup> Not suitable for salt air environments. Do not leave fan outdoors for extended periods of time or in anticipation of inclement weather.

Lead times may vary.  
See full warranty for coverage information.


# AIRGO

## AIRFLOW

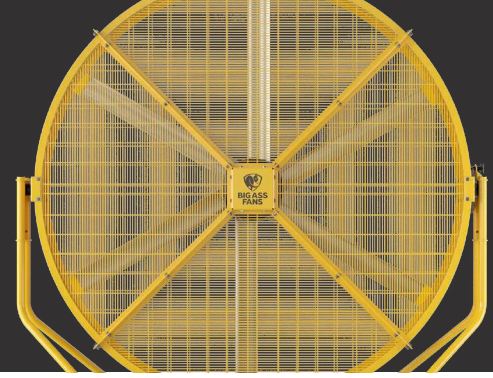

### AIRFLOW VELOCITY

The three lines show air velocity from the center of the fan at three sensors of varying height.

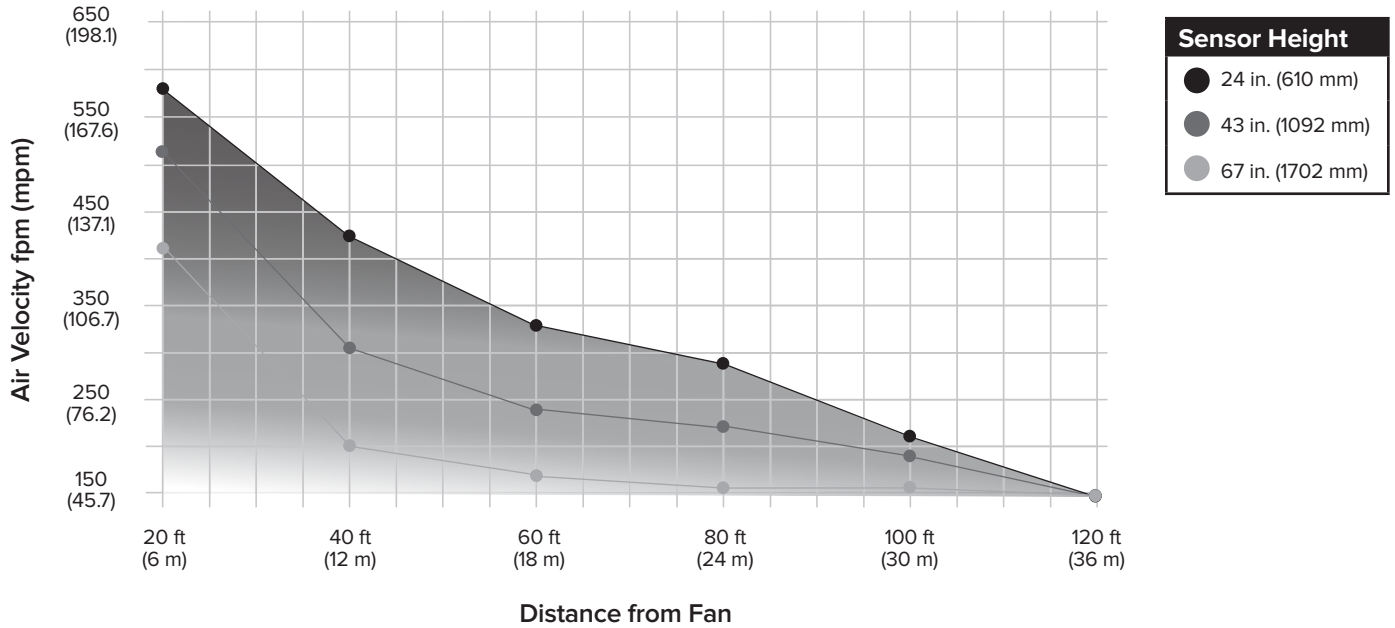

### AIRFLOW DISTANCE

Shaded areas represent cooling up to 120 feet (36.6 meters). That's one-third the length of a football field! Darker shading indicates faster air velocity.

