EXPERIMENT 2

AIM: Numerical Simulation and Performance Analysis of Microwave Transmission Lines and Two-Port Networks Using Scattering Parameters


Objective 1: To model coaxial, waveguide or microstrip transmission structures for microwave-frequency operation.

Objective 2: To determine characteristic impedance, propagation constant and transmission characteristics of the selected structure.

Objective 3: To obtain and analyze S_{11}, S_{21}, S_{12} and S_{22} over a specified frequency range.

Objective 4: To evaluate return loss, insertion loss and transmission efficiency from the simulated S-parameter response.

Output:

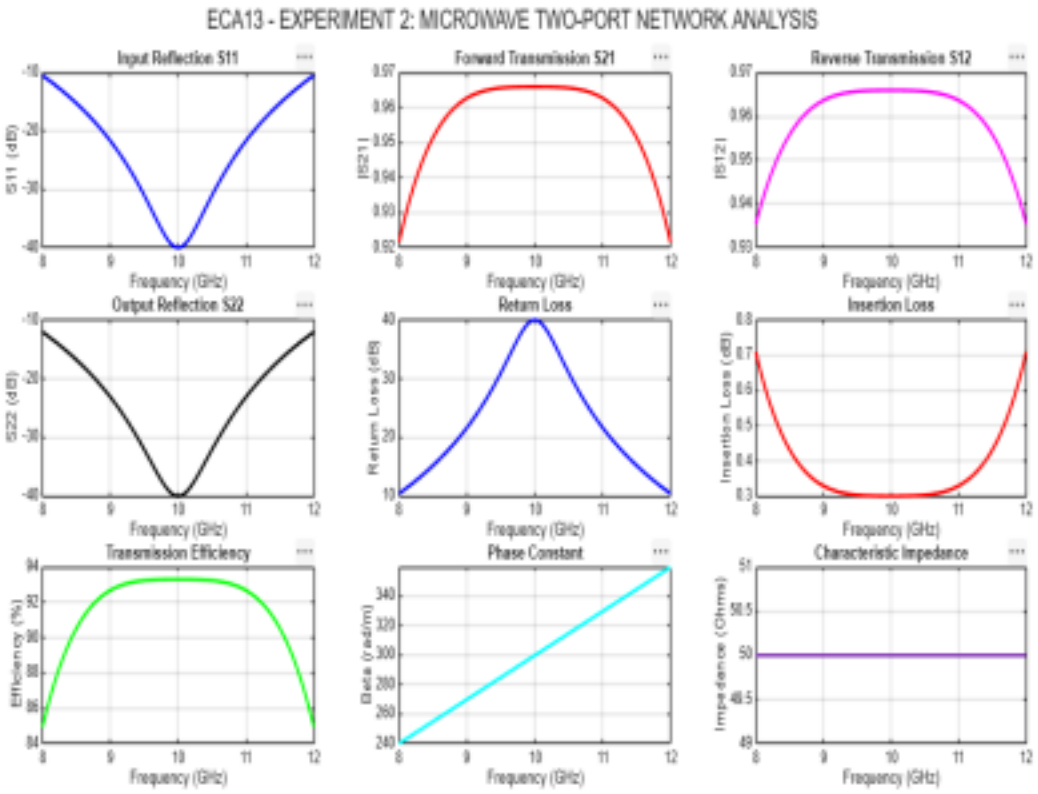

Input parameters:

S.No.	Input Parameter	Symbol	Value
1	Speed of Light	$$	3×10^8m/s
2	Characteristic Impedance	$$_0$	50 Ω
3	Transmission Line Length	$$	50 mm
4	Center Frequency	$$_0$	10 GHz
5	Starting Frequency	$$_{min}$	8 GHz
6	Ending Frequency	$$_{max}$	12 GHz
7	Frequency Step	Δ$$	10 MHz
8	Number of Frequency Points	$$	401

Result :

The microwave transmission line was simulated over the frequency range of 8–12 GHz. The S parameters, return loss, insertion loss, transmission efficiency, phase constant, and characteristic impedance were analyzed. The ideal matched, lossless model achieved 100% transmission efficiency with zero reflection.