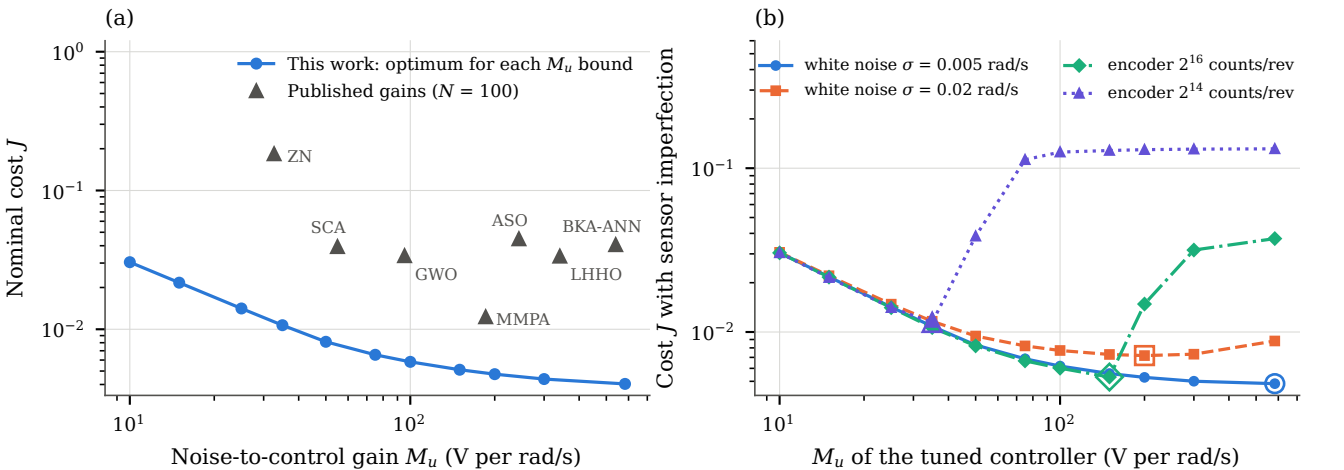
(a)
This work: optimum for each M_u bound
Published gains (N = 100)
ZN
SCA
GWO
ASO
BKA-ANN
LHHO
MMPA
Nominal cost J
Noise-to-control gain M_u (V per rad/s)
(b)
white noise σ = 0.005 rad/s
white noise σ = 0.02 rad/s
encoder 2^{16} counts/rev
encoder 2^{14} counts/rev
Cost J with sensor imperfection
M_u of the tuned controller (V per rad/s)