
Forza™ TAPE
A FORCE TO BE RECKONED WITH

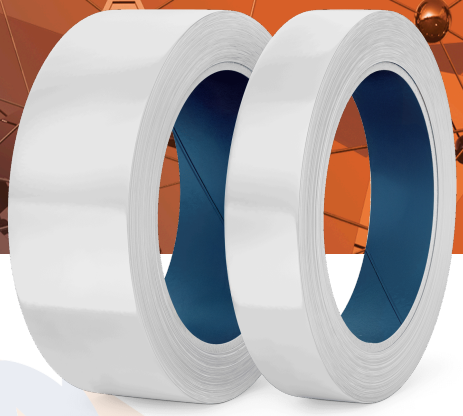

TECHNICAL DATA SHEET

T461

Synthetic Rubber Transfer Tape

ForzaTAPE® T461 is an extremely aggressive heavy coat weight synthetic rubber transfer tape with a natural kraft liner. It is designed for mounting and bonding insulation panels, trim, and edging applications.

Features

- Extremely aggressive synthetic rubber adhesive
- Heavy coat weight — 20 mil adhesive thickness
- High peel adhesion — 7.5 lbs @ 1 mil/in of width
- Natural kraft liner for easy handling and release
- Transfer tape construction — no carrier, for clean lamination
- Wide application temperature range: 50°F – 105°F
- Shelf life: 12 months from manufacture

Applications

ForzaTAPE® T461 is specifically designed for:

- Mounting and bonding insulation panels to a variety of substrates
- Fixing edging, trim, and decorative panels
- Bonding signage and display components
- General laminating and mounting in insulation applications

Substrates

ForzaTAPE® T461 is used to mount and bond:

- Insulation panels
- Trim and edging components
- Decorative panels
- Signage and display components

Technical Data

Properties	Value
Adhesive Type	Synthetic Rubber
Carrier	None — Transfer Tape
Adhesive Thickness	20 mils
Liner	Natural Kraft
Liner Thickness	3.2 mils
Peel Adhesion	7.5 lbs @ 1 mil/in width
Application Temp Range	50°F – 105°F
Shelf Life	12 months

Packaging

3/4" x 100'	1-1/2" x 100'	2" x 100'

PURPOSE-BUILT. PERFORMANCE. GUARANTEED STRENGTH.

PROUDLY MADE IN THE USA*

402.731.9300
info@forzabuilt.com
www.forzabuilt.com

3211 Nebraska Ave, Suite 300
Council Bluffs, Iowa 51501

Surface Preparation

Ensure substrate is clean and dry and free from dust, dirt, oil, wax, or silicone.

Allow any cleaning solvents to fully evaporate before applying the tape to ensure optimal adhesion.

Application Instructions

Apply the tape to the part to be bonded, ensuring that no air is trapped between the tape and the substrate. Apply adequate pressure using a J roller, using a recommended application pressure of 15 pounds per inch of tape width, and apply with care to avoid wrinkles or trapped air.

At the point of final assembly or lamination, remove the release liner and apply with care to avoid wrinkles or trapped air.

Bond strength continues to build over the hours following application as the adhesive fully wets out the substrate, so allow adequate dwell time before placing the assembly into service.

Clean Up Information

Unapplied tape may be removed cleanly from surfaces. Any adhesive residue can be removed using isopropyl alcohol, mineral spirits, or an appropriate adhesive remover. Once the adhesive has fully bonded, removal may require mechanical methods such as scraping or abrasion.

Storage & Disposal

Store material in original unopened packaging at temperatures between 40°F and 100°F. Shelf life is 12 months when stored as recommended.

Dispose of in accordance with all applicable local, state, and federal regulations.

Precautionary Information

This product is classified as Non-Hazardous under GHS.

Information

Technical Information: The technical data provided is based on laboratory testing and is believed to be reliable; however, it is offered for informational purposes only. Actual performance will vary depending on substrate, application technique, and environmental conditions.

Product Selection Use: Many factors beyond Forza's control can affect product performance. Users are responsible for evaluating the product and determining suitability for their specific application, including testing under actual service conditions.

Limitation Liability: To the extent permitted by law, Forza shall not be liable for any indirect, incidental, or consequential damages arising from the use or inability to use this product.

Disclaimer: This product is intended for industrial and professional use. Users must follow all product instructions, warnings, and applicable safety regulations. Improper use may result in injury, property damage, or product failure.

402.731.9300
info@forzabuilt.com
www.forzabuilt.com

3211 Nebraska Ave, Suite 300
Council Bluffs, Iowa 51501