

# SEVILLA

by ESHBELIA SARABI



# LIGHTING PRODUCT CATALOG

Architectural, commercial and outdoor lighting

COMMERCIAL PREVIEW | REVISION R01 | SEPTEMBER 2026



# CONTENTS

|                                |                |
|--------------------------------|----------------|
| <b>01. BULB SERIES</b>         | <b>03 - 05</b> |
| <b>02. MODULE SERIES</b>       | <b>06 - 07</b> |
| <b>03. PANEL LIGHT</b>         | <b>08 - 15</b> |
| <b>04. DOWN LIGHT</b>          | <b>16 - 25</b> |
| <b>05. SPOT LIGHT</b>          | <b>26 - 31</b> |
| <b>06. LINEAR LIGHT</b>        | <b>32 - 37</b> |
| <b>07. TRACK LIGHT</b>         | <b>38 - 39</b> |
| <b>08. STRIP LIGHT</b>         | <b>40 - 43</b> |
| <b>09. HIGH BAY</b>            | <b>44 - 46</b> |
| <b>10. FLOOD LIGHT</b>         | <b>47 - 48</b> |
| <b>11. WALL LIGHT</b>          | <b>49 - 59</b> |
| <b>12. LAWN LIGHT</b>          | <b>60 - 72</b> |
| <b>13. MOBILE TRACK SOCKET</b> | <b>73</b>      |
| <b>14. POWER SUPPLY</b>        | <b>74 - 78</b> |





# BULB SERIES

In the current market, LED bulbs are one of the most commonly used and environmentally friendly lighting fixtures. Different bulbs are used in different lighting places.

## Benefits

**Long life:** The light bulb consumes less power, and its life is as long as 15,000h, which is undoubtedly a cost effective lamp.

**Environmental protection:** It does not contain mercury, scrap and throw away is not good to pollute the environment, the light emitted by 1Lm, the power used is not high, reduce greenhouse gas emissions.



## Features


Screw E27, conform to the international standard. The installation method is simple, is a high popularity of home lighting fixtures. Choose high diffusion projection mask, wide lighting range.

In addition to basic lighting, light bulbs also have the role of decorative lighting



ESH-AC-0200


LIGHT DISTRIBUTION CURVE

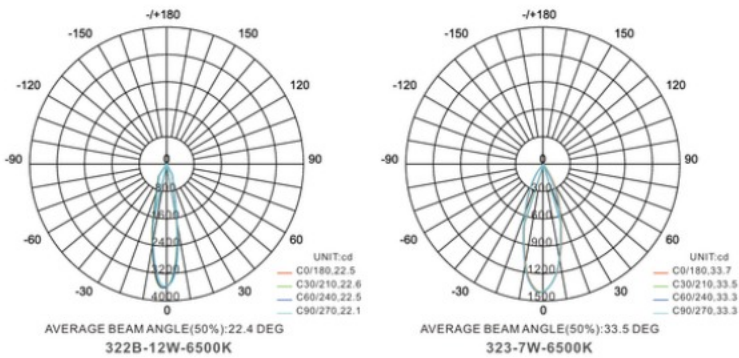

FEATURES & BENEFIT

|                         |                            |
|-------------------------|----------------------------|
| Materials of Optics     | Anti Uv PC                 |
| Type of connection      | Screwless terminal         |
| Certificates            | CE(EMC) LVD RoHS CB        |
| Mounting type           | Twist into E27 lamp holder |
| Mounting location       | Ceiling                    |
| Application environment | Indoor                     |

INSTALLATION & ACCESSORIES

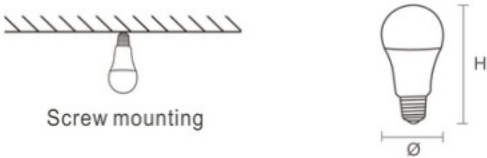

TECHNICAL DATA


| Item No.        | Power | Voltage  | Color temperature | Luminous efficacy | Size      |
|-----------------|-------|----------|-------------------|-------------------|-----------|
| ESH-AC-0200-A01 |       | 220-240V | 3000K/4000K/6500K | 90-10 lm/w        | 60*112 mm |
| ESH-AC-0200-A02 |       | 220-240V | 3000K/4000K/6500K | 90-10 lm/w        | 65*124 mm |
| ESH-AC-0200-A03 |       | 220-240V | 3000K/4000K/6500K | 90-10 lm/w        | 70*138 mm |






ESH-AC-0201

LIGHT DISTRIBUTION CURVE

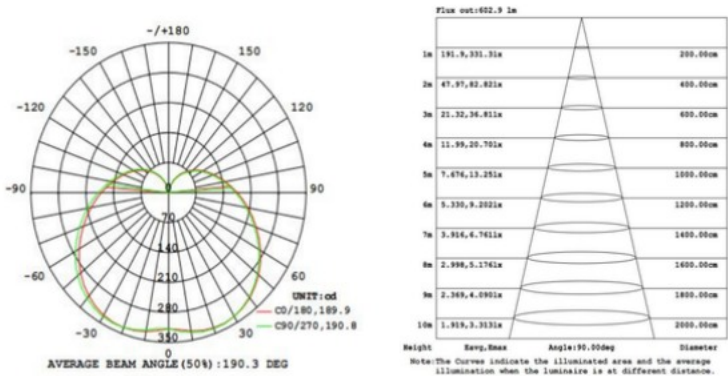


FEATURES & BENEFIT

|                         |                            |
|-------------------------|----------------------------|
| Materials of Optics     | Anti Uv PC                 |
| Type of connection      | Screwless terminal         |
| Certificates            | CE(EMC) LVD RoHS CB        |
| Mounting type           | Twist into E27 lamp holder |
| Mounting location       | Ceiling                    |
| Application environment | Indoor                     |

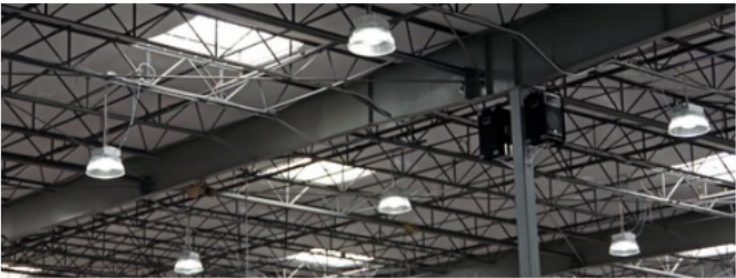

INSTALLATION & ACCESSORIES

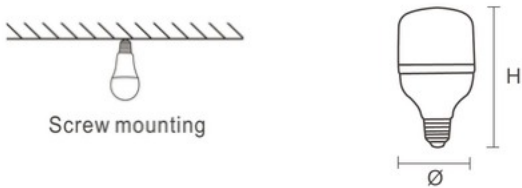

TECHNICAL DATA

| Item No.        | Power | Voltage  | Color temperature | Luminous efficacy | Size       |
|-----------------|-------|----------|-------------------|-------------------|------------|
| ESH-AC-0201-A01 |       | 220-240V | 3000K/4000K/6500K | 90-100 lm/w       | 80*139 mm  |
| ESH-AC-0201-A02 |       | 220-240V | 3000K/4000K/6500K | 90-100 lm/w       | 100*165 mm |
| ESH-AC-0201-A03 |       | 220-240V | 3000K/4000K/6500K | 90-100 lm/w       | 120*195 mm |
| ESH-AC-0201-A04 |       | 220-240V | 3000K/4000K/6500K | 90-100 lm/w       | 140*218 mm |



# MODULE SERIES

Our LED module bulb features a cool white and warm white option, perfect for any setting. Its small size and modular structure make it versatile and easy to install. With an elegant design and beautiful outline shape, it's ideal for home, office, shops, hotel, and supermarket use.

## Benefits

**Long life:** The light bulb consumes less power, and its life is as long as 15,000h, which is undoubtedly a cost effective lamp.

**Environmental protection:** It does not contain mercury, scrap and throw away is not good to pollute the environment, the light emitted by 1Lm, the power used is not high, reduce greenhouse gas emissions.






ESH-AC-0202-A01



ESH-AC-0202-A02


ESH-AC-0202

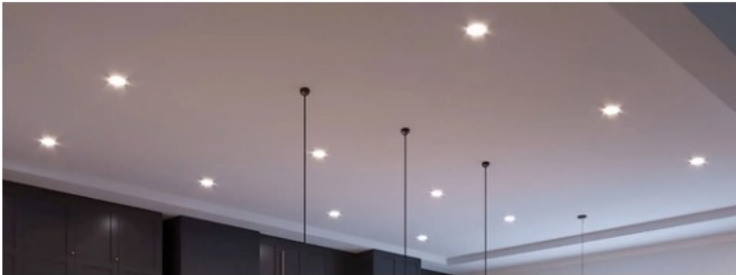

FEATURES & BENEFIT

|                         |                     |
|-------------------------|---------------------|
| Materials of Optics     | Anti Uv PC          |
| Materials of Housing    | PC                  |
| Certificates            | CE(EMC) LVD RoHS CB |
| Mounting type           | Recessed            |
| Mounting location       | Ceiling             |
| Application environment | Indoor              |


INSTALLATION & ACCESSORIES

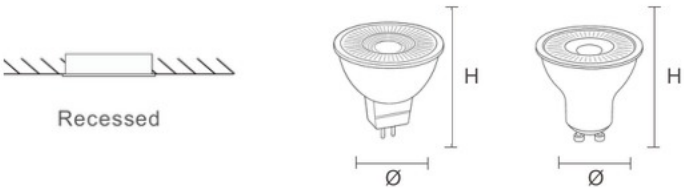

TECHNICAL DATA

| Item No.        | Power | Voltage  | Color temperature | Luminous efficacy | Size     |
|-----------------|-------|----------|-------------------|-------------------|----------|
| ESH-AC-0202-A01 |       | 220-240V | 3000K/4000K/6000K | 90 lm/w           | 49*57 mm |
| ESH-AC-0202-A02 |       | 220-240V | 3000K/4000K/6000K | 90 lm/w           | 50*56 mm |





# PANEL LIGHT

Recessed panel light and Surface mounted panel light, each has its own characteristics. The application scene is very wide, can be flexibly matched with different decoration styles.

## Benefits

1. Conventional 2835 lamp beads, good light efficiency, low light decay, long life and other advantages, to meet the conventional requirements of the use of lamps

2. Lens: luminous form diffuse reflection, showing comfortable light effect, irradiation area is large, reduce the space dark area

3. Aluminum lamp body, heat dissipation fast and good Bright light, wide irradiation surface, suitable for basic lighting, larger scene application No stroboscopic glare, visual comfort





ESH-AC-0203




ESH-AC-0203



Borderless suit

ESH-AC-0203

LIGHT DISTRIBUTION CURVE

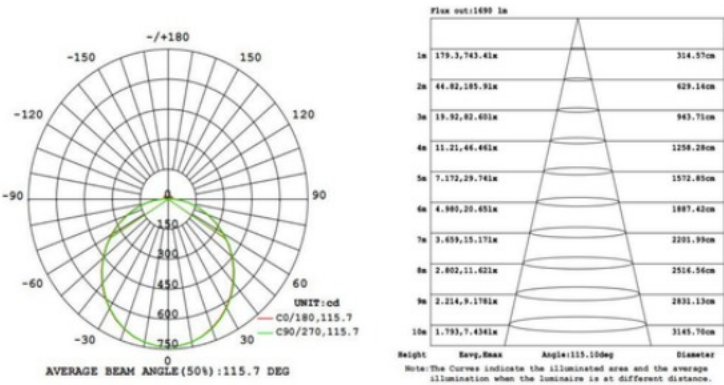


FEATURES & BENEFIT

|                         |                     |
|-------------------------|---------------------|
| Materials of Optics     | Anti Uv PC          |
| Materials of Housing    | Aluminum            |
| Certificates            | CE(EMC) LVD RoHS CB |
| Mounting type           | Holeless            |
| Mounting location       | Ceiling             |
| Application environment | Indoor              |

INSTALLATION & ACCESSORIES



Surface mounted



Aluminum design,  
fast heat dissipation



TECHNICAL DATA

| Item No.        | Power | Voltage  | Color temperature | Luminous efficiency | Size      |
|-----------------|-------|----------|-------------------|---------------------|-----------|
| ESH-AC-0203-A01 |       | 220-240V | 4000K/6500K       | 110-120 lm/w        | 175*50 mm |
| ESH-AC-0203-A02 |       | 220-240V | 4000K/6500K       | 110-120 lm/w        | 225*50 mm |
| ESH-AC-0203-A03 |       | 220-240V | 4000K/6500K       | 110-120 lm/w        | 300*50 mm |

ESH-AC-0204

Light weight


LIGHT DISTRIBUTION CURVE

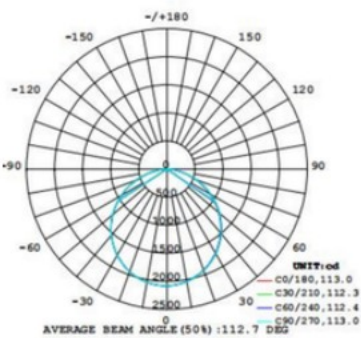

FEATURES & BENEFIT


|                         |                     |
|-------------------------|---------------------|
| Materials of Optics     | Anti Uv PC          |
| Materials of Housing    | Aluminum            |
| Certificates            | CE(EMC) LVD RoHS CB |
| Mounting type           | Recessed            |
| Mounting location       | Ceiling             |
| Application environment | Indoor              |

INSTALLATION & ACCESSORIES

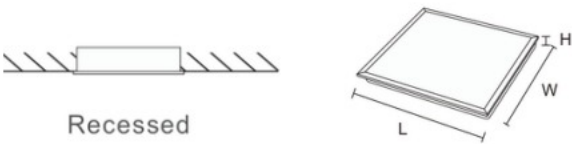

TECHNICAL DATA

| Item No.    | Power | Voltage  | Color temperature | Luminous efficiency | Size       |
|-------------|-------|----------|-------------------|---------------------|------------|
| ESH-AC-0204 |       | 220-240V | 4000K/6500K       | 110-120 lm/w        | 595*595 mm |

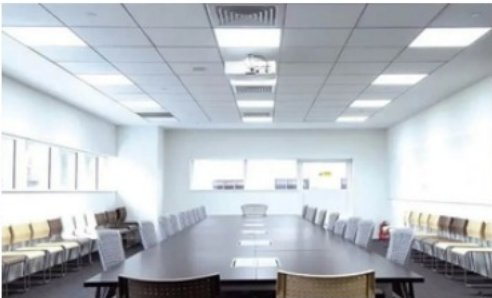








Light weight

ESH-AC-0205


LIGHT DISTRIBUTION CURVE

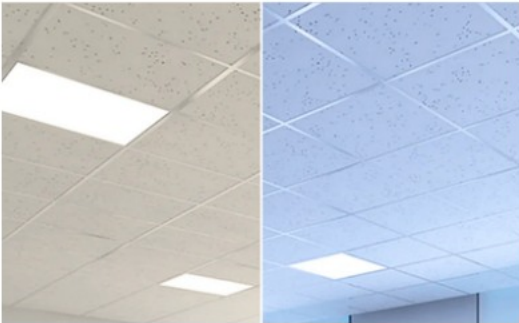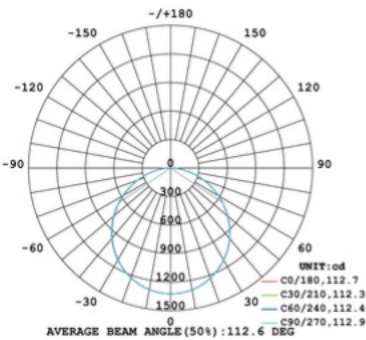

FEATURES & BENEFIT


|                         |                     |
|-------------------------|---------------------|
| Materials of Optics     | Anti Uv PC          |
| Materials of Housing    | Aluminum            |
| Certificates            | CE(EMC) LVD RoHS CB |
| Mounting type           | Recessed            |
| Mounting location       | Ceiling             |
| Application environment | Indoor              |

INSTALLATION & ACCESSORIES

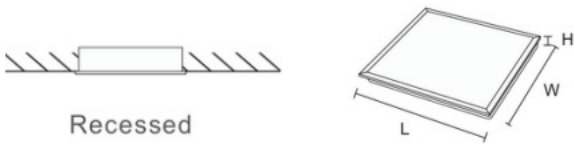

TECHNICAL DATA

| Item No.    | Power | Voltage  | Color temperature | Luminous efficiency | Size          |
|-------------|-------|----------|-------------------|---------------------|---------------|
| ESH-AC-0205 |       | 220-240V | 4000K/6500K       | 100 lm/w            | 595*595*34 mm |

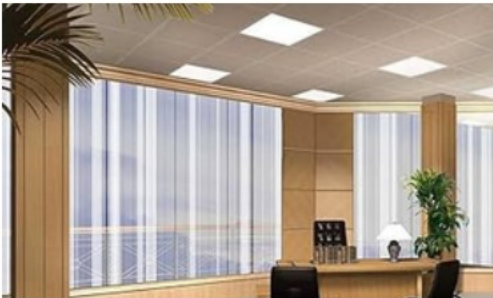




High quality design

# ESH-AC-0206

## LIGHT DISTRIBUTION CURVE

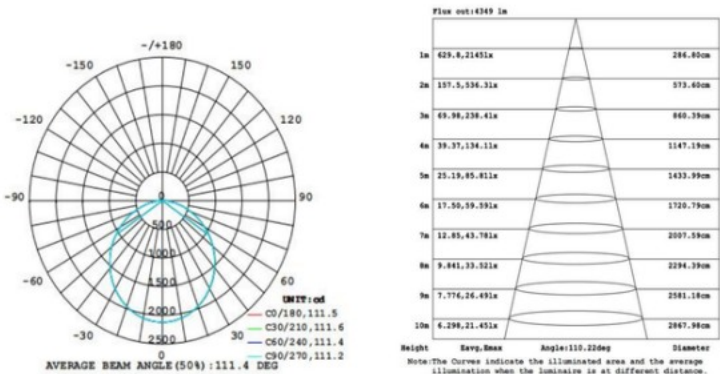


## FEATURES & BENEFIT

|                         |                     |
|-------------------------|---------------------|
| Materials of Optics     | Anti Uv PC          |
| Materials of Housing    | Aluminum            |
| Certificates            | CE(EMC) LVD RoHS CB |
| Mounting type           | Holeless            |
| Mounting location       | Ceiling             |
| Application environment | Indoor              |

## INSTALLATION & ACCESSORIES



Surface mounted



## TECHNICAL DATA


| Item No.        | Power | Voltage  | Color temperature | Luminous efficiency | Size       |
|-----------------|-------|----------|-------------------|---------------------|------------|
| ESH-AC-0206-A01 |       | 220-240V | 4000K/6500K       | 100-110 lm/w        | 395 *45 mm |
| ESH-AC-0206-A02 |       | 220-240V | 4000K/6500K       | 100-110 lm/w        | 485*45 mm  |



Wide exposure range

ESH-AC-0207

LIGHT DISTRIBUTION CURVE

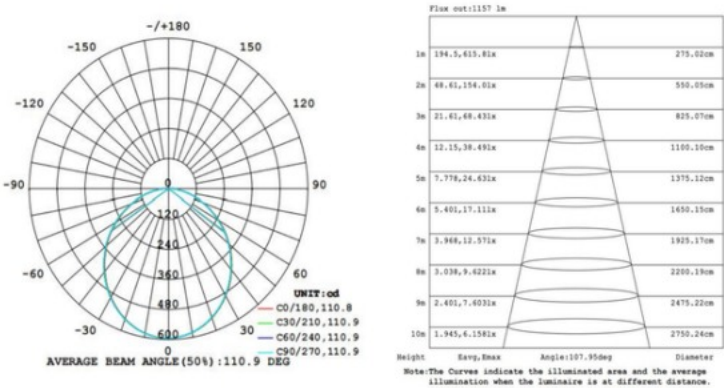

FEATURES & BENEFIT


|                         |                     |
|-------------------------|---------------------|
| Materials of Optics     | Anti Uv PC          |
| Materials of Housing    | PC                  |
| Certificates            | CE(EMC) LVD RoHS CB |
| Mounting type           | Surface mounted     |
| Mounting location       | Ceiling             |
| Application environment | Indoor              |

INSTALLATION & ACCESSORIES



TECHNICAL DATA

| Item No.    | Power | Voltage  | Color temperature | Luminous efficiency | Size       |
|-------------|-------|----------|-------------------|---------------------|------------|
| ESH-AC-0207 |       | 220-240V | 4000K/6500K       | 100-110 lm/w        | 280 *55 mm |

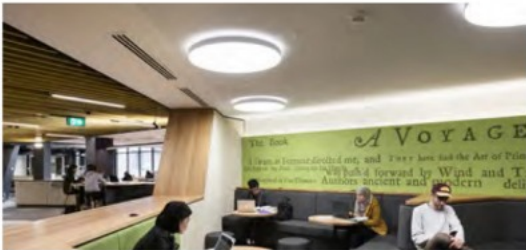







Premium design

ESH-AC-0208

LIGHT DISTRIBUTION CURVE

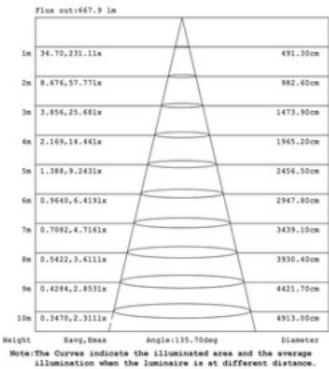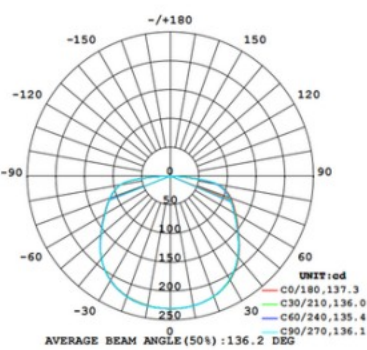


FEATURES & BENEFIT

|                         |                     |
|-------------------------|---------------------|
| Materials of Optics     | Anti Uv PC          |
| Materials of Housing    | PC                  |
| Certificates            | CE(EMC) LVD RoHS CB |
| Mounting type           | Surface mounted     |
| Mounting location       | Ceiling             |
| Application environment | Indoor              |

INSTALLATION & ACCESSORIES



Surface mounted



TECHNICAL DATA


| Item No.        | Power | Voltage  | Color temperature | Luminous efficiency | Size      |
|-----------------|-------|----------|-------------------|---------------------|-----------|
| ESH-AC-0208-A01 |       | 220-240V | 4000K             | 82 lm/w             | 287*35 mm |
| ESH-AC-0208-A02 |       | 220-240V | 4000K             | 82 lm/w             | 383*35 mm |





Premium design

ESH-AC-0209

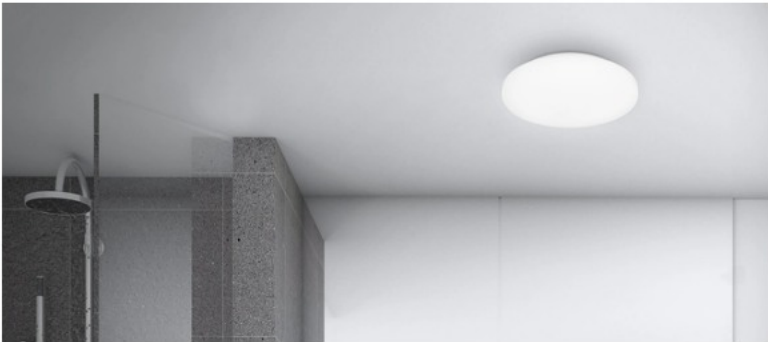


FEATURES & BENEFIT

|                         |                     |
|-------------------------|---------------------|
| Materials of Optics     | Anti Uv PC          |
| Materials of Housing    | PC                  |
| Certificates            | CE(EMC) LVD RoHS CB |
| Mounting type           | Surface mounted     |
| Mounting location       | Ceiling             |
| Application environment | Indoor              |

INSTALLATION & ACCESSORIES



Surface mounted



TECHNICAL DATA

| Item No.        | Power | Voltage  | Color temperature | Luminous efficiency | Size      |
|-----------------|-------|----------|-------------------|---------------------|-----------|
| ESH-AC-0209-A01 |       | 220-240V | 2700K/4000K/6000K | 88 lm/w             | 250*50 mm |
| ESH-AC-0209-A02 |       | 220-240V | 2700K/4000K/6000K | 88 lm/w             | 380*50 mm |



# DOWN LIGHT

The light source is more dispersed, the light effect is uniform, suitable for large area lighting, to create a comfortable visual environment, downlights are often used in basic lighting, generally used in corridors, bars, restaurants, bathrooms and other areas, can also be applied to commercial lighting, with no main light design decoration style.

## Benefits

Ra>80/90/98, high color rendering index, restore the true color of the product. High quality LED chip, light is bright and comfortable, light efficiency is stable and lasting. Die-cast aluminum design, solid, efficient heat dissipation, extended service life. Spring fastener, no screw installation. COB, SMD two product structure scheme, Ip54/ IP44/I P20, a variety of protection levels are available.

## Installation:

- 1.In the process of using lamps, a certain amount of heat will inevitably be generated, so when installing lamps, pay attention to maintaining a certain distance from the wall to reduce the phenomenon of yellowing of the wall.
- 2.Confirm the actual hole size, it is recommended that professionals open holes to maintain the beauty of the ceiling.









IP20/IP44/IP54  
Dust and moisture proof

ESH-DL-0413


LIGHT DISTRIBUTION CURVE

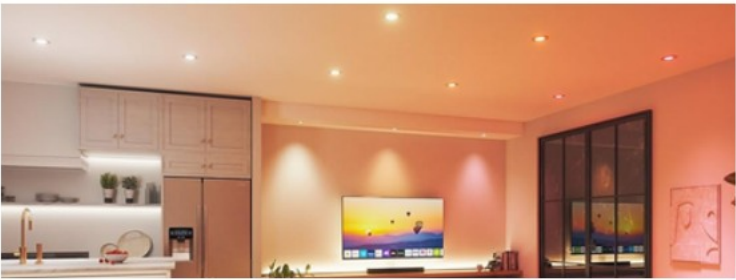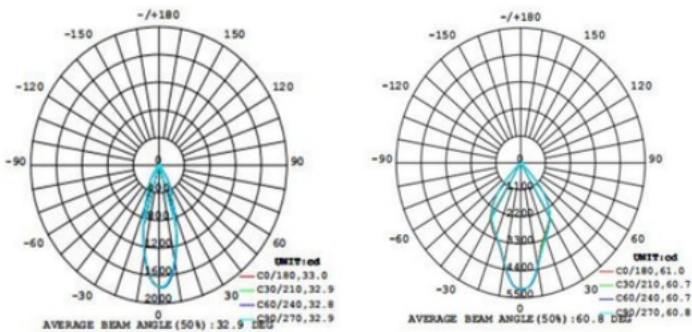

FEATURES & BENEFIT

|                         |                     |
|-------------------------|---------------------|
| Materials of Optics     | Glass               |
| Materials of Housing    | Aluminum            |
| Certificates            | CE(EMC) LVD RoHS CB |
| Mounting type           | Recessed            |
| Mounting location       | Ceiling             |
| Application environment | Indoor              |
| IP Rating               | IP54                |

INSTALLATION & ACCESSORIES

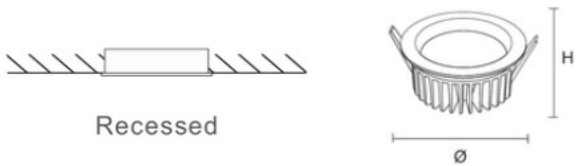

TECHNICAL DATA


| Item No.        | Power | Voltage  | Color temperature | Size       | Cut-Out |
|-----------------|-------|----------|-------------------|------------|---------|
| ESH-DL-0413-A01 |       | 220-240V | 3000K/6500K       | 95*55 mm   | 75 mm   |
| ESH-DL-0413-A02 |       | 220-240V | 3000K/6500K       | 145*75 mm  | 120 mm  |
| ESH-DL-0413-A03 |       | 220-240V | 3000K/6500K       | 170*75 mm  | 145 mm  |
| ESH-DL-0413-A04 |       | 220-240V | 3000K/6500K       | 230*110 mm | 205 mm  |
| ESH-DL-0413-A05 |       | 220-240V | 3000K/6500K       | 230*120 mm | 205 mm  |
| ESH-DL-0413-A06 |       | 220-240V | 3000K/6500K       | 230*128 mm | 205 mm  |



Sepcial material of reflectors ( 4 different colors to choice)

ESH-DL-0414

LIGHT DISTRIBUTION CURVE

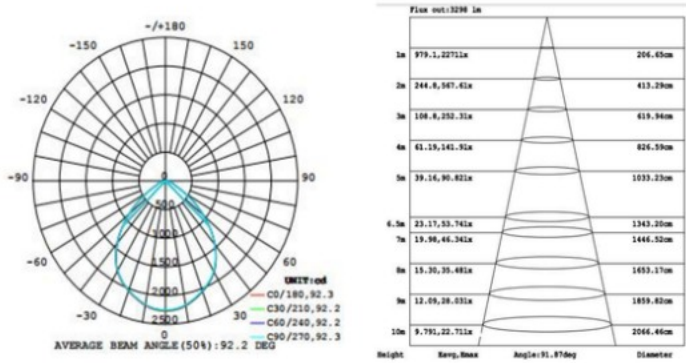

FEATURES & BENEFIT

|                         |              |
|-------------------------|--------------|
| Materials of Optics     | PC           |
| Materials of Housing    | Aluminum     |
| Certificates            | CB CE LVDEMC |
| Mounting type           | Recessed     |
| Mounting location       | Ceiling      |
| Application environment | Indoor       |

INSTALLATION & ACCESSORIES



TECHNICAL DATA


| Item No.        | Power | Voltage  | Color temperature | Size       | Cut-Out |
|-----------------|-------|----------|-------------------|------------|---------|
| ESH-DL-0414-A01 |       | 220-240V | 3000K/4000K/6500K | 88*45 mm   | 75 mm   |
| ESH-DL-0414-A02 |       | 220-240V | 3000K/4000K/6500K | 130*70 mm  | 110 mm  |
| ESH-DL-0414-A03 |       | 220-240V | 3000K/4000K/6500K | 165*90 mm  | 145 mm  |
| ESH-DL-0414-A04 |       | 220-240V | 3000K/4000K/6500K | 220*105 mm | 195 mm  |
| ESH-DL-0414-A05 |       | 220-240V | 3000K/4000K/6500K | 220*105 mm | 195 mm  |



Long Life

ESH-DL-0415


LIGHT DISTRIBUTION CURVE

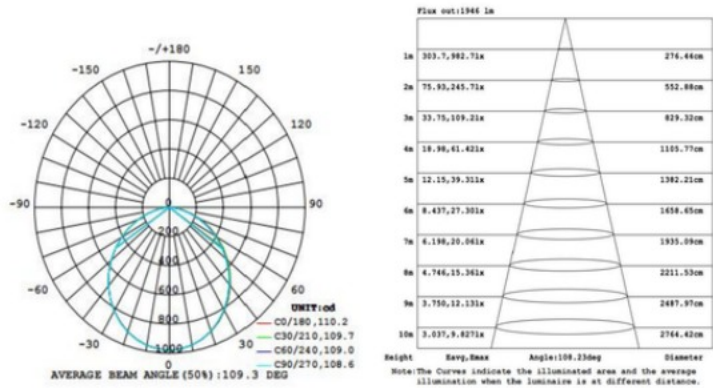

FEATURES & BENEFIT

|                         |                     |
|-------------------------|---------------------|
| Materials of Optics     | Anti Uv PC          |
| Materials of Housing    | Aluminum            |
| Certificates            | CE(EMC) LVD RoHS CB |
| Mounting type           | Recessed            |
| Mounting location       | Ceiling             |
| Application environment | Indoor              |

INSTALLATION & ACCESSORIES

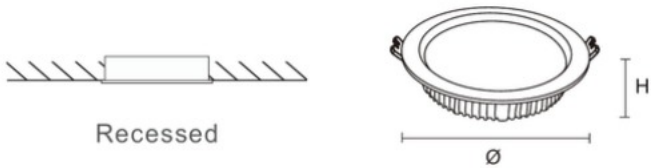

TECHNICAL DATA


| Item No.        | Power | Voltage  | Color temperature | Size      | Cut-Out |
|-----------------|-------|----------|-------------------|-----------|---------|
| ESH-DL-0415-A01 |       | 220-240V | 3000K/4000K/6500K | 105*30 mm | 75 mm   |
| ESH-DL-0415-A02 |       | 220-240V | 3000K/4000K/6500K | 230*32 mm | 205 mm  |



Cover the light source design  
Reduce the discomfort caused  
by direct light sources

ESH-DL-0416


LIGHT DISTRIBUTION CURVE

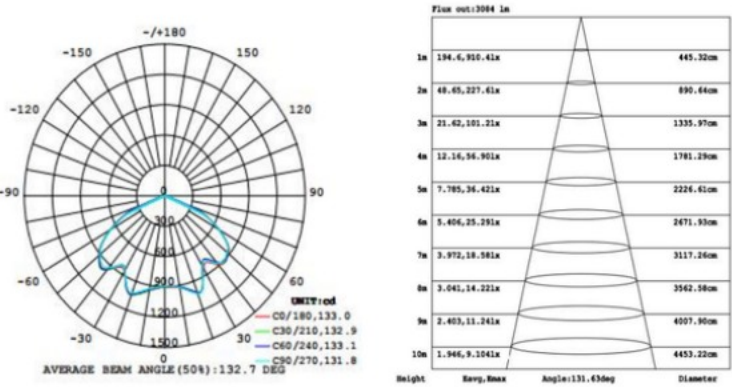

FEATURES & BENEFIT

|                         |                     |
|-------------------------|---------------------|
| Materials of Optics     | Glass               |
| Materials of Housing    | Aluminum            |
| Certificates            | CE(EMC) LVD RoHS CB |
| Mounting type           | Recessed            |
| Mounting location       | Ceiling             |
| Application environment | Indoor              |

INSTALLATION & ACCESSORIES

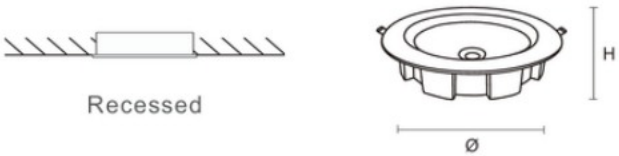

TECHNICAL DATA

| Item No.        | Power | Voltage  | Color temperature | Size      | Cut-Out |
|-----------------|-------|----------|-------------------|-----------|---------|
| ESH-DL-0416-A01 |       | 220-240V | 3000K/4000K/6500K | 90*46 mm  | 75 mm   |
| ESH-DL-0416-A02 |       | 220-240V | 3000K/4000K/6500K | 170*46 mm | 140 mm  |
| ESH-DL-0416-A03 |       | 220-240V | 3000K/4000K/6500K | 225*46 mm | 190 mm  |





ESH-DL-0417




ESH-DL-0417



No hole design

ESH-DL-0417


LIGHT DISTRIBUTION CURVE

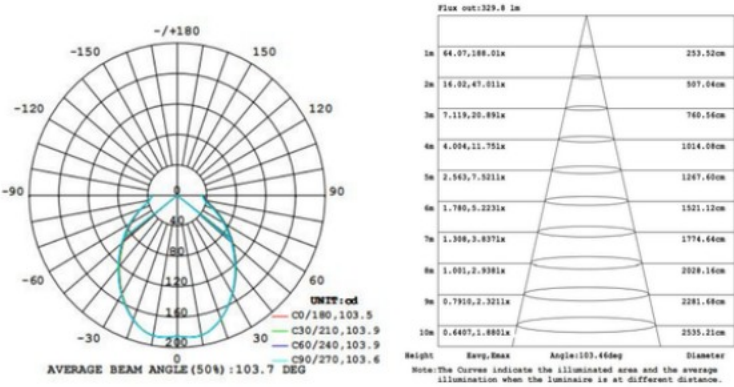

FEATURES & BENEFIT

|                         |                     |
|-------------------------|---------------------|
| Materials of Optics     | Glass               |
| Materials of Housing    | Aluminum            |
| Certificates            | CE(EMC) LVD RoHS CB |
| Mounting type           | Recessed            |
| Mounting location       | Ceiling             |
| Application environment | Indoor              |

INSTALLATION & ACCESSORIES

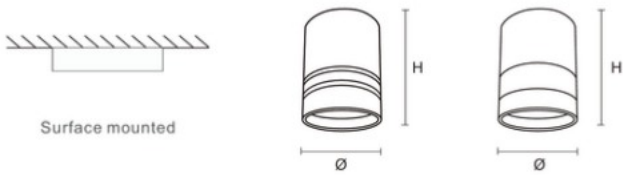

TECHNICAL DATA

| Item No.        | Power | Voltage  | Color temperature | Luminous efficiency | Size        |
|-----------------|-------|----------|-------------------|---------------------|-------------|
| ESH-DL-0417-A01 |       | 220-240V | 3000K/6500K       | 80-90 lm/w          | 80*100 mm   |
| ESH-DL-0417-A02 |       | 220-240V | 3000K/6500K       | 80-90 lm/w          | 80*110.5 mm |






ESH-DL-0418



ESH-DL-0418

ESH-DL-0418


LIGHT DISTRIBUTION CURVE

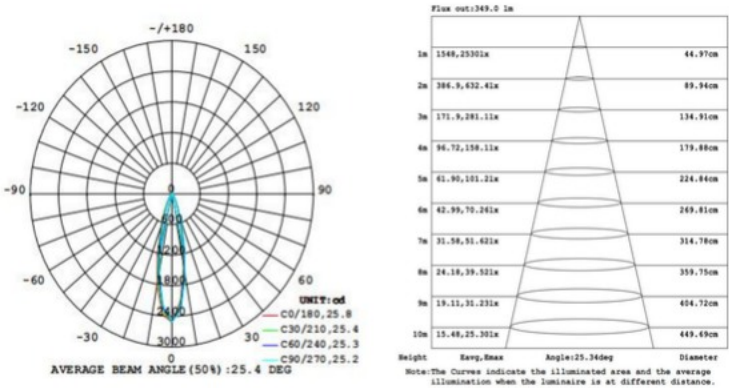

FEATURES & BENEFIT


|                         |                     |
|-------------------------|---------------------|
| Materials of Optics     | Anti Uv PC          |
| Materials of Housing    | Aluminum            |
| Certificates            | CE(EMC) LVD RoHS CB |
| Mounting type           | Holeless            |
| Mounting location       | Ceiling             |
| Application environment | Indoor              |

INSTALLATION & ACCESSORIES

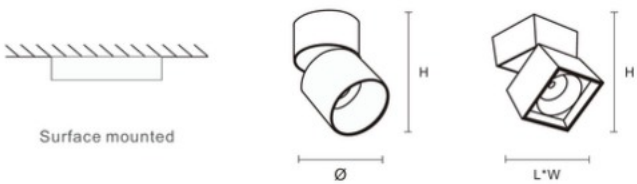

TECHNICAL DATA

| Item No.        | Power | Voltage  | Color temperature | Luminous efficiency | Size      |
|-----------------|-------|----------|-------------------|---------------------|-----------|
| ESH-DL-0418-A01 |       | 220-240V | 3000K/6500K       | 80-90 lm/w          | 80*110 mm |
| ESH-DL-0418-A02 |       | 220-240V | 3000K/6500K       | 80-90 lm/w          | 80*110 mm |


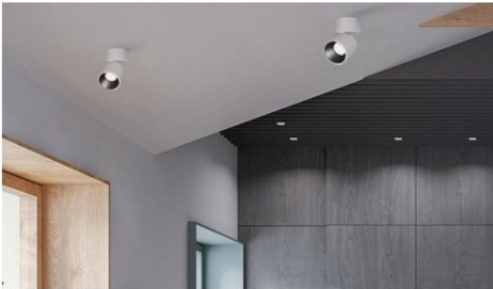




IP65  
Dust and moisture proof

ESH-DL-0419


LIGHT DISTRIBUTION CURVE

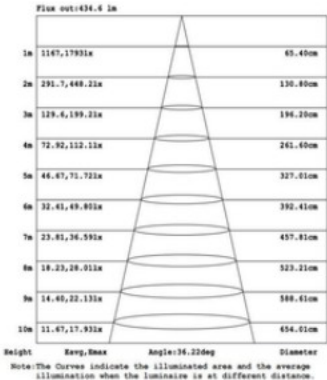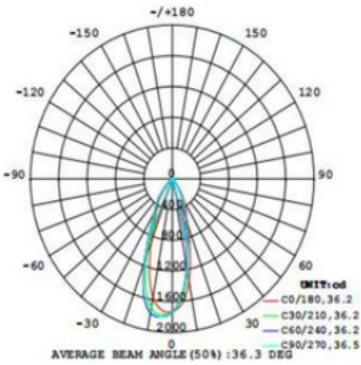

FEATURES & BENEFIT

|                         |                     |
|-------------------------|---------------------|
| Materials of Optics     | Glass               |
| Materials of Housing    | Aluminum            |
| Certificates            | CE(EMC) LVD RoHS CB |
| Mounting type           | Surface mounted     |
| Mounting location       | Ceiling             |
| Application environment | Indoor/Outdoor      |
| IP Rating               | IP65                |

INSTALLATION & ACCESSORIES

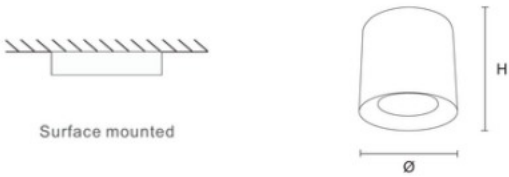


TECHNICAL DATA

| Item No.        | Power | Voltage  | Color temperature | Luminous efficiency | Size     |
|-----------------|-------|----------|-------------------|---------------------|----------|
| ESH-DL-0419-A01 |       | 220-240V | 3000K/6500K       | 90-100 lm/w         | 80*80 mm |
| ESH-DL-0419-A02 |       | 220-240V | 3000K/6500K       | 90-100 lm/w         | 95*90 mm |








Long life,  
no discoloration

ESH-DL-0420


LIGHT DISTRIBUTION CURVE

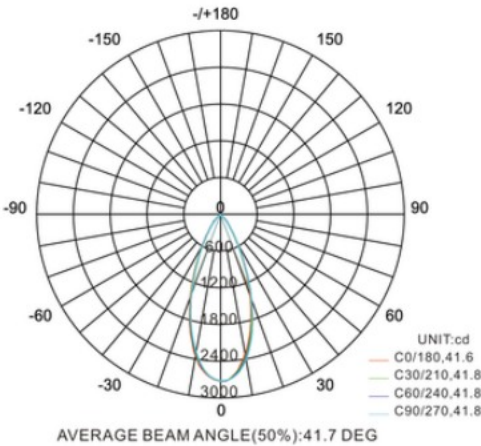

FEATURES & BENEFIT



|                         |                     |
|-------------------------|---------------------|
| Materials of Optics     | PC                  |
| Materials of Housing    | Aluminum            |
| Certificates            | CE(EMC) LVD RoHS CB |
| Mounting type           | Recessed            |
| Mounting location       | Ceiling             |
| Application environment | Indoor              |
| IP Rating               | IP65                |

INSTALLATION & ACCESSORIES

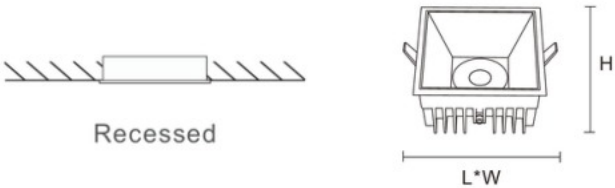

TECHNICAL DATA

| Item No.    | Power | Voltage  | Color temperature | Size          | Cut-Out    |
|-------------|-------|----------|-------------------|---------------|------------|
| ESH-DL-0420 |       | 220-240V | 3000K/6500K       | 158*158*96 mm | 145*145 mm |

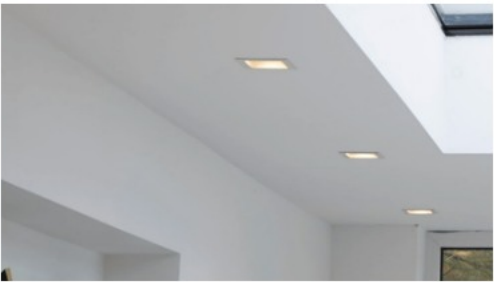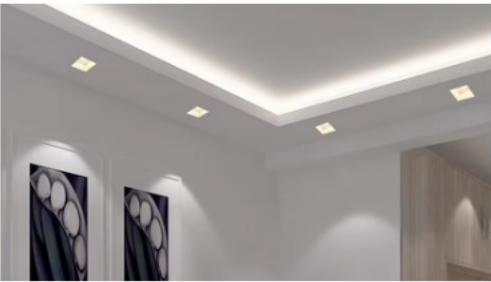






ESH-DL-0421


LIGHT DISTRIBUTION CURVE

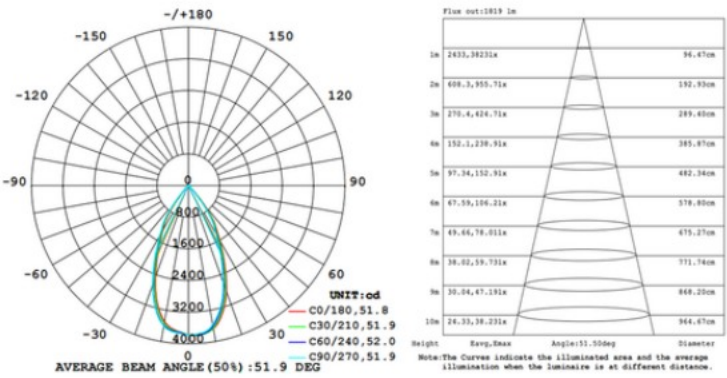

FEATURES & BENEFIT

|                         |                         |
|-------------------------|-------------------------|
| Materials of Optics     | Glass                   |
| Materials of Housing    | Aluminum                |
| Certificates            | CE(EMC) LVD RoHS CB     |
| Mounting type           | Surface mounted/Hanging |
| Mounting location       | Ceiling/hanging         |
| Application environment | Indoor                  |

INSTALLATION & ACCESSORIES

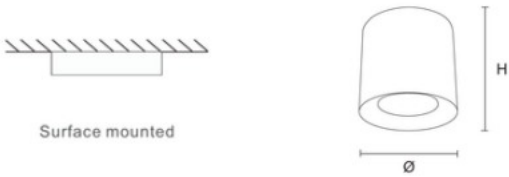

TECHNICAL DATA

| Item No.        | Power | Voltage  | Color temperature | Luminous efficiency | Size       |
|-----------------|-------|----------|-------------------|---------------------|------------|
| ESH-DL-0421-A01 |       | 220-240V | 3000K/4000K/6500K | 92 lm/w             | 102*150 mm |
| ESH-DL-0421-A02 |       | 220-240V | 3000K/4000K/6500K | 100 lm/w            | 120*150 mm |



# SPOT LIGHT

Spotlights are the main application lamps without main light design, which can achieve key lighting and create a variety of decorative lighting atmosphere.

It is divided into embedded and semi-embedded two types of installation, the use of hanging, landing, suspended installation, usually placed around the ceiling, the upper part of the home, the interior of the wall, and in the area of the kick line, the light of the spot light is soft and concentrated, the light spot is rounded, the focus of the product and area, or the formation of different artistic effects to enhance the sense of space hierarchy, aesthetic and style.

The structure of the spotlight is mainly composed of four parts: shell, lamp bead, aluminum substrate and drive, and its advantages are as follows:

1. Long service life: the selection of high-quality LED lamp beads can achieve 50,000 hours of work market.
2. More COB point light source is used to focus light and play a local lighting role.
3. Lamp tail aluminum design, good heat dissipation effect.
4. Small size, light weight, can be easily integrated into different lighting environments, strong applicability.






ESH-DL-0422

ESH-DL-0422

LIGHT DISTRIBUTION CURVE

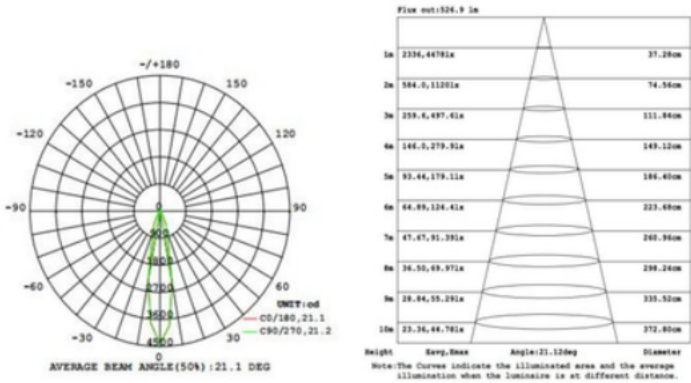

FEATURES & BENEFIT

|                         |                           |
|-------------------------|---------------------------|
| Materials of Optics     | Anti Uv PMMA, Glass (323) |
| Materials of Housing    | Aluminum                  |
| Certificates            | CE(EMC) LVD RoHS CB       |
| Mounting type           | Recessed                  |
| Mounting location       | Ceiling                   |
| Application environment | Indoor                    |

INSTALLATION & ACCESSORIES



TECHNICAL DATA


| Item No.    | Power | Voltage  | Color temperature | Size     | Cut-Out |
|-------------|-------|----------|-------------------|----------|---------|
| ESH-DL-0422 |       | 220-240V | 3000K/4000K       | 90*70 mm | 82 mm   |



ESH-DL-0423

ESH-DL-0423

LIGHT DISTRIBUTION CURVE

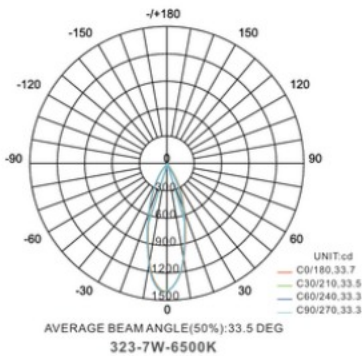

FEATURES & BENEFIT

|                         |                           |
|-------------------------|---------------------------|
| Materials of Optics     | Anti Uv PMMA, Glass (323) |
| Materials of Housing    | Aluminum                  |
| Certificates            | CE(EMC) LVD RoHS CB       |
| Mounting type           | Recessed                  |
| Mounting location       | Ceiling                   |
| Application environment | Indoor                    |

INSTALLATION & ACCESSORIES



TECHNICAL DATA

| Item No.    | Power | Voltage  | Color temperature | Size     | Cut-Out |
|-------------|-------|----------|-------------------|----------|---------|
| ESH-DL-0423 |       | 220-240V | 3000K/4000K       | 95*52 mm | 75 mm   |






Sepcial material of reflectors (5 different colors to choice)

ESH-DL-0424


LIGHT DISTRIBUTION CURVE

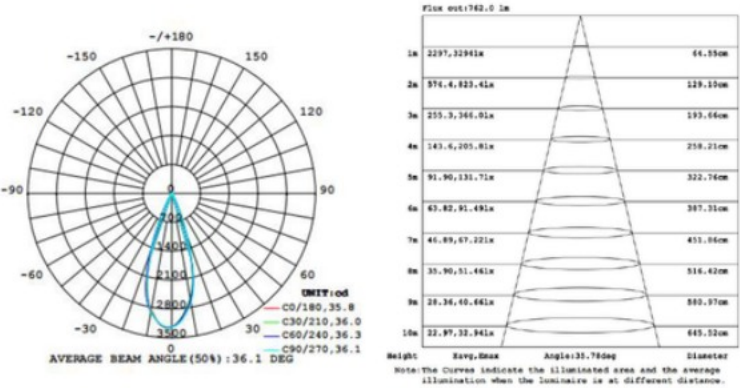

FEATURES & BENEFIT

|                         |                     |
|-------------------------|---------------------|
| Materials of Optics     | Anti Uv PC          |
| Materials of Housing    | Aluminum            |
| Certificates            | CE(EMC) LVD RoHS CB |
| Mounting type           | Recessed            |
| Mounting location       | Ceiling             |
| Application environment | Indoor              |
| Reflection              | Anti-glare          |

INSTALLATION & ACCESSORIES

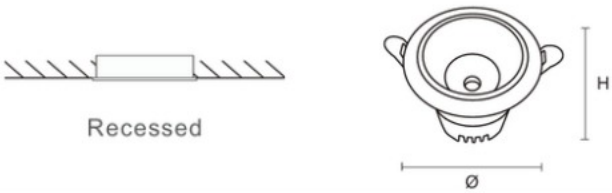


TECHNICAL DATA

| Item No.        | Power | Voltage  | Color temperature | Size       | Cut-Out |
|-----------------|-------|----------|-------------------|------------|---------|
| ESH-DL-0424-A01 |       | 220-240V | 3000K/4000K/6500K | 68*54 mm   | 60 mm   |
| ESH-DL-0424-A02 |       | 220-240V | 3000K/4000K/6500K | 87*82 mm   | 75 mm   |
| ESH-DL-0424-A03 |       | 220-240V | 3000K/4000K/6500K | 105*100 mm | 95 mm   |



ESH-DL-0425

LIGHT DISTRIBUTION CURVE

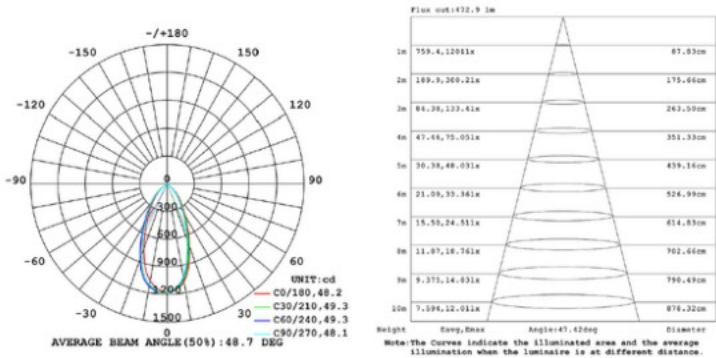

FEATURES & BENEFIT

|                         |                     |
|-------------------------|---------------------|
| Materials of Optics     | Anti Uv PC          |
| Materials of Housing    | Aluminum            |
| Certificates            | CE(EMC) LVD RoHS CB |
| Mounting type           | Recessed            |
| Mounting location       | Ceiling             |
| Application environment | Indoor              |
| Reflection              | Anti-glare          |

INSTALLATION & ACCESSORIES



TECHNICAL DATA


| Item No.    | Power | Voltage  | Color temperature | Size     | Cut-Out |
|-------------|-------|----------|-------------------|----------|---------|
| ESH-DL-0425 |       | 220-240V | 3000K/4000K       | 83*78 mm | 75 mm   |



IP65  
Dust and moisture proof

ESH-DL-0426


LIGHT DISTRIBUTION CURVE

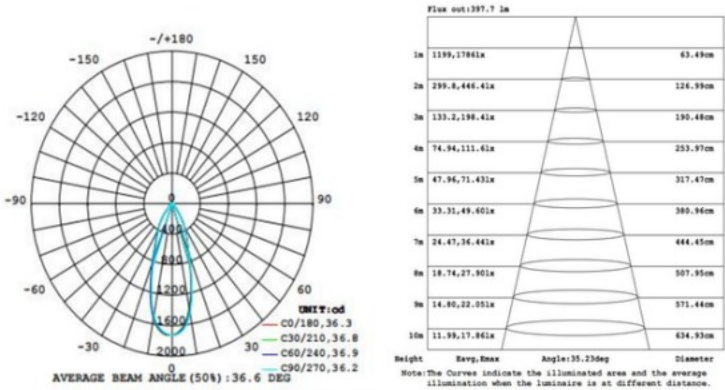

FEATURES & BENEFIT


|                         |                     |
|-------------------------|---------------------|
| Materials of Optics     | PC                  |
| Materials of Housing    | Aluminum            |
| Certificates            | CE(EMC) LVD RoHS CB |
| Mounting type           | Recessed            |
| Mounting location       | Ceiling             |
| Application environment | Indoor/Outdoor      |
| IP Rating               | IP65                |

INSTALLATION & ACCESSORIES

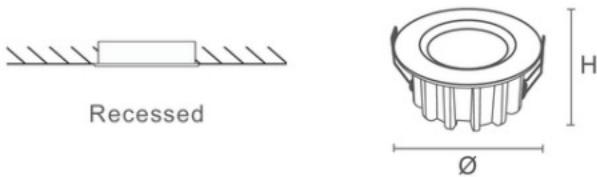


TECHNICAL DATA

| Item No.        | Power | Voltage  | Color temperature | Size      | Cut-Out |
|-----------------|-------|----------|-------------------|-----------|---------|
| ESH-DL-0426-A01 |       | 220-240V | 3000K/6500K       | 85*45 mm  | 70 mm   |
| ESH-DL-0426-A02 |       | 220-240V | 3000K/6500K       | 108*52 mm | 95 mm   |



# LINEAR LIGHT

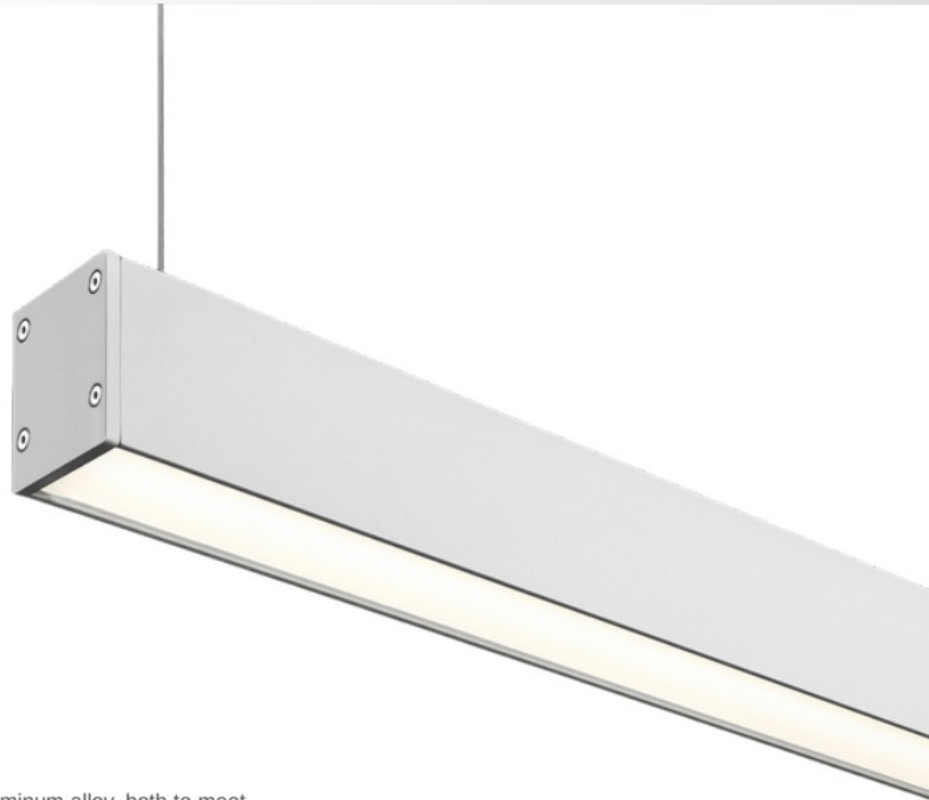


Line light is a Soft light, the shell is often beautiful and strong aluminum alloy, both to meet the basic lighting of the space, but also to design a unique geometric shape to decorate the space, such as supermarkets can use linear light design to decorate the ceiling, greatly reducing the cost of hard and soft decoration.

## Benefit

- 1.Low energy consumption, long life, working time can reach more than 50,000 hours.
- 2.Decorate the space with linear light to create a highly aesthetic art installation.
- 3.Line lights give people a simple and clear visual feeling, often used in office space, commercial space and home space.
- 4.3000K/4000K/6000K A variety of color temperatures to choose from, from warm white to cold white, lighting space can create a different atmosphere. Outgoing light direction: plane outgoing light, upward outgoing light, downward outgoing light Installation method: embedded, Surface mounted, Suspension, Splicing




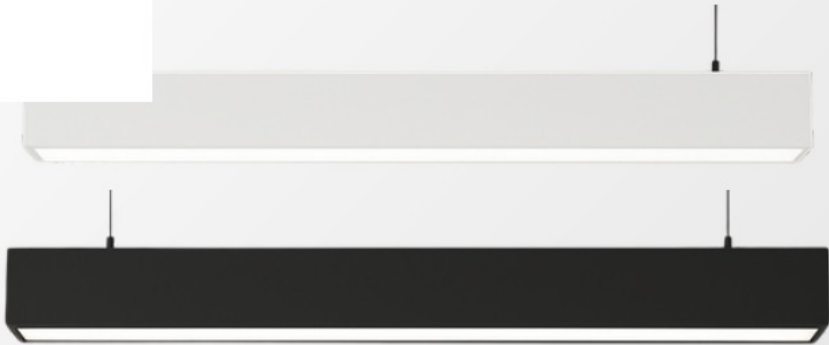

Borderless design

ESH-AC-0210


LIGHT DISTRIBUTION CURVE

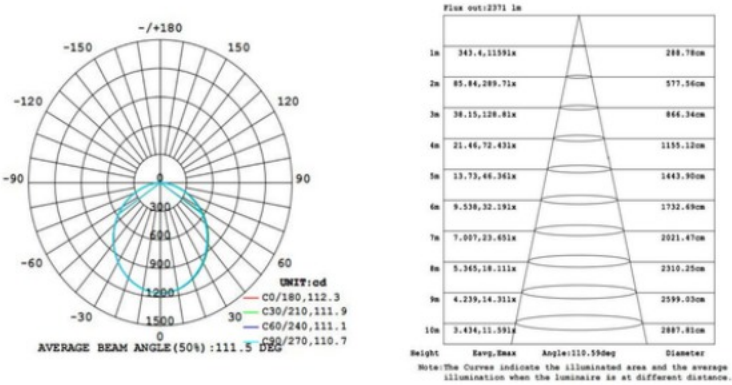

FEATURES & BENEFIT

|                         |                            |
|-------------------------|----------------------------|
| Materials of Optics     | Anti Uv PC                 |
| Materials of Housing    | Aluminum                   |
| Certificates            | CE(EMC) LVD RoHS CB        |
| Mounting type           | Suspension/Surface mounted |
| Mounting location       | Ceiling                    |
| Application environment | Indoor                     |

INSTALLATION & ACCESSORIES

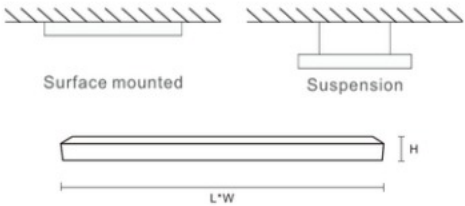

TECHNICAL DATA

| Item No.    | Power | Voltage  | Color temperature | Luminous efficiency | Size          |
|-------------|-------|----------|-------------------|---------------------|---------------|
| ESH-AC-0210 |       | 220-240V | 3000K/4000K/6500K | 100 lm/w            | 1204*60*75 mm |







IP65  
Water and dust resistant

ESH-AC-0211


LIGHT DISTRIBUTION CURVE

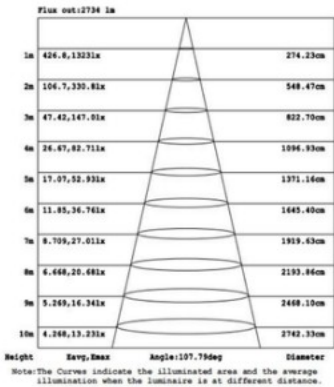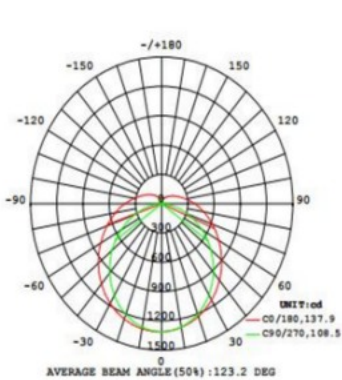

FEATURES & BENEFIT


|                         |                            |
|-------------------------|----------------------------|
| Materials of Optics     | Anti Uv PC                 |
| Materials of Housing    | Anti Uv PC                 |
| Certificates            | CE(EMC) LVD RoHS CB        |
| Mounting type           | Suspension/Surface mounted |
| Mounting location       | Ceiling                    |
| Application environment | Parking and indoor         |
| IP Rating               | IP65                       |

INSTALLATION & ACCESSORIES



TECHNICAL DATA

| Item No.    | Power | Voltage  | Color temperature | Luminous efficiency | Size              |
|-------------|-------|----------|-------------------|---------------------|-------------------|
| ESH-AC-0211 |       | 220-240V | 4000K/6500K       | 100-110 lm/w        | 1225*63.7*63.7 mm |

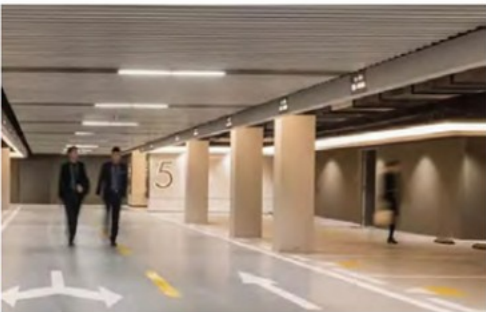




IP65  
Water and dust resistant

ESH-AC-0212


LIGHT DISTRIBUTION CURVE

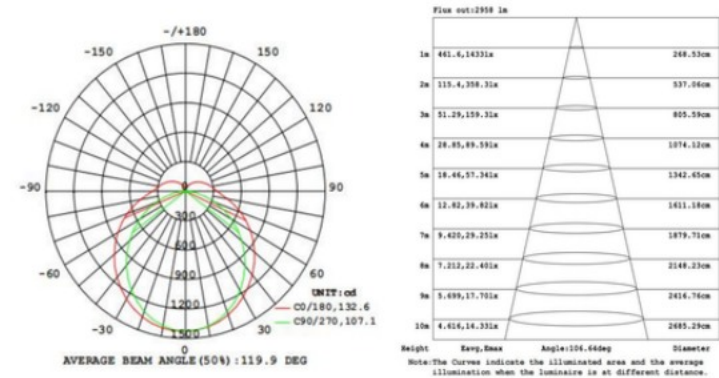

FEATURES & BENEFIT

|                         |                            |
|-------------------------|----------------------------|
| Materials of Optics     | Anti Uv PC                 |
| Materials of Housing    | Aluminum                   |
| Certificates            | CE(EMC) LVD RoHS CB        |
| Mounting type           | Suspension/Surface mounted |
| Mounting location       | Ceiling                    |
| Application environment | Parking and indoor         |
| IP Rating               | IP65                       |

INSTALLATION & ACCESSORIES



TECHNICAL DATA

| Item No.    | Power | Voltage  | Color temperature | Luminous efficiency | Size            |
|-------------|-------|----------|-------------------|---------------------|-----------------|
| ESH-AC-0212 |       | 220-240V | 4000K/6500K       | 100 lm/w            | 1200*55*52.8 mm |








ESH-AC-0213

Technical model mapping pending confirmation



IP65  
Water and dust resistant


LIGHT DISTRIBUTION CURVE

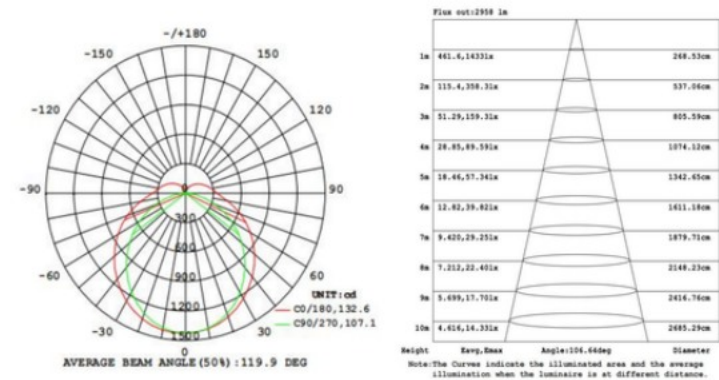

FEATURES & BENEFIT


|                         |                            |
|-------------------------|----------------------------|
| Materials of Optics     | Anti Uv PC                 |
| Materials of Housing    | Aluminum                   |
| Certificates            | CE(EMC) LVD RoHS CB        |
| Mounting type           | Suspension/Surface mounted |
| Mounting location       | Ceiling                    |
| Application environment | Parking and indoor         |
| IP Rating               | IP65                       |

INSTALLATION & ACCESSORIES

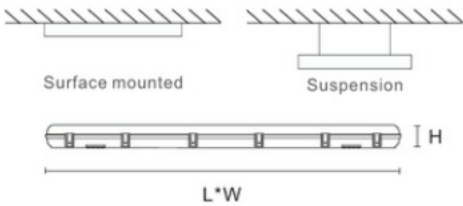

TECHNICAL DATA

| Item No.    | Power | Voltage  | Color temperature | Luminous efficiency | Size            |
|-------------|-------|----------|-------------------|---------------------|-----------------|
| ESH-AC-0213 |       | 220-240V | 4000K/6500K       | 100 lm/w            | 1200*55*52.8 mm |

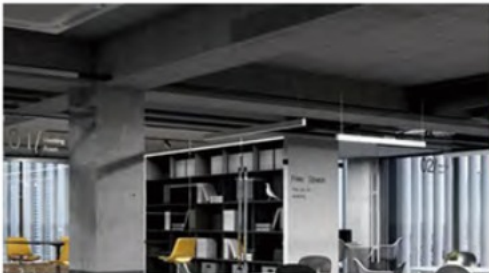






IP65  
Water and dust resistant

ESH-AC-0214


LIGHT DISTRIBUTION CURVE

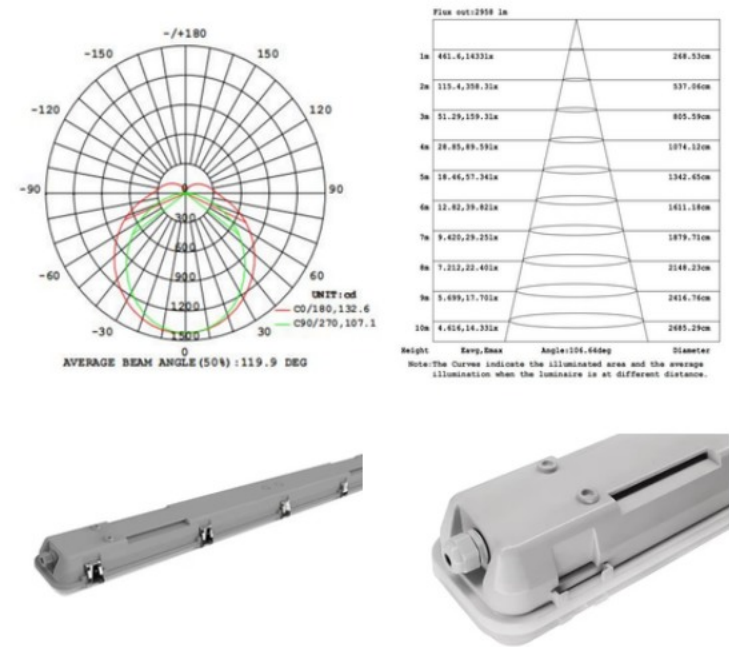

FEATURES & BENEFIT


|                         |                            |
|-------------------------|----------------------------|
| Materials of Optics     | Anti Uv PC                 |
| Materials of Housing    | Aluminum                   |
| Certificates            | CE(EMC) LVD RoHS CB        |
| Mounting type           | Suspension/Surface mounted |
| Mounting location       | Ceiling                    |
| Application environment | Parking and indoor         |
| IP Rating               | IP65                       |


INSTALLATION & ACCESSORIES

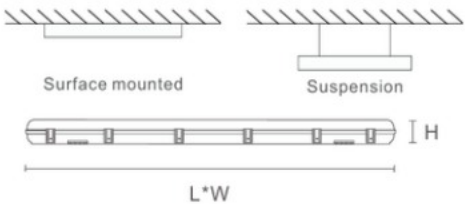

TECHNICAL DATA

| Item No.    | Power | Voltage  | Color temperature | Luminous efficiency | Size           |
|-------------|-------|----------|-------------------|---------------------|----------------|
| ESH-AC-0214 | Tube  | 220-240V | 4000K/6500K       | -                   | 1265*113*86 mm |

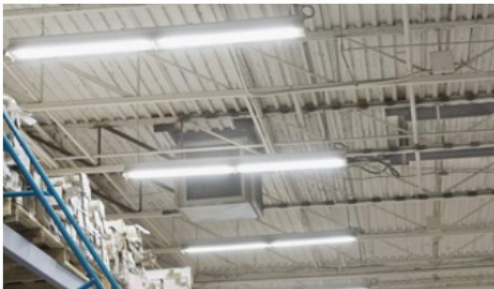



# TRACK LIGHT



In commercial lighting, the application of rail lights is more common, compared with a single independent downlight and spotlights, rail lights can be rotated longitudinally, multi-angle irradiation, easy to adjust the installation position of the outstanding advantages.

1. Guide spotlights, precise control of light, focus highlights of items and areas.
2. To meet the basic, key lighting needs, but also to provide lighting art decoration for the lighting space.
3. With thick aluminum track, snap installation, easy to disassemble.
4. The structure of the lamp is often composed of COB light source + optical lens, which is accurate in light control and better presents the texture and details of the irradiated object.



ESH-AC-0215-A01




ESH-AC-0215-A02



Colour temperature  
selectable: 3K, 4K & 6.5K

# ESH-AC-0215


## LIGHT DISTRIBUTION CURVE

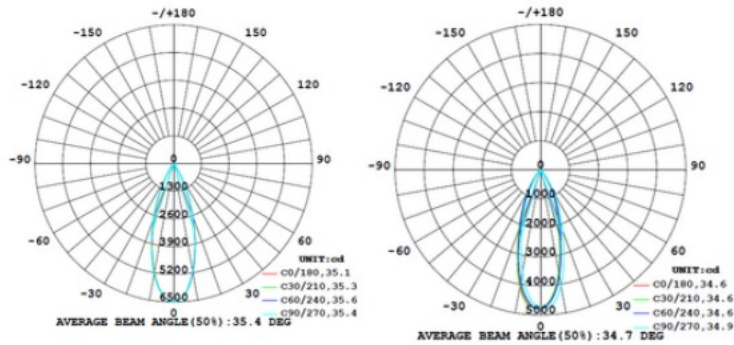

## FEATURES & BENEFIT

|                         |                     |
|-------------------------|---------------------|
| Materials of Optics     | Glass               |
| Materials of Housing    | Aluminum            |
| Certificates            | CE(EMC) LVD RoHS CB |
| Mounting type           | Track mounting      |
| Mounting location       | Ceiling             |
| Application environment | Indoor              |

## INSTALLATION & ACCESSORIES

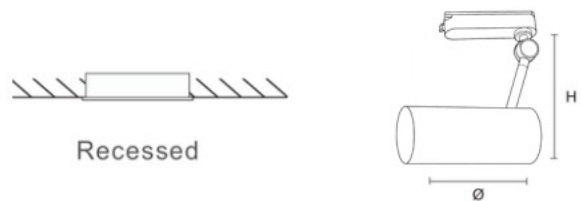

## TECHNICAL DATA

| Item No.        | Body colour | Power | Voltage  | Color temperature | Luminous efficiency | Size      |
|-----------------|-------------|-------|----------|-------------------|---------------------|-----------|
| ESH-AC-0215-A01 | Black/White | 30W   | 220-240V | 3000K/4000K/6500K | 60-70 lm/w          | 70*160 mm |
| ESH-AC-0215-A02 | Black/White | 38W   | 220-240V | 3000K/4000K/6500K | 65-75 lm/w          | 80*160 mm |

## INSTALLATION OPTIONS





# STRIP LIGHT



Widely used in residential décor (bedrooms, living rooms) and commercial environments (bars, retail stores). In home-lighting applications, the LED strip light can create soft, customizable ambience to enhance comfort and elevate interior design. In commercial spaces, its flexible installation, high brightness, and adjustable color temperature help highlight products and create eye-catching visual effects. With a high IP rating for selected models, it is moisture-resistant, dustproof, long-lasting, highly efficient, environmentally friendly, and energy-saving.





ESH-AC-0216-A04



ESH-AC-0216-A01





ESH-AC-0216-A05



ESH-AC-0216-A02


ESH-AC-0216

LIGHT DISTRIBUTION CURVE

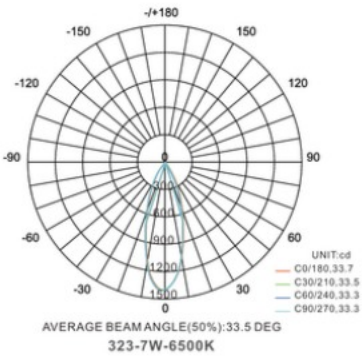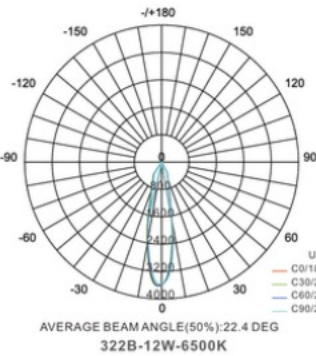

FEATURES & BENEFIT

|                         |                     |
|-------------------------|---------------------|
| Materials of Optics     | Anti Uv PC          |
| Type of connection      | Screwless terminal  |
| Certificates            | CE(EMC) LVD RoHS CB |
| Mounting location       | Ceiling/wall        |
| Application environment | Indoor              |
| IP Rating               | IP65                |

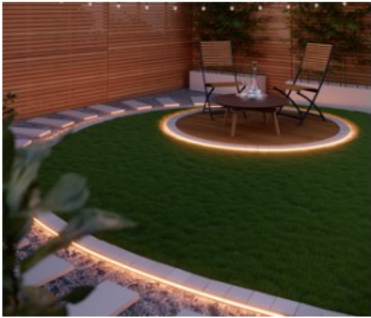


TECHNICAL DATA

| Item No.        | Power | Voltage  | Color temperature | IP Rating | Luminous efficieny | Meter Quantity |
|-----------------|-------|----------|-------------------|-----------|--------------------|----------------|
| ESH-AC-0216-A01 |       | 24V      | 3000K/4000K/6500K | IP20      | 100-105 lm/w       | 120D ea/m      |
| ESH-AC-0216-A02 |       | 220-240V | 3000K/4000K/6500K | IP65      | 90-95 lm/w         | 120D ea/m      |
| ESH-AC-0216-A03 |       | 220-240V | 3000K/4000K/6500K | IP65      | 115-120 lm/w       | 180D ea/m      |
| ESH-AC-0216-A04 |       | 24V      | 3000K/4000K/6500K | IP20      | 95-100 lm/w        | 320D ea/m      |
| ESH-AC-0216-A05 |       | 24V      | 3000K/4000K/6500K | IP65      | 90 lm/w            | 120D ea/m      |



ESH-AC-0217

LIGHT DISTRIBUTION CURVE

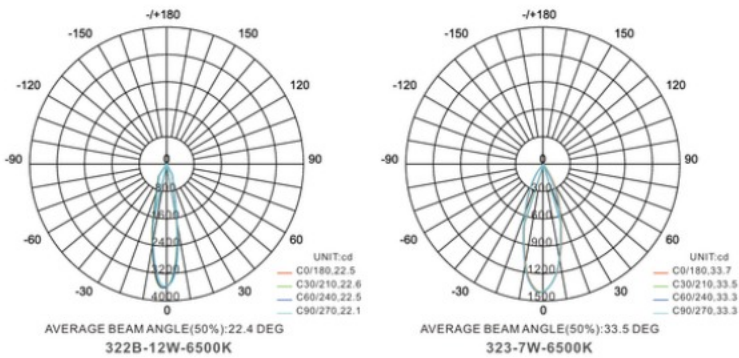

FEATURES & BENEFIT

|                         |                     |
|-------------------------|---------------------|
| Materials of Optics     | Anti Uv PC          |
| Type of connection      | Screwless terminal  |
| Certificates            | CE(EMC) LVD RoHS CB |
| Mounting location       | Ceiling/wall        |
| Application environment | Indoor/Outdoor      |
| IP Rating               | IP65                |




TECHNICAL DATA

| Item No.        | Power | Voltage  | Color temperature | Luminous efficieny | Size      |
|-----------------|-------|----------|-------------------|--------------------|-----------|
| ESH-AC-0217-A01 |       | 220-240V | 3000K/4000K       | 45-50 lm/w         | 8 mm*50 m |
| ESH-AC-0217-A02 |       | 220-240V | 3000K/4000K       | 45-50 lm/w         | 8 mm*50 m |
| ESH-AC-0217-A03 |       | 220-240V | 3000K/4000K       | 45-50 lm/w         | 8 mm*50 m |



ESH-AC-0218

LIGHT DISTRIBUTION CURVE

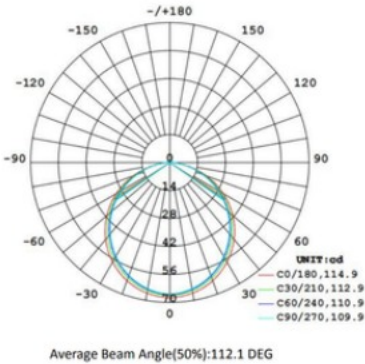

FEATURES & BENEFIT

|                         |                     |
|-------------------------|---------------------|
| Materials of Optics     | Anti Uv PC          |
| Type of connection      | Screwless terminal  |
| Certificates            | CE(EMC) LVD RoHS CB |
| Mounting location       | Wall/Floor          |
| Application environment | Outdoor             |
| Operating Temp.         | -20 - 45°C          |
| IP Rating               | IP67                |



Clips & Alum. Carrier:L20\*W19\*H18mm



TECHNICAL DATA


| Item No.    | Power | Voltage | Color temperature | Luminous efficiency | Size     |
|-------------|-------|---------|-------------------|---------------------|----------|
| ESH-AC-0218 | 12W/M | 24V     | 4000K             | 630 lm/M            | 10M/Roll |

INSTALLATION OPTIONS

Waterproof Connector:



Top Bending  
R>150mm

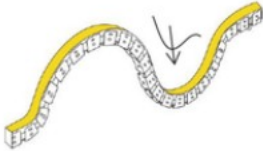

Mold able Carrier





# HIGH BAY



Widely used in industrial Spaces (workshops, warehouses) and large venues (parking lots, stadiums). In the industrial lighting space, the mining lamp can provide enough light to ensure that the production process is not easy to go wrong and reduce the risk of safety accidents. In the large place lighting space, its IP index is high, waterproof and dustproof, long service life, high luminous efficiency, environmental protection and energy saving.








High luminous efficiency



Waterproof and dustproof

ESH-AC-0219



LIGHT DISTRIBUTION CURVE

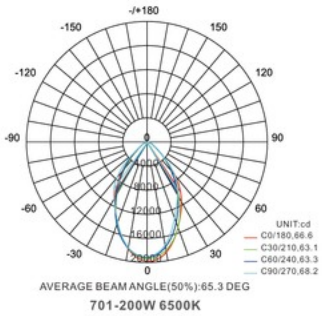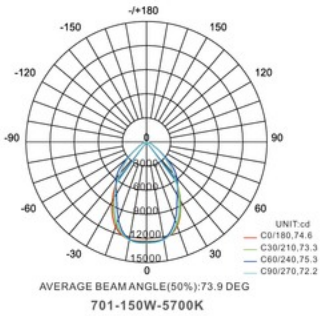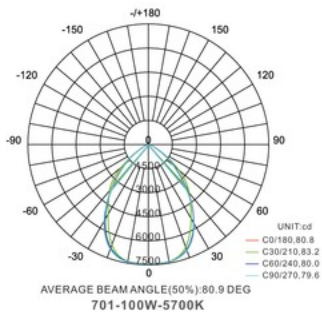

FEATURES & BENEFIT

|                         |                     |
|-------------------------|---------------------|
| Materials of Optics     | Anti Uv PC          |
| Materials of Housing    | Aluminum            |
| Certificates            | CE(EMC) LVD RoHS CB |
| Mounting type           | Suspension          |
| Mounting location       | Ceiling             |
| Application environment | Indoor/Outdoor      |
| IP Rating               | IP65                |

INSTALLATION & ACCESSORIES



TECHNICAL DATA

| Item No.        | Power | Voltage  | Color temperature | Luminous efficiency | Size       |
|-----------------|-------|----------|-------------------|---------------------|------------|
| ESH-AC-0219-A01 | 100W  | 220-240V | 6500K             | 120-160 lm/w        | 250*160 mm |
| ESH-AC-0219-A02 | 150W  | 220-240V | 6500K             | 120-160 lm/w        | 300*170 mm |
| ESH-AC-0219-A03 | 200W  | 220-240V | 6500K             | 120-160 lm/w        | 350*180 mm |




High luminous efficiency




IP65  
Waterproof and dustproof

ESH-AC-0220


LIGHT DISTRIBUTION CURVE



H00215 (100W/60°)  
H00218 (150W/60°)  
H00221 (200&240W/60°)



H00214 (100W/85°)  
H00217 (150W/85°)  
H00220 (200&240W/85°)



H00213 (100W/115°)  
H00216 (150W/115°)  
H00219 (200&240W/115°)



Loop mounting




Ceiling mounting

FEATURES & BENEFIT

|                         |                     |
|-------------------------|---------------------|
| Materials of Optics     | Anti Uv PC          |
| Materials of Housing    | Aluminum            |
| Certificates            | CE(EMC) LVD RoHS CB |
| Mounting type           | Suspension          |
| Mounting location       | Ceiling             |
| Application environment | Indoor/Outdoor      |
| IP Rating               | IP65                |

INSTALLATION & ACCESSORIES




Suspension



TECHNICAL DATA

| Item No.    | Power | Voltage  | Color temperature | Luminous efficacy | Size       |
|-------------|-------|----------|-------------------|-------------------|------------|
| ESH-AC-0220 | 200W  | 220-240V | 3000K/4000K       | 32000 lm          | 330*175 mm |

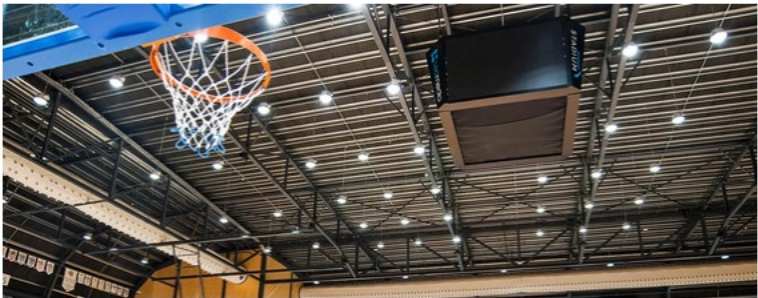





# FLOOD LIGHT



The casting light can achieve different lighting effects by adjusting the brightness, color and irradiation Angle of the light, which is mainly used in stage performances, architectural lighting and landscape lighting.


**Benefit:**

- 1.Large Angle luminescence.
- 2.Die-cast aluminum, integrated molding, sealed glass lamp shade, protection class IP65.
- 3.Low energy consumption, high brightness, long service life.
- 4.Good heat dissipation performance of the lamp body, reducing the probability of failure



ESH-FL-0039


LIGHT DISTRIBUTION CURVE

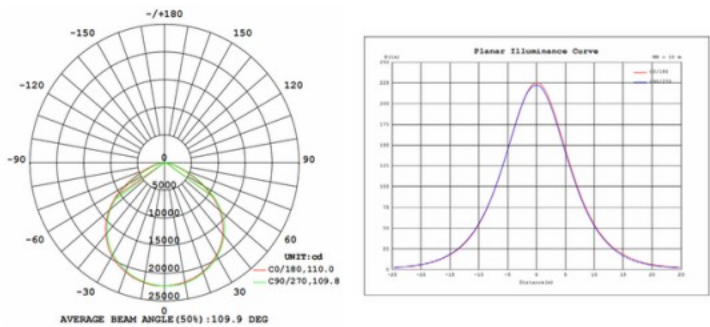

FEATURES & BENEFIT

|                         |                          |
|-------------------------|--------------------------|
| Materials of Optics     | Glass                    |
| Materials of Housing    | Aluminum                 |
| Certificates            | CE(EMC) LVD RoHS CB      |
| Mounting type           | Suspension               |
| Mounting location       | Underground/Wall/Ceiling |
| Application environment | Indoor/Outdoor           |
| IP Rating               | IP65                     |

INSTALLATION & ACCESSORIES

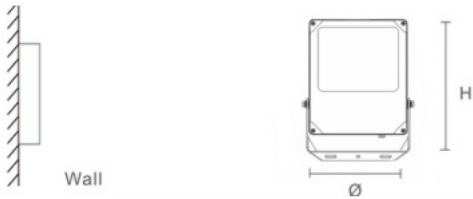


TECHNICAL DATA

| Item No.    | Power | Voltage  | Color temperature | Luminous efficacy | Size          |
|-------------|-------|----------|-------------------|-------------------|---------------|
| ESH-FL-0039 | 200W  | 220-240V | 3000K/4000K       | 27921 lm          | 456*390*55 mm |







# WALL LIGHT

In a wide variety of lamps, ceiling lamps are loved by consumers because of:

1. Bright light, simple atmosphere
2. Low power, but high brightness, economic and practical
3. The way of installation and replacement is convenient, the lamp is mainly installed on the ceiling, which has less impact on the height of the space and does not occupy space

Ra>80, rich style, no video flash Often used in home lighting, to create a comfortable and comfortable home environment





ESH-WL-0087




ESH-WL-0087



IP65  
Waterproof and dustproof

ESH-WL-0087


LIGHT DISTRIBUTION CURVE

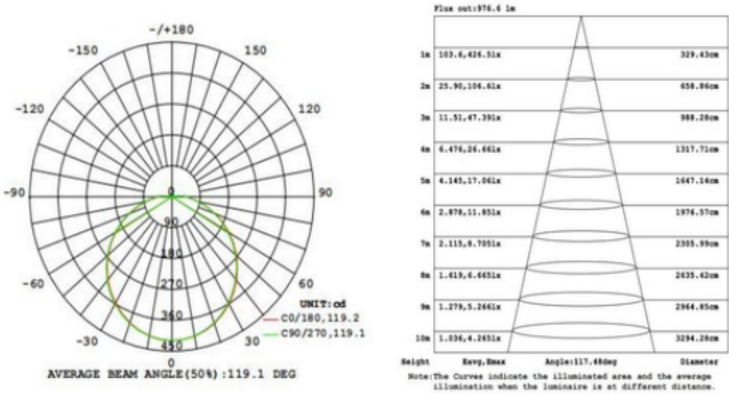

FEATURES & BENEFIT


|                         |                     |
|-------------------------|---------------------|
| Materials of Optics     | Anti Uv PC          |
| Materials of Housing    | Aluminum            |
| Certificates            | CE(EMC) LVD RoHS CB |
| Mounting type           | Suspension          |
| Mounting location       | Ceiling             |
| Application environment | Indoor/Outdoor      |
| IP Rating               | IP65                |

INSTALLATION & ACCESSORIES

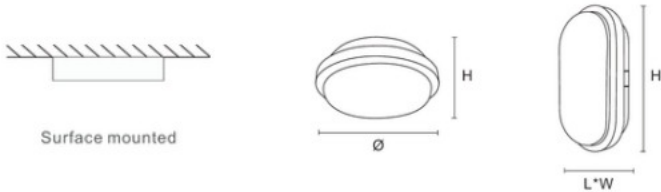

TECHNICAL DATA


| Item No.        | Power | Voltage  | Color temperature | Luminous efficacy | Size            |
|-----------------|-------|----------|-------------------|-------------------|-----------------|
| ESH-WL-0087-A01 |       | 220-240V | 3000K/4000K       | 100-120 lm/w      | 220*66.5 mm     |
| ESH-WL-0087-A02 |       | 220-240V | 3000K/4000K       | 100-120 lm/w      | 144*270*68.5 mm |

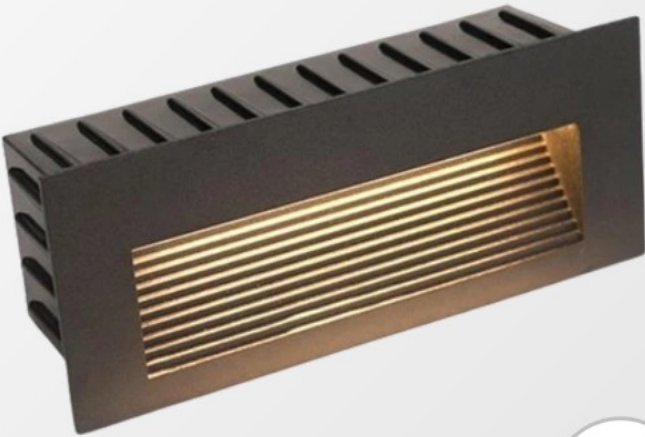

IP66  
Water and dust resistant

ESH-WL-0088

LIGHT DISTRIBUTION CURVE

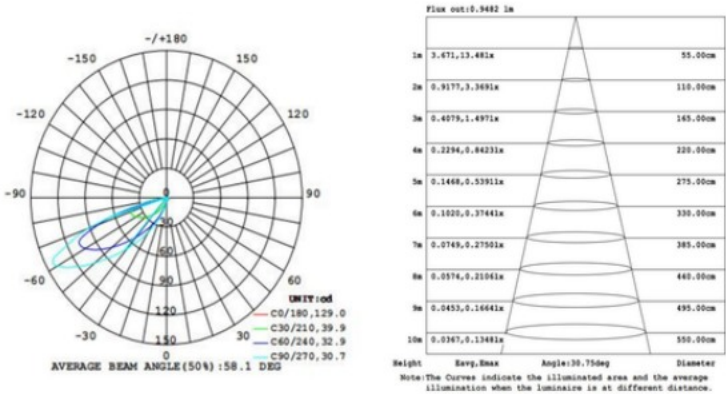

FEATURES & BENEFIT

|                         |                     |
|-------------------------|---------------------|
| Materials of Optics     | PC                  |
| Materials of Housing    | Aluminum            |
| Certificates            | CE(EMC) LVD RoHS CB |
| Mounting type           | Recessed            |
| Mounting location       | Wall/Step           |
| Application environment | Indoor/Outdoor      |
| IP Rating               | IP65                |

INSTALLATION & ACCESSORIES



TECHNICAL DATA

| Item No.    | Power | Voltage  | Color temperature | Luminous efficacy | Size         |
|-------------|-------|----------|-------------------|-------------------|--------------|
| ESH-WL-0088 |       | 220-240V | 3000K             | 70-80 lm/w        | 135*50*55 mm |







IP65  
Water and dust resistant

ESH-WL-0089


LIGHT DISTRIBUTION CURVE

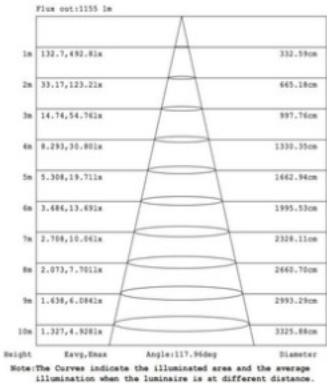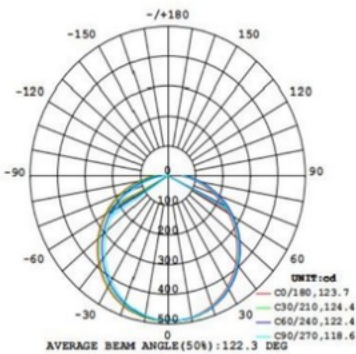

FEATURES & BENEFIT

|                         |                     |
|-------------------------|---------------------|
| Materials of Optics     | Anti Uv PC          |
| Materials of Housing    | Aluminum            |
| Certificates            | CE(EMC) LVD RoHS CB |
| Mounting type           | Wall mounted        |
| Mounting location       | Wall                |
| Application environment | Indoor/Outdoor      |
| IP Rating               | IP65                |

INSTALLATION & ACCESSORIES

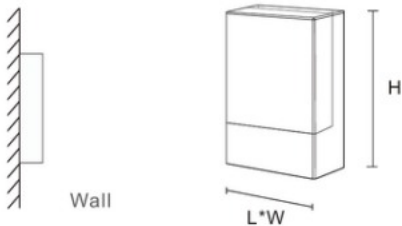

TECHNICAL DATA



| Item No.    | Power | Voltage  | Color temperature | Luminous efficacy | Size          |
|-------------|-------|----------|-------------------|-------------------|---------------|
| ESH-WL-0089 |       | 220-240V | 3000K             | 120 lm/w          | 160*50*200 mm |



IP65  
Water and dust resistant

ESH-WL-0090


LIGHT DISTRIBUTION CURVE

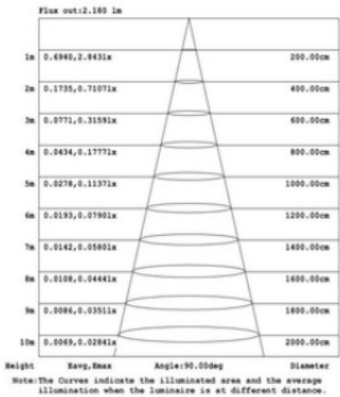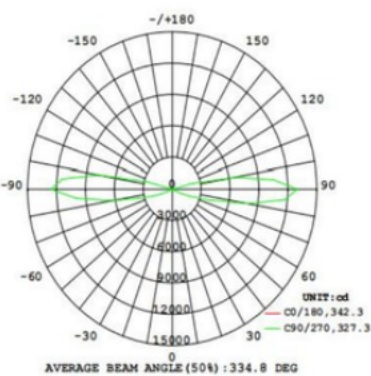

FEATURES & BENEFIT

|                         |                     |
|-------------------------|---------------------|
| Materials of Optics     | Anti Uv PC          |
| Materials of Housing    | Aluminum            |
| Certificates            | CE(EMC) LVD RoHS CB |
| Mounting type           | Wall mounted        |
| Mounting location       | Wall                |
| Application environment | Indoor/Outdoor      |
| IP Rating               | IP65                |

INSTALLATION & ACCESSORIES

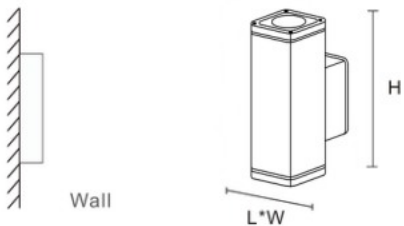

TECHNICAL DATA



| Item No.        | Power | Voltage  | Color temperature | Luminous efficacy | Size          |
|-----------------|-------|----------|-------------------|-------------------|---------------|
| ESH-WL-0090-A01 |       | 220-240V | 3000K             | 70-80 lm/w        | 90*135*150 mm |
| ESH-WL-0090-A02 |       | 220-240V | 3000K             | 70-80 lm/w        | 90*135*200 mm |



IP65  
Water and dust resistant

ESH-WL-0091


LIGHT DISTRIBUTION CURVE

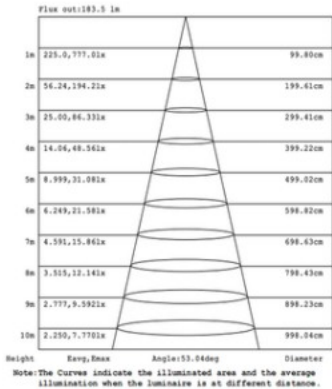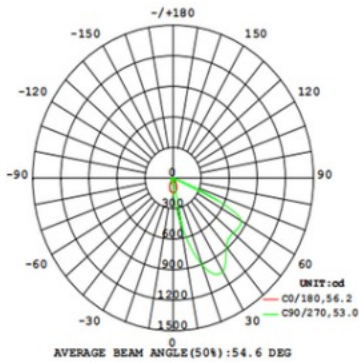

FEATURES & BENEFIT

|                         |                     |
|-------------------------|---------------------|
| Materials of Optics     | Anti Uv PC/Glass    |
| Materials of Housing    | Aluminum            |
| Certificates            | CE(EMC) LVD RoHS CB |
| Chips                   | LED component       |
| Mounting type           | Wall mounted        |
| Mounting location       | Wall                |
| Application environment | Indoor/Outdoor      |
| IP Rating               | IP65                |

INSTALLATION & ACCESSORIES

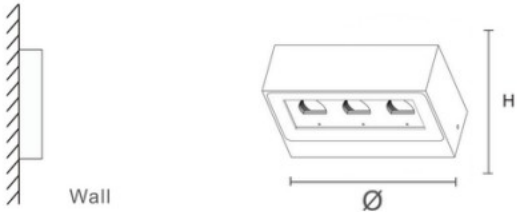

TECHNICAL DATA



| Item No.    | Power | Voltage  | Color temperature | Luminous efficacy | Size      |
|-------------|-------|----------|-------------------|-------------------|-----------|
| ESH-WL-0091 | 15W   | 220-240V | 3000K             | 55 lm/w           | 205*60 mm |



IP65  
Water and dust resistant

ESH-WL-0092


LIGHT DISTRIBUTION CURVE

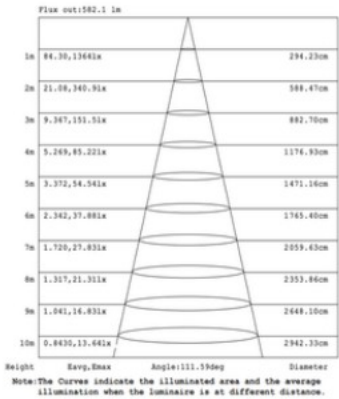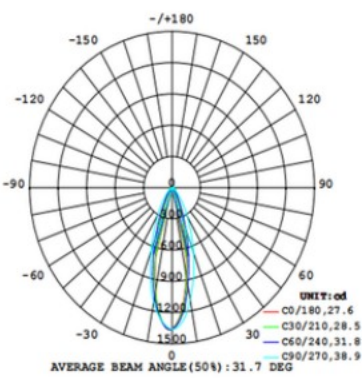

FEATURES & BENEFIT

|                         |                     |
|-------------------------|---------------------|
| Materials of Optics     | Glass               |
| Materials of Housing    | Aluminum            |
| Certificates            | CE(EMC) LVD RoHS CB |
| Chips                   | LED component       |
| Mounting type           | Surface mounted     |
| Mounting location       | Wall                |
| Application environment | Indoor/Outdoor      |
| IP Rating               | IP65                |

INSTALLATION & ACCESSORIES

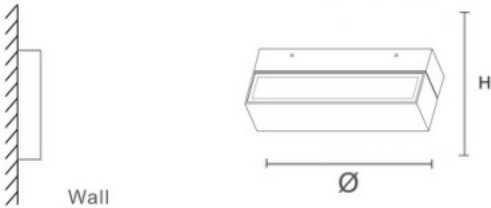

TECHNICAL DATA

| Item No.    | Power | Voltage  | Color temperature | Luminous efficacy | Size         |
|-------------|-------|----------|-------------------|-------------------|--------------|
| ESH-WL-0092 |       | 220-240V | 3000K             | 88 lm/w           | 231*49*77 mm |





ESH-WL-0093-A01





ESH-WL-0093-A02



ESH-WL-0093-A03

ESH-WL-0093


LIGHT DISTRIBUTION CURVE

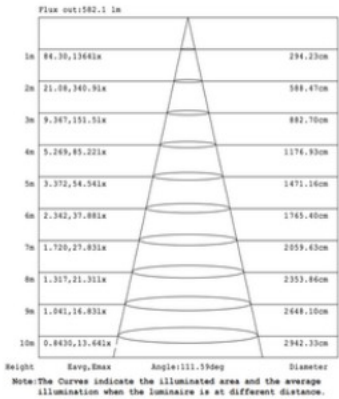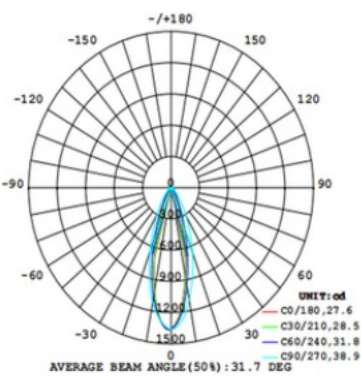

FEATURES & BENEFIT


|                         |                     |
|-------------------------|---------------------|
| Materials of Optics     | Glass               |
| Materials of Housing    | Aluminum            |
| Certificates            | CE(EMC) LVD RoHS CB |
| Mounting type           | Surface mounted     |
| Mounting location       | Wall                |
| Application environment | Indoor/Outdoor      |
| IP Rating               | IP65                |

INSTALLATION & ACCESSORIES

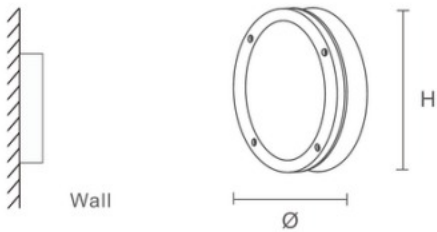

TECHNICAL DATA



| Item No.        | Power | Voltage  | Color temperature | Luminous efficacy | Size      |
|-----------------|-------|----------|-------------------|-------------------|-----------|
| ESH-WL-0093-A01 |       | 220-240V | 3000K             | 90-100 lm/w       | 220*71 mm |
| ESH-WL-0093-A02 |       | 220-240V | 3000K             | 90-100 lm/w       | 220*73 mm |
| ESH-WL-0093-A03 |       | 220-240V | 3000K             | 90-100 lm/w       | 220*76 mm |



IP65  
Water and dust resistant

ESH-WL-0094


LIGHT DISTRIBUTION CURVE

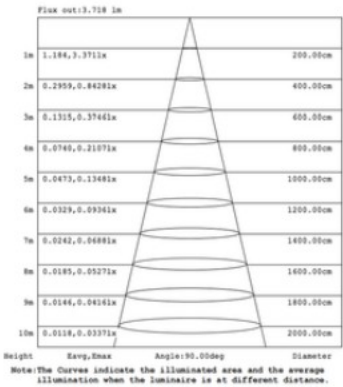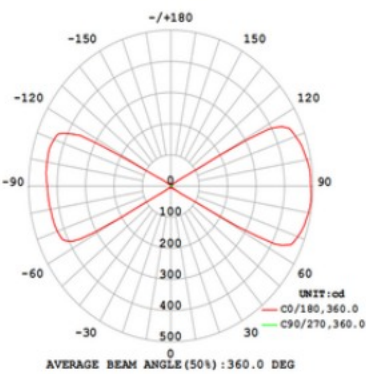

FEATURES & BENEFIT


|                         |                     |
|-------------------------|---------------------|
| Materials of Optics     | Glass               |
| Materials of Housing    | Aluminum            |
| Certificates            | CE(EMC) LVD RoHS CB |
| Mounting type           | Surface mounted     |
| Mounting location       | Wall                |
| Application environment | Indoor/Outdoor      |
| IP Rating               | IP65                |

INSTALLATION & ACCESSORIES

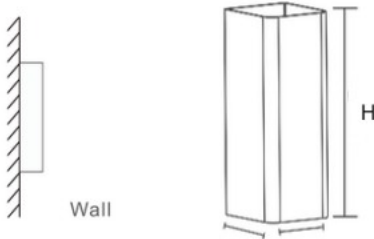

TECHNICAL DATA


| Item No.    | Power  | Voltage  | Color temperature | Luminous efficacy | Size          |
|-------------|--------|----------|-------------------|-------------------|---------------|
| ESH-WL-0094 | 2*6.5W | 220-240V | 3000K             | 54 lm/w           | 105*94*240 mm |



IP65  
Water and dust resistant

ESH-WL-0095


LIGHT DISTRIBUTION CURVE

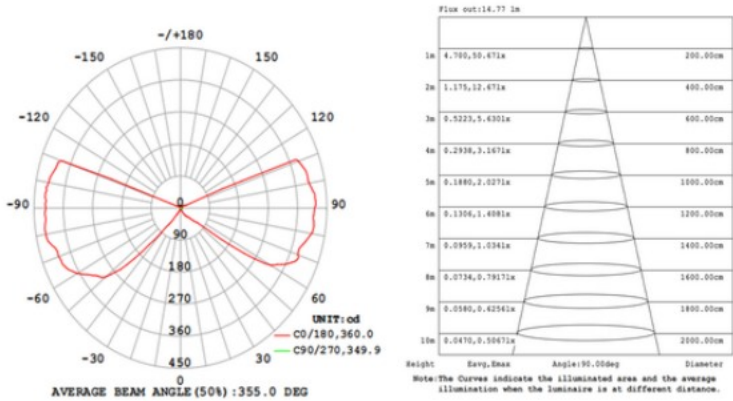

FEATURES & BENEFIT

|                         |                     |
|-------------------------|---------------------|
| Materials of Optics     | Glass               |
| Materials of Housing    | Aluminum            |
| Certificates            | CE(EMC) LVD RoHS CB |
| Mounting type           | Surface mounted     |
| Mounting location       | Wall                |
| Application environment | Indoor/Outdoor      |
| IP Rating               | IP65                |

INSTALLATION & ACCESSORIES

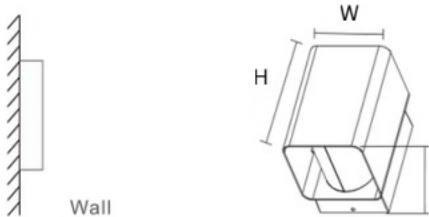

TECHNICAL DATA



| Item No.    | Power  | Voltage  | Color temperature | Luminous efficacy | Size           |
|-------------|--------|----------|-------------------|-------------------|----------------|
| ESH-WL-0095 | 2*6.5W | 220-240V | 3000K             | 76 lm/w           | 127*104*138 mm |



IP65  
Water and dust resistant

ESH-WL-0096


LIGHT DISTRIBUTION CURVE

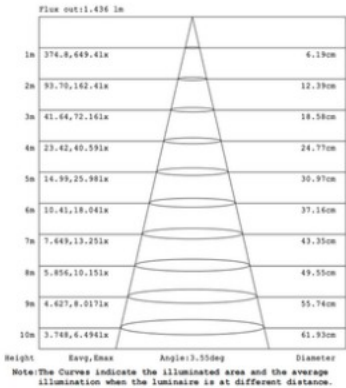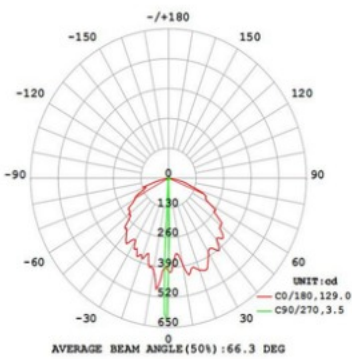

FEATURES & BENEFIT

|                         |                     |
|-------------------------|---------------------|
| Materials of Optics     | Glass               |
| Materials of Housing    | Aluminum            |
| Certificates            | CE(EMC) LVD RoHS CB |
| Chips                   | LED component       |
| Mounting type           | Surface mounted     |
| Mounting location       | Wall                |
| Application environment | Indoor/Outdoor      |
| IP Rating               | IP65                |

INSTALLATION & ACCESSORIES

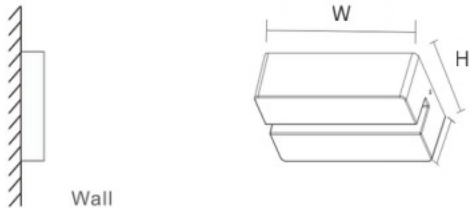

TECHNICAL DATA

| Item No.    | Power  | Voltage  | Color temperature | Luminous efficacy | Size         |
|-------------|--------|----------|-------------------|-------------------|--------------|
| ESH-WL-0096 | 2*6.5W | 220-240V | 3000K             | 48.6 lm/w         | 155*90*46 mm |





# LAWN LIGHT

In a wide variety of outdoor lighting options, lawn lights are favored by consumers because of:

1. Soft and pleasant illumination, enhancing the beauty of gardens and landscapes
2. Energy-efficient performance with high brightness — both eco-friendly and economical
3. Easy installation and maintenance, suitable for lawns, pathways, and flower beds

With  $Ra > 80$ , rich styles, and no flicker, lawn lights are often used in gardens, parks, and villas to create a warm, inviting outdoor atmosphere while highlighting the natural beauty of the surroundings.







ESH-UG-0006

ESH-UG-0006

ESH-UG-0006

ESH-UG-0006


LIGHT DISTRIBUTION CURVE

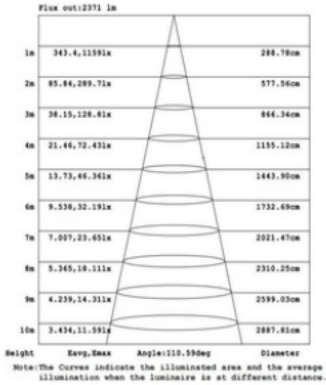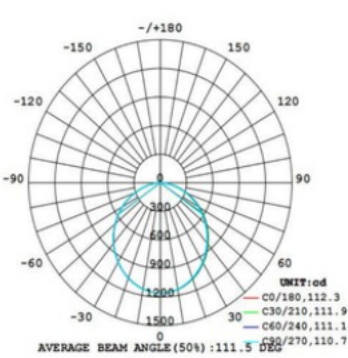

FEATURES & BENEFIT

|                         |                     |
|-------------------------|---------------------|
| Materials of Optics     | Glass               |
| Materials of Housing    | Aluminum            |
| Certificates            | CE(EMC) LVD RoHS CB |
| Mounting type           | Put                 |
| Mounting location       | Lawn                |
| Application environment | Indoor/outdoor      |
| IP Rating               | IP65                |

INSTALLATION & ACCESSORIES

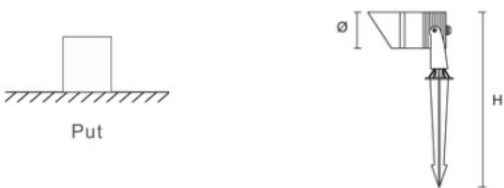


TECHNICAL DATA

| Item No.        | Power | Voltage  | Color temperature | Luminous efficiency | Size          |
|-----------------|-------|----------|-------------------|---------------------|---------------|
| ESH-UG-0006-A01 |       | 220-240V | 3000K             | 100 lm/w            | 50*125*292 mm |
| ESH-UG-0006-A02 |       | 220-240V | 3000K             | 100 lm/w            | 64*138*310 mm |
| ESH-UG-0006-A03 |       | 220-240V | 3000K             | 100 lm/w            | 64*138*310 mm |
| ESH-UG-0006-A04 |       | 220-240V | 3000K             | 100 lm/w            | 64*185*385 mm |

ESH-UG-0007




LIGHT DISTRIBUTION CURVE

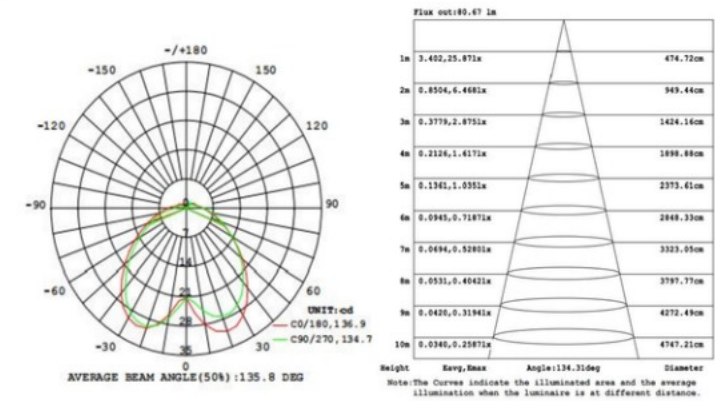

FEATURES & BENEFIT

|                         |                     |
|-------------------------|---------------------|
| Materials of Optics     | PMMA                |
| Materials of Housing    | Aluminum            |
| Certificates            | CE(EMC) LVD RoHS CB |
| Mounting type           | Put                 |
| Mounting location       | Lawn                |
| Application environment | Indoor/outdoor      |
| IP Rating               | IP65                |

INSTALLATION & ACCESSORIES



TECHNICAL DATA


| Item No.    | Power | Voltage | Color temperature | Luminous efficiency | Size       |
|-------------|-------|---------|-------------------|---------------------|------------|
| ESH-UG-0007 |       | 24V     | 3000K             | 20-30 lm/w          | 18*1064 mm |





ESH-UG-0008



LIGHT DISTRIBUTION CURVE

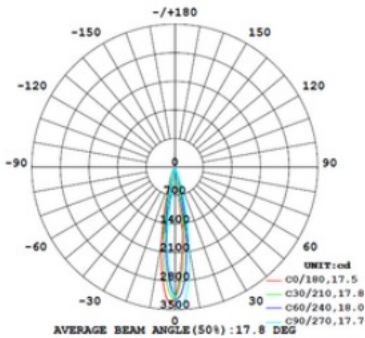

FEATURES & BENEFIT

|                         |                     |
|-------------------------|---------------------|
| Materials of Optics     | Glass               |
| Materials of Housing    | Aluminum            |
| Certificates            | CE(EMC) LVD RoHS CB |
| Mounting type           | Put                 |
| Mounting location       | Underground         |
| Application environment | Indoor/outdoor      |
| IP Rating               | IP65                |

INSTALLATION & ACCESSORIES



TECHNICAL DATA

| Item No.        | Power | Voltage  | Color temperature | Luminous efficiency | Size      |
|-----------------|-------|----------|-------------------|---------------------|-----------|
| ESH-UG-0008-A01 |       | 220-240V | 3000K             | 100 lm/w            | 64*146 mm |
| ESH-UG-0008-A02 |       | 220-240V | 3000K             | 100 lm/w            | 90*170 mm |






ESH-UG-0009



Stereo Light


LIGHT DISTRIBUTION CURVE

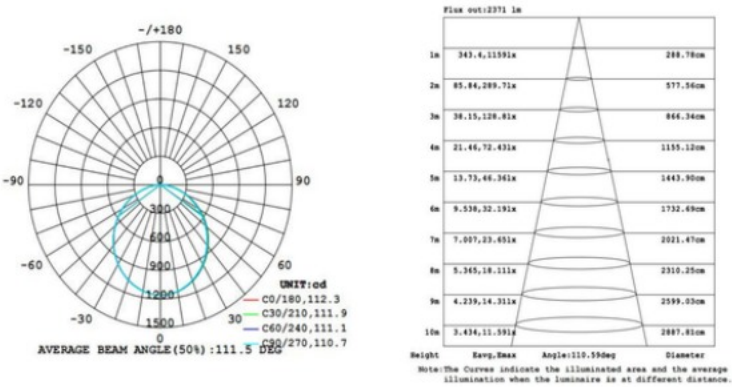

FEATURES & BENEFIT

|                         |                     |
|-------------------------|---------------------|
| Materials of Optics     | Glass               |
| Materials of Housing    | Aluminum            |
| Certificates            | CE(EMC) LVD RoHS CB |
| Mounting type           | Surface mounted     |
| Mounting location       | Ground/Lawn         |
| Application environment | Outdoor             |
| IP Rating               | IP65                |

INSTALLATION & ACCESSORIES

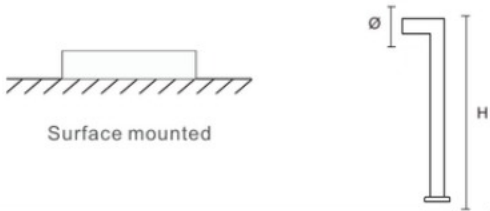

TECHNICAL DATA



| Item No.    | Power | Voltage  | Color temperature | Luminous efficiency | Size               |
|-------------|-------|----------|-------------------|---------------------|--------------------|
| ESH-UG-0009 |       | 220-240V | 3000K             | 80-90 lm/w          | 150*50*100*600 mm  |
| ESH-UG-0009 |       | 220-240V | 3000K             | 80-90 lm/w          | 150*50*100*1000 mm |

ESH-UG-0010



Large irradiation range


LIGHT DISTRIBUTION CURVE

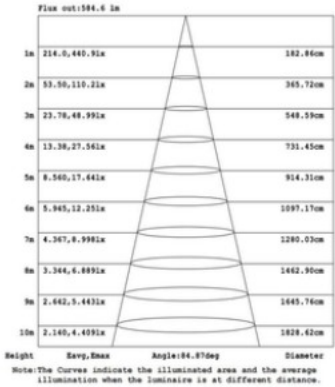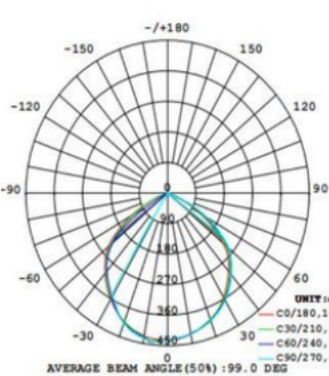

FEATURES & BENEFIT

|                         |                     |
|-------------------------|---------------------|
| Materials of Optics     | Glass               |
| Materials of Housing    | Aluminum            |
| Certificates            | CE(EMC) LVD RoHS CB |
| Mounting type           | Surface mounted     |
| Mounting location       | Ground/Lawn         |
| Application environment | Outdoor             |
| IP Rating               | IP65                |

INSTALLATION & ACCESSORIES



TECHNICAL DATA

| Item No.    | Power | Voltage  | Color temperature | Luminous efficiency | Size              |
|-------------|-------|----------|-------------------|---------------------|-------------------|
| ESH-UG-0010 |       | 220-240V | 3000K             | 80-90 lm/w          | 150*50*100*600 mm |







Bright light effect

ESH-UG-0011


LIGHT DISTRIBUTION CURVE

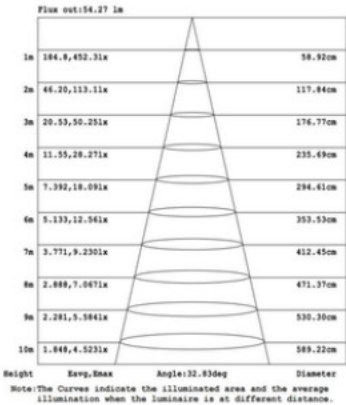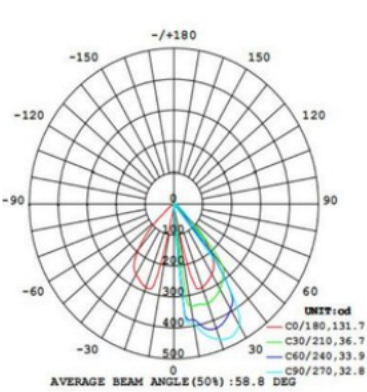

FEATURES & BENEFIT

|                         |                     |
|-------------------------|---------------------|
| Materials of Optics     | Glass               |
| Materials of Housing    | Aluminum            |
| Certificates            | CE(EMC) LVD RoHS CB |
| Mounting type           | Surface mounted     |
| Mounting location       | Ground/Lawn         |
| Application environment | Outdoor             |
| IP Rating               | IP65                |

INSTALLATION & ACCESSORIES

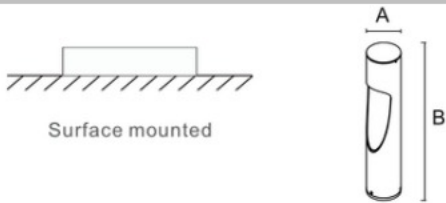

TECHNICAL DATA

| Item No.    | Power | Voltage  | Color temperature | Luminous efficiency | Size       |
|-------------|-------|----------|-------------------|---------------------|------------|
| ESH-UG-0011 |       | 220-240V | 3000K             | 80-90 lm/w          | 120*450 mm |
| ESH-UG-0011 |       | 220-240V | 3000K             | 80-90 lm/w          | 120*600 mm |
| ESH-UG-0011 |       | 220-240V | 3000K             | 80-90 lm/w          | 120*800 mm |




ESH-UG-0012



Stereo light


LIGHT DISTRIBUTION CURVE

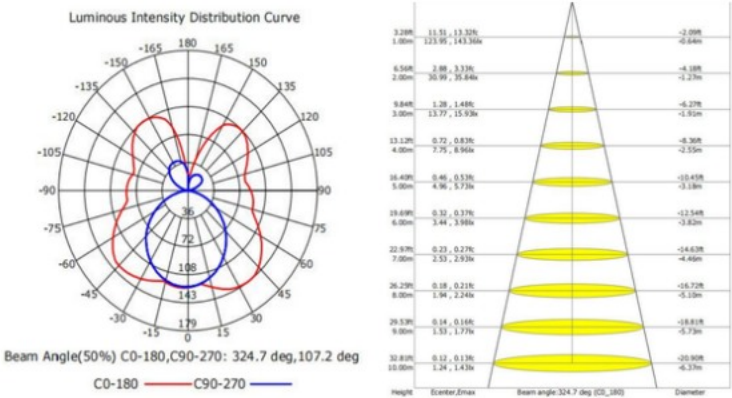

FEATURES & BENEFIT

|                         |                     |
|-------------------------|---------------------|
| Materials of Optics     | Glass               |
| Materials of Housing    | Aluminum            |
| Certificates            | CE(EMC) LVD RoHS CB |
| Mounting type           | Surface mounted     |
| Mounting location       | Ground/Lawn         |
| Application environment | Outdoor             |
| IP Rating               | IP65                |

INSTALLATION & ACCESSORIES

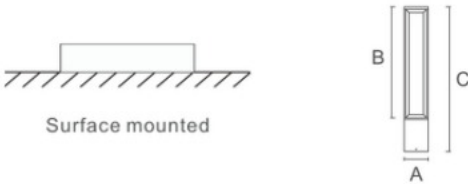

TECHNICAL DATA

| Item No.        | Power | Voltage  | Color temperature | Luminous efficiency | Size           |
|-----------------|-------|----------|-------------------|---------------------|----------------|
| ESH-UG-0012-A01 |       | 220-240V | 3000K             | 80-90 lm/w          | 150*150*600 mm |
| ESH-UG-0012-A02 |       | 220-240V | 3000K             | 80-90 lm/w          | 150*150*900 mm |






Large irradiation range

ESH-UG-0013


LIGHT DISTRIBUTION CURVE

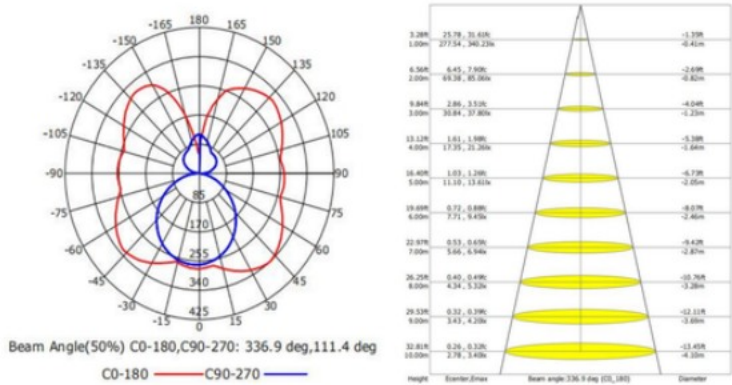

FEATURES & BENEFIT


|                         |                     |
|-------------------------|---------------------|
| Materials of Optics     | PC                  |
| Materials of Housing    | Aluminum            |
| Certificates            | CE(EMC) LVD RoHS CB |
| Mounting type           | Surface mounted     |
| Mounting location       | Ground/Lawn         |
| Application environment | Outdoor             |
| IP Rating               | IP65                |

INSTALLATION & ACCESSORIES

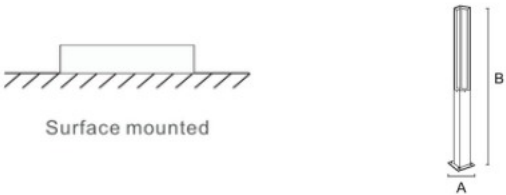

TECHNICAL DATA

| Item No.    | Power | Voltage  | Color temperature | Luminous efficiency | Size            |
|-------------|-------|----------|-------------------|---------------------|-----------------|
| ESH-UG-0013 |       | 220-240V | 3000K             | 80-90 lm/w          | 150*150*2500 mm |

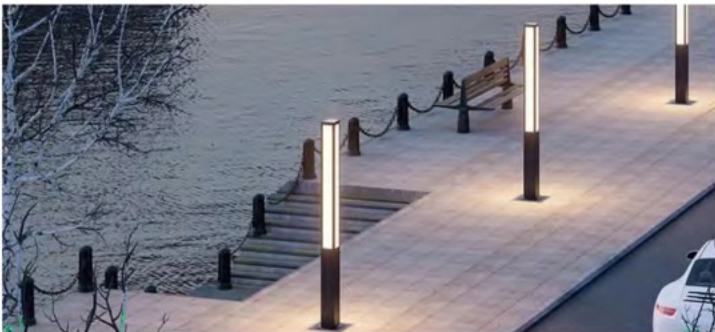




Bright light effect

ESH-UG-0014


LIGHT DISTRIBUTION CURVE

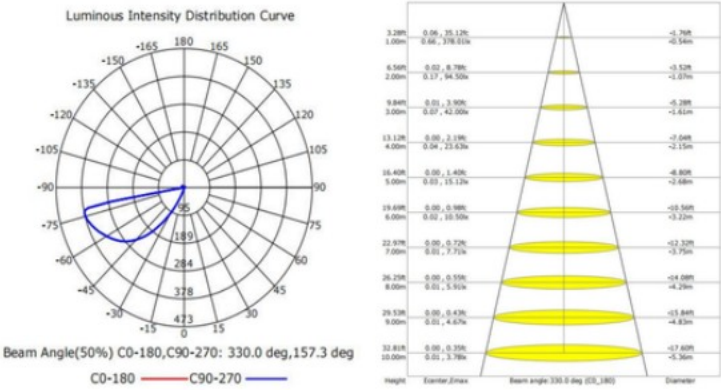

FEATURES & BENEFIT


|                         |                     |
|-------------------------|---------------------|
| Materials of Optics     | PC                  |
| Materials of Housing    | Aluminum            |
| Certificates            | CE(EMC) LVD RoHS CB |
| Mounting type           | Surface mounted     |
| Mounting location       | Ground/Lawn         |
| Application environment | Outdoor             |
| IP Rating               | IP65                |

INSTALLATION & ACCESSORIES

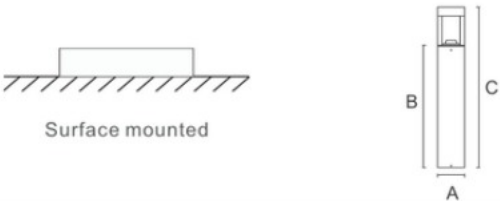

TECHNICAL DATA

| Item No.    | Power | Voltage  | Color temperature | Luminous efficiency | Size           |
|-------------|-------|----------|-------------------|---------------------|----------------|
| ESH-UG-0014 |       | 220-240V | 3000K             | 80-90 lm/w          | 150*400*300 mm |
| ESH-UG-0014 |       | 220-240V | 3000K             | 80-90 lm/w          | 150*400*600 mm |



IP67  
Water and dust resistant

ESH-UG-0015



FEATURES & BENEFIT

|                         |                     |
|-------------------------|---------------------|
| Materials of Optics     | Glass               |
| Materials of Housing    | Aluminum/PC         |
| Certificates            | CE(EMC) LVD RoHS CB |
| Mounting type           | Put                 |
| Mounting location       | Underground         |
| Application environment | outdoor             |
| IP Rating               | IP67                |

INSTALLATION & ACCESSORIES



TECHNICAL DATA

| Item No.        | Power | Voltage  | Color temperature | Luminous efficiency | Size      |
|-----------------|-------|----------|-------------------|---------------------|-----------|
| ESH-UG-0015-A01 |       | 220-240V | 3000K             | 120 lm/w            | 150*90 mm |
| ESH-UG-0015-A02 |       | 220-240V | 3000K             | 120 lm/w            | 180*90 mm |
| ESH-UG-0015-A03 |       | 220-240V | 3000K             | 120 lm/w            | 200*90 mm |





IP65  
Water and dust resistant


ESH-UG-0016



FEATURES & BENEFIT

|                         |                     |
|-------------------------|---------------------|
| Materials of Optics     | Glass               |
| Materials of Housing    | Aluminum/PC         |
| Certificates            | CE(EMC) LVD RoHS CB |
| Mounting type           | Put                 |
| Mounting location       | Underground         |
| Application environment | outdoor             |
| IP Rating               | IP65                |

INSTALLATION & ACCESSORIES



TECHNICAL DATA



| Item No.        | Power | Voltage  | Color temperature | Luminous efficiency | Size     |
|-----------------|-------|----------|-------------------|---------------------|----------|
| ESH-UG-0016-A01 |       | 220-240V | 3000K             | 20 lm/w             | 47*80 mm |
| ESH-UG-0016-A02 |       | 220-240V | 3000K             | 20 lm/w             | 47*80 mm |
| ESH-UG-0016-A03 |       | 220-240V | 3000K             | 20 lm/w             | 56*86 mm |
| ESH-UG-0016-A04 |       | 220-240V | 3000K             | 20 lm/w             | 47*80 mm |
| ESH-UG-0016-A05 |       | 220-240V | 3000K             | 20 lm/w             | 56*86 mm |



ESH-UG-0017



LIGHT DISTRIBUTION CURVE

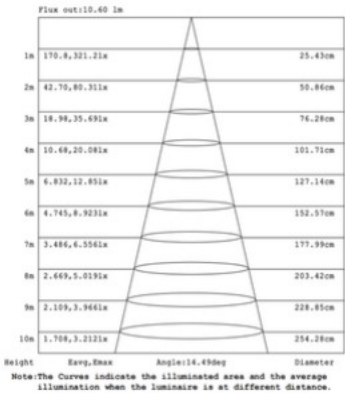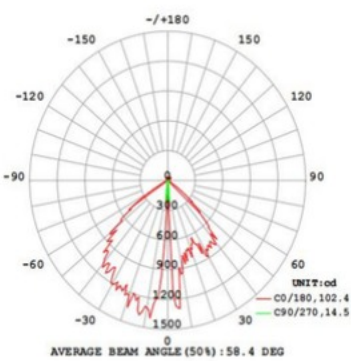

FEATURES & BENEFIT

|                         |                     |
|-------------------------|---------------------|
| Materials of Optics     | Glass               |
| Materials of Housing    | Aluminum            |
| Certificates            | CE(EMC) LVD RoHS CB |
| Mounting type           | Surface mounted     |
| Mounting location       | Ground/Lawn         |
| Application environment | Outdoor             |
| IP Rating               | IP65                |


INSTALLATION & ACCESSORIES




TECHNICAL DATA

| Item No.    | Power | Voltage  | Color temperature | Luminous efficiency | Size          |
|-------------|-------|----------|-------------------|---------------------|---------------|
| ESH-UG-0017 |       | 220-240V | 3000K             | 50 lm/w             | 163*57*650 mm |



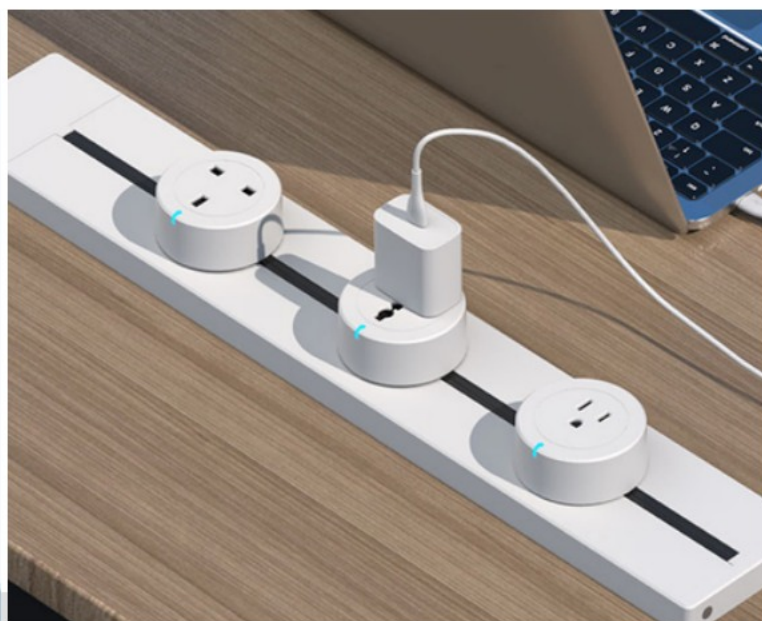

# MOBILE TRACK SOCKET

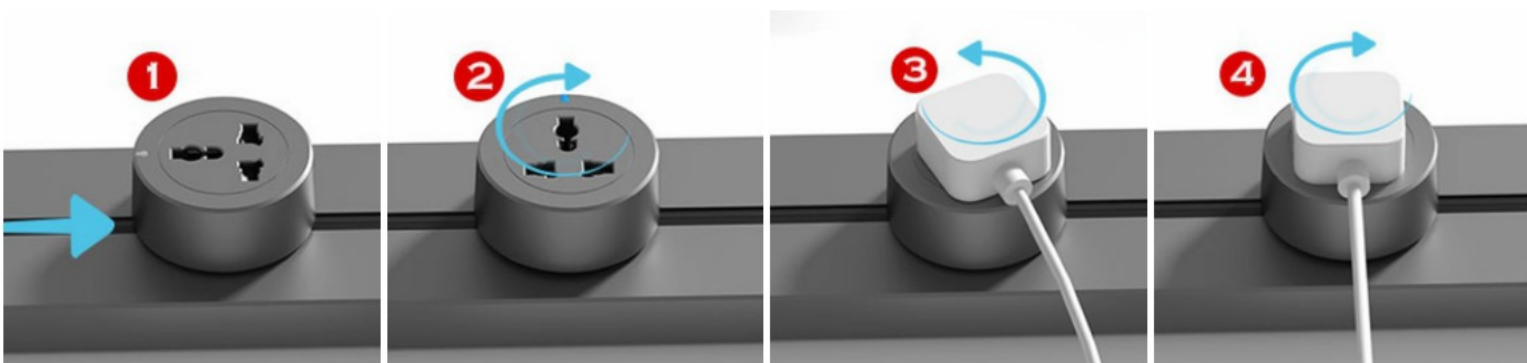

1. Adapter slides freely

2. Rotate to power on

3. Turn counterclockwise to power off

4. Turn clockwise to power on

## TECHNICAL DATA



ESH-AC-0221



ESH-AC-0222



ESH-AC-0223

**S8-A+C Series**  
**USB+TYPEC (5V 2.1A) /SURFACEMOUNTEDTYPE**

**Product size**



86x19x400mm




86x19x500mm




86x19x600mm



86x19x800mm




86x19x1000mm



Copper strip ground for good contact



Rubber seals are Waterproof and dustproof



# POWER SUPPLY

Among various lighting accessories, LED power supplies are highly valued by consumers because of:

1. Stable voltage output, ensuring consistent and reliable performance of LED lights
2. High efficiency and low energy loss, making them durable and cost-effective
3. Compact design and easy installation, suitable for different lighting applications

With high safety protection, long lifespan, and excellent compatibility, LED power supplies are widely used in residential, commercial, and industrial lighting systems — providing the steady energy that keeps every light shining bright and efficient.







ESH-AC-0224

PRODUCT DESCRIPTION

- For luminaire of protection class I and class II
- Isolated / SELV / Built in / Independent (With side caps)
- Input Voltage 220-240 VAC
- Protection: SCP/ OLP/ OVP/ OTP
- DALI dimming,Push Dimming,Corridor mode
- DALI-2 Parts 251, 252 and 253
- Dimming range 1% to 100%
- Output current adjusted via dip-switch
- Efficiency>87% ; Power Factor>0.95
- Suitable for emergency lighting acc. to EN 50172

TECHNICAL DATA

| Item No.    | Power | Input Voltage | Output Current | Output Voltage | Size (L*W*H) |
|-------------|-------|---------------|----------------|----------------|--------------|
| ESH-AC-0224 |       | 220-240V      | 80-500mA       | 2.5-49V        | 88*40*22 mm  |




ESH-AC-0225

PRODUCT DESCRIPTION

- For luminaire of protection class I and class II
- Isolated / SELV / Built in / Independent (With side caps)
- Input Voltage 220-240 VAC
- Protection: SCP/ OLP/ OVP/ OTP
- DALI dimming,Push Dimming,Corridor mode
- DALI-2 Parts 251, 252 and 253
- Dimming range 1% to 100%
- Output current adjusted via dip-switch
- Efficiency>90% ; Power Factor>0.95
- Suitable for emergency lighting acc. to EN 50172

TECHNICAL DATA

| Item No.    | Power | Input Voltage | Output Current | Output Voltage | Size (L*W*H) |
|-------------|-------|---------------|----------------|----------------|--------------|
| ESH-AC-0225 |       | 220-240V      | 150-700mA      | 2.5-49V        | 98*43*22mm   |

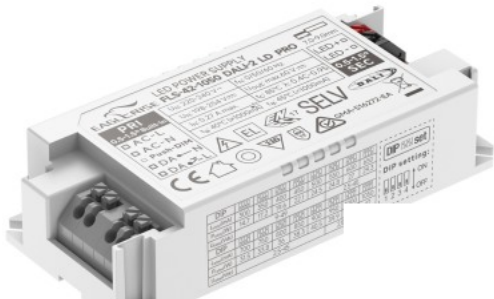

ESH-AC-0226

Technical data pending confirmation

PRODUCT DESCRIPTION

- For luminaire of protection class I and class II
- Isolated / SELV / Built in / Independent (With side caps)
- Input Voltage 220-240 VAC
- Protection: SCP/ OLP/ OVP/ OTP
- DALI dimming,Push Dimming,Corridor mode
- DALI-2 Parts 251, 252 and 253
- Dimming range 1% to 100%
- Output current adjusted via dip-switch
- Efficiency>90% ; Power Factor>0.95
- Suitable for emergency lighting acc. to EN 50172

TECHNICAL DATA

| Item No.    | Power | Input Voltage | Output Current | Output Voltage | Size (L*W*H) |
|-------------|-------|---------------|----------------|----------------|--------------|
| ESH-AC-0226 |       | 220-240V      | 80-500mA       | 2.5-49V        | 88*40*22 mm  |






ESH-AC-0227

PRODUCT DESCRIPTION

- For luminaire of protection class I and class II
- Isolated / SELV / Built in / Independent (With side caps)
- Input Voltage 220-240 VAC
- Protection: SCP/ OLP/ OVP/ OTP
- DALI dimming, Push Dimming, Corridor mode
- DALI-2 Parts 251, 252 and 253
- Dimming range 1% to 100%
- Output current adjusted via dip-switch
- Efficiency>90% ; Power Factor>0.95
- Suitable for emergency lighting acc. to EN 50172

TECHNICAL DATA

| Item No.    | Power | Input Voltage | Output Current | Output Voltage | Size (L*W*H) |
|-------------|-------|---------------|----------------|----------------|--------------|
| ESH-AC-0227 |       | 220-240V      | 900-1500mA     | 2.5-49V        | 113*43*25 mm |

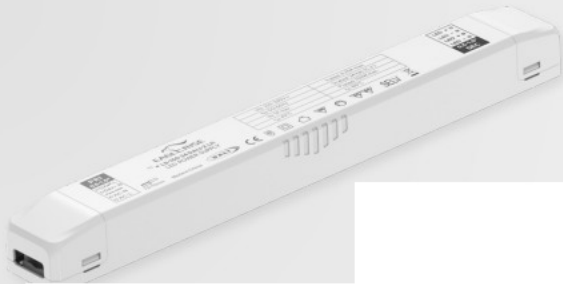

ESH-AC-0228

PRODUCT DESCRIPTION

- For luminaire of protection class I and class II
- Isolated / SELV / Built in / Independent
- Input Voltage 220-240 VAC
- Protection: SCP/ OLP/ OVP/ OTP
- DALI dimming, Push Dimming, Corridor mode
- DALI-2 Parts 251, 252 and 253
- Dimming range 1% to 100%
- Efficiency>91%
- Power Factor>0.95

TECHNICAL DATA

| Item No.    | Power | Input Voltage | Output Current | Output Voltage | Size (L*W*H) |
|-------------|-------|---------------|----------------|----------------|--------------|
| ESH-AC-0228 | 150W  | 220-240V      | 0-6.25A        | 24V            | 318*38*30 mm |



ESH-AC-0229

PRODUCT DESCRIPTION

- High efficiency up to 86%
- Built-in active PFC function
- All-Around Protection: OLP,SCP,OTP
- Compact plastic Case, Free Air Convection
- Waterproof(IP67) and UL Dry/Damp/Wet Location
- Input Surge Protection:2kV line-line
- High Reliability & Long Lifetime

TECHNICAL DATA

| Item No.    | Power | Input Voltage | Output Current | Output Voltage | Size (L*W*H) |
|-------------|-------|---------------|----------------|----------------|--------------|
| ESH-AC-0229 |       | 220-240VAC    | 0-1A           | 24V            | 118*35*26mm  |



ESH-AC-0230

PRODUCT DESCRIPTION

- For luminaries of protection ClassII, SELV, Independent
- Input Voltage 220-240VAC
- Protections: SCP/OLP/OVP/OTP
- Power Factor: ≥0.95 (Typ.)
- Efficiency: ≥88% (Typ.)

TECHNICAL DATA

| Item No.    | Power | Input Voltage | Output Current | Output Voltage | Size (L*W*H) |
|-------------|-------|---------------|----------------|----------------|--------------|
| ESH-AC-0230 |       | 220-240V      | 0-2.5A         | 24V            | 113*43*25 mm |



ESH-AC-0231

PRODUCT DESCRIPTION

- For luminaire of protection class I and class II
- Isolated / SELV / Built in / Independent
- Input Voltage 220-240 VAC
- Protection: SCP/ OLP/ OVP/ OTP
- DALI dimming, Push Dimming, Corridor mode
- DALI-2 Parts 251, 252 and 253
- Dimming range 1% to 100%
- Efficiency>91%
- Power Factor>0.95

TECHNICAL DATA

| Item No.    | Power | Input Voltage | Output Current | Output Voltage | Size (L*W*H) |
|-------------|-------|---------------|----------------|----------------|--------------|
| ESH-AC-0231 | 150W  | 220-240V      | 0-6.25A        | 24V            | 318*38*30 mm |



ESH-AC-0232

PRODUCT DESCRIPTION

- Class II, SELV, Independent
- Input Voltage 220-240VAC
- Protections: SCP/OLP/OVP/OTP
- Power Factor: ≥0.95(Typ.)
- Efficiency: ≥88%@12V;≥89%@24V(Typ.)

TECHNICAL DATA

| Item No.    | Power | Input Voltage | Output Current | Output Voltage | Size (L*W*H) |
|-------------|-------|---------------|----------------|----------------|--------------|
| ESH-AC-0232 |       | 220-240VAC    | 0-3.13A        | 24V            | 168*38*30mm  |



ESH-AC-0233

PRODUCT DESCRIPTION

- Class II, SELV, Independent
- Input Voltage 220-240VAC
- Protections: SCP/OLP/OVP/OTP
- Power Factor:  $\geq 0.95$  (Typ.)
- Efficiency:  $\geq 93\%$  (Typ.)

TECHNICAL DATA

| Item No.    | Power | Input Voltage | Output Current | Output Voltage | Size (L*W*H) |
|-------------|-------|---------------|----------------|----------------|--------------|
| ESH-AC-0233 | 120W  | 220-240V      | 0-5A           | 24V            | 227*38*30mm  |



ESH-AC-0234

PRODUCT DESCRIPTION

- Class II, SELV, Independent
- Input Voltage 220-240VAC
- Protections: SCP/OLP/OVP/OTP
- Power Factor:  $\geq 0.9$ (Typ.)

TECHNICAL DATA

| Item No.    | Power | Input Voltage | Output Current | Output Voltage | Size (L*W*H) |
|-------------|-------|---------------|----------------|----------------|--------------|
| ESH-AC-0234 | 150W  | 220-240V      | 0-6.25A        | 24V            | 227*38*30mm  |