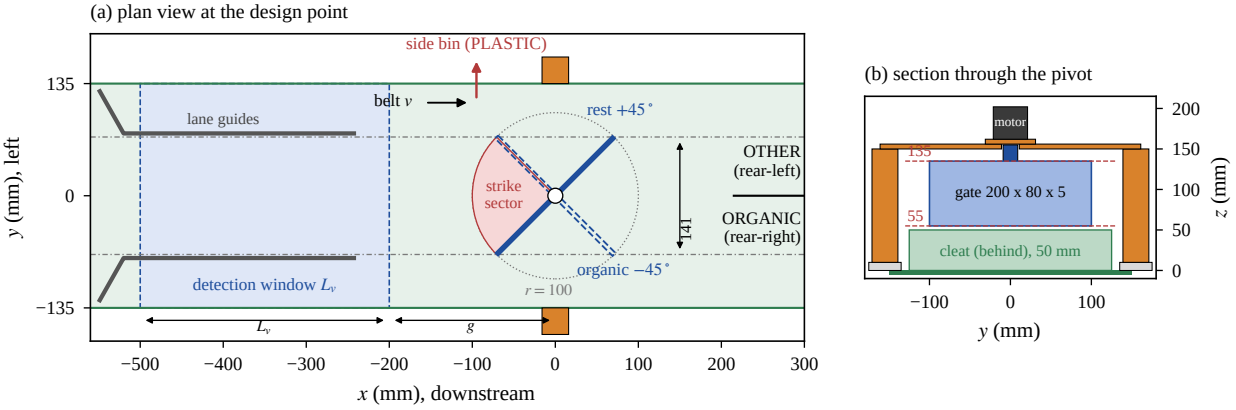
(a) plan view at the design point
side bin (PLASTIC)
belt v
lane guides
rest +45°
strike sector
OTHER (rear-left)
ORGANIC (rear-right)
141
organic −45°
$r = 100$
detection window L_v
L_v
g
135
0
−135
y (mm), left
−500
−400
−300
−200
−100
0
100
200
300
x (mm), downstream
(b) section through the pivot
motor
135
gate 200 x 80 x 5
55
cleat (behind), 50 mm
200
150
100
50
0
z (mm)
−100
0
100
y (mm)