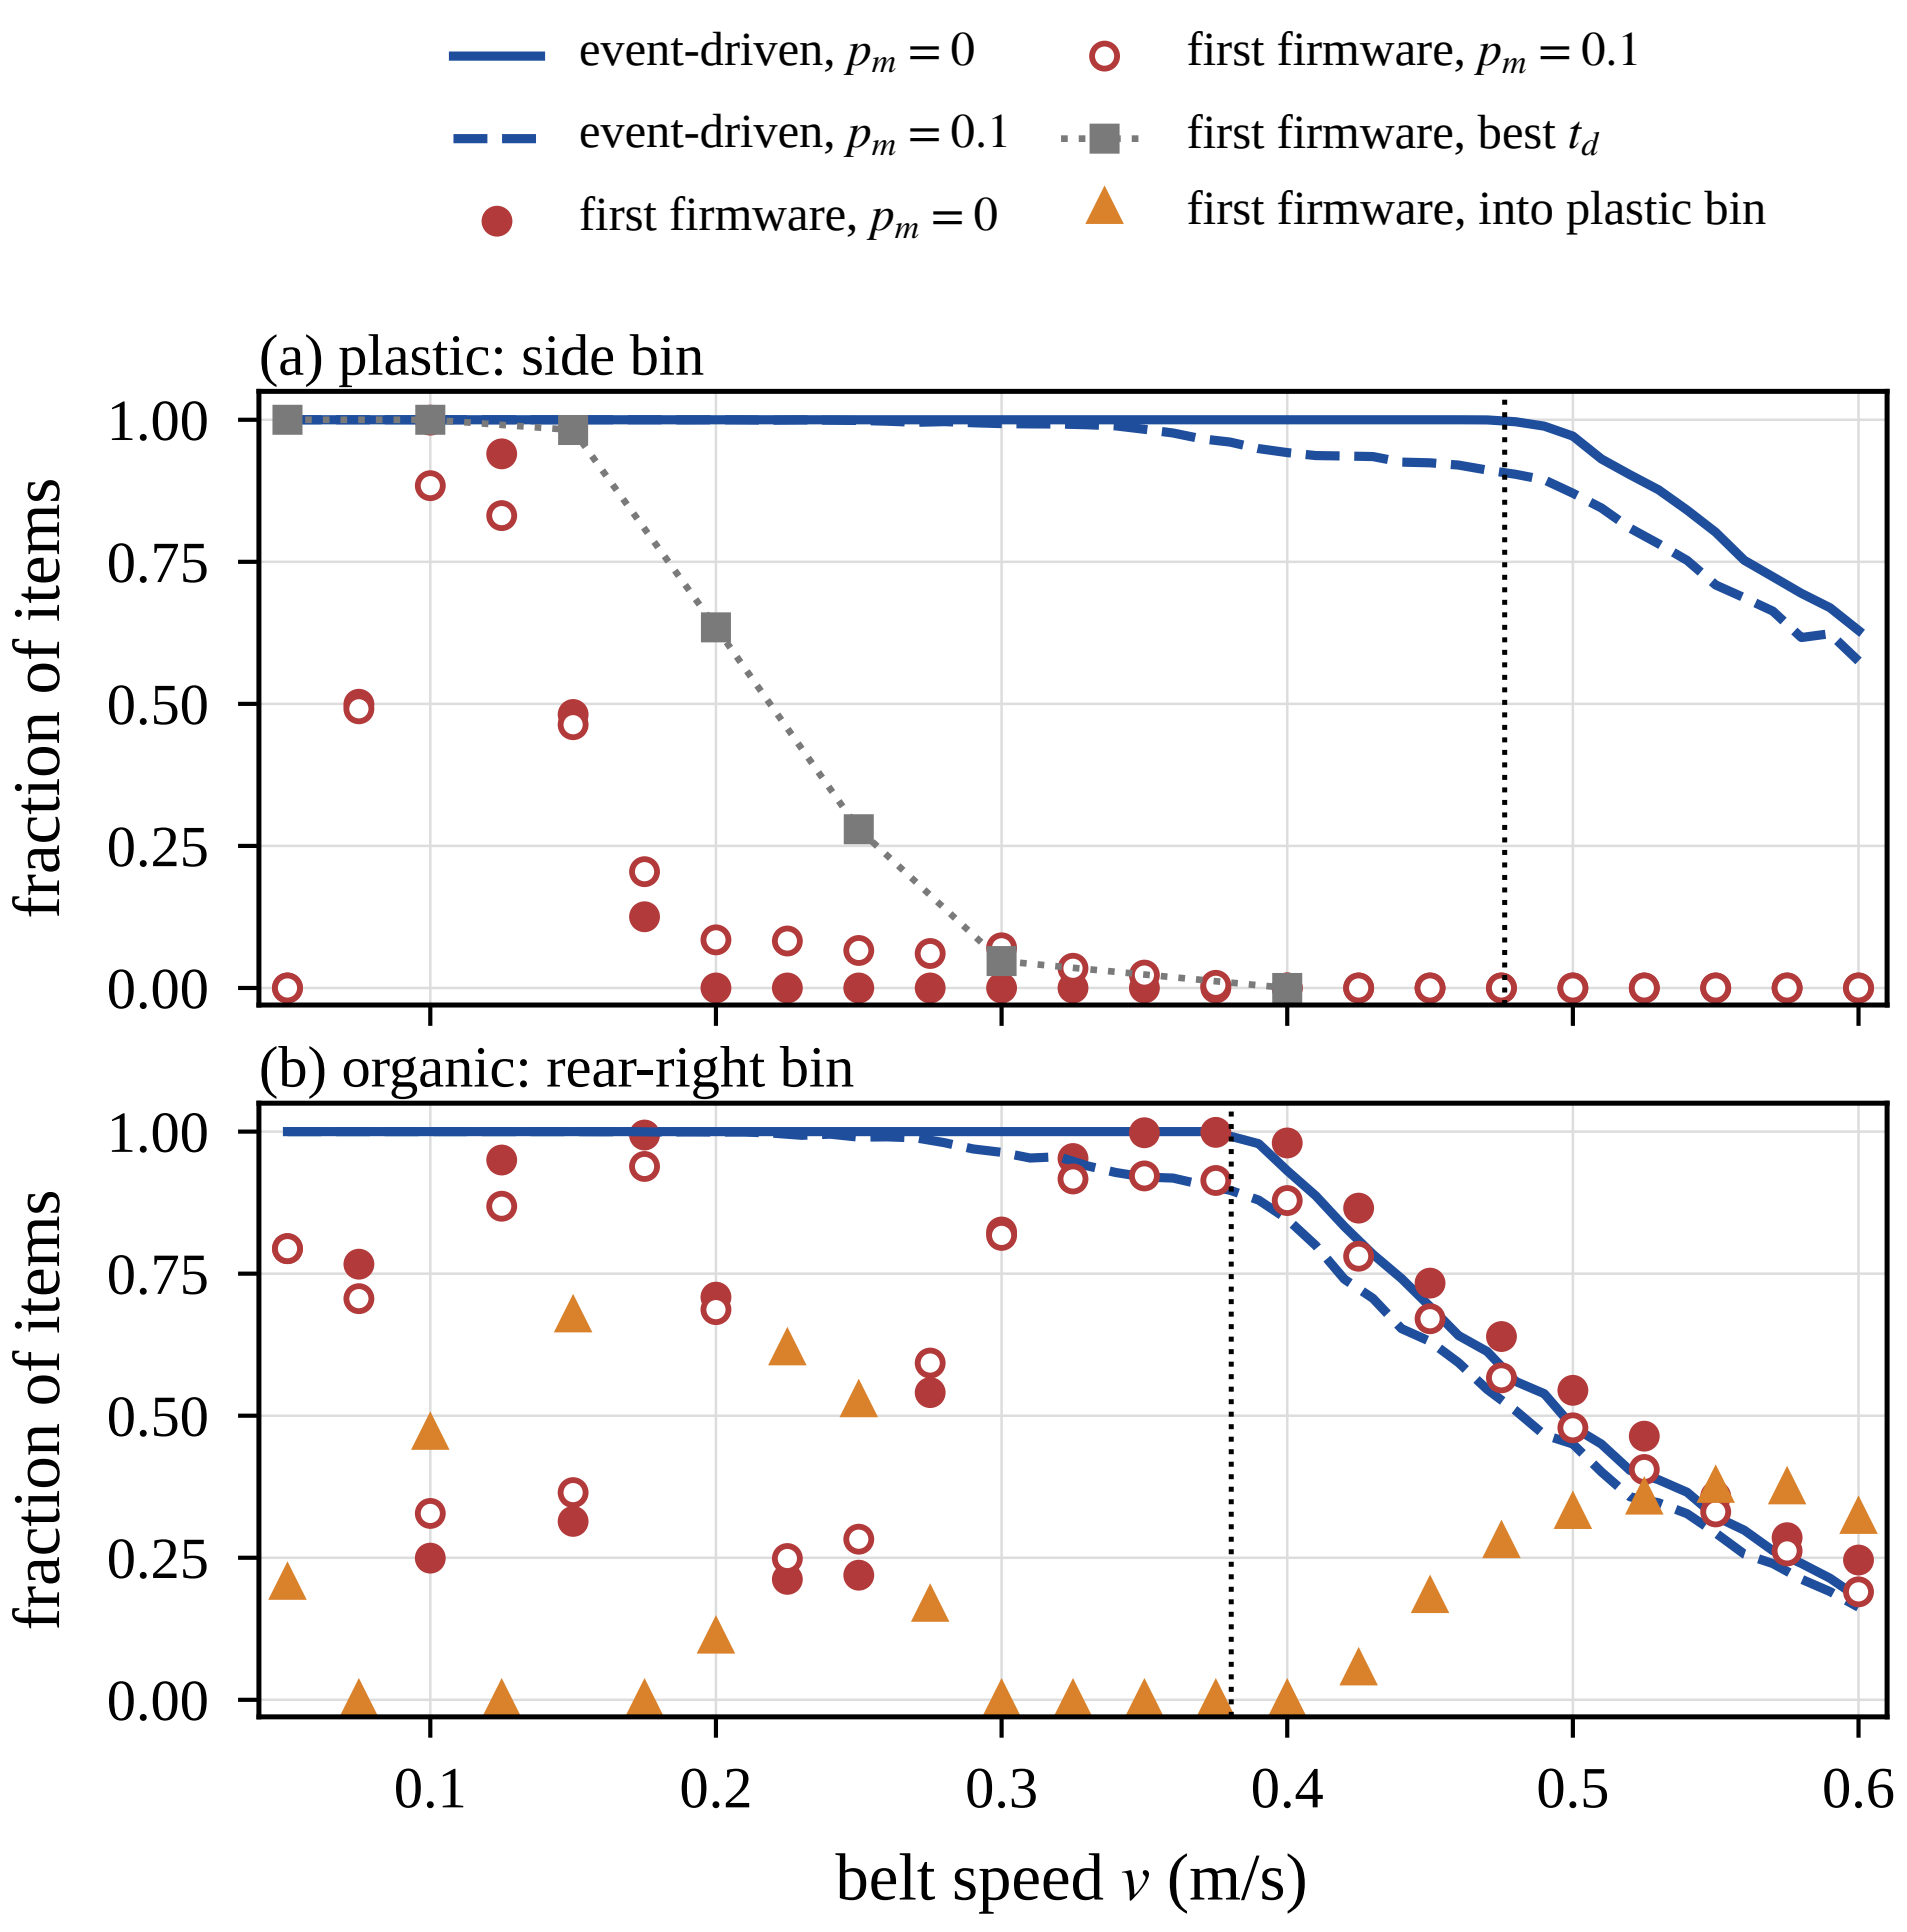
event-driven, $p_m = 0$
event-driven, $p_m = 0.1$
first firmware, $p_m = 0$
first firmware, $p_m = 0.1$
first firmware, best t_d
first firmware, into plastic bin
(a) plastic: side bin
(b) organic: rear-right bin
fraction of items
1.00
0.75
0.50
0.25
0.00
0.1
0.2
0.3
0.4
0.5
0.6
belt speed v (m/s)