




EDM ONLY

REVISIONS


LTR	DESCRIPTION OR ECO#	APP.	DATE
A	INITIAL RELEASE		

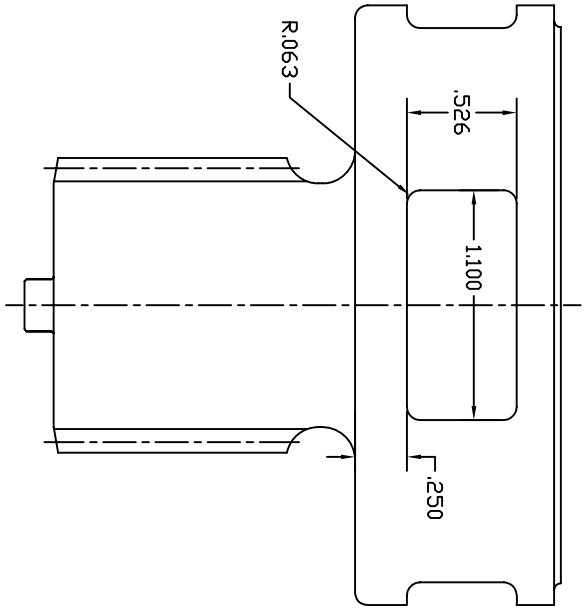

EDM ONLY

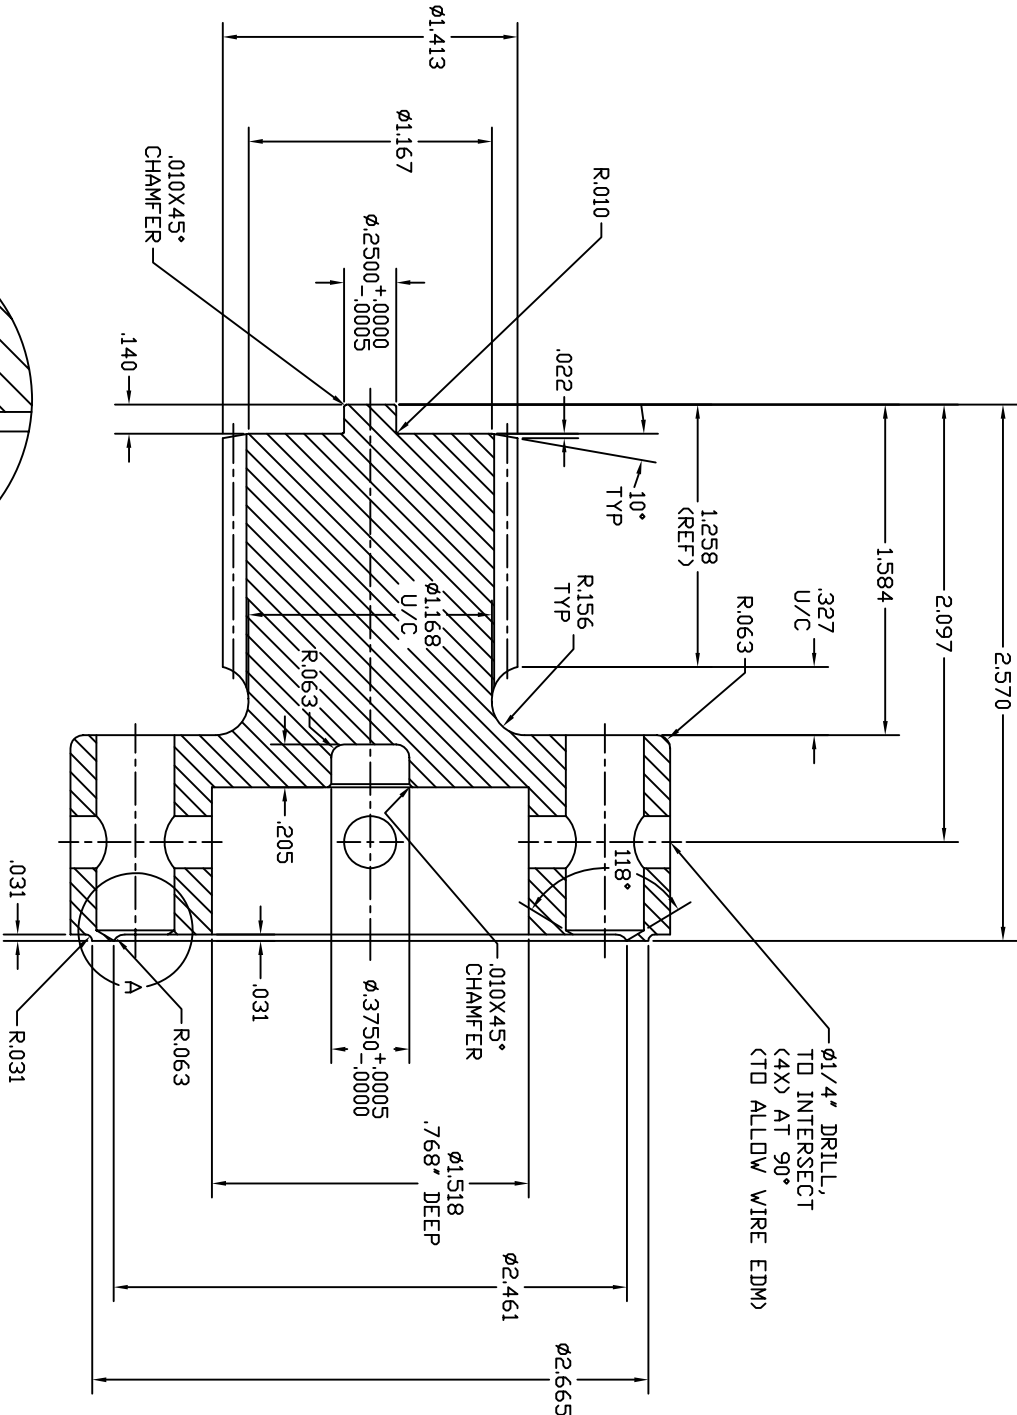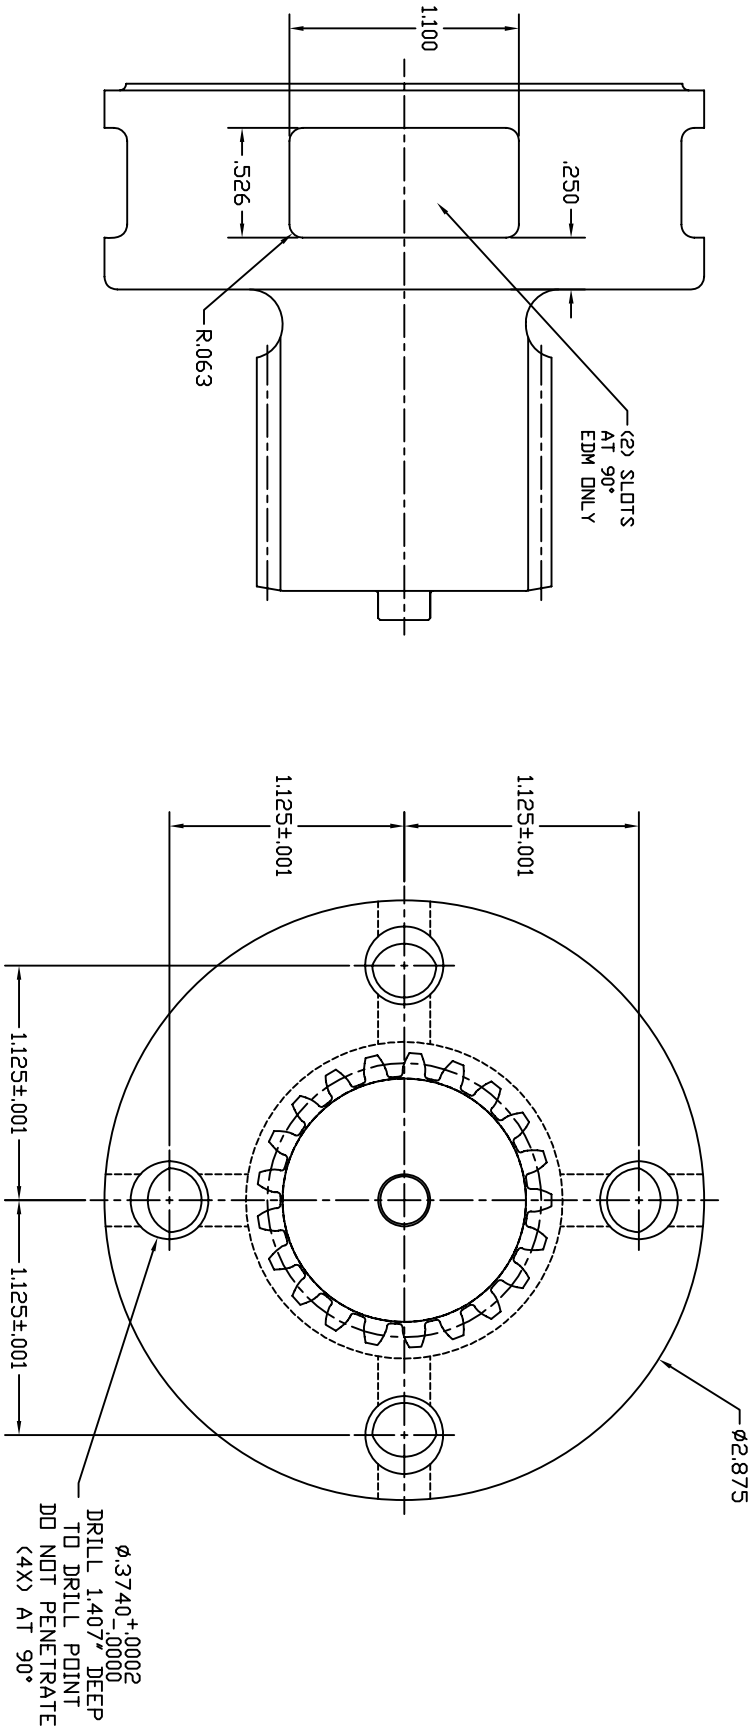

DETAIL A
SCALE 3:1

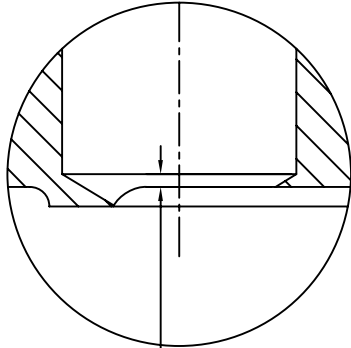

- NOTES:
- 1) REMOVE ALL BURRS AND BREAK SHARP EDGES
 2. GEAR DATA REFLECTS ACTUAL MACHINED DIMENSIONS

INVOLUTE SPUR-GEAR DATA	STD
AMERICAN STANDARD 20° STUB	EXT
NUMBER OF TEETH	21
DIAMETRAL PITCH	16/21
PRESSURE ANGLE	20°
PITCH DIAMETER (REF.)	1.3125"
CIRCULAR THICKNESS	0.0982"
WHOLE DEPTH (MIN.)	0.1125"
WORKING DEPTH	0.1000"
CHORDAL ADDENDUM (MAX. OD)	0.0500"
CHORDAL THICKNESS	0.0982"
MEASUREMENT OVER PINS	1.452"±.001
PIN DIAMETER	0.108"

TOLERANCE	MATERIAL	TITLE:
.XXX=±.005 .XX=±.010 X/X=±1/64 X/X=±1°	300M 49-53 HRC	AIR TOOL - DUAL SPEED VER15 5TH ST CAGE
UNLESS OTHERWISE SPECIFIED	FINISH	
SCALE	DRAWING SIZE: B	
1" = 1"	CAD NO. SKH4119-605	

DRAWN: <u>EK</u>	CHECKED: _____
DATE: <u>11/14/06</u>	APPROVED: _____
DWG. NO. <u>SKH4119-605</u>	REV <u>A</u>