REVISIONS			
LTR	DESCRIPTION OR ECO#	APP.	DATE
A	INITIAL RELEASE		08/28/06

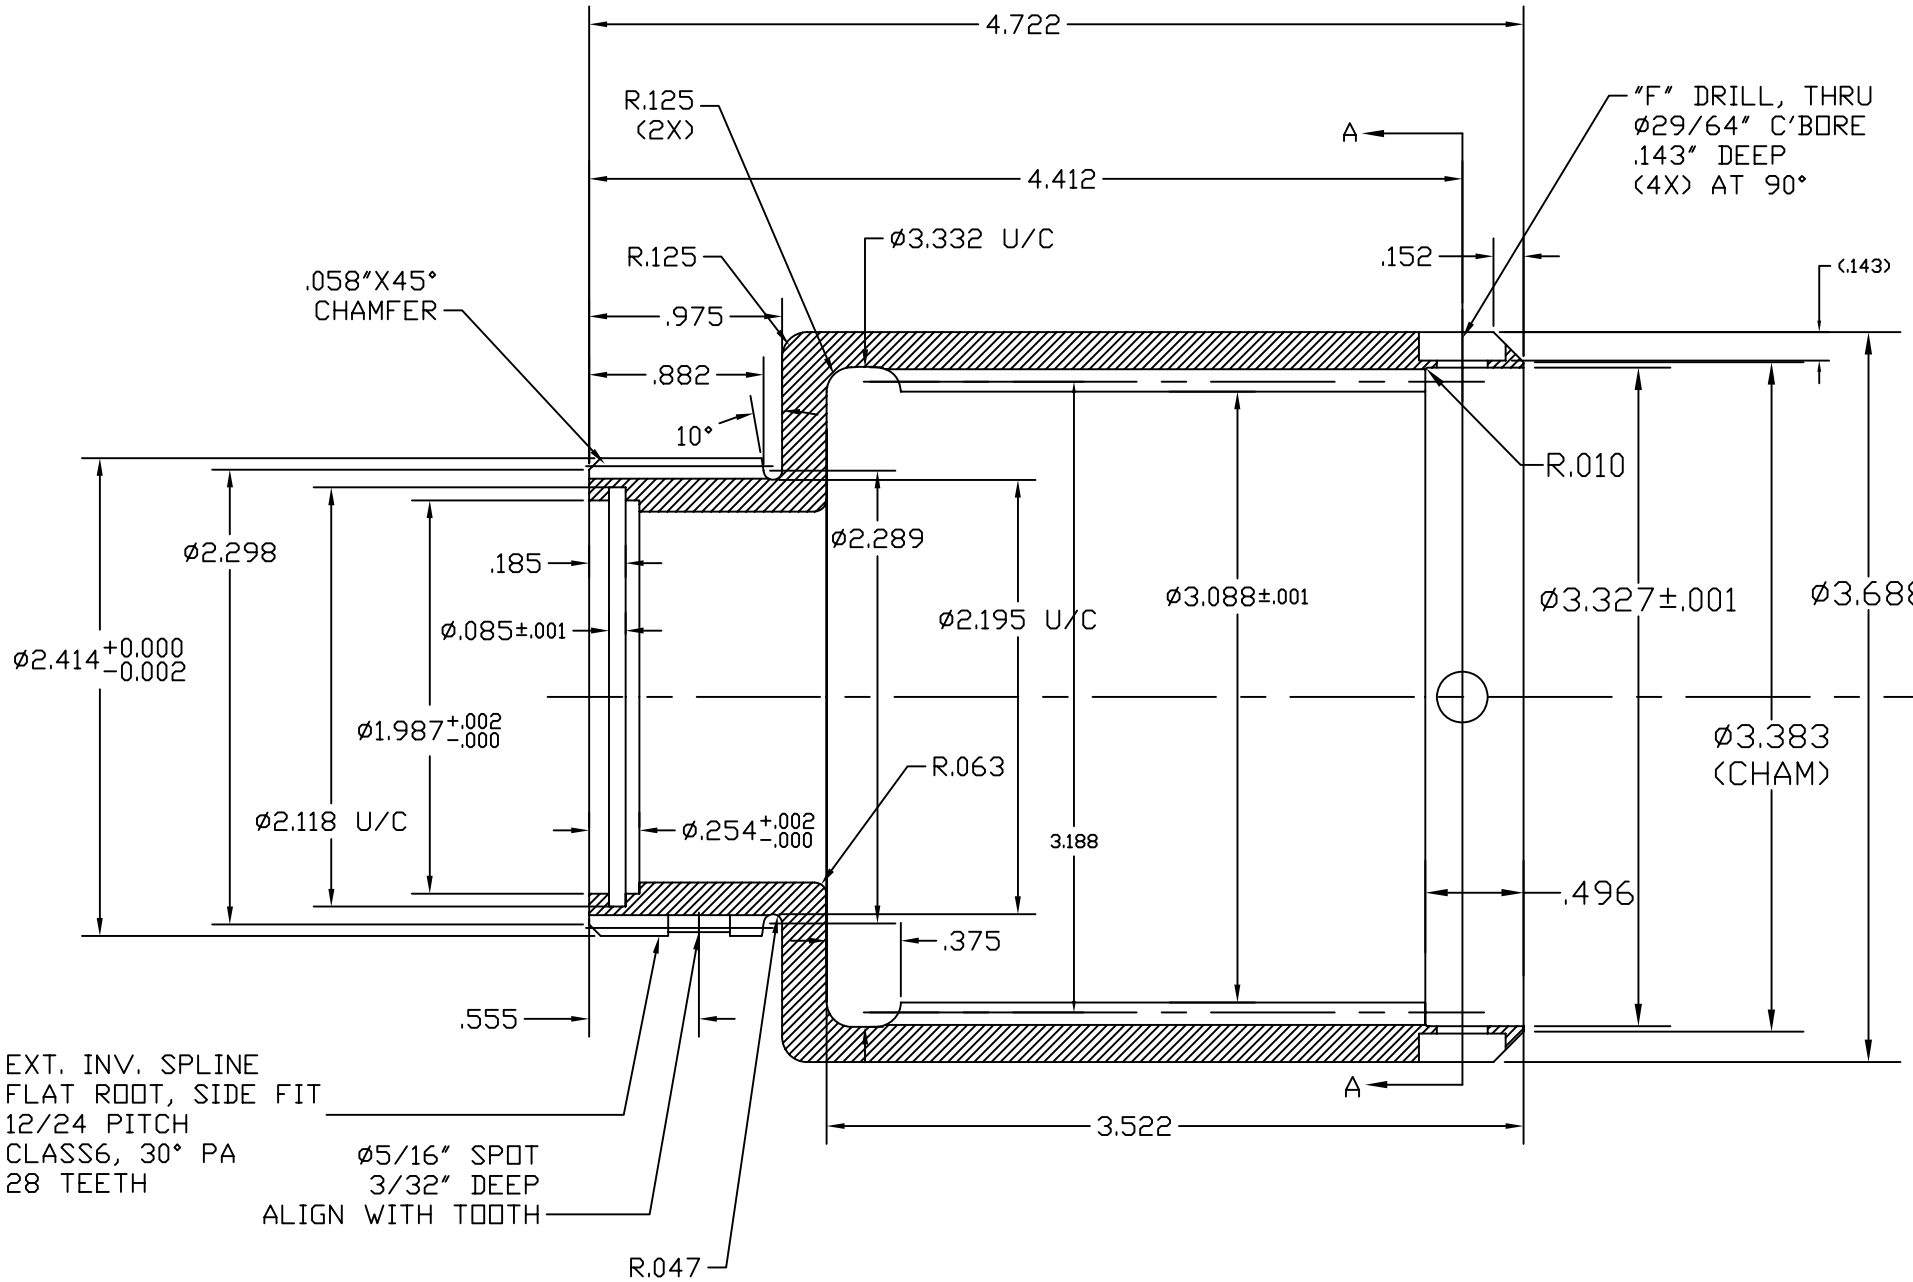

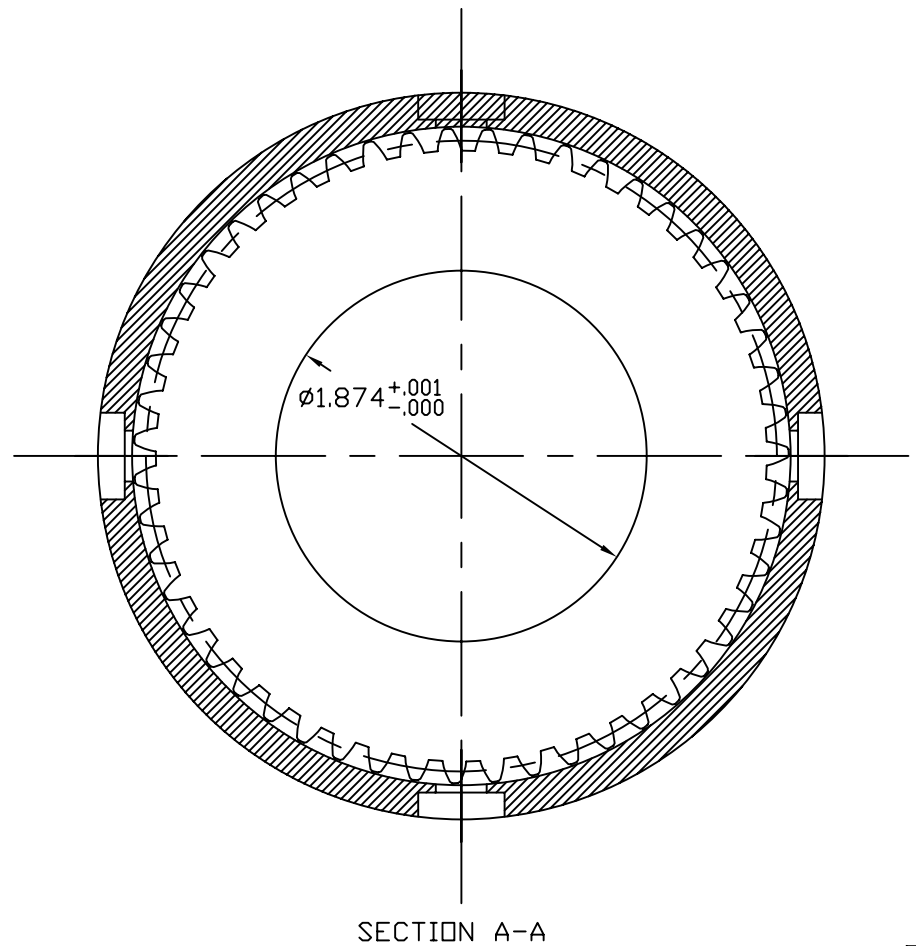

QTY: 1

INVOLUTE SPUR-GEAR DATA	STD
AMERICAN STANDARD 20° STUB	
NUMBER OF TEETH	51
DIAMETRAL PITCH	16/21
PRESSURE ANGLE	20°
PITCH DIAMETER (REF.)	3.1875"
CIRCULAR THICKNESS	0.0982"
WHOLE DEPTH (MIN.)	0.1125"
WORKING DEPTH	0.1000"
CHORDAL ADDENDUM (MAX. OD)	0.0500"
CHORDAL THICKNESS	0.0982"
MEASUREMENT OVER PINS	3.046±.001
PIN DIAMETER	0.108"

NOTES:
1) REMOVE ALL BURRS AND BREAK SHARP EDGES
2. GEAR DATA REFLECTS ACTUAL MACHINED DIMENSIONS

TOLERANCE	MATERIAL	TITLE: AIR TOOL DUAL SPEED VER15 BIG HOUSING	
.XXX=±.005 .XX=±.010 X/X=±1/64 ∠=±1° UNLESS OTHERWISE SPECIFIED	4340 AQ 44-48 HRC		
	FINISH		
	BLACK OXIDE	DRAWN: PS DATE: 04/28/06	CHECKED: APPROVED:
SCALE	DRAWING SIZE: B	DWG. NO. SKH4119-565	REV A
1" = 1"	CAD NO. SKH4119-565		