




| REVISIONS | | | | |
|---|---|---|---|---|
| ZONE | REV. | DESCRIPTION | DATE | APPROVED |
| | 0 | Initial Release | 11/12/2012 | |
| | 1 | CHANGED TRIGGER WELL LENGTH AND LOCATION (LOCATION WAS 3.265 AND LENGTH WAS 2.566), CHANGED DIMENSION IN TRIGGER WELL AND BTWN EARS (WAS .5010±.0010) | 4/4/2013 | MCH (STS) |
| | 2 | CHANGED DIMENSION IN TRIGGER WELL AND BTWN EARS (WAS .5000 +.0030/-.0000) | 5/28/2013 | MCH (STS) |
| | 3 | CHANGED DIMESNION ON .5000" HOLE (WAS .5010 ± .0010) | 7/9/2013 | |

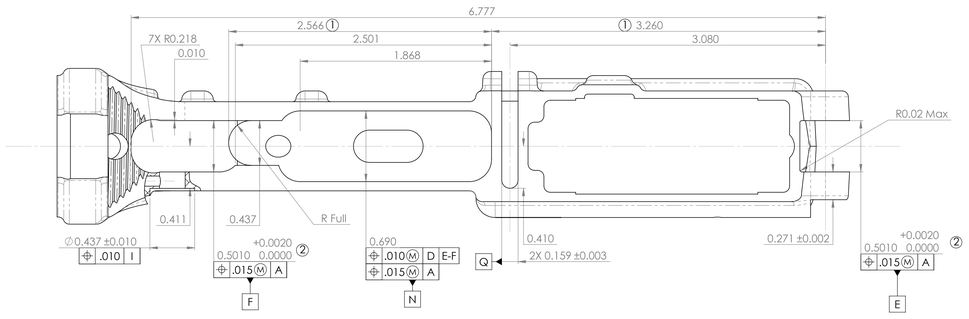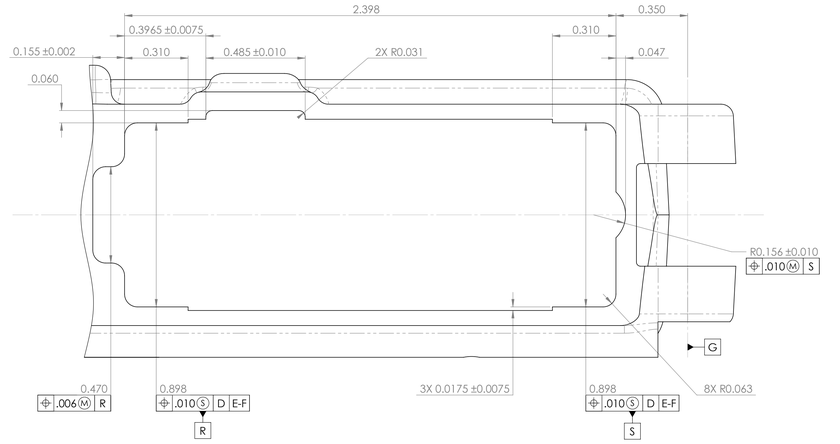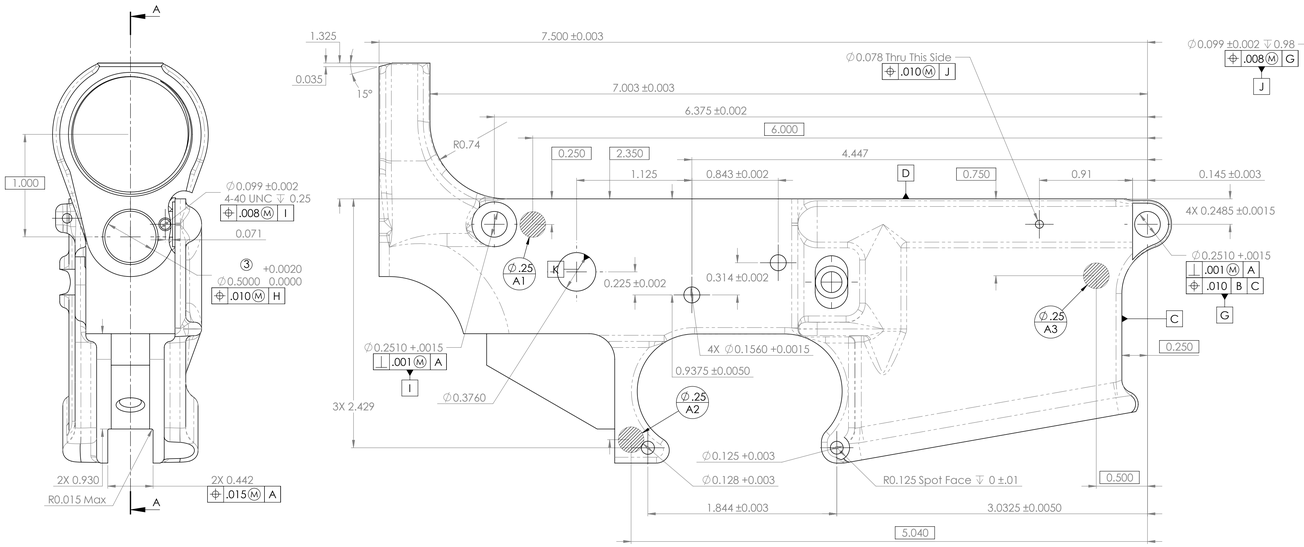


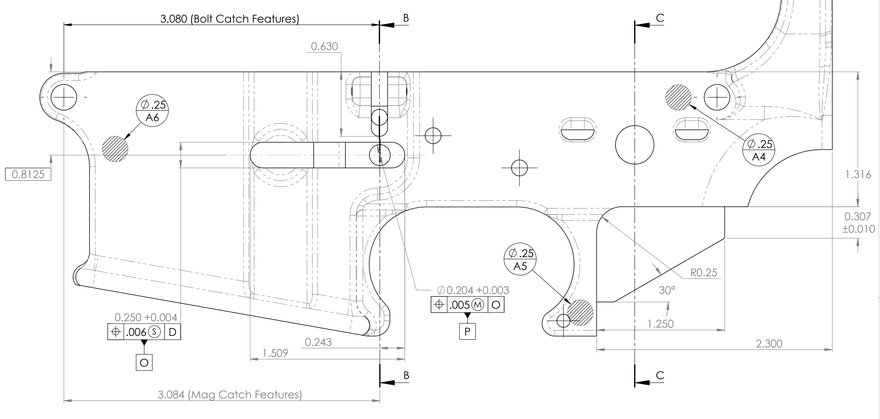






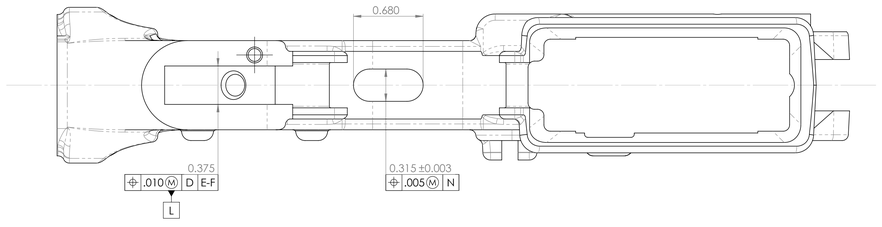

SECTION A-A

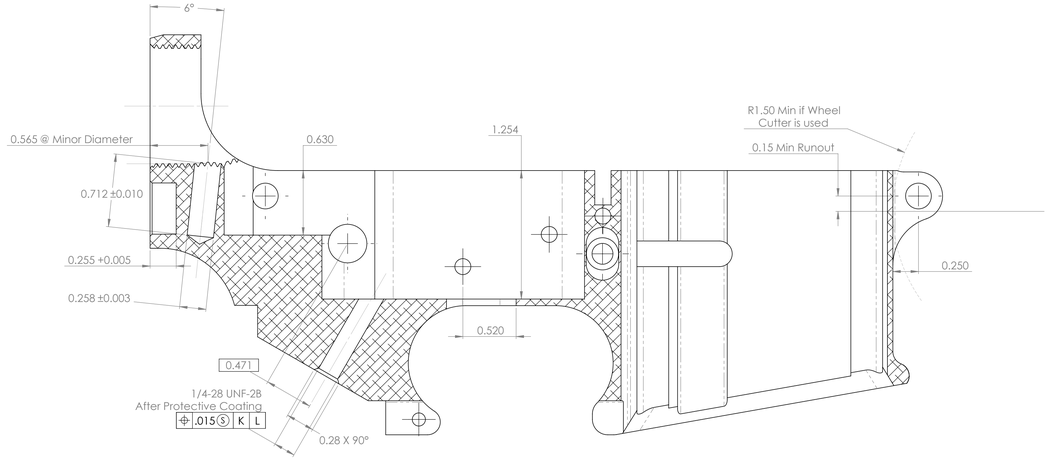

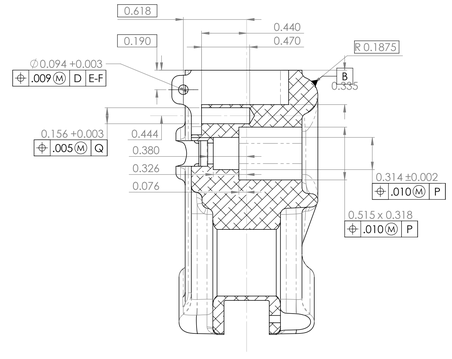
SECTION B-B




SECTION C-C

NOTES:
1. MAKE FROM ST-15 FORGING (7075-T6)
2. FINAL PROTECTIVE FINISH: HARD COAT ANODIZE PER MIL-A-8625, TYPE III CLASS II, FILM THICKNESS .0010 ±.0002. FINISH SHALL BE LUSTERLESS (FLAT) COLOR: BLACK #37038 OF FED-STD-595, SEAL, GRIT BLAST PRIOR TO APPLYING FINISH.
3. ALL DIMENSIONS APPLY PRIOR TO PROTECTIVE FINISH UNLESS OTHERWISE SPECIFIED.


**PROPRIETARY AND CONFIDENTIAL**

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BRAVO TOOL SOLUTIONS, LLC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF AERO PRECISION INC. IS PROHIBITED.


| | | | NAME | DATE |
|---|---|---|---|---|
| | | UNLESS OTHERWISE SPECIFIED: | | |
| | | DIMENSIONS ARE IN INCHES | DRAWN: MCH | 11/12/12 |
| | | TOLERANCES:<br>FRACTIONAL ± 1/64<br>TWO PLACE DECIMAL ± .01<br>THREE PLACE DECIMAL ± .005<br>FOUR PLACE DECIMAL ± .0010 | CHECKED: | |
| | | | ENG APPR. | |
| | | | MFG APPR. | |
| | | INTERPRET GEOMETRIC TOLERANCING PER: | Q.A. | |
| | | MATERIAL<br>7075-T6 ST-15 Forging | COMMENTS: | |
| | | FINISH | | |
| NEXT ASSY | USED ON | | | |
| APPLICATION | | | | |

TITLE: Mil-Spec AR-15 Lower Receiver

SIZE E | DWG. NO. ST-15 Lower | REV 3

SCALE: 7:4 WEIGHT: | SHEET 1 OF 1

E ST-15 Lower REV 3