



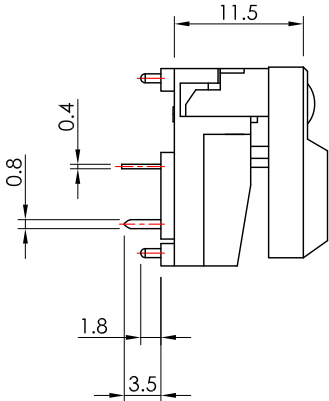



*開關產品未經SWITRONIC同意，請勿拆解，否則無法負品質及安全責任。
Please do not decompose the switch without any permission from SWITRONIC, otherwise the quality and safety responsibility could not be guaranteed.

*本圖面若與目錄之規格尺寸不符，以本圖面規格尺寸為主。
Below is our main specification if different from catalog.



RoHS compliant

CAP STYLES

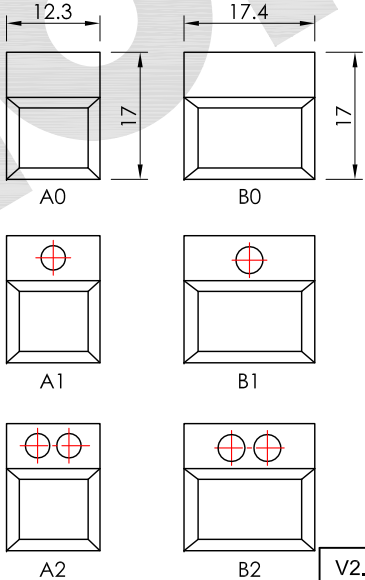

LED COLOR LEFT		LED COLOR RIGHT	
□	W/O LED	□	W/O LED
1	Red	1	Red
2	Yellow	2	Yellow
3	Green	3	Green

MP86XXXXH-G


CAP STYLE		CAP COLOR	
A0	W/O LED	R	Red
A1	1 LED	G	Gray
A2	2 LED	B	Black
B0	W/O LED	W	White
B1	1 LED	Y	Yellow
B2	2 LED	O	Orange
		BU	Blue
		GN	Green

RoHS compliant




SPECIFICATION

Rating: 12mA 24V DC.
Circuit: SPDT.
Travel: 1.5±0.4mm.
Function: OFF-(ON).
Contact resistance: 100mΩ Max (initial).
Insulation resistance: 100MΩ Min.
Withstand voltage: 250V AC for 1 minute.
Operating temperature: +10°C ~ +60°C.
Operating force: 170±50g.
Operating life: 50,000 Cycles Min.
Soldering specifications: 250°C Max. for 3 sec.
Soldering time: 1 time only.
Note1: Unwashable, don't be immersed by epoxy and organic solvent.
Note2: Please check the actual size, do not scale the drawing page.



P.C.B. LAYOUT



MATERIAL

Base: Nylon66, UL-94V-2 Min.
Cap: ABS.
Terminal: Phosphor bronze, Gold plated.

產品 PRODUCT		型號 MODEL NO.	
製圖 DRAWN BY		單位 UNIT	
核圖 CHECKED BY		比例 SCALE	
主管 APPROVED BY		公差 TOLERANCE	
Peter Kuo		mm	
Chuck Young		3 : 2	
Margaret Lee		.X=±0.3mm, .XX=±0.2mm	

SWITRONIC
INDUSTRIAL CORP.
Switches



一綺電子企業股份有限公司

總公司：110 台北市信義路四段415號13樓之3
13F-3 NO. 415, SEC. 4, HSIN YI ROAD, TAIPEI, TAIWAN
TEL：886-2-27290229 (Rep.) FAX：886-2-27582086
URL：http://www.switronic.com
E-MAIL：switches@ms36.hinet.net