Information Technology Fundamentals

Mohammad Hossein Manshaei

manshaei@gmail.com

Networking
Module 2: Part I

Module Objectives

1. Explain the most famous networking platform, i.e., “Mobile and wireless Computing”
2. Address the Future of Mobile Networking
3. Review Network Management Protocol

Main Reference:

Chapter 7: Wireless and Mobile Networks
(or Chapter 6 from the 6th edition)

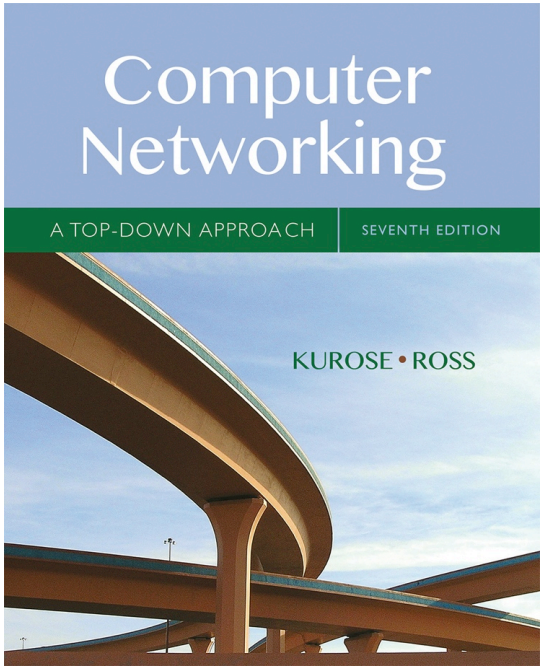

A note on the use of these Powerpoint slides:

We're making these slides freely available to all (faculty, students, readers). They're in PowerPoint form so you see the animations; and can add, modify, and delete slides (including this one) and slide content to suit your needs. They obviously represent a lot of work on our part. In return for use, we only ask the following:

- If you use these slides (e.g., in a class) that you mention their source (after all, we'd like people to use our book!)
- If you post any slides on a www site, that you note that they are adapted from (or perhaps identical to) our slides, and note our copyright of this material.

Thanks and enjoy! JFK/KWR

Computer Networking: A Top Down Approach

7th edition
Jim Kurose, Keith Ross
Pearson/Addison Wesley
April 2016

Ch. 7: Wireless and Mobile Networks

Background:

- # wireless (mobile) phone subscribers now exceeds # wired phone subscribers (5-to-1)!
- # wireless Internet-connected devices equals # wireline Internet-connected devices
  - laptops, Internet-enabled phones promise anytime untethered Internet access
- two important (but different) challenges
  - *wireless:* communication over wireless link
  - *mobility:* handling the mobile user who changes point of attachment to network

Chapter 7 outline

7.1 Introduction

Wireless

7.2 Wireless links, characteristics
- CDMA

6.73 IEEE 802.11 wireless LANs ("Wi-Fi")

67.4 Cellular Internet Access
- architecture
- standards (e.g., 3G, LTE)

Mobility

7.5 Principles: addressing and routing to mobile users

7.6 Mobile IP

7.7 Handling mobility in cellular networks

7.8 Mobility and higher-layer protocols

Elements of a wireless network

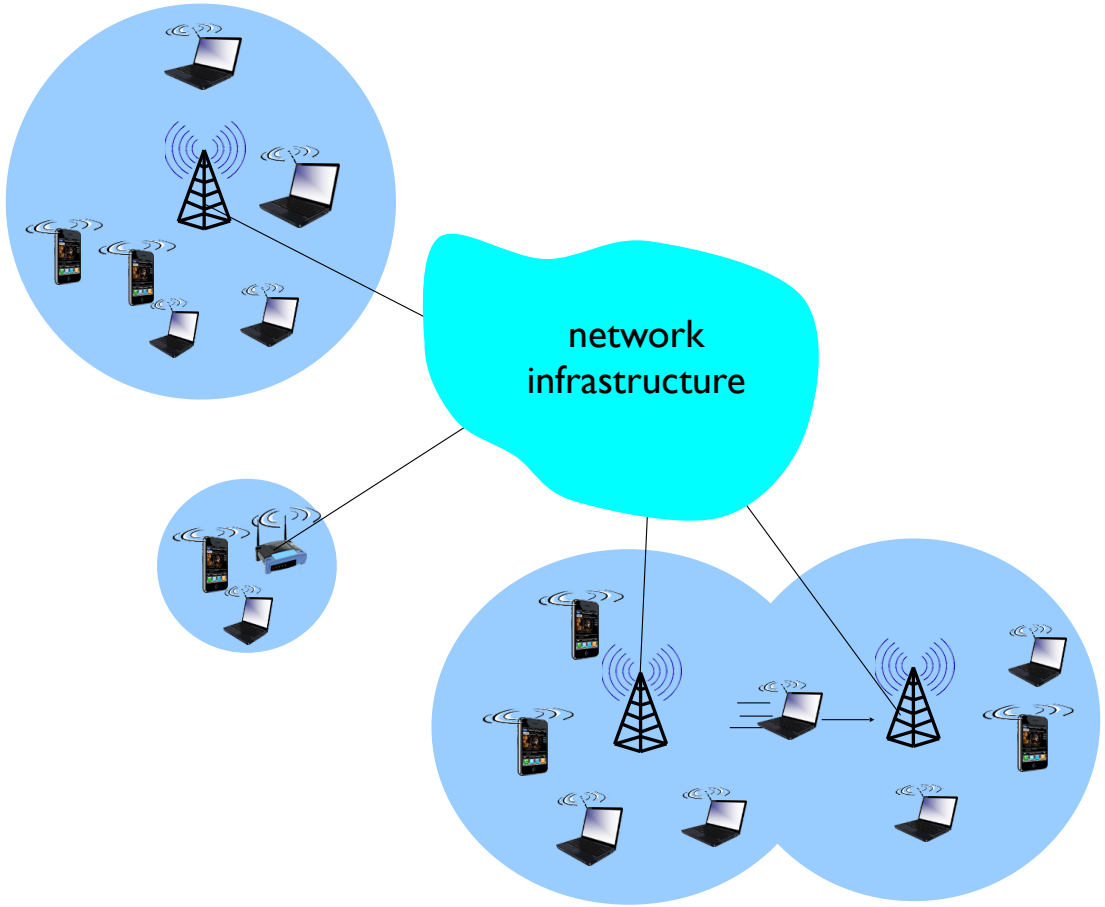

Elements of a wireless network

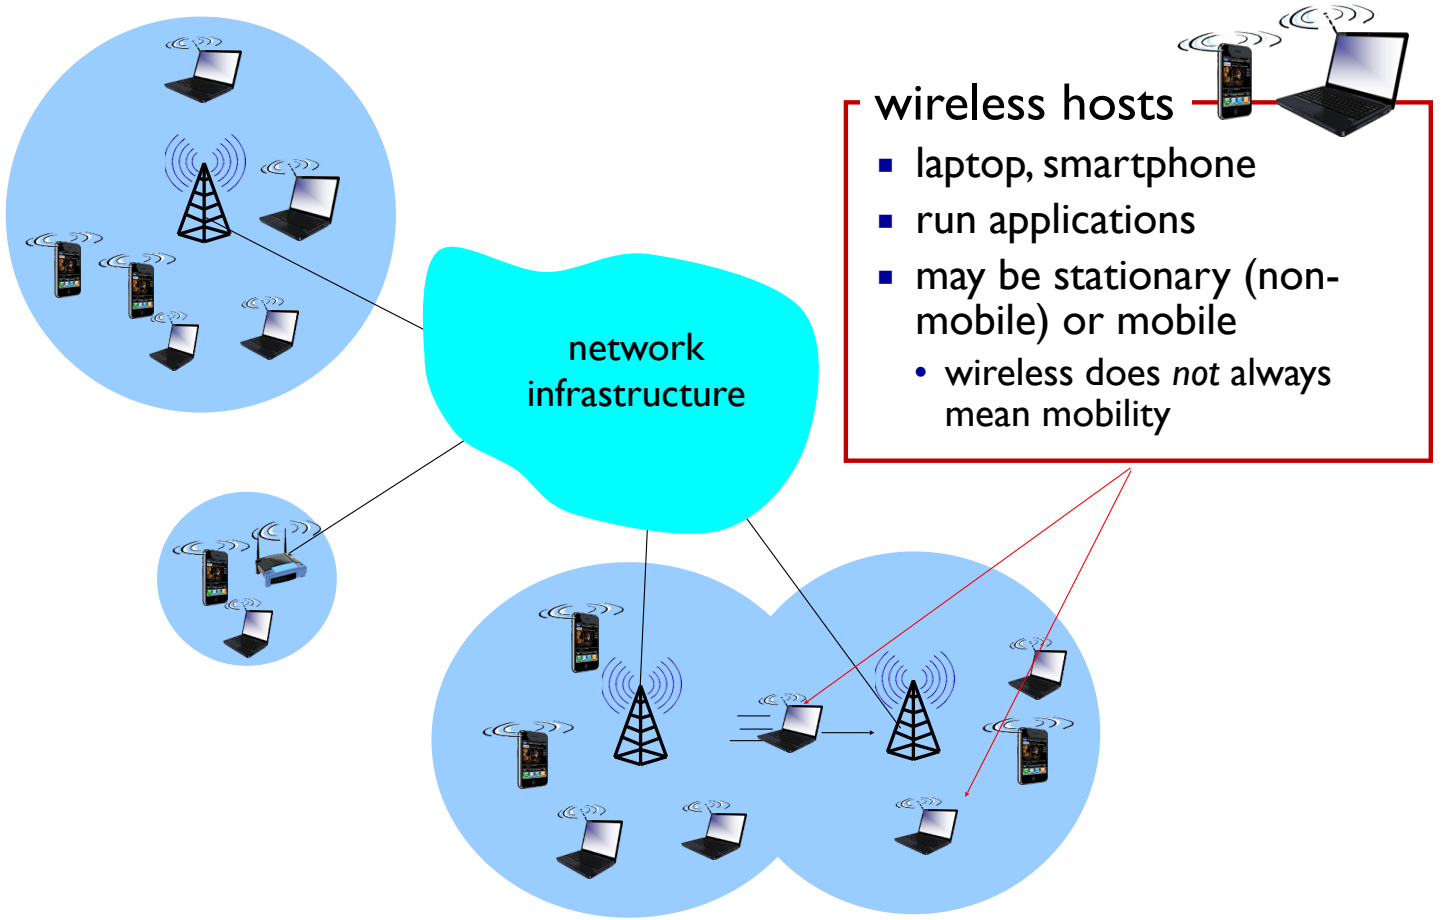

wireless hosts

- laptop, smartphone
- run applications
- may be stationary (non-mobile) or mobile
  - wireless does *not* always mean mobility

Elements of a wireless network

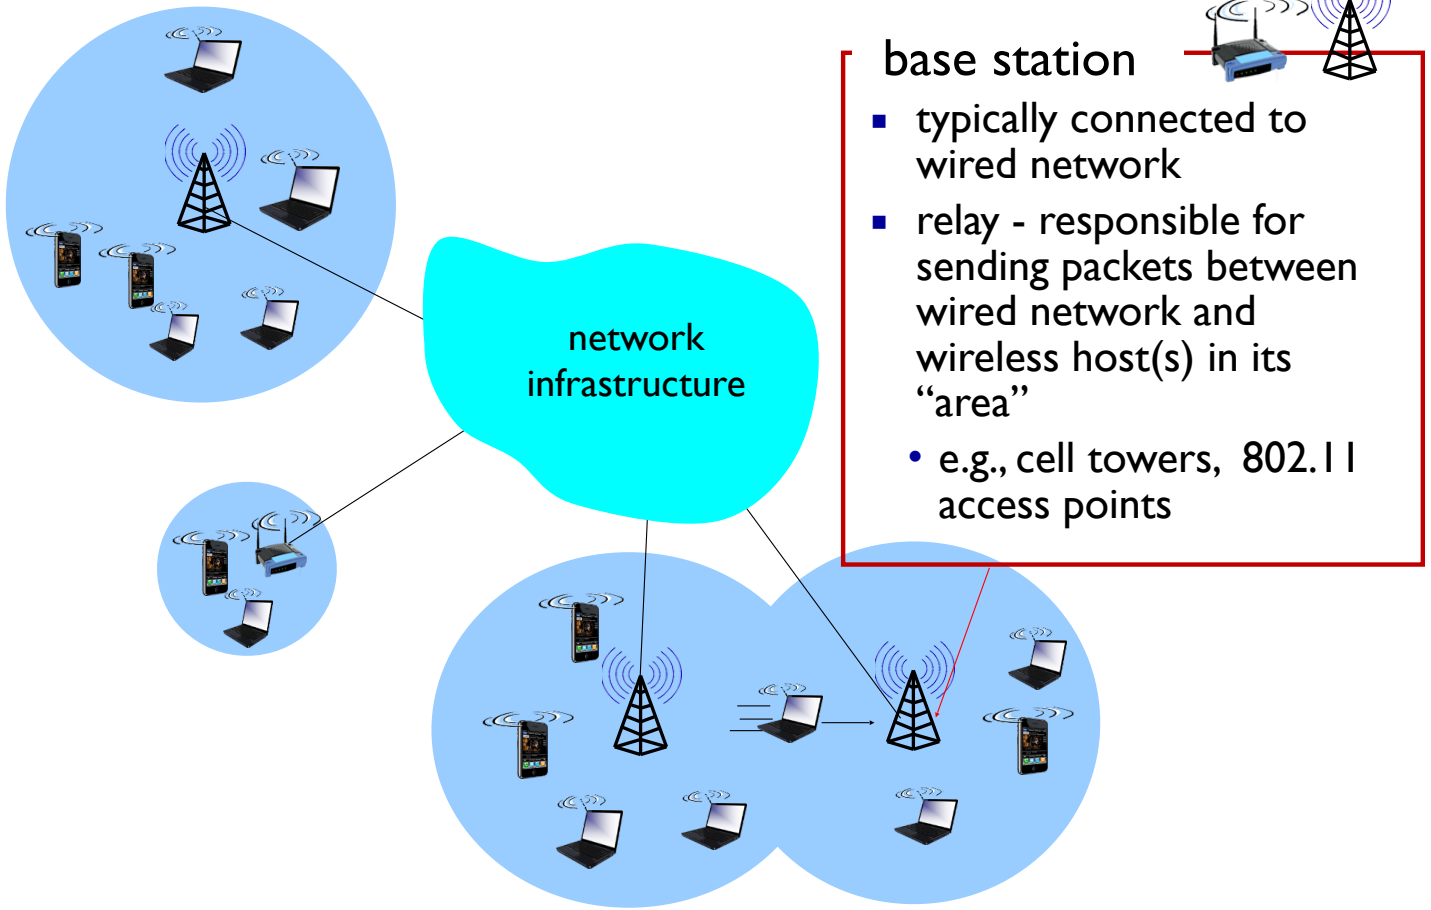

base station

- typically connected to wired network
- relay - responsible for sending packets between wired network and wireless host(s) in its "area"
  - e.g., cell towers, 802.11 access points

Elements of a wireless network

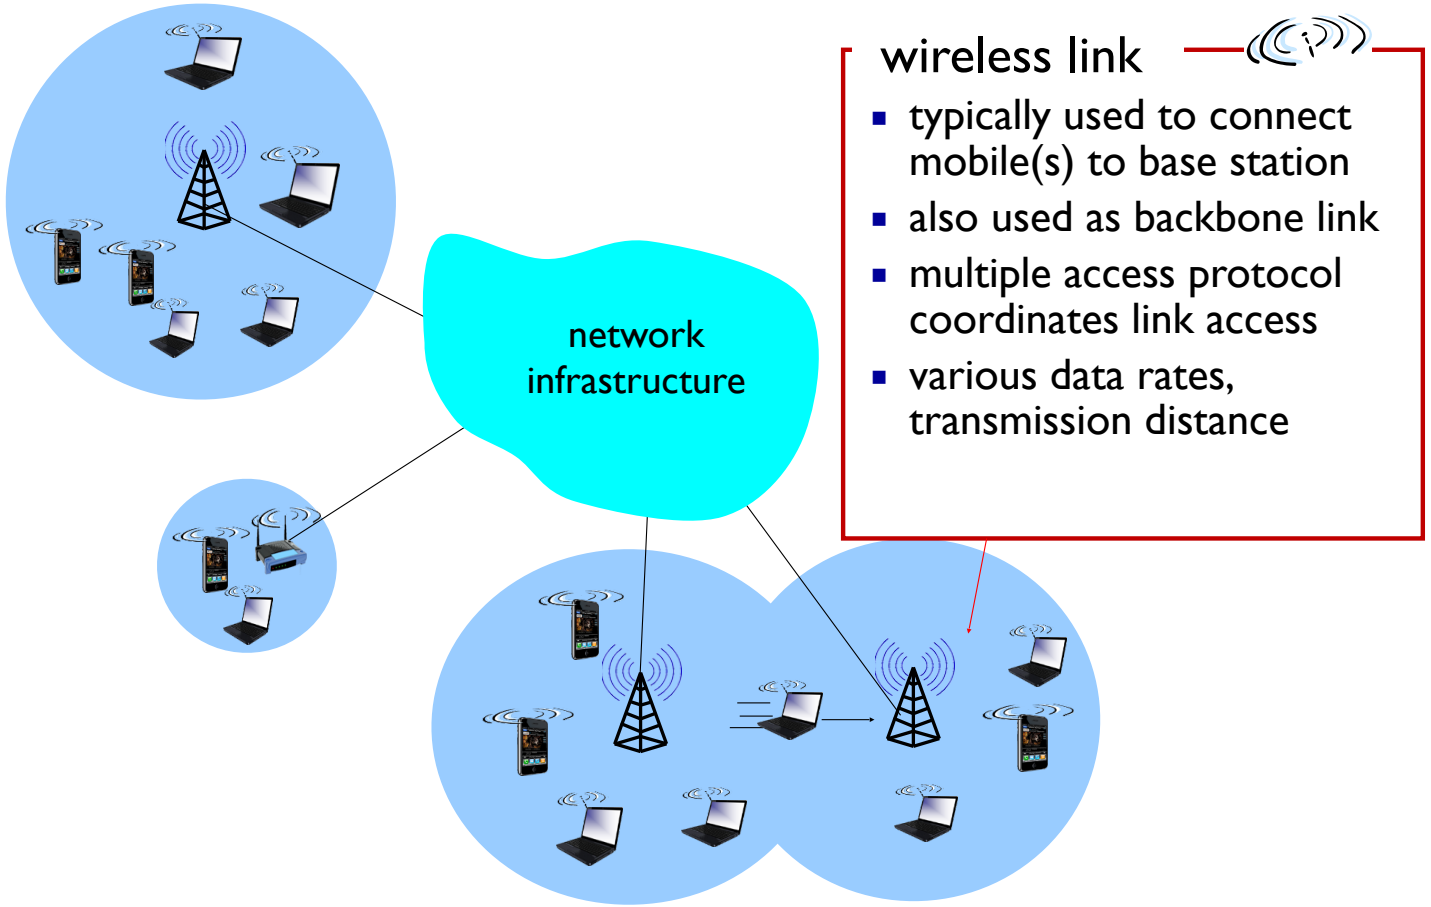

wireless link

- typically used to connect mobile(s) to base station
- also used as backbone link
- multiple access protocol coordinates link access
- various data rates, transmission distance

Characteristics of selected wireless links

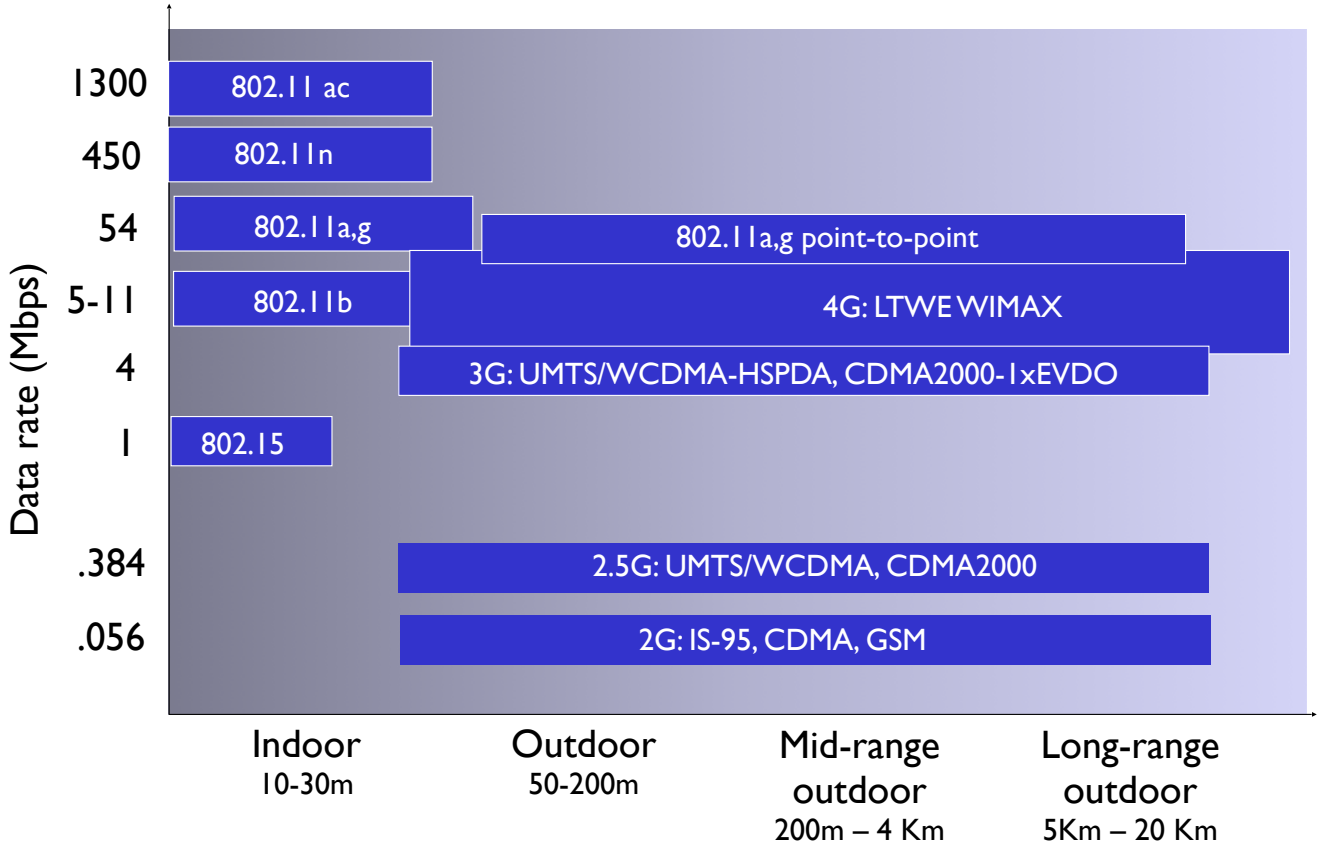

International Mobile Telecommunications
IMT-2000, IMT-Advanced, and IMT-2020

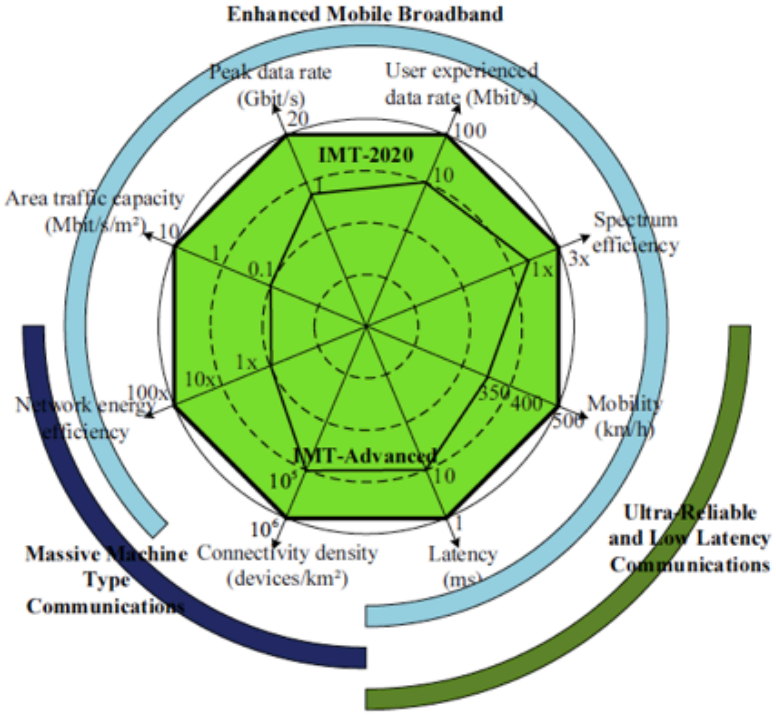

Elements of a wireless network

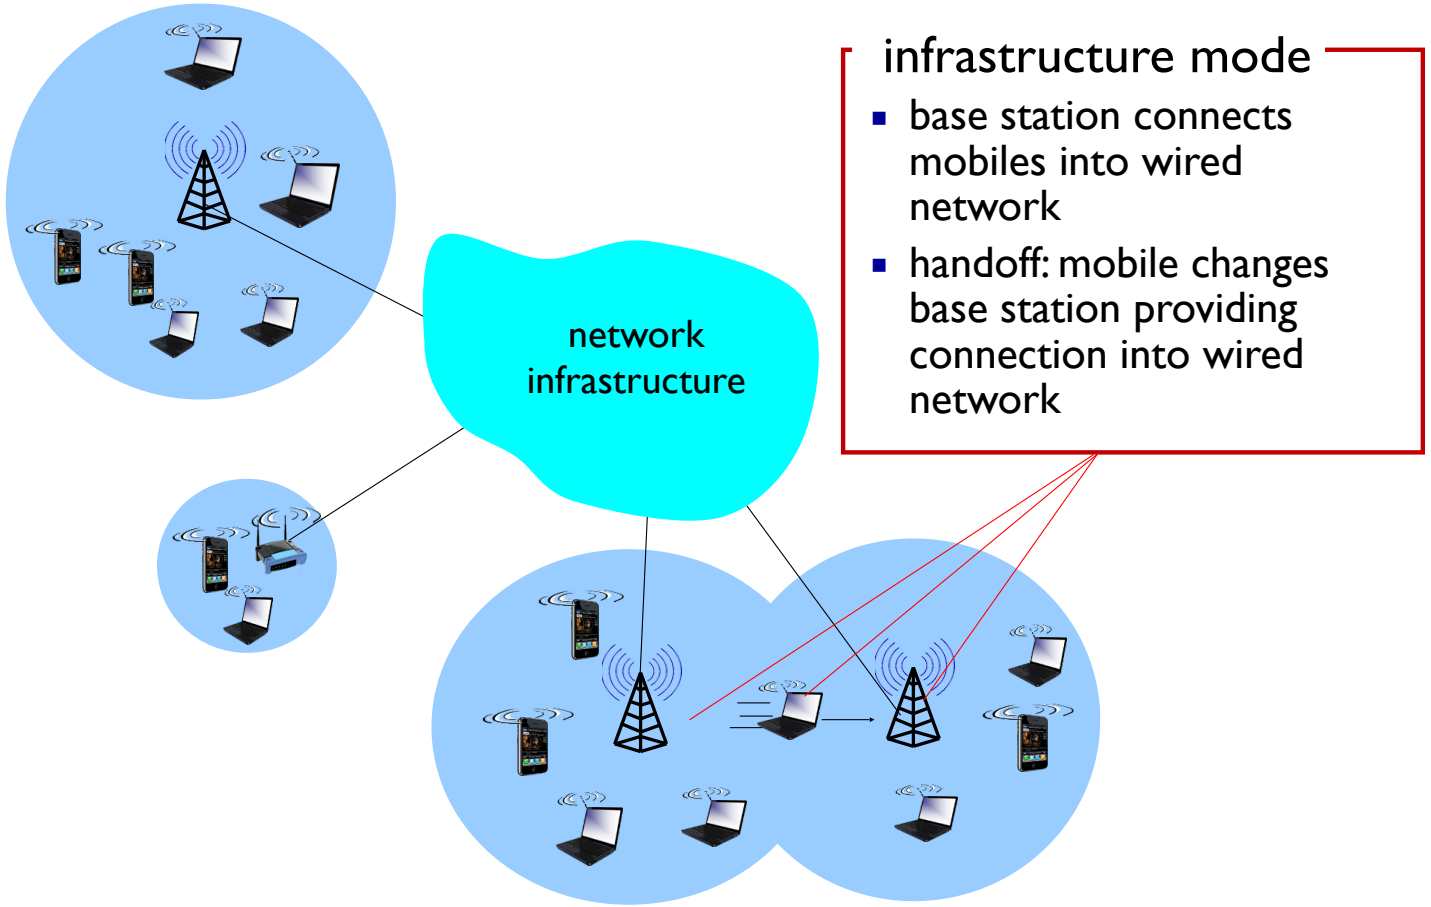

infrastructure mode

- base station connects mobiles into wired network
- handoff: mobile changes base station providing connection into wired network

Elements of a wireless network

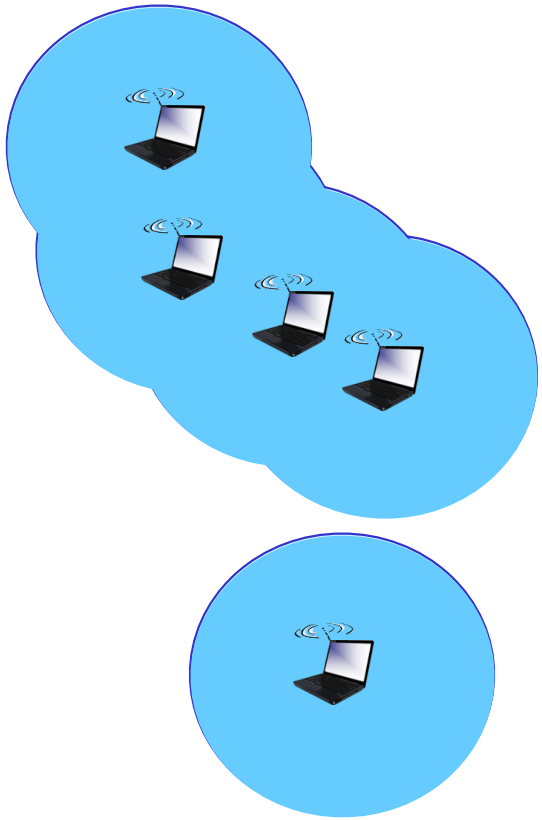

ad hoc mode

- no base stations
- nodes can only transmit to other nodes within link coverage
- nodes organize themselves into a network: route among themselves

Wireless network taxonomy

	single hop	multiple hops
infrastructure (e.g., APs)	host connects to base station (WiFi, WiMAX, cellular) which connects to larger Internet	host may have to relay through several wireless nodes to connect to larger Internet: *mesh net*
no infrastructure	no base station, no connection to larger Internet (Bluetooth, ad hoc nets)	no base station, no connection to larger Internet. May have to relay to reach other a given wireless node MANET, VANET

Chapter 7 outline

7.1 Introduction

Wireless

7.2 Wireless links, characteristics
- CDMA

7.3 IEEE 802.11 wireless LANs ("Wi-Fi")

7.4 Cellular Internet Access
- architecture
- standards (e.g., 3G, LTE)

Mobility

7.5 Principles: addressing and routing to mobile users

7.6 Mobile IP

7.7 Handling mobility in cellular networks

7.8 Mobility and higher-layer protocols

Wireless Link Characteristics (1)

important differences from wired link ….

- *decreased signal strength:* radio signal attenuates as it propagates through matter (path loss)
- *interference from other sources:* standardized wireless network frequencies (e.g., 2.4 GHz) shared by other devices (e.g., phone); devices (motors) interfere as well
- *multipath propagation:* radio signal reflects off objects ground, arriving ad destination at slightly different times

…. make communication across (even a point to point) wireless link much more "difficult"

Wireless Link Characteristics (2)

- SNR: signal-to-noise ratio
  - larger SNR – easier to extract signal from noise (a "good thing")
- *SNR versus BER tradeoffs*
  - *given physical layer:* increase power -> increase SNR->decrease BER
  - *given SNR:* choose physical layer that meets BER requirement, giving highest thruput
    - SNR may change with mobility: dynamically adapt physical layer (modulation technique, rate)

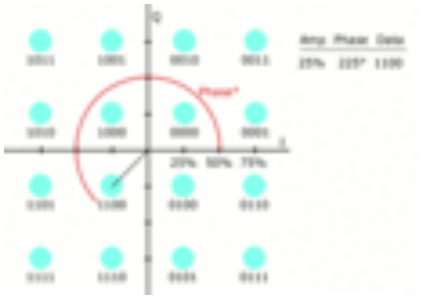

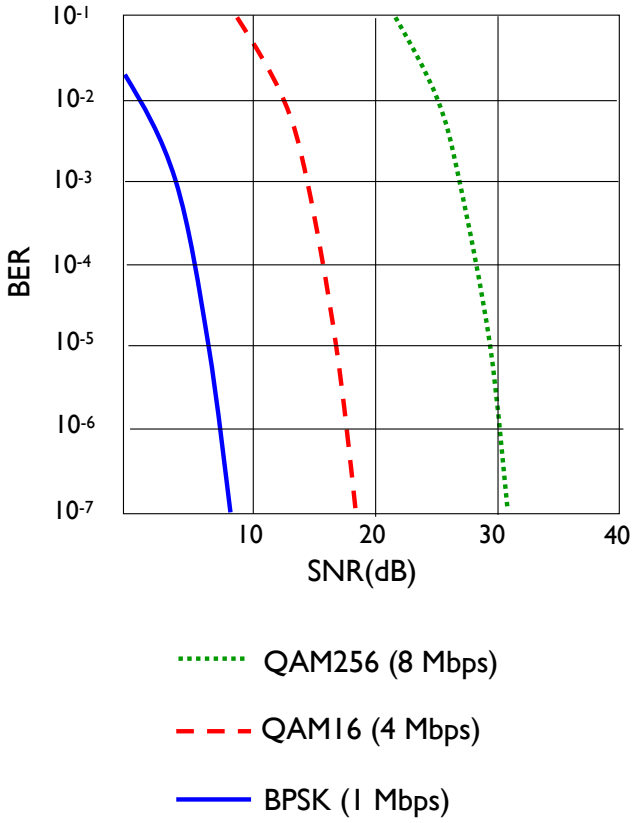

Wireless network characteristics

Multiple wireless senders and receivers create additional problems (beyond multiple access):

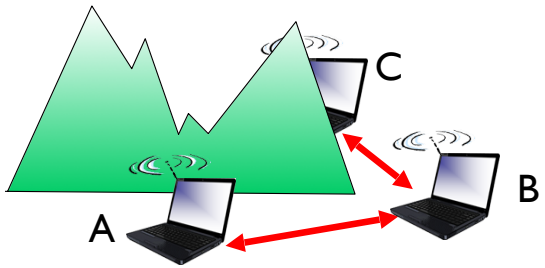

Hidden terminal problem

- B, A hear each other
- B, C hear each other
- A, C can not hear each other means A, C unaware of their interference at B

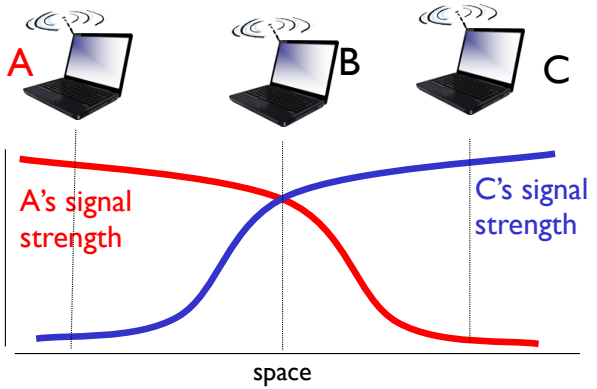

Signal attenuation:

- B, A hear each other
- B, C hear each other
- A, C can not hear each other interfering at B

Code Division Multiple Access (CDMA)

- unique "code" assigned to each user; i.e., code set partitioning
  - all users share same frequency, but each user has own "chipping" sequence (i.e., code) to encode data
  - allows multiple users to "coexist" and transmit simultaneously with minimal interference (if codes are "orthogonal")
- *encoded signal* = (original data) X (chipping sequence)
- *decoding:* inner-product of encoded signal and chipping sequence

CDMA encode/decode

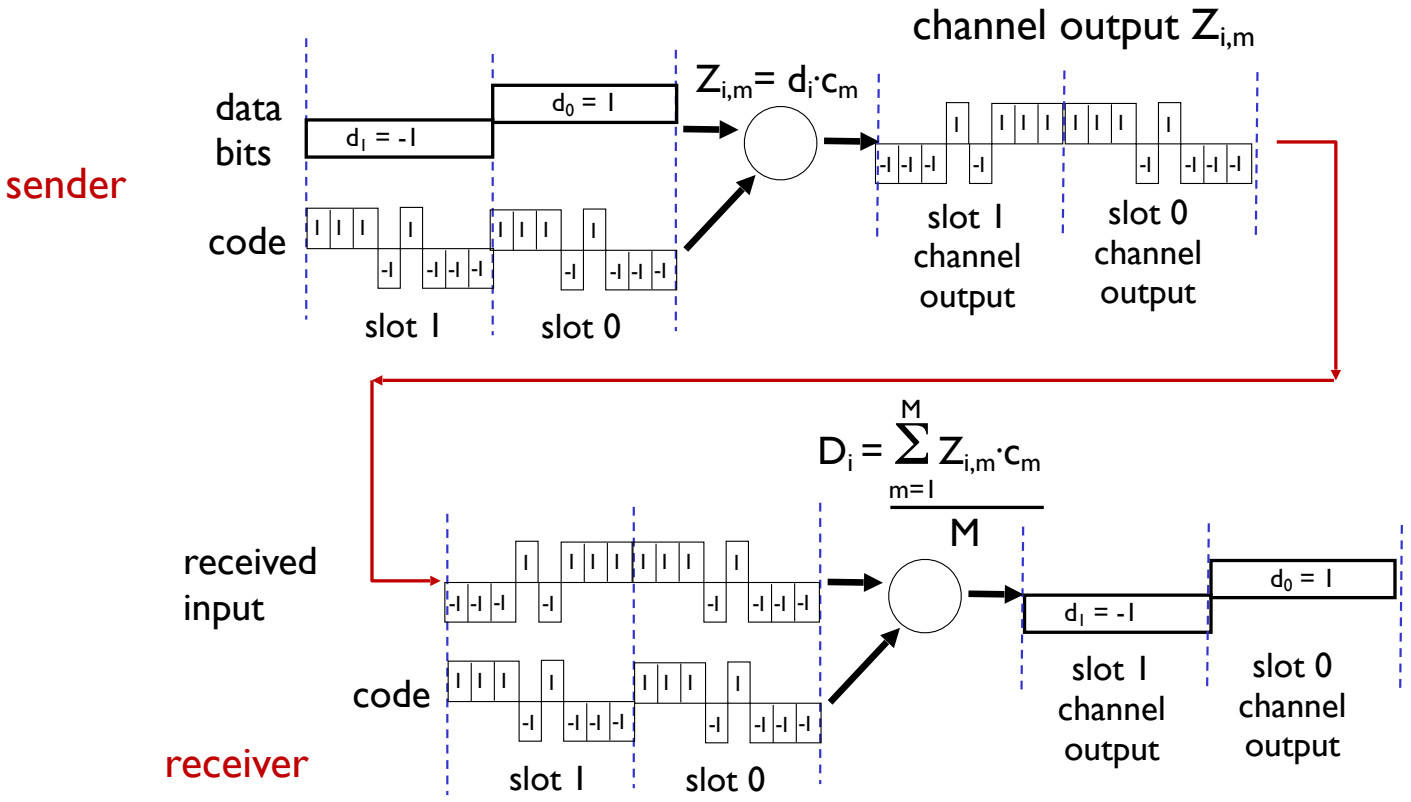

CDMA: two-sender interference