The Pixel Luminosity Telescope: a Dedicated Luminosity Monitor for CMS

Pixel 2010

Matt Hollingsworth on behalf of the
CMS PLT Group

CMS-Pixel Luminosity Telescope (PLT) Collaboration

Canterbury University

Anthony Butler, Phil Butler, Nuno Rodrigues, Stuart Lansley

CERN

Jean-Paul Chatelain, Cathy Farrow, Richard Hall-Wilton, Rob Loos, Vladimir Ryjov, Pier Trapani, Carl Ayres

HEPHY Vienna

Manfred Pernicka, Siegfried Schmid, Helmut Steininger

Princeton University

Valerie Halyo, Bert Harrop, Adam Hunt, Dan Marlow, Bill Sands, David Stickland, Phil Hebda

Rutgers University

Oleksiy Atramentov, Anthony Barker, A.J.Richards, Ed Bartz, John Doroshenko, Yuri Gershtein, Dmitry Hits, Rishi Patel, Steve Schnetzer, Bob Stone

Vanderbilt University

Bill Gabela, Will Johns

University of California, Davis

Richard Lander

University of Tennessee

William Bugg, Stefan Spanier, Matt Hollingsworth, Zong Chang Yang

Past Contributors

Gary Grim (LANL), Richard Lander (UC, Davis), Alick Macpherson (CERN), Lalith Perera (Mississippi)

Importance of Luminosity Monitoring in CMS

- Limiting systematic in many Tevatron measurements
- Production cross section -> Absolute mass of new particles
- Bunch-by-bunch uniformity
  - Trigger biases
- Stable normalization over the lifetime of CMS
- Instant feedback to accelerator control
  - Instantaneous luminosity
  - Beam quality
- Want to measure luminosity as well as possible ➔PLT

The Pixel Luminosity Telescope (PLT)

- Relative luminosity measurement
- Independent of CMS (self-triggered)
- Relative bunch-by-bunch measurements
- Precision at 1% level (stat, syst)

⇒ 3 layer particle tracking

Self monitoring/calibrating

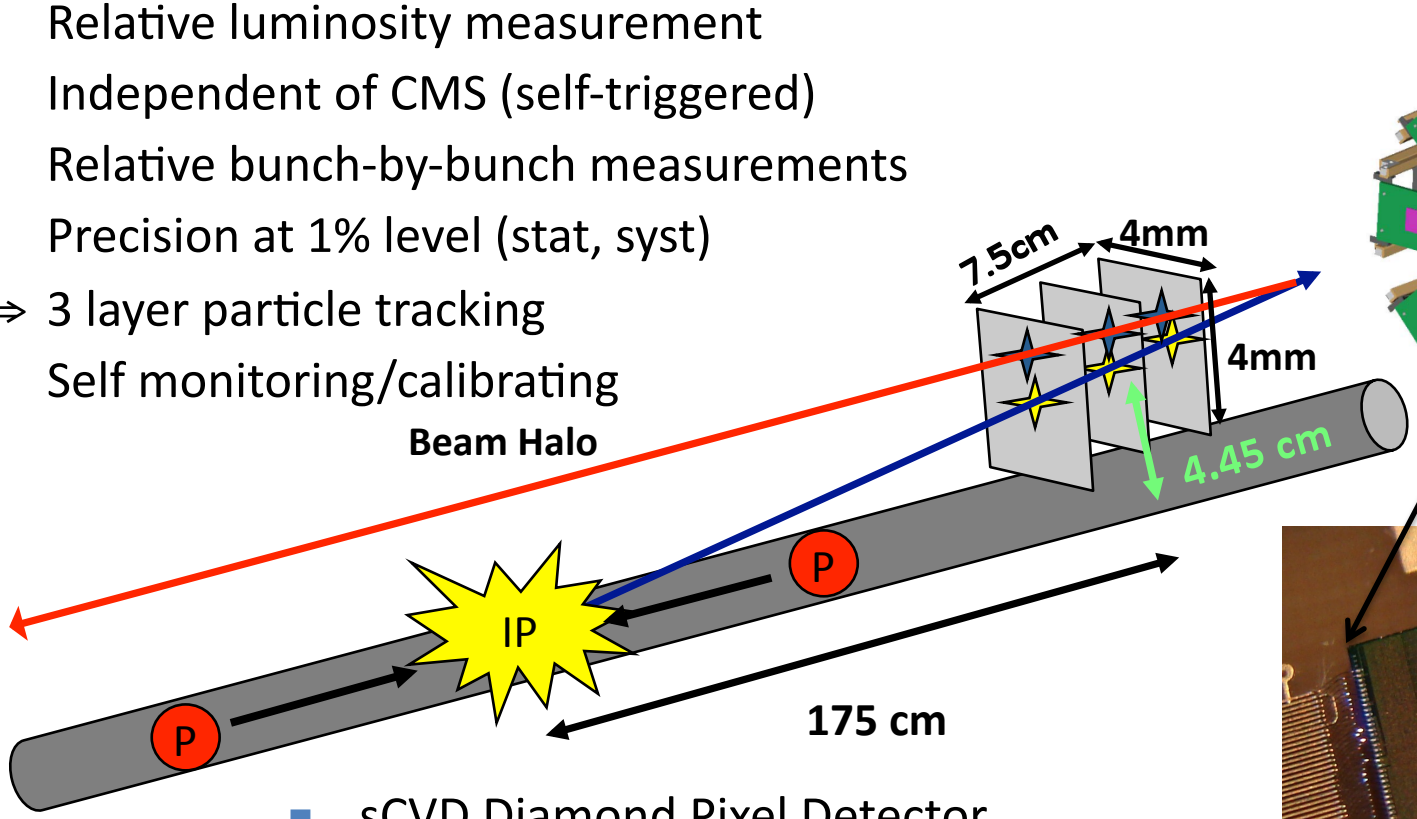

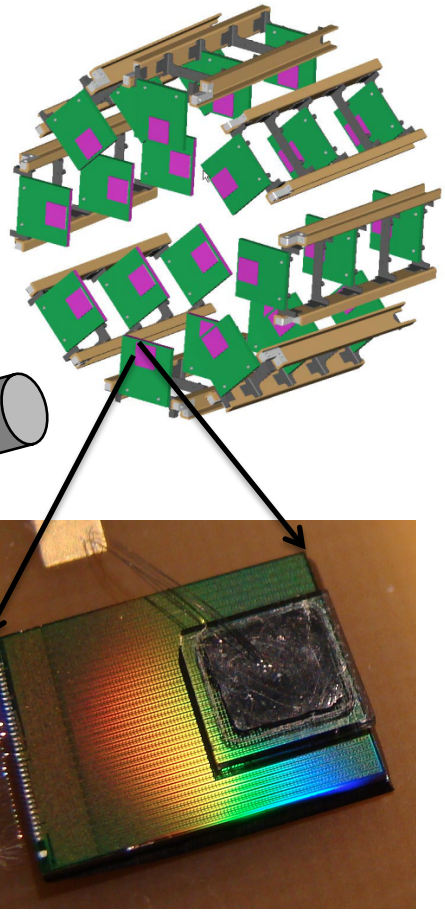

- sCVD Diamond Pixel Detector
  - Fast OR readout (3-layer coincidence): online luminosity information
  - Full pixel readout (1-10 kHz): alignment, luminous region, background studies, etc.

PLT Mechanics

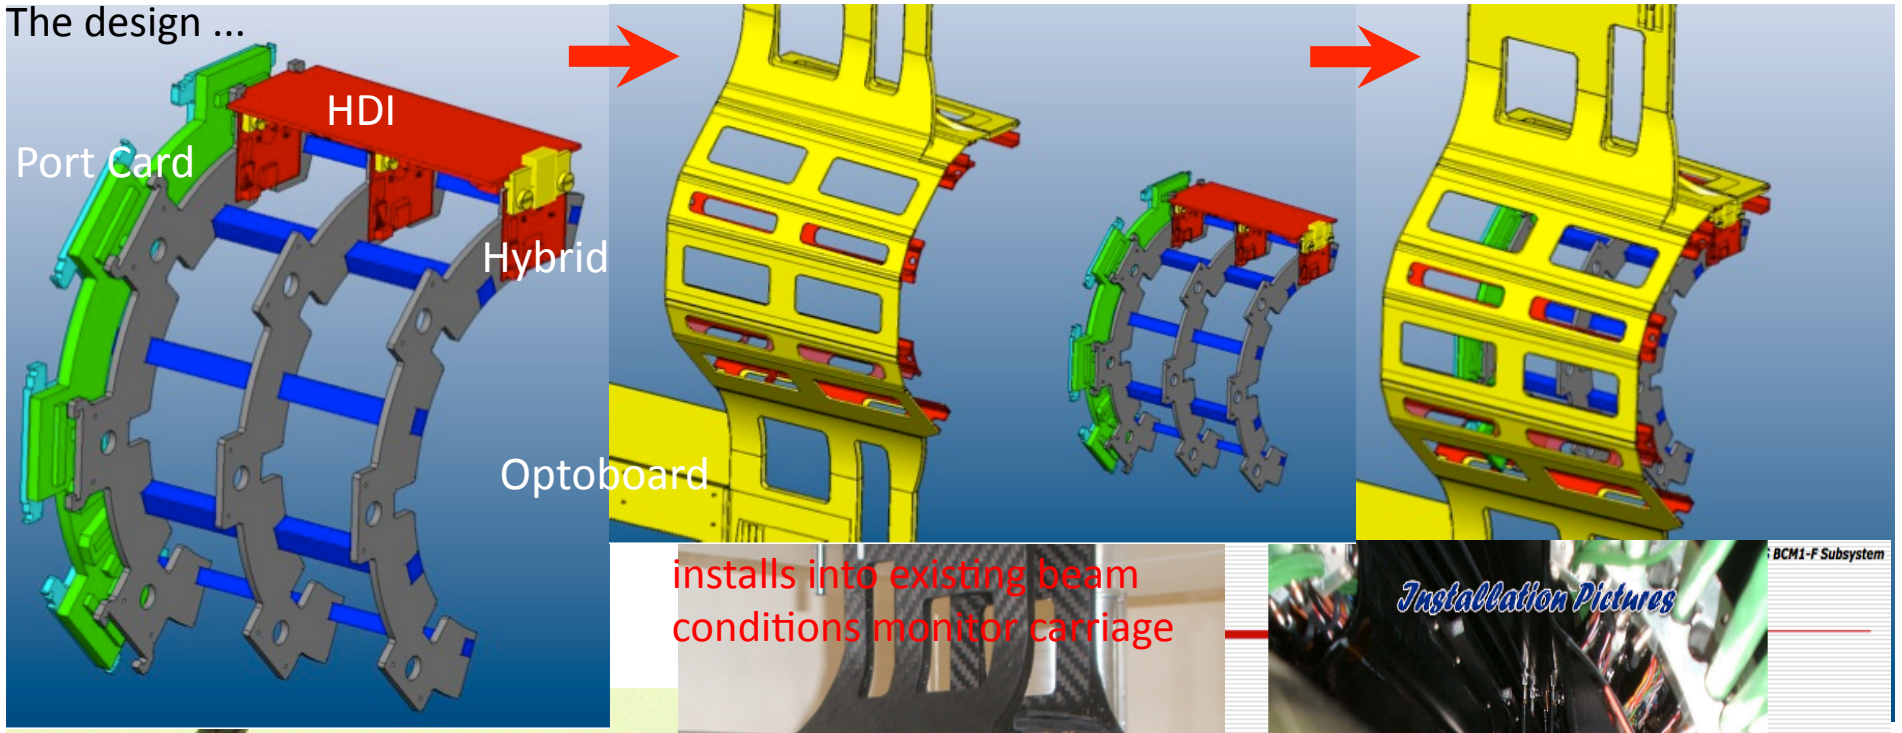

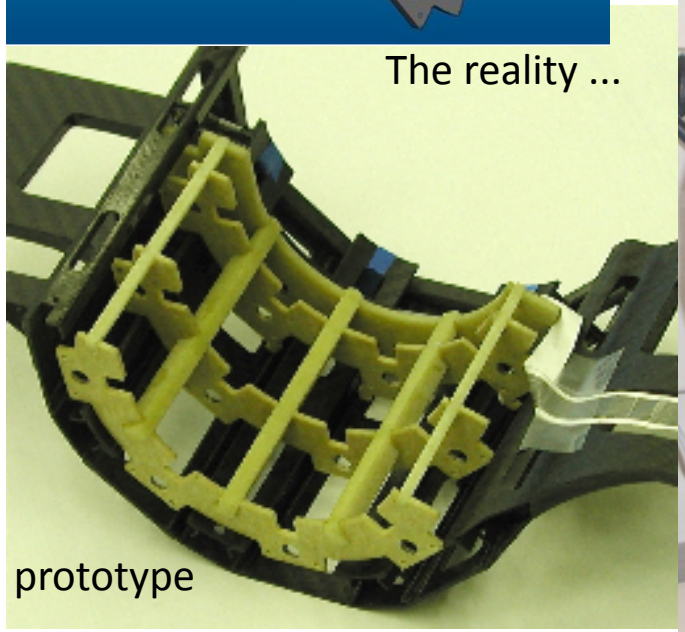

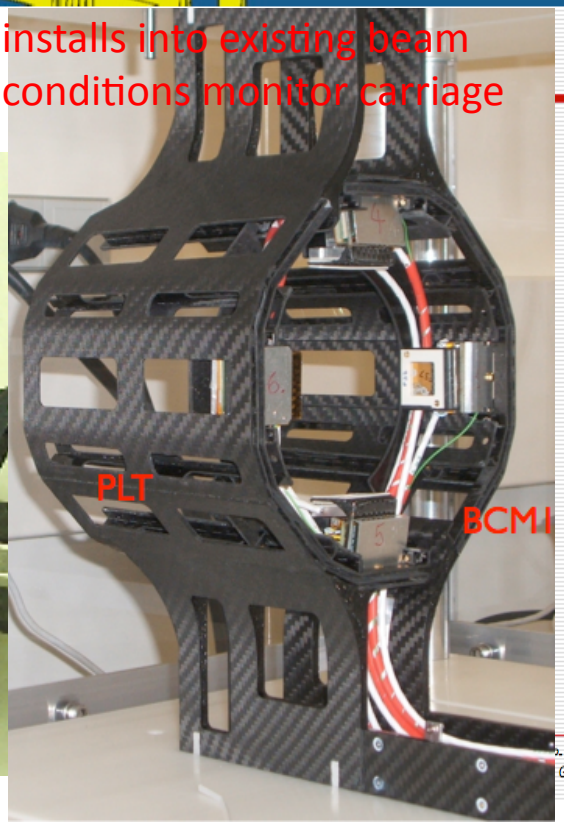

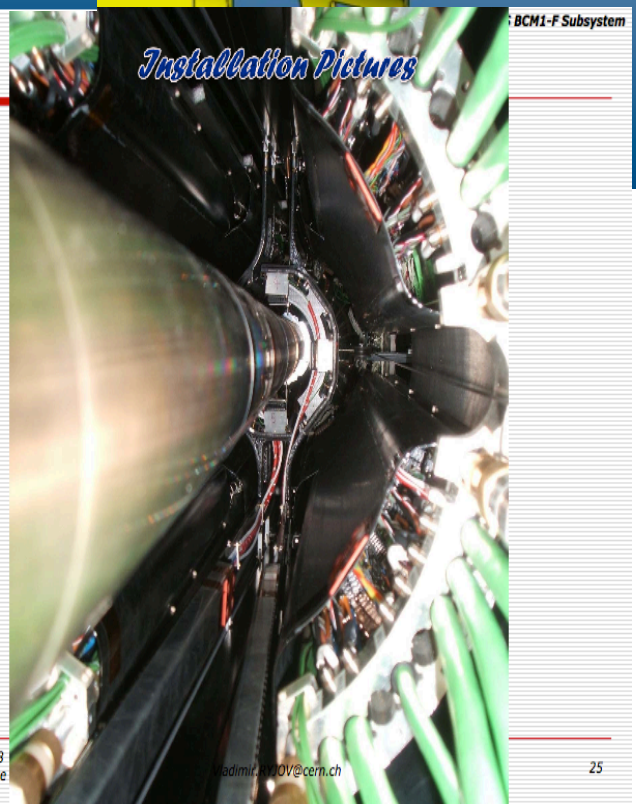

Single-Crystal Diamond Detector (sCVD)

- Radiation hard (survives > 2 x 10^{15} p/cm^2)
- No need for cooling
- Full charge collection at E-field < 0.2V/um
- Fast signal collection (~1ns from 500 um)
- Pulse height well separated from pedestal

- BCM1F is currently the largest implementation of sCVD diamond
  - NIM Paper

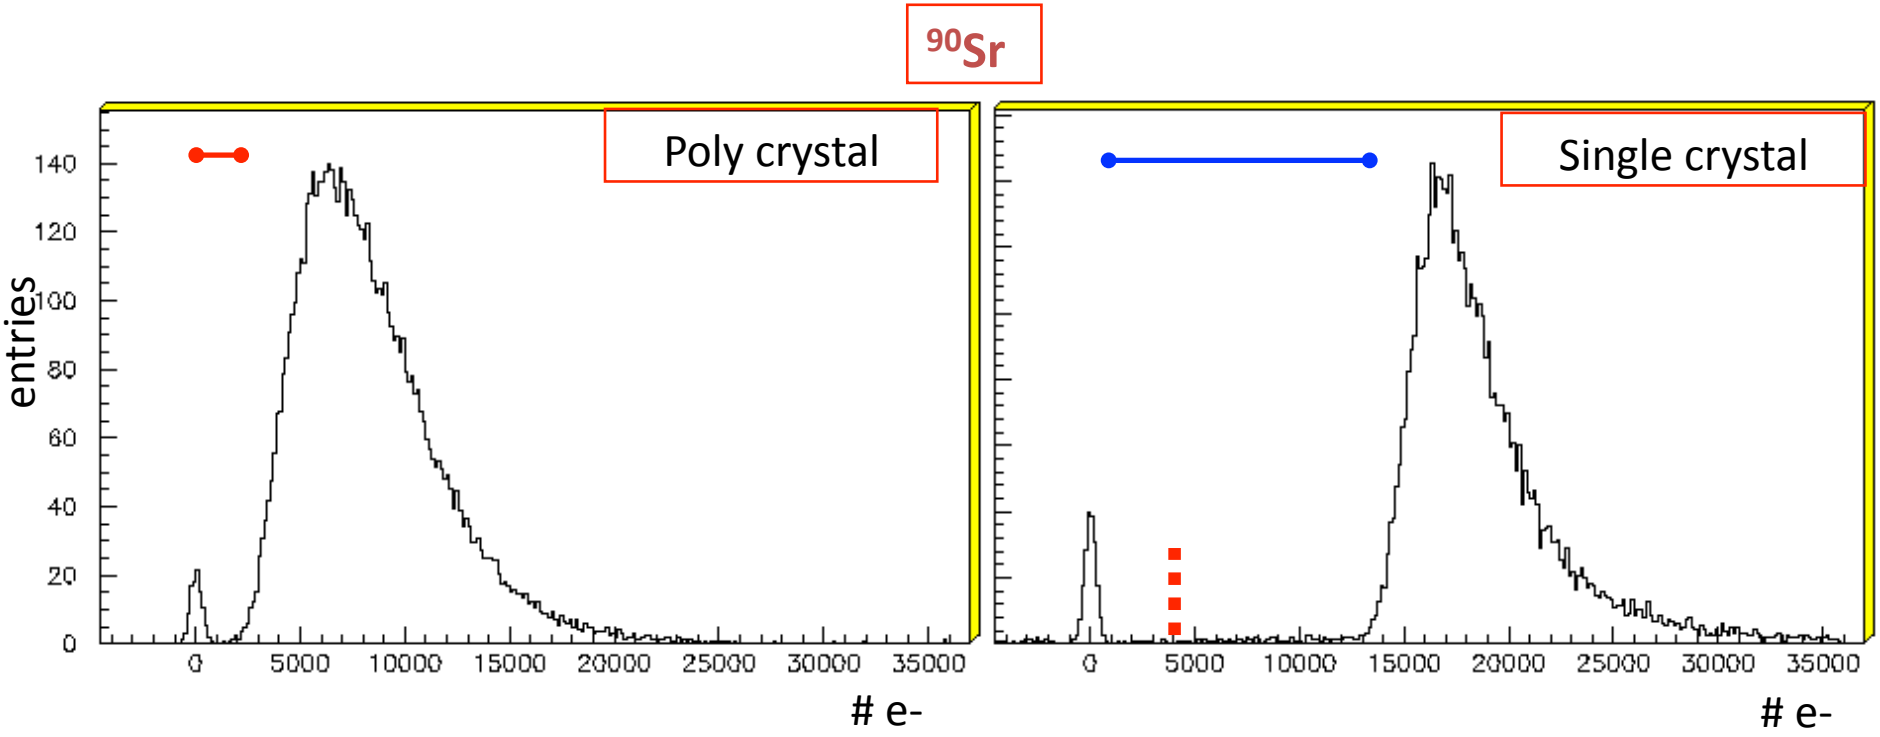

Readout

- CMS Pixel chip (PSI46) bump-bonded to sCVD
- Has fast cluster counting in double-columns built in
- Individual pixel thresholds adjustable
- Individual pixels can be masked
- Self-triggered by Fast Or readout
- Full analog readout of
  - Hit address
  - Charge deposit
- Standard pixel readout (FEC, FED [ADC])
- FED has custom firmware for Fast Or

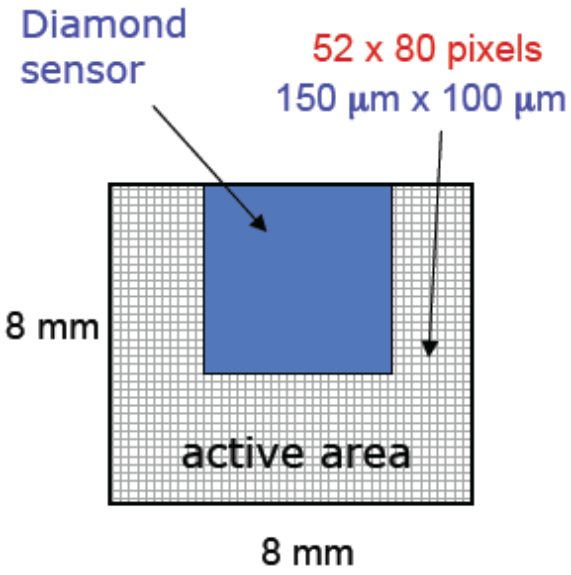

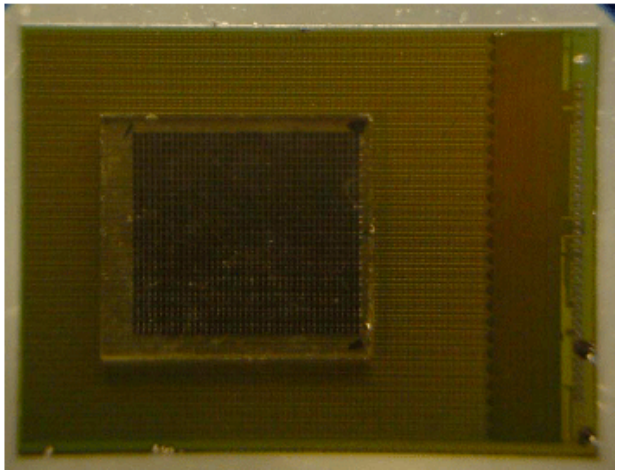

Bump bonded at Princeton micro-fab lab

PLT Performance – Test Beams

- Test beams
  - 2009 : CERN SPS
    - Efficiency
  - 2010 : FNAL Mtest
    - Optical Readout Characterization
    - Fast Or signal timing studies with TDC
  - 2010 : CERN PS
    - Long-running systematics
    - In-pixel occupancy
    - Spatial Resolution

CERN SPS – May 2009

- 150 GeV/c π+
- 2 days of beam time
- Used electrical FED and FEC

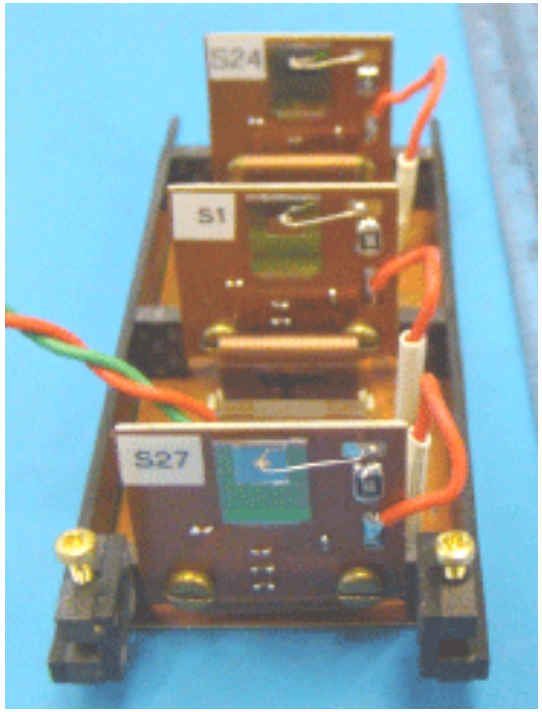

Small (6x6 mm) Scintillators
(used as triggers)

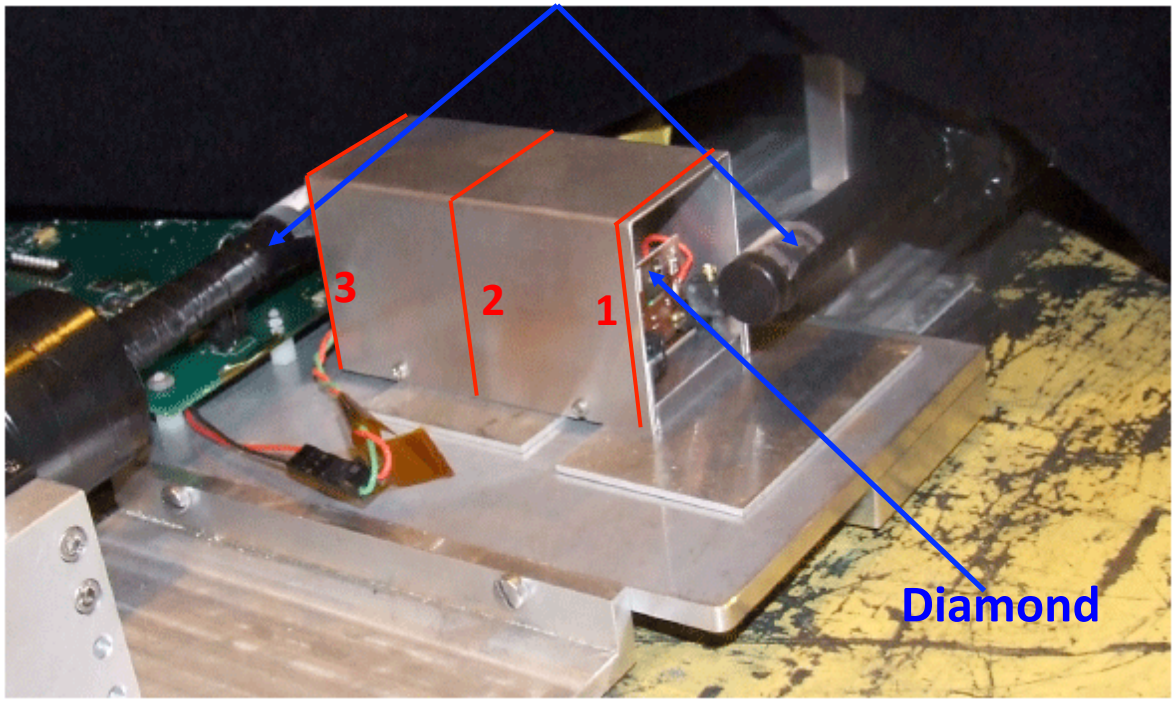

Efficiencies

- Fiducial area
  - Masked border rows/columns
  - Removed columns in the shadow of the entrance counter
- Dead pixels
  - Plane 1: 1.8%
  - Plane 2: 2.2%
  - Plane 3: 0.1%
- Bump bonding efficiency
- Fast Or Efficiency:

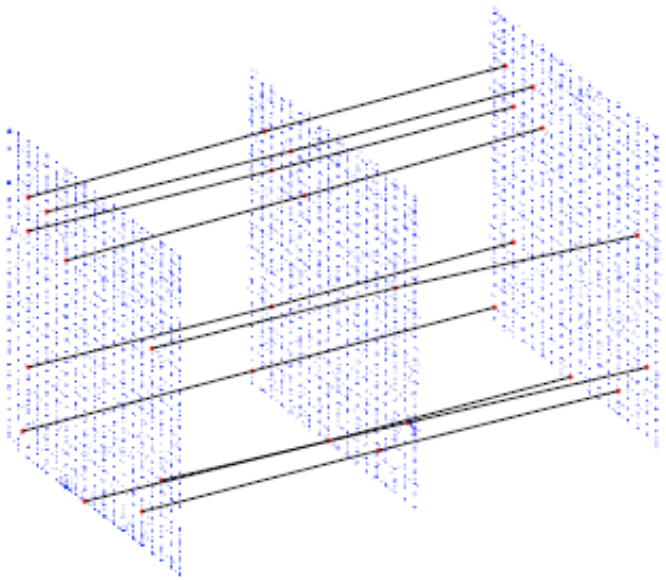

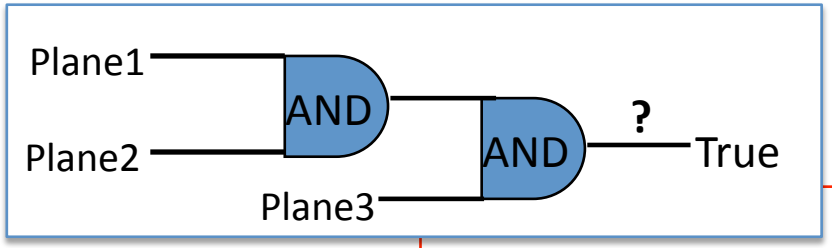

	Plane 1	Plane 2	Plane 3
Measured Efficiencies	99.3%	99.6%	99.9%

Alignment

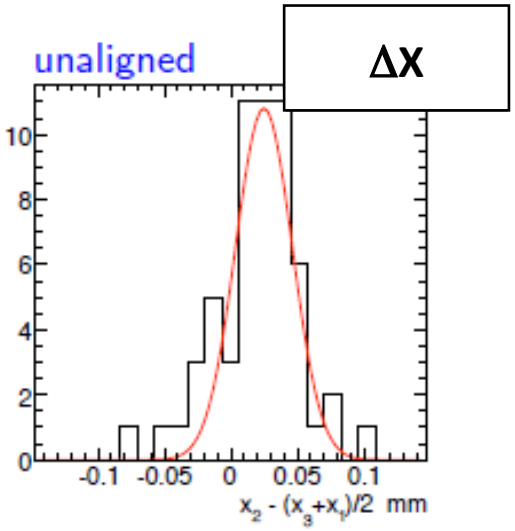

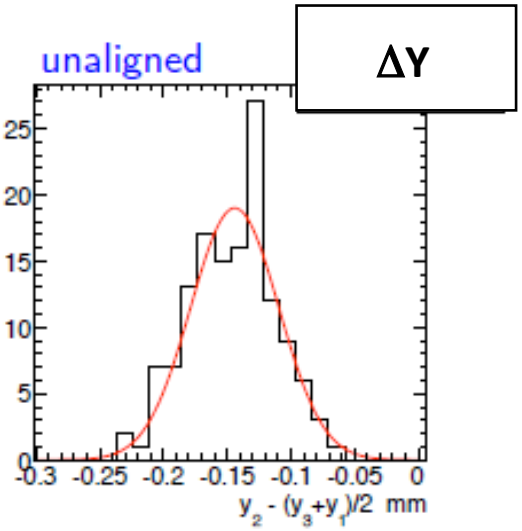

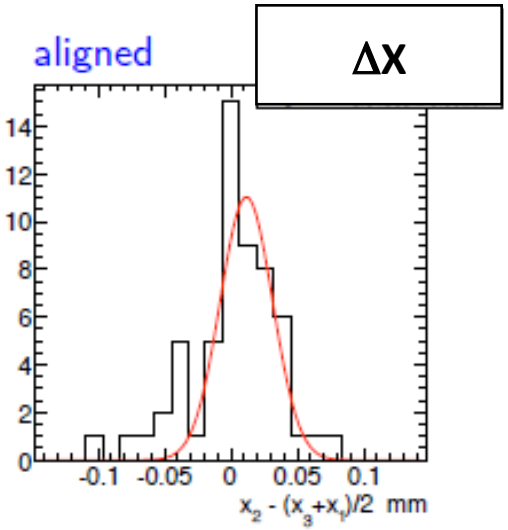

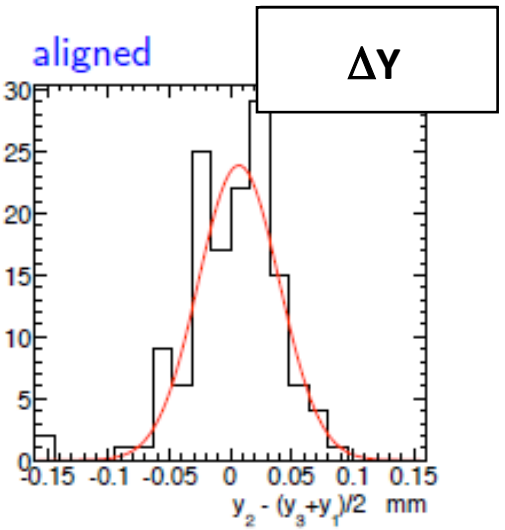

- Successfully reconstructed tracks
  - Hit position defined as the "center of charge" (charge sharing)
- Define residual: $x_2 - (x_3-x_1)/2$
- Alignment
  - X offset: 25 ± 5 um
  - Y offset: 144 ± 3 um
- Even with only a few tracks, a successful alignment was achieved
  - X alignment: 57 tracks
  - Y alignment: 140 tracks

Fast Or

- FNAL Mtest – March 2010, 80 GeV pions
- Full optical readout used (including Fast Or)
- Studied timing of Fast Or with a Multi-Hit TDC
- Triggered on scintillator coincidence

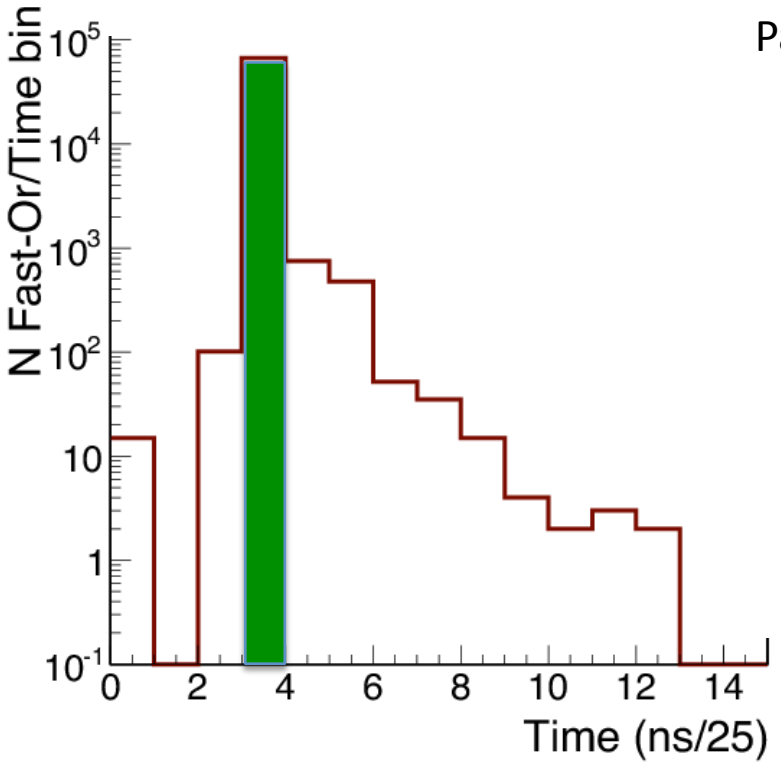

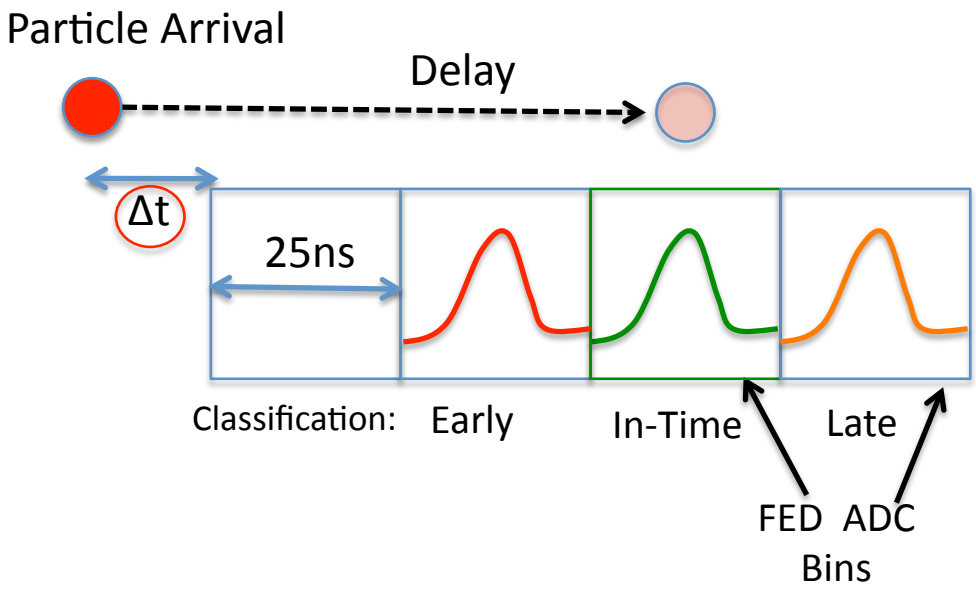

Fast Or Timing Studies

- Beam out of sync with the system clock -> time walk effects exaggerated
- Select out in-time particle arrivals with TDC -> measure early, late, and on-time Fast Ors in LHC operating conditions

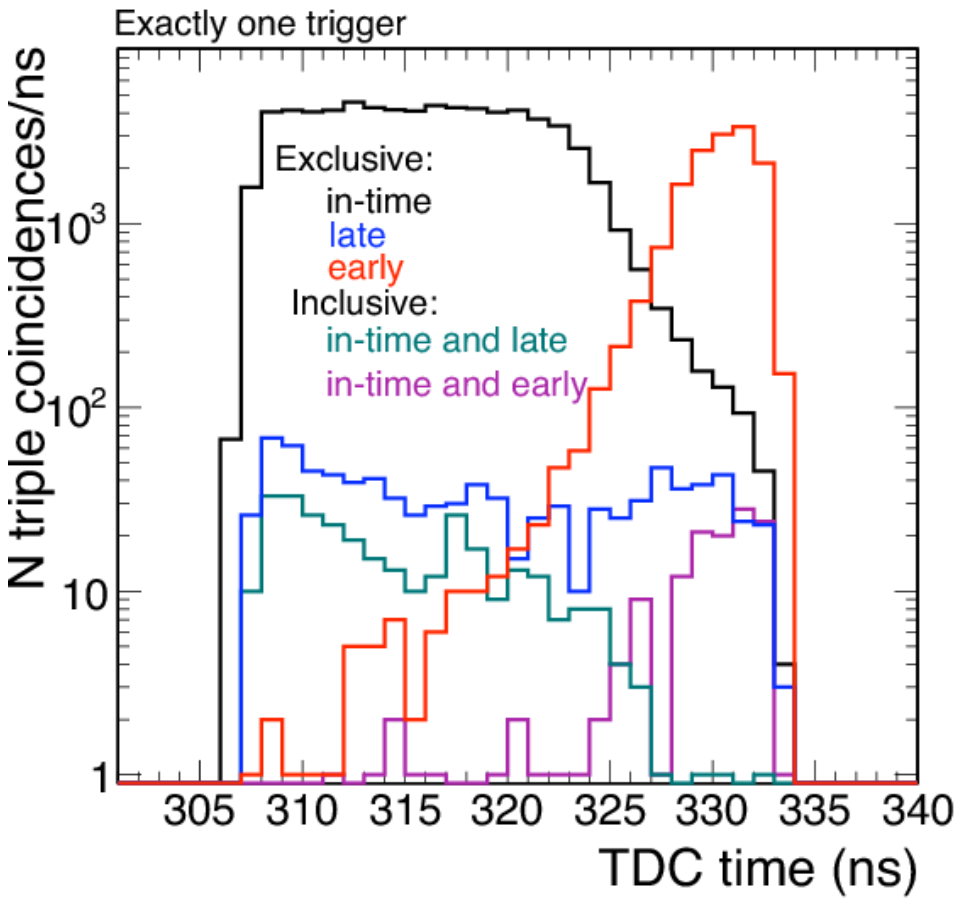

- Exclusive: only one Fast Or
- Inclusive: in-time + early or late

	Exclusive	Inclusive
Early	0.13%	0.01%
Late	0.84%	0.38%

- Exclusive events -> errors in relative bunch-by-bunch luminosity measurement
- Inclusive events-> errors in overall luminosity measurement (overcount)
- Meets goal of 1% systematic error

CERN PS T9 – May 2010

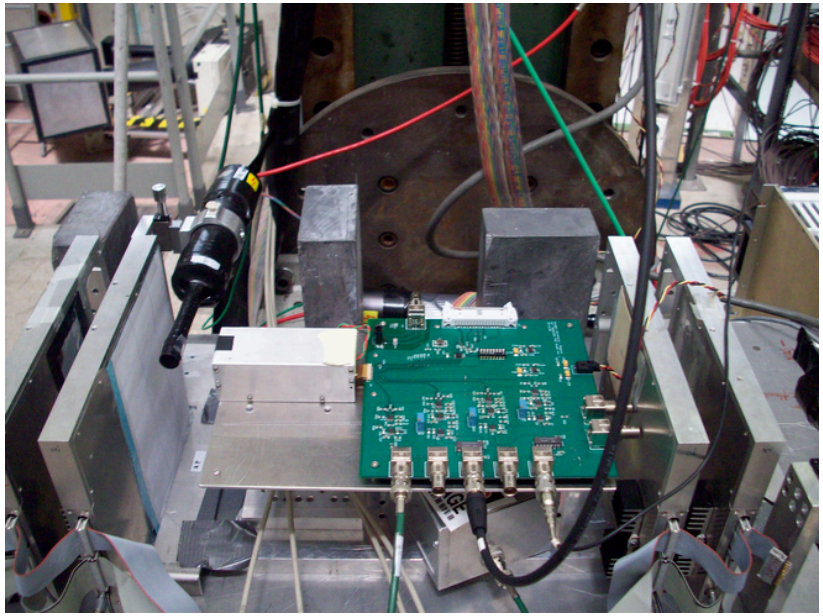

- Beam composition
  - 60% protons
  - 35% pions
  - 10 GeV
- 3 weeks of beam
  - 90% time running
- Included Si Strip tracker, provided by the University of Zurich
  - Intrinsic resolution of 2 um per plane
  - Resolution limited by multiple scattering

Event Selection/Characterization

- Trimmed per-pixel thresholds to 3000 e-
- ADC -> Charge conversion done using PSI46 charge injection facility
- The border region was excluded

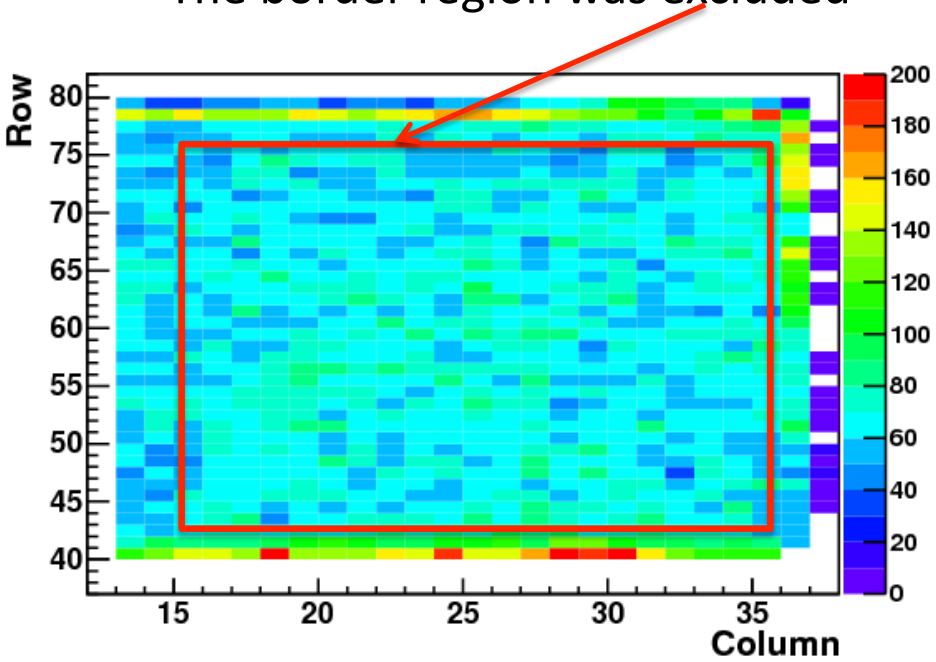

Red box indicates analyzed region

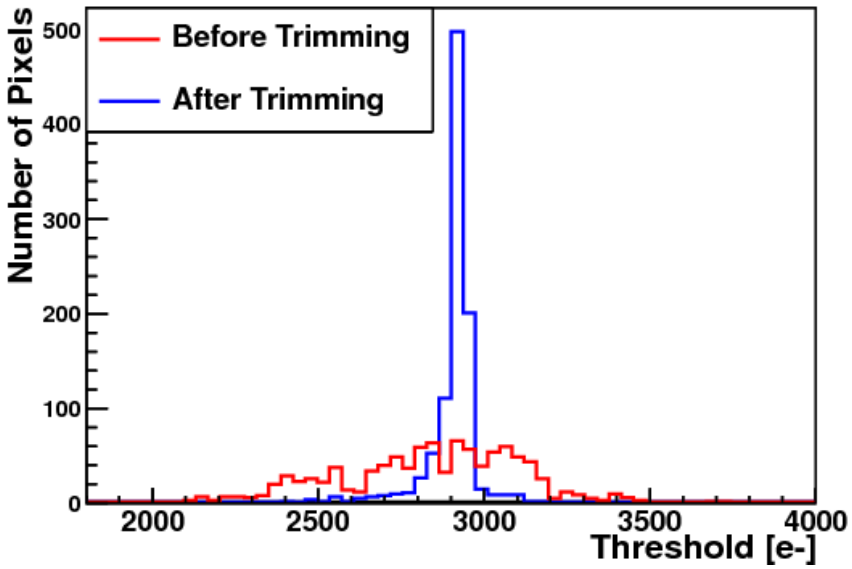

Pixel thresholds before and after trimming

- Exactly one cluster, defined as a collection of adjacent hits, also required

Charge Deposit

- Signal/Threshold = ~16000/3000 =5.3
- Broadening effects
  - Calibration Error
  - Beam out of time with system clock
  - Broken clusters

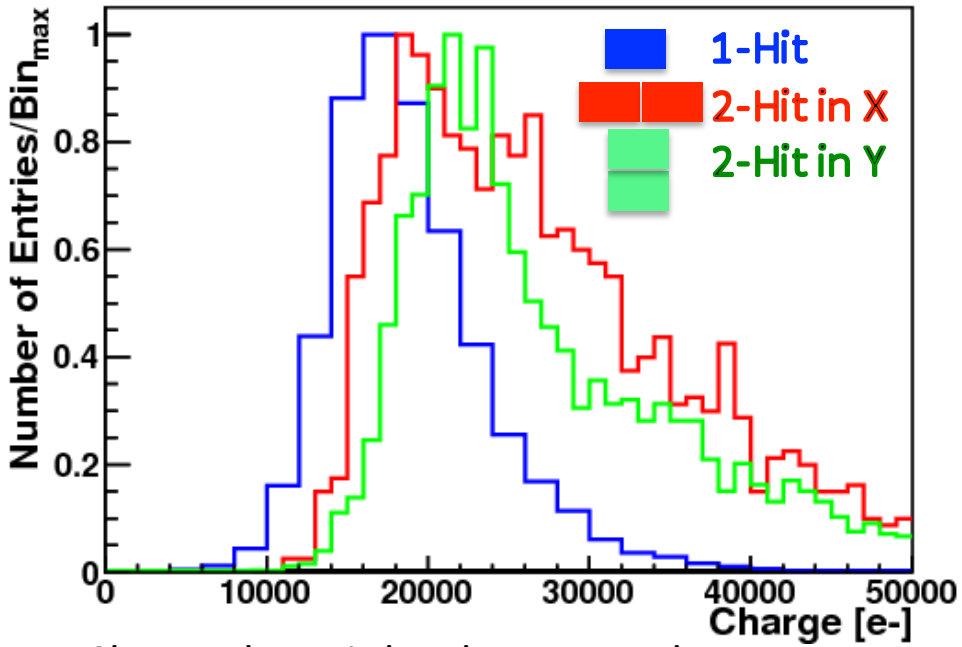

Charge deposit by cluster topology

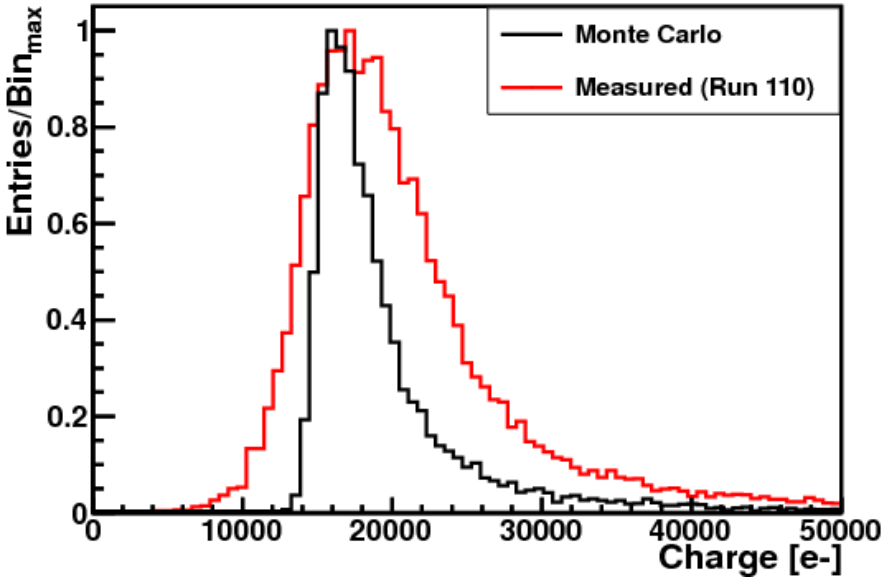

Charge deposit for all 1-cluster events (all cluster topologies included)
Normalized to the maximum point

In-Pixel Occupancy: 1 Hit Events

- Position in the pixel is calculated with respect to the lower left corner
- $\Delta x_{pixel} = x_{track} - col*(150\ [\mu m])$, $\Delta y_{pixel} = y_{track} - row*(100\ [\mu m])$

- The red box corresponds to the pixel area
  - 150 µm x 100 µm

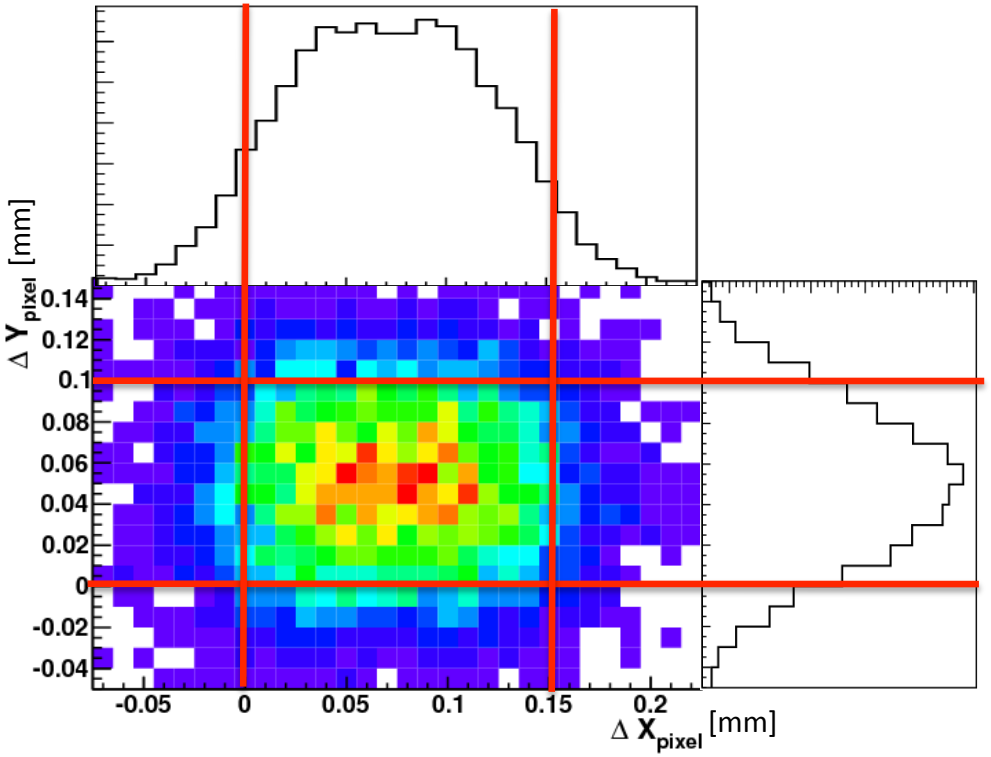

In Pixel Occupancy: 2 Hit "XX" Clusters

- $\Delta X_{border} = (x_{track} \% d_x - \delta)$
  - δ is a phase factor used to adjust border position to 0
- 0 corresponds to the border between the pixels

Cluster configuration

- The red boxes represent the area of the component pixels

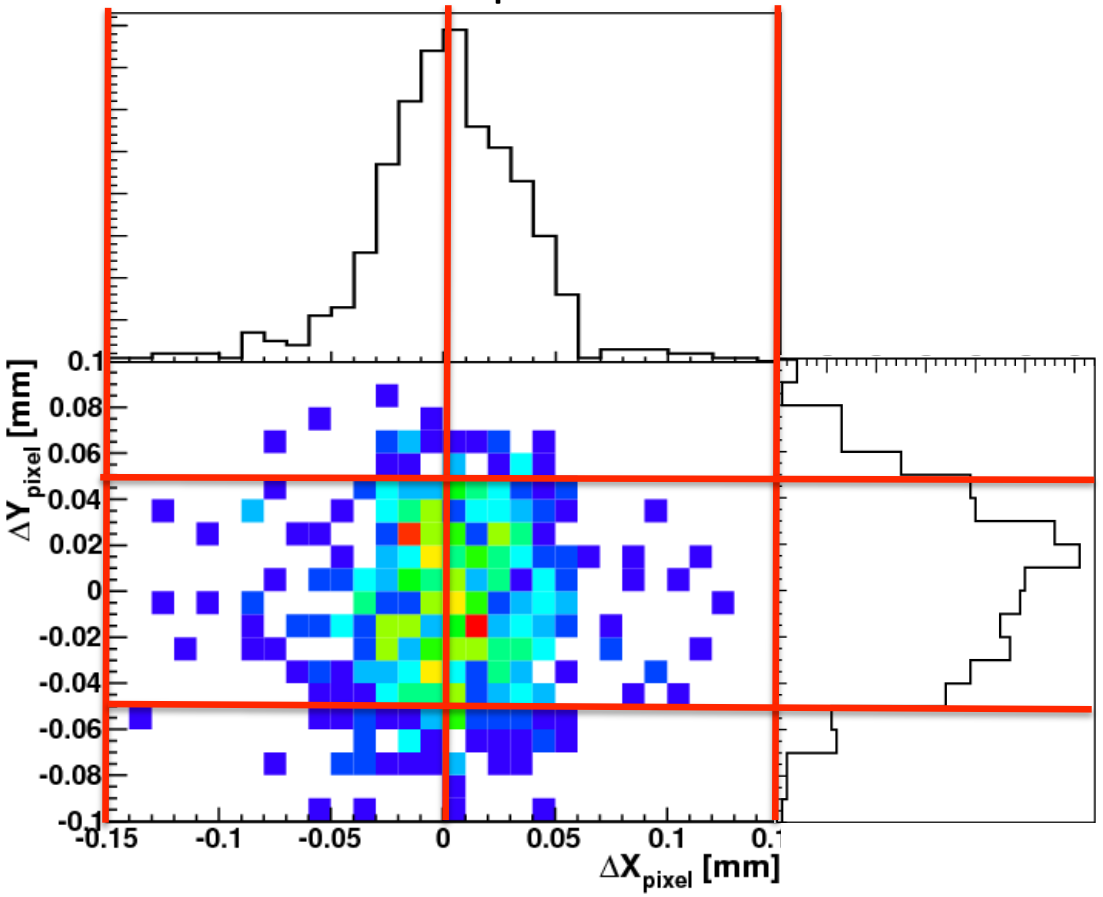

In Pixel Occupancy: 2 Hit "YY" Clusters

- $\Delta Y_{border} = (y_{track} \% d_x - \delta)$
  - δ is a phase factor used to adjust border position to 0
- 0 corresponds to the border between the pixels

Cluster configuration

- The red boxes represent the area of the component pixels

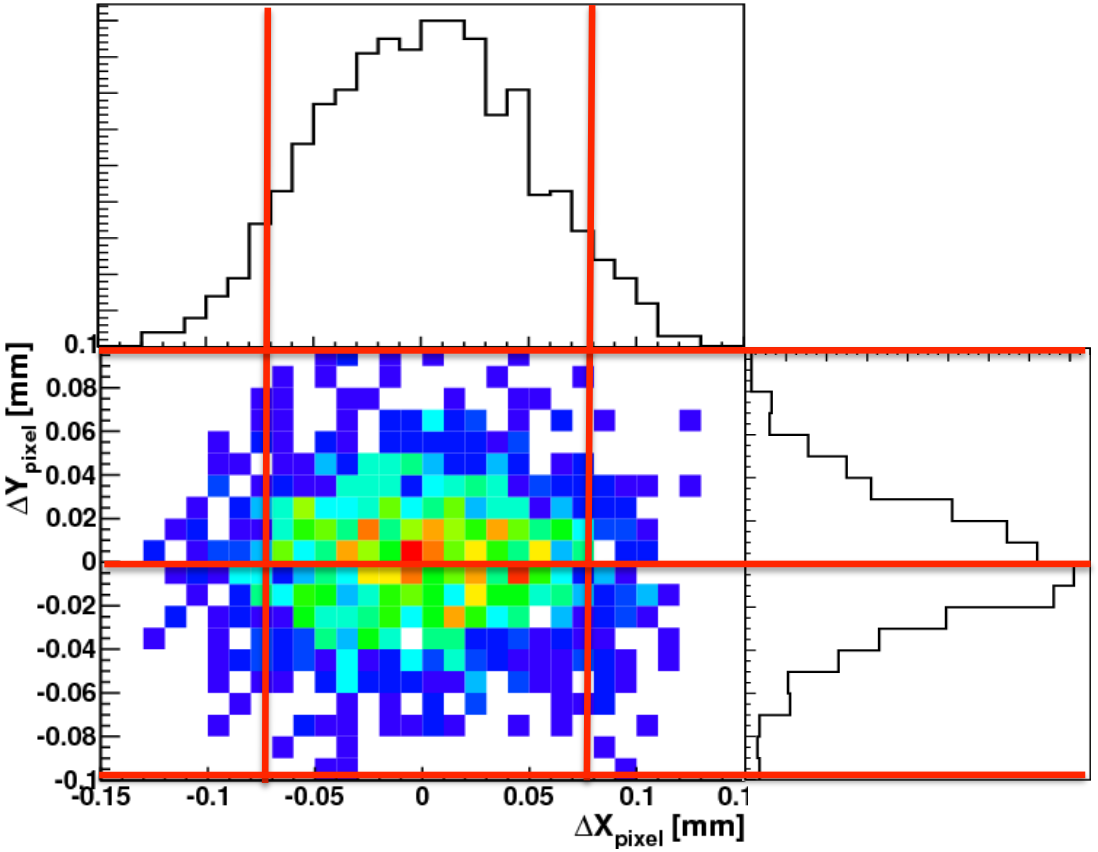

2-Hit residuals with η-based correction

- Residuals: $\Delta_x = x_{track} - x_{plt}$, $\Delta_y = y_{track} - y_{plt}$
- Required that there is exactly 1 hit in the PLT
- Includes $\eta = Q_r/(Q_r+Q_l)$ correction

Perpendicular Tracks

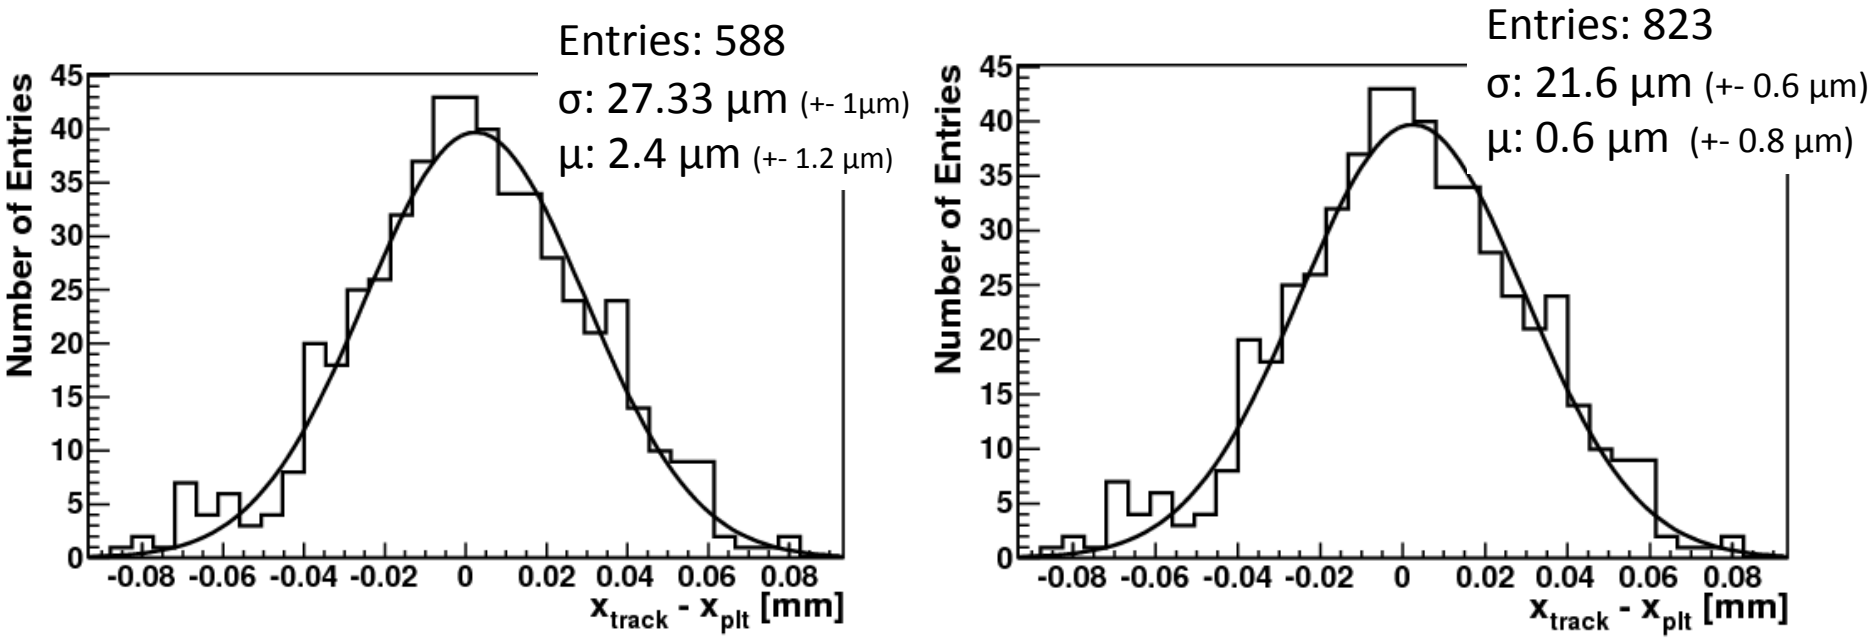

- Charge sharing improves the resolution beyond digital resolution
- Efficiency goes down significantly (90% drop for perpendicular tracks) when requiring 2-hit clusters

Digital Resolution
X : 43. 3 μm
Y : 28.9 μm

Production

- sCVD diamonds from Diamond Detectors
- Diamond Characterization done at Rutgers
- Bump bonding at PRISM

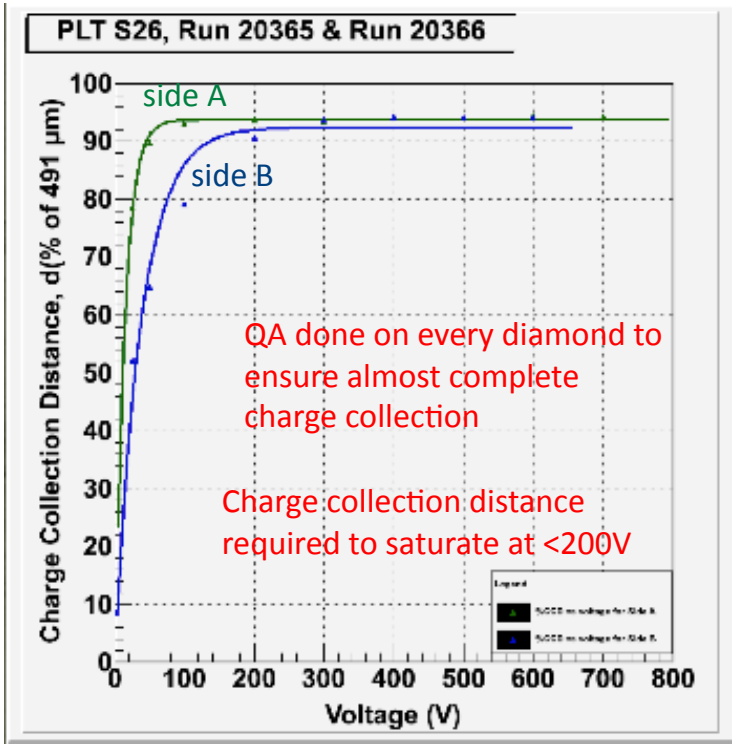

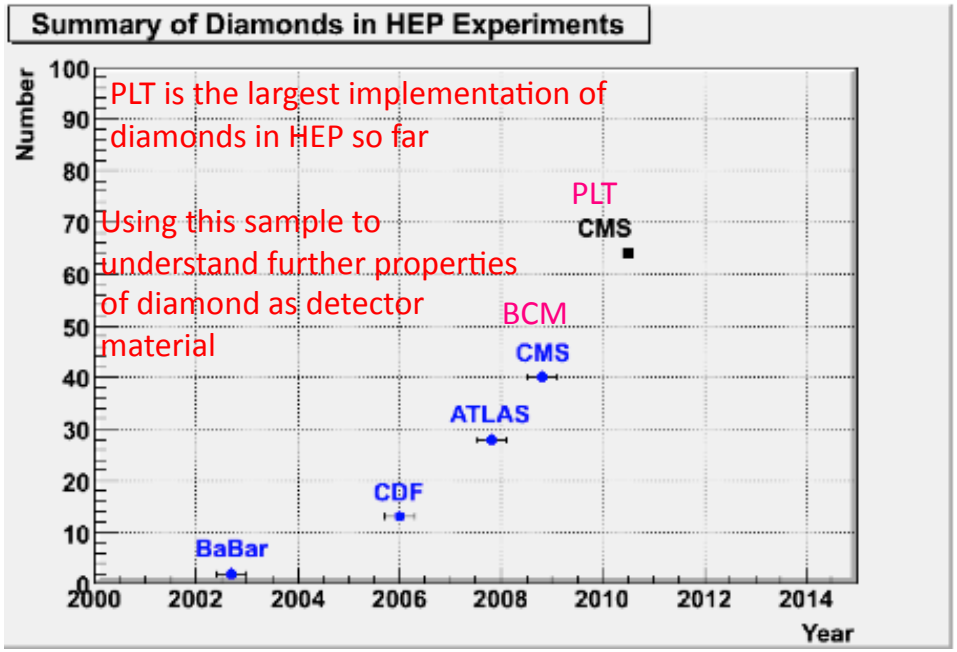

Conclusions

- PLT is a dedicated luminosity monitor for CMS based on sCVD diamond detectors
  - 1% statistical precision on bunch-by-bunch luminosity in ~1s
  - Precision realtime monitoring of IP centroid
  - Monitoring of beam halo and beam abort gap
- Will provide information on operation of diamond detectors
  - Diamond tracking performance and efficiency
  - Long-term high radiation environment

Backup

Setup

Configuration 1

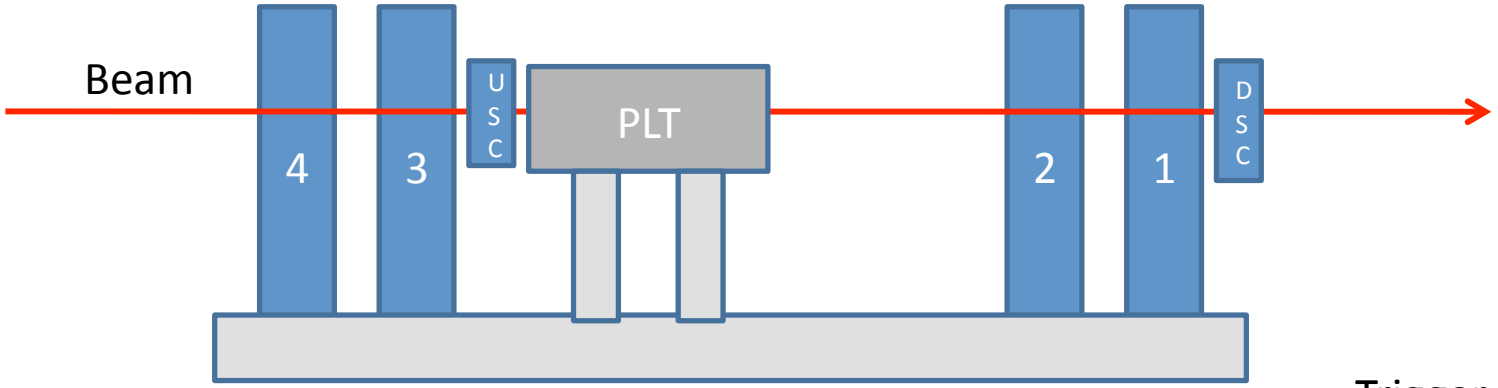

Trigger for most of the runs: Fastout of Plane 2 + DSC

Configuration 2

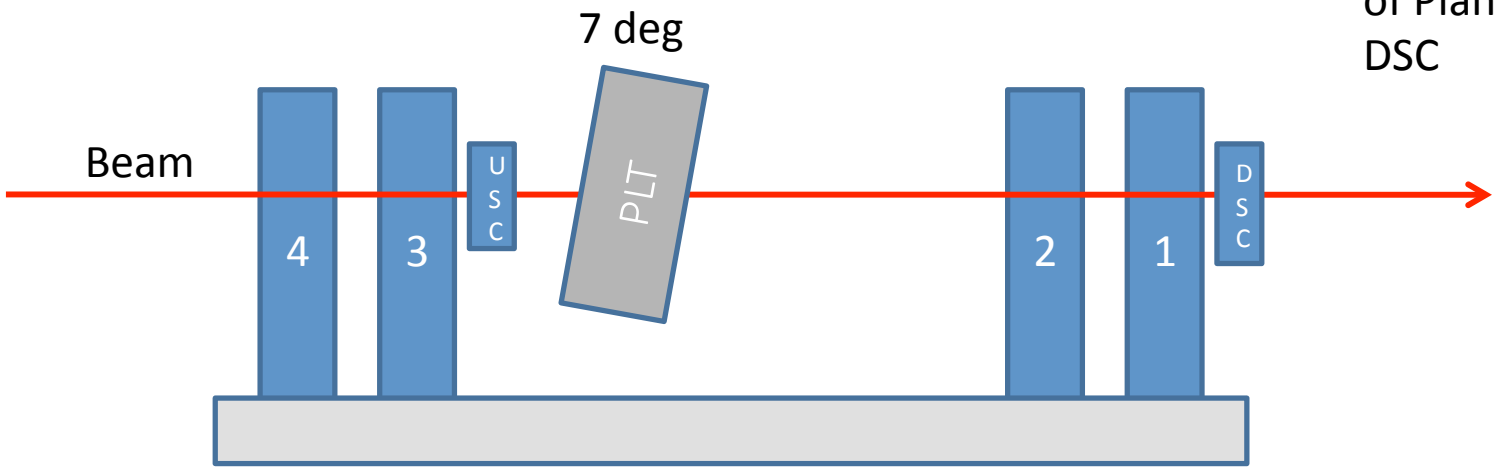

DCOL Configurations

- Divided clusters with a length of 1 in X and 0 in Y into 4 separate types (“XX” clusters)

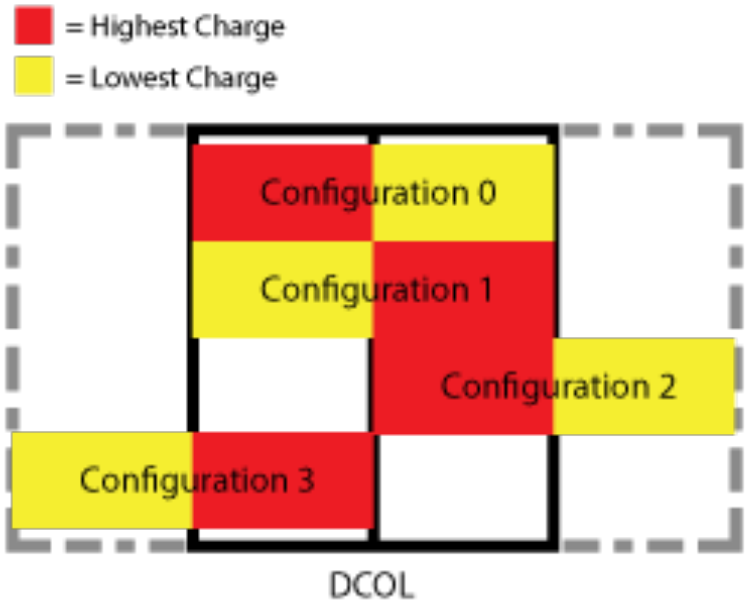

- Configuration 0 and 1 are referred to as “inside DCOL” clusters while 2 and 3 are referred to as “mixed DCOL” clusters

DCOL Asymmetries

- More asymmetries can be found if I divide the sample into the 4 configurations described earlier

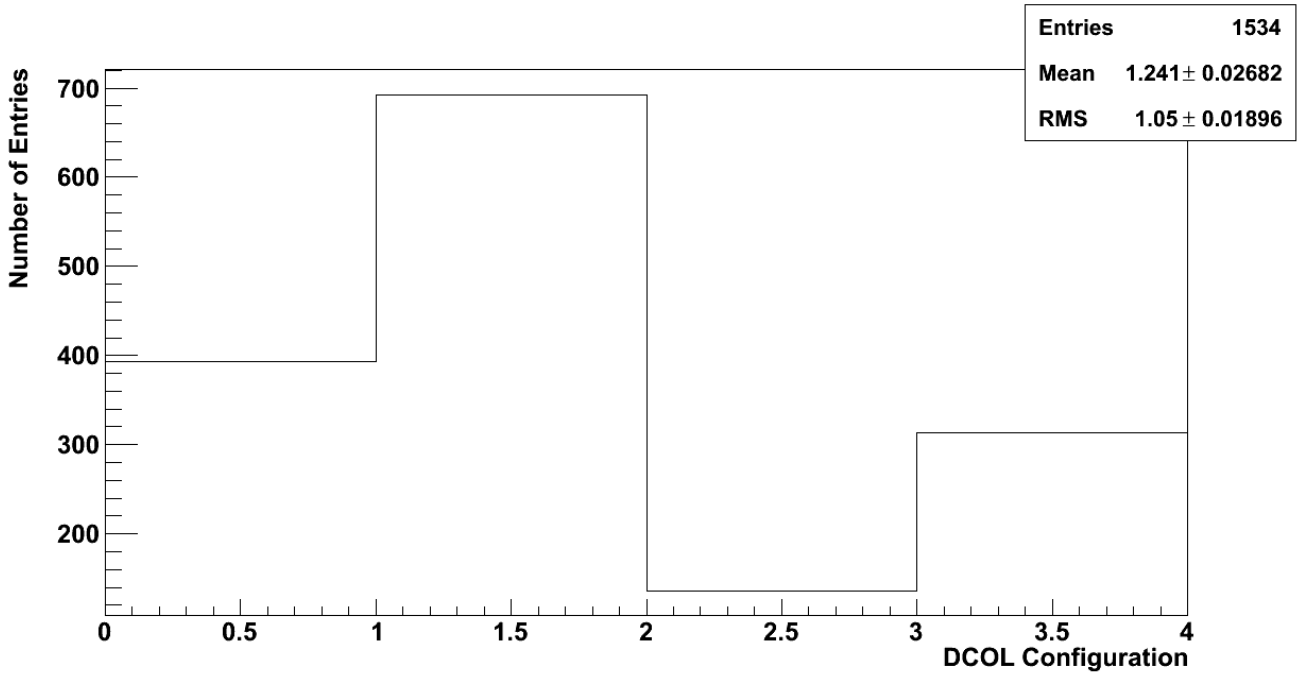

DCOL Configurations for XX clusters. A preference is seen for the charge to be higher in the right pixel (configuration 1 and 3) than the left pixel (0 and 2).

Left/Right Column Occupancy for Single-Hit Events

- Same plot as on previous slide, except for 1-hit events: asymmetry much less significant

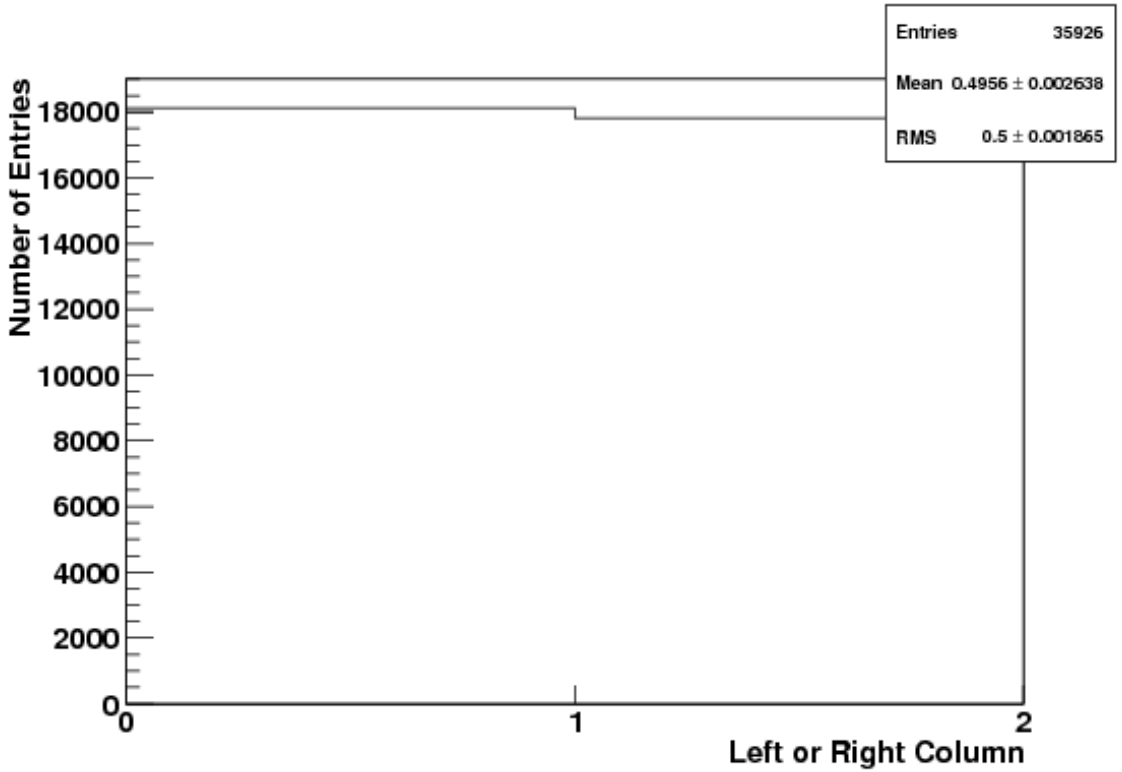

Column % 2. 0 corresponds to a hit in the left column of a DCOL, while 1 corresponds to a hit in the right

Address Levels

- Have an algorithm for automatically detecting address levels
- Peak detection -> Defines address levels as the center of each peak pair
- Results in plots like that ->
- Would probably be worthwhile to make this an online calibration that sweeps over all pixel to get the ringing that comes from larger level drops

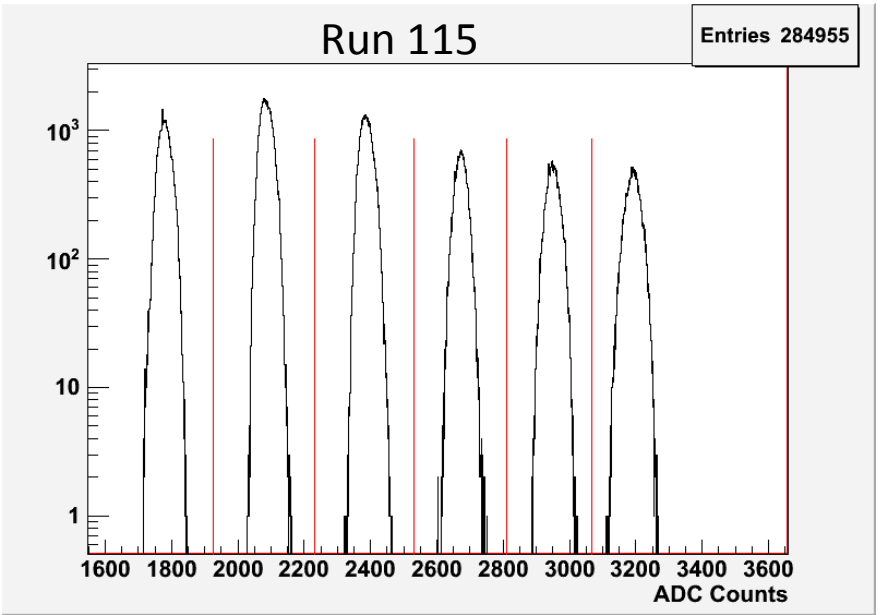

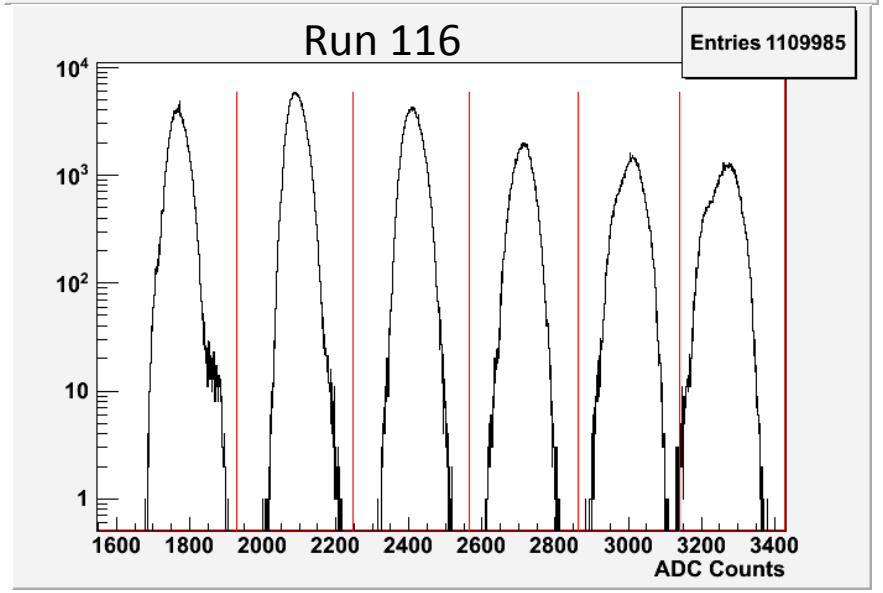

- Levels are not necessarily stable!
- Nothing was touched from run 115 (top) to run 116 (bottom), but at some point the address levels started fluctuating
- Could have been from a brownout or some sort of electrical failure… run 116 was the only time that the bt/plt scalers lost sync also

Pulse Height Stability

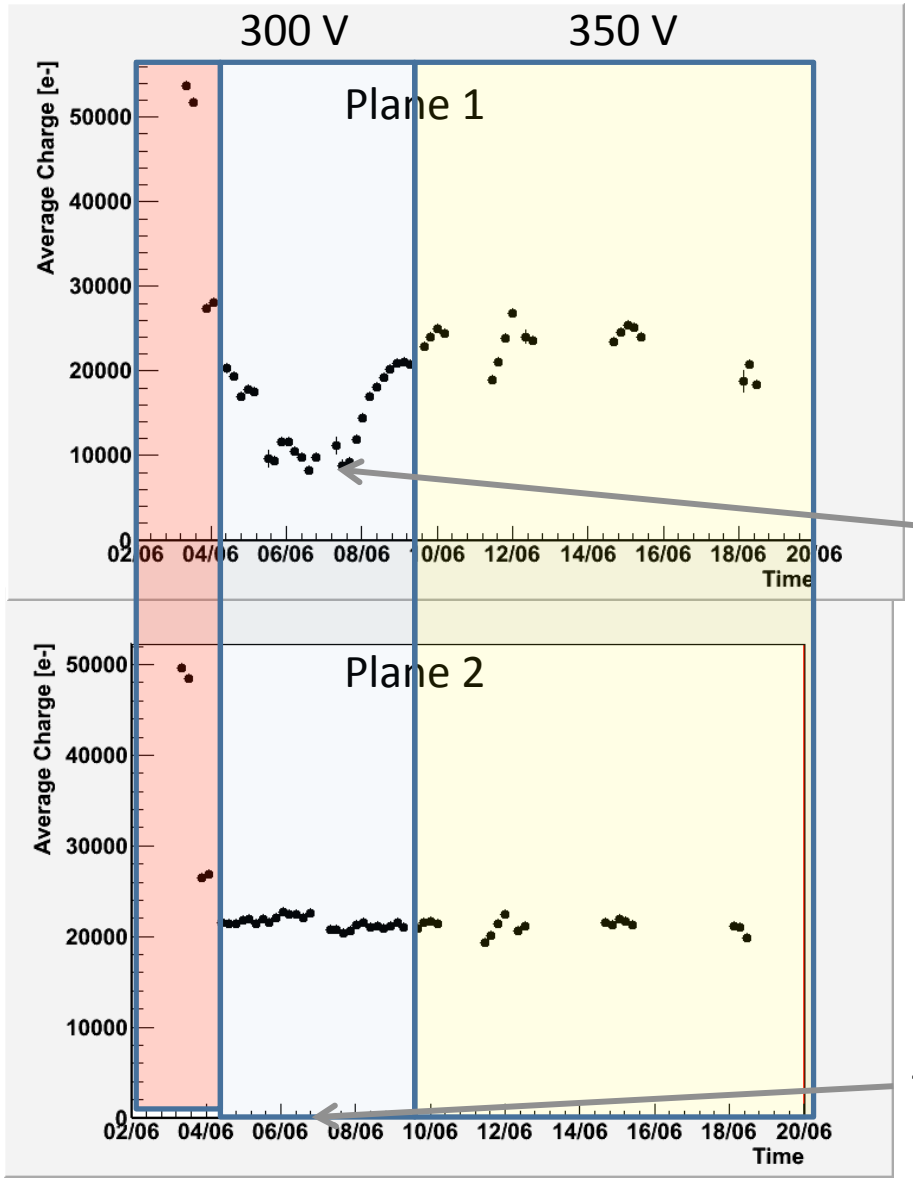

Covered front hole with tape

Trimming, 7th @ 8:00 am

- Area marked in red is untrustworthy (gain calibration isn't appropriate)
- Plane 1's pulse heights stabilized after enclosure was made to be light-tight
- Plane 2's pulse heights were stable during the entire run

PLT Diamond CCD Summary

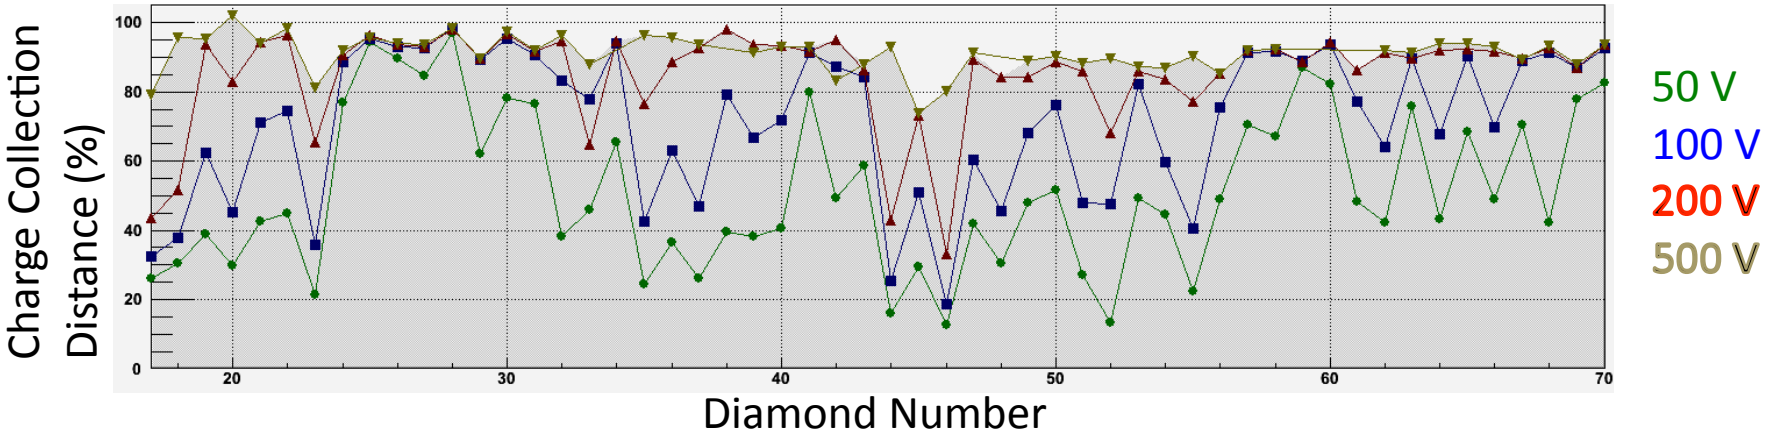

Trimming

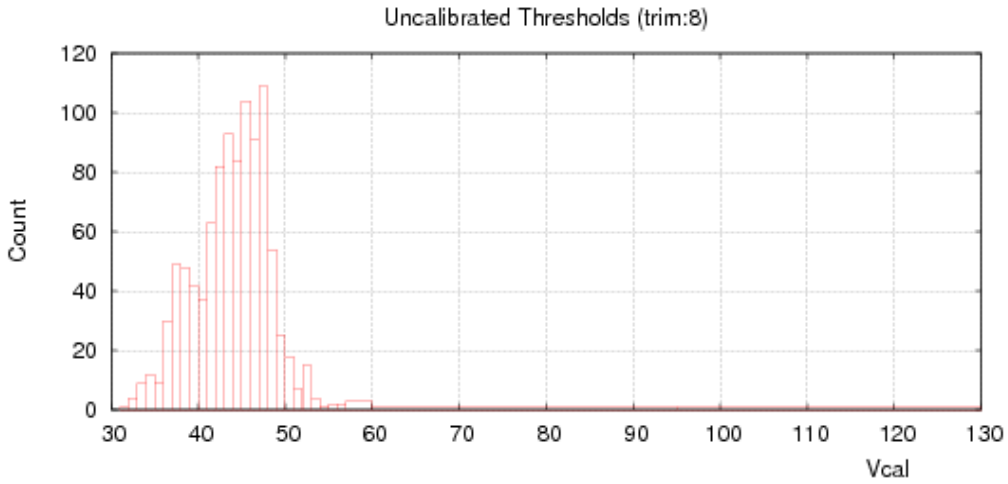

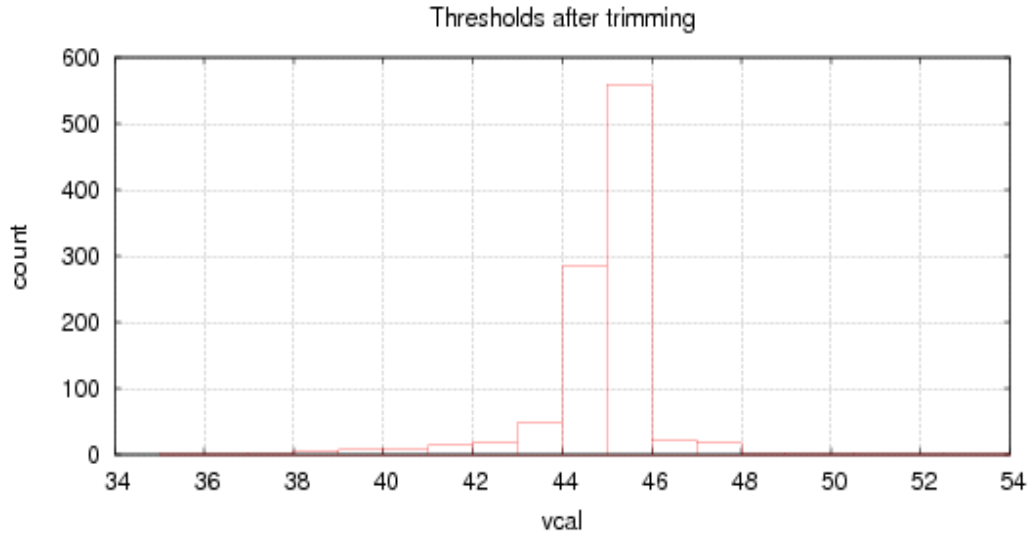

- ROCs were individually trimmed
- Took 15 minutes/ROC
- First 2 ROCs were trimmed, never trimmed the last one
- In electrons: ~3000 e-

- Expected Charge Deposit
  - Perpendicular tracks: 36*513*1.05=19391
  - Grazing angle tracks: 36*100*1.05=3780

Gain Calibration

- Took 4 different gain calibration runs, ~6 days apart (run 101,102,103,104)
- First run seems to be unusable for plane

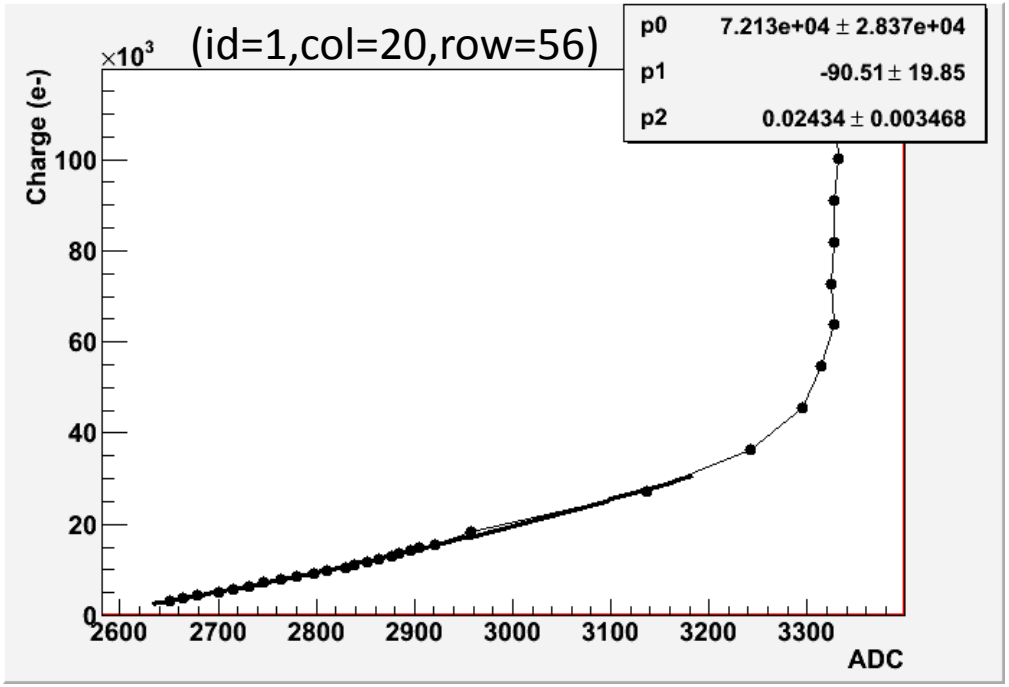

Run	Time
101	Jun 4 13:13
102	Jun 7 09:08
103	Jun 12 17:40
104	Jun 18 16:12

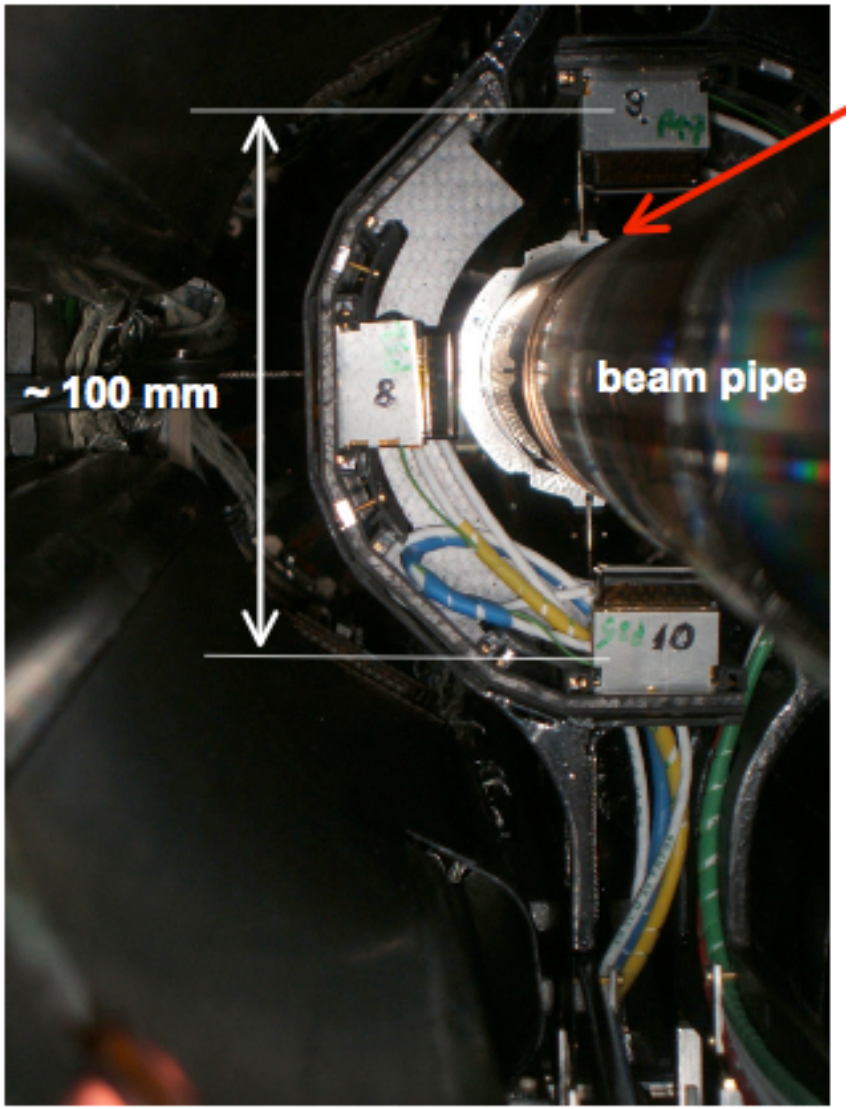
~ 100 mm
beam pipe

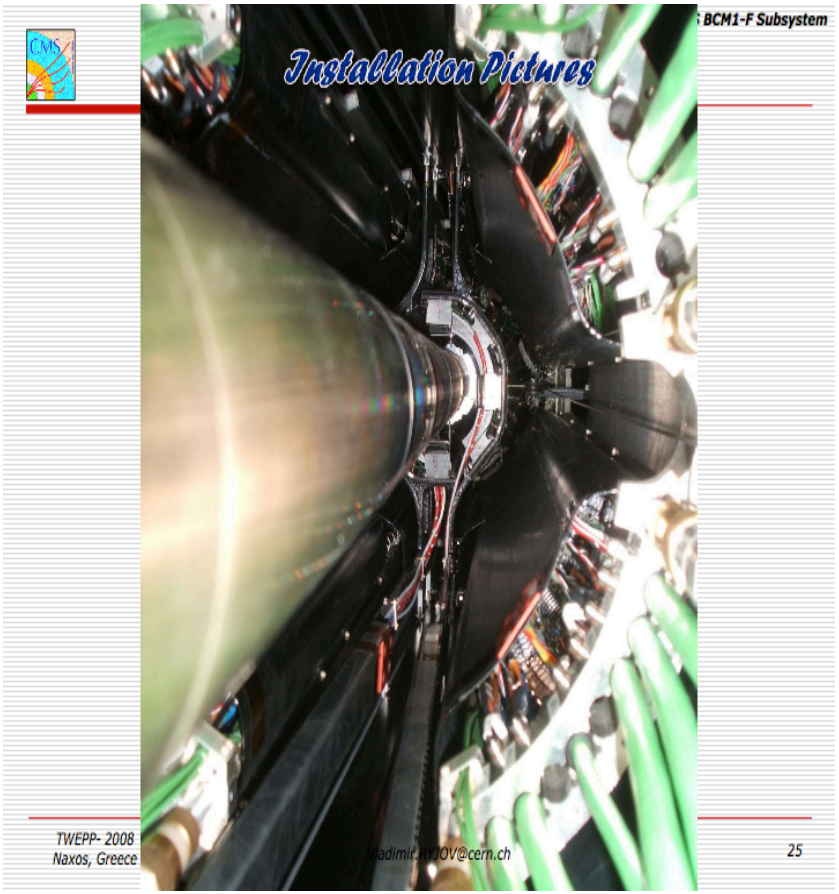
BCM1-F Subsystem
Installation Pictures
TWEPP- 2008
Naxos, Greece
25