



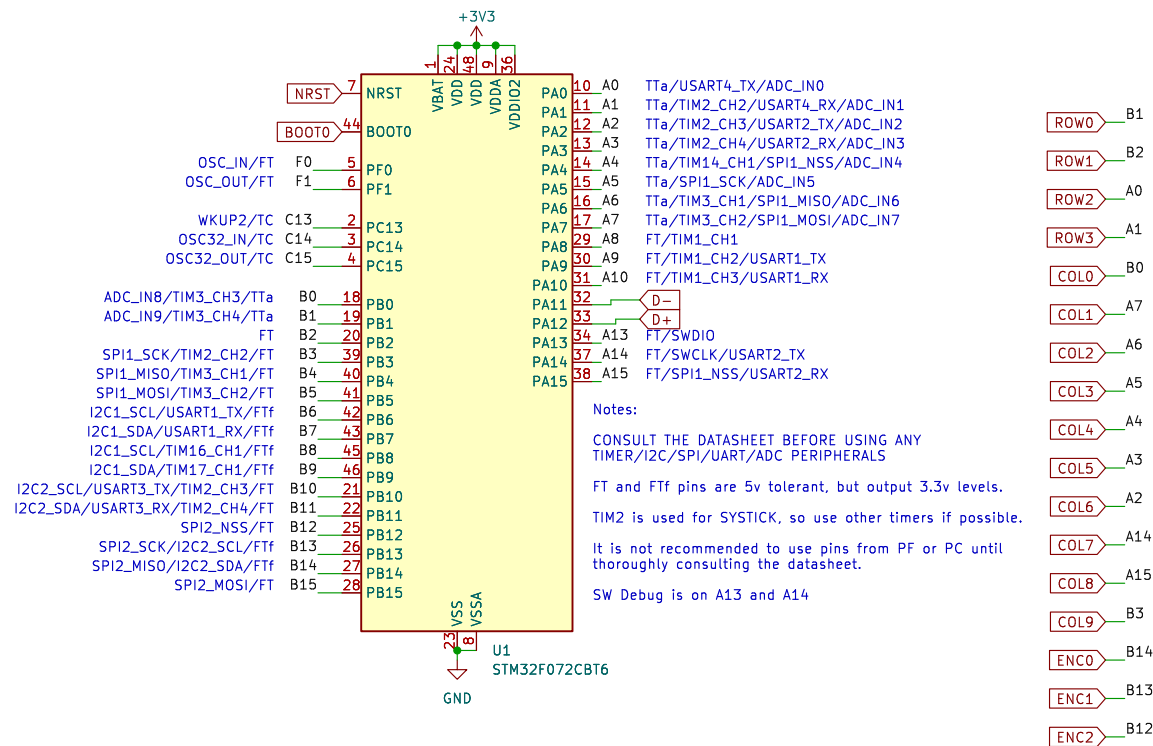


switches

File: switches.kicad_sch

USB-C 2.0 Port
5.1k resistors to GND on both CC pins indicate
that this device is acting in legacy 2.0 UFP mode.

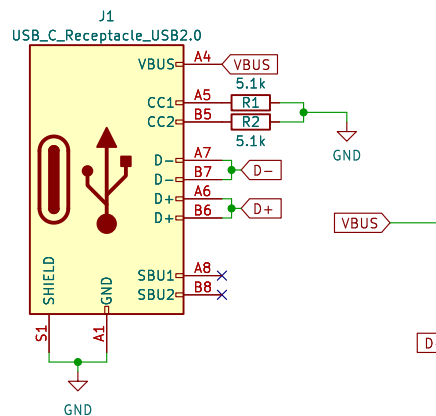

ESD, reverse polarity,
and over-current protection

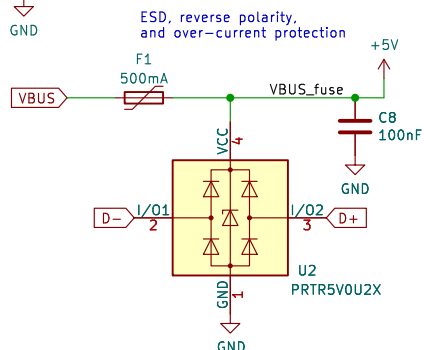

Notes:


CONSULT THE DATASHEET BEFORE USING ANY
TIMER/I2C/SPI/UART/ADC PERIPHERALS

FT and FTf pins are 5v tolerant, but output 3.3v levels.


TIM2 is used for SYSTICK, so use other timers if possible.

It is not recommended to use pins from PF or PC until thoroughly consulting the datasheet.

SW Debug is on A13 and A14

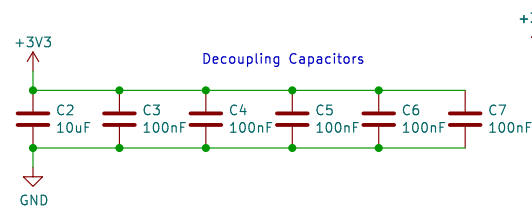

Power Regulation



Sheet: /

File: submission.kicad_sch

Title:


Size: A4

Date:

KiCad E.D.A. 8.0.2

Rev:

Id: 1/2

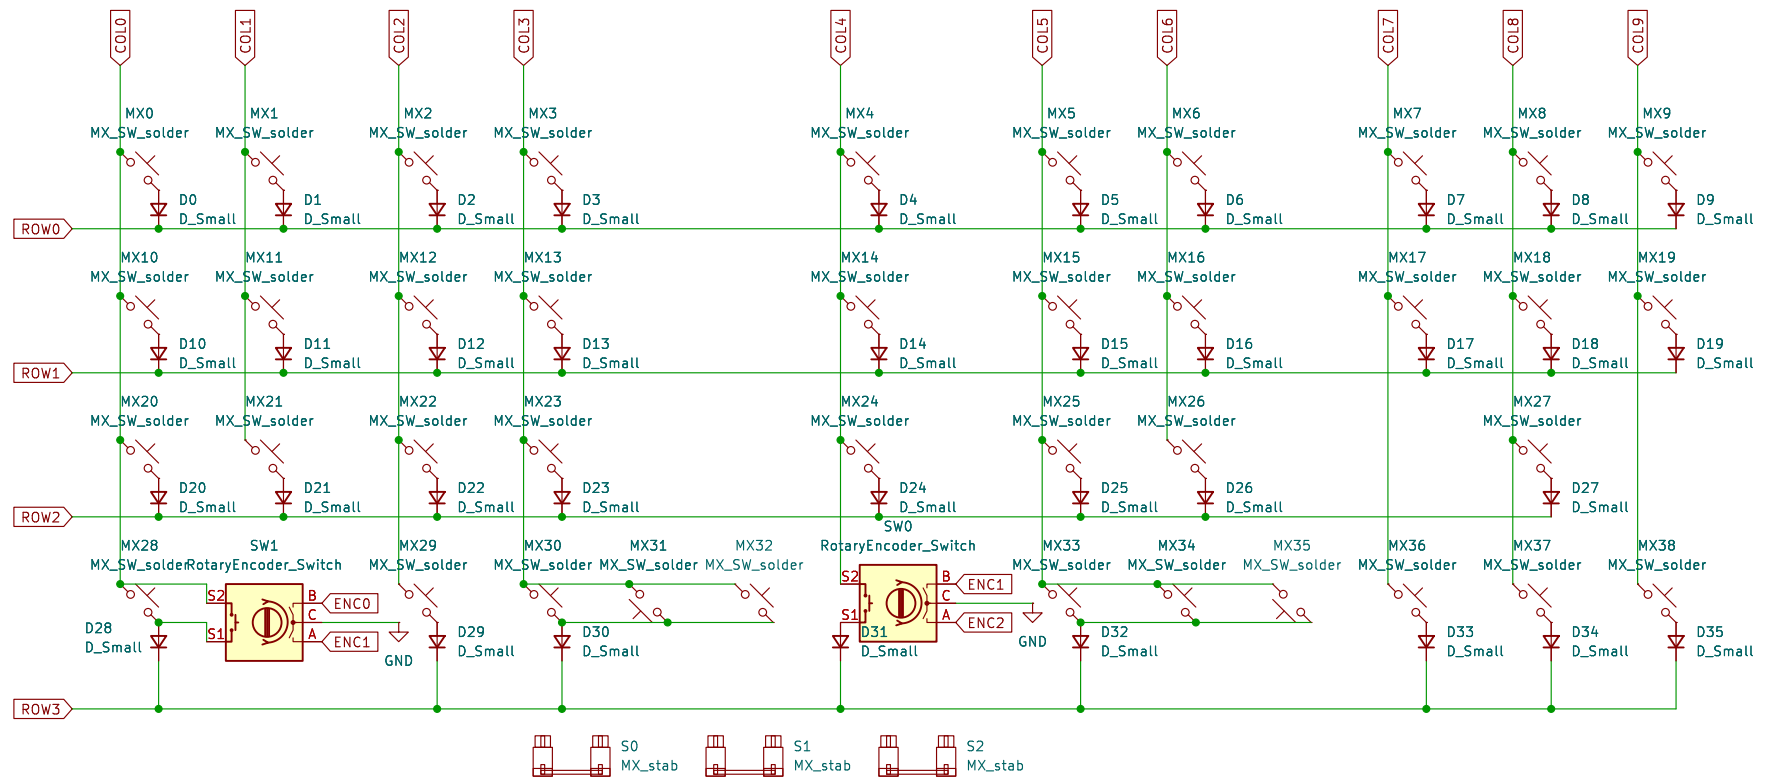

Sheet: /switches/ File: switches.kicad_sch		
Title:		
Size: A4	Date:	Rev:
KiCad E.D.A. 8.0.2		Id: 2/2