Tecnológico de Estudios Superiores de Villa Guerrero

Explorar el Hardware con lspci / lspci -v

Materia:

Sistemas Operativos.

Alumna:

Escobar Aguilar Mia Dolores

Docente:


I.S.C Juan Reynoso Elías

Grupo:


3501

1. Iniciamos esta practica abriendo nuestra terminal utilizando Ctrl + Alt + T, o


simplemente presionando el botón de la terminal.

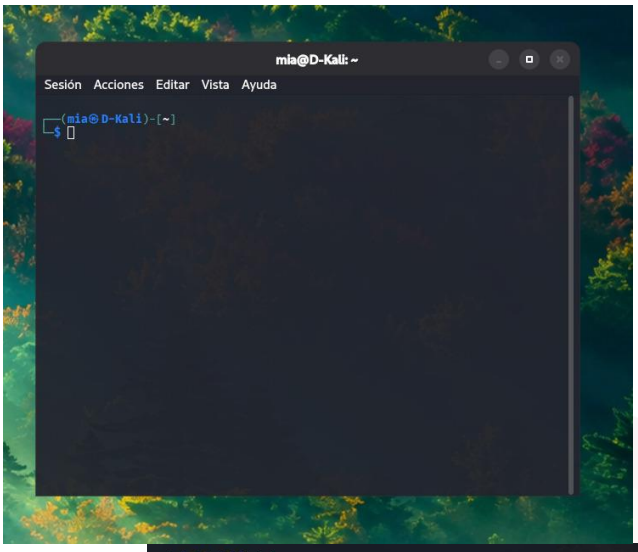

2. El comando lspci permite listar los dispositivos de hardware conectados mediante el bus PCI/PCIe y conocer información básica sobre ellos.

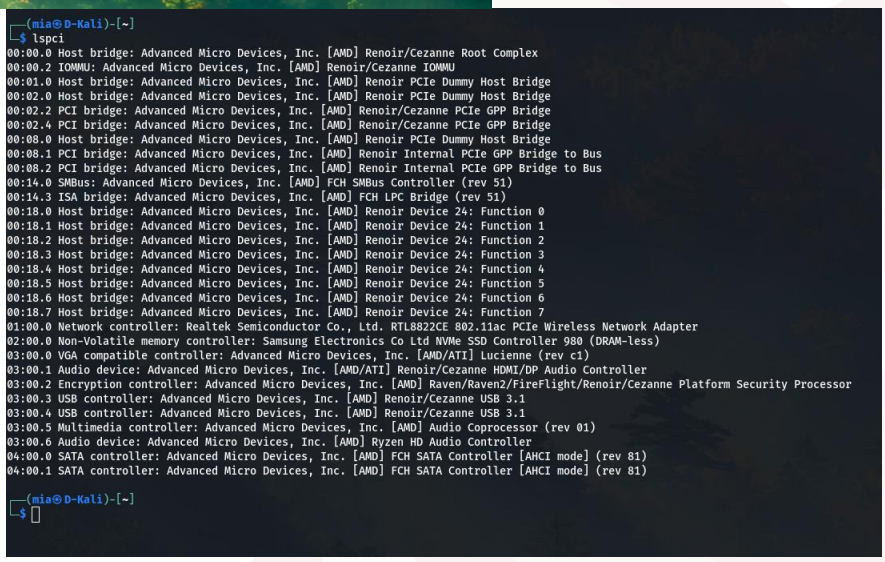

3. El comando lspci -v muestra información detallada de los dispositivos PCI y permite identificar el controlador (driver) que utiliza cada dispositivo en el sistema.

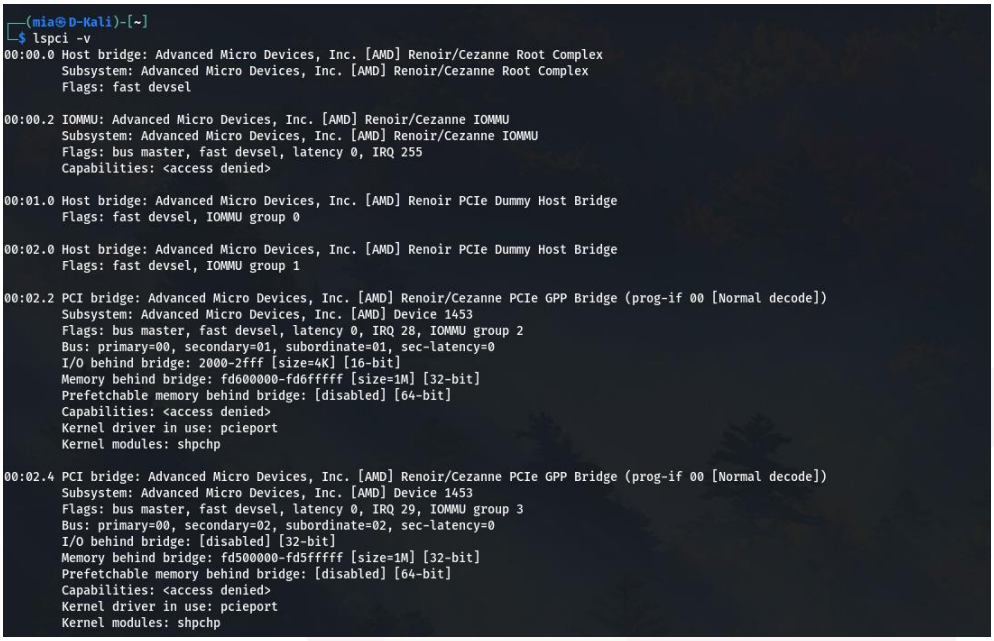

```
┌──(mia㉿D-Kali)-[~]
└─$ lspci -v
00:00.0 Host bridge: Advanced Micro Devices, Inc. [AMD] Renoir/Cezanne Root Complex
        Subsystem: Advanced Micro Devices, Inc. [AMD] Renoir/Cezanne Root Complex
        Flags: fast devsel

00:00.2 IOMMU: Advanced Micro Devices, Inc. [AMD] Renoir/Cezanne IOMMU
        Subsystem: Advanced Micro Devices, Inc. [AMD] Renoir/Cezanne IOMMU
        Flags: bus master, fast devsel, latency 0, IRQ 255
        Capabilities: <access denied>

00:01.0 Host bridge: Advanced Micro Devices, Inc. [AMD] Renoir PCIe Dummy Host Bridge
        Flags: fast devsel, IOMMU group 0

00:02.0 Host bridge: Advanced Micro Devices, Inc. [AMD] Renoir PCIe Dummy Host Bridge
        Flags: fast devsel, IOMMU group 1

00:02.2 PCI bridge: Advanced Micro Devices, Inc. [AMD] Renoir/Cezanne PCIe GPP Bridge (prog-if 00 [Normal decode])
        Subsystem: Advanced Micro Devices, Inc. [AMD] Device 1453
        Flags: bus master, fast devsel, latency 0, IRQ 28, IOMMU group 2
        Bus: primary=00, secondary=01, subordinate=01, sec-latency=0
        I/O behind bridge: 2000-2fff [size=4K] [16-bit]
        Memory behind bridge: fd600000-fd6fffff [size=1M] [32-bit]
        Prefetchable memory behind bridge: [disabled] [64-bit]
        Capabilities: <access denied>
        Kernel driver in use: pcieport
        Kernel modules: shpchp

00:02.4 PCI bridge: Advanced Micro Devices, Inc. [AMD] Renoir/Cezanne PCIe GPP Bridge (prog-if 00 [Normal decode])
        Subsystem: Advanced Micro Devices, Inc. [AMD] Device 1453
        Flags: bus master, fast devsel, latency 0, IRQ 29, IOMMU group 3
        Bus: primary=00, secondary=02, subordinate=02, sec-latency=0
        I/O behind bridge: [disabled] [32-bit]
        Memory behind bridge: fd500000-fd5fffff [size=1M] [32-bit]
        Prefetchable memory behind bridge: [disabled] [64-bit]
        Capabilities: <access denied>
        Kernel driver in use: pcieport
        Kernel modules: shpchp
```

- Wi-Fi → Kernel driver in use: rtw88_8822ce
- Gráfica → Kernel driver in use: amdgpu