

④ YT-35CV4

Welding Torch for CO₂/MAG Welding

Easier Operation and Stronger Structure!



- Welding torch for welding mild steel and stainless steel.
- CC fitting connection type.


Specifications

Model	Rated Current (A)	Cooling Method	Rated Duty Cycle (%)	Applicable Wire Diameter (mm)				Cable Length (m)
				0.9	1.0	1.2	1.4	
YT-35CV4	350	Air-cooled	45 (CO ₂) / 35 (MAG)	○	○	◎	○	3

Note:

- Torch is equipped with parts for the wire of "◎" diameter. Optional parts are required to use the wires of "○" diameters.
- 4.5 m cable length type also available.
- Rated duty cycle is based on IEC 60974-7.

Parts list

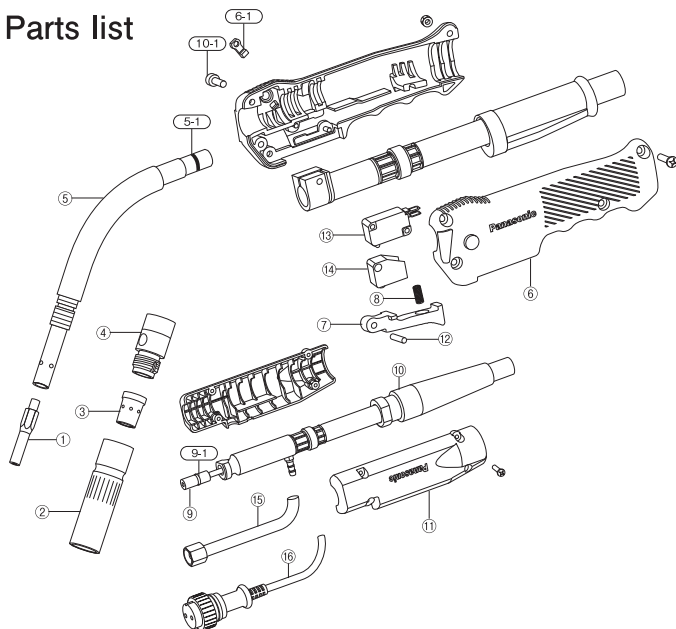

No.	Description	YT-35CV4
1	Contact tip	TET01296
2	Nozzle	TGN00143
3	Orifice	TGR01001
4	Insulator	TFZ35101
5	Torch body	TCX00877
5-1	O-ring	P8V
6	Handle C	TKC00029
6-1	Packing	TZV00002
7	Switch lever C	THL00002
8	Switch spring	TBN00003
9	Liner	TDT00398
9-1	O-ring	P7
10	Power cable	TDX00381
10-1	Clamping bolt	XVE5A15
11	Protection tube	TFP00018
12	Pin	XPJ4B18FJ
13	Micro switch	YTA16(AM59356A)
14	Switch cover	TSK50102
15	Gas hose assembly	TWG00046
16	Control cable assembly	TWU18102
—	Liner (4.5 m torch)	TDT00399
—	Power cable (4.5 m torch)	TDX00382

④ RED TORCH 4 All New. RED

Welding Torch for CO₂/MAG Welding

Higher Welding Performance, Operability and Safety.

CC Fitting Connection Type

Euro-Connector Type

■For Mild Steel and Stainless Steel CC Fitting Connection Type

Applicable Wire Diameter (mm)					Cable Length (m)	Remarks							
0.6	0.8	0.9	1.0	1.2			1.4	1.6					
1	YT-18CS4	180	Air-cooled	40 (CO ₂) / 20 (MAG)	○	◎					3		
2	YT-20CS4	200	Air-cooled	50 (CO ₂) / 25 (MAG)			◎	○	○			3	
3	YT-35CE4	350	Air-cooled	20 (CO ₂) / 20 (MAG)			◎	○	○			3	Lightweight type
4	YT-35CEM4	350	Air-cooled	20(CO ₂) / 20 (MAG)			○	○	◎			4.5	Lightweight type
5	YT-35CS4	350	Air-cooled	45 (CO ₂) / 35 (MAG)			○	○	◎	○		3	
6	YT-35CSM4	350	Air-cooled	45 (CO ₂) / 35 (MAG)			○	○	◎			4.5	
7	YT-35CSL4	350	Air-cooled	45 (CO ₂) / 35 (MAG)					◎	○		6	
8	YT-35CH4	350	Air-cooled	60 (CO ₂) / 35 (MAG)			○	○	◎	○		3	High duty cycle
9	YT-35CHM4	350	Air-cooled	60 (CO ₂) / 35 (MAG)			○	○	◎	○		4.5	High duty cycle
10	YT-35CHL4	350	Air-cooled	60 (CO ₂) / 35 (MAG)					◎	○		6	High duty cycle
11	YT-35CSG4	350	Air-cooled	20 (Pulsed MAG) / 45 (CO ₂) / 35 (MAG)			○	○	◎	○		3	For pulse welding
12	YT-50CE4	500	Air-cooled	25 (CO ₂) / 20 (MAG)					○	◎	○	3	Lightweight type
13	YT-50CEM4	500	Air-cooled	25 (CO ₂) / 20 (MAG)					○	◎	○	4.5	Lightweight type
14	YT-50CEL4	500	Air-cooled	25 (CO ₂) / 20 (MAG)					○	◎	○	6	Lightweight type
15	YT-50CS4	500	Air-cooled	40 (CO ₂) / 35 (MAG)					○	◎	○	3	
16	YT-50CSM4	500	Air-cooled	40 (CO ₂) / 35 (MAG)					○	◎	○	4.5	
17	YT-50CSL4	500	Air-cooled	40 (CO ₂) / 35 (MAG)					○	◎	○	6	
18	YT-50CSG4	500	Air-cooled	20 (Pulsed MAG 350 A) / 40 (CO ₂) / 35 (MAG)					○	◎	○	3	For pulse welding

Euro-Connector Type

	Model No.	Rated current (A)	Cooling type	Duty cycle (%)	Applicable Wire Diameter (mm)						Cable Length (m)	Remarks	
					0.6	0.8	0.9	1.0	1.2	1.4			1.6
19	YT-18ES4	180	Air-cooled	40 (CO ₂) / 20 (MAG)	○	◎						3	
20	YT-20ES4	200	Air-cooled	50 (CO ₂) / 25 (MAG)		○	◎	○	○			3	
21	YT-35EE4	350	Air-cooled	20 (CO ₂) / 20 (MAG)			○	○	◎			3	Lightweight type
22	YT-35ES4	350	Air-cooled	45 (CO ₂) / 35 (MAG)			○	○	◎			3	
23	YT-35ESG4	350	Air-cooled	20 (Pulsed MAG) / 45 (CO ₂) / 35 (MAG)			○	○	◎			3	For pulse welding
24	YT-35EEM4	350	Air-cooled	20 (CO ₂) / 20 (MAG)				○	◎			4.5	Lightweight type
25	YT-35ESM4	350	Air-cooled	45 (CO ₂) / 35 (MAG)				○	◎			4.5	

Note: 2 drive 4 roll wire feeder is required to use 4.5 m Euro-connector type torch.

■For Aluminum CC Fitting Connection Type

Applicable connection type					Applicable Wire Diameter (mm)						Cable Length (m)	Remarks
Model No.	Rated current (A)	Cooling type	Duty cycle (%)	0.6	0.8	0.9	1.0	1.2	1.4	1.6		
26	YT-20MD2	200	Air-cooled	30 (Pulsed MIG) / 60 (MIG)				○	◎		3	
27	YT-30MD2	300	Air-cooled	30 (Pulsed MIG) / 50 (MIG)				○	◎	○	3	
28	YT-40MDW2	400	Water-cooled	60 (Pulsed MIG) / 100 (MIG)					◎	○	3	
29	YT-50MDW2	500	Water-cooled	60 (Pulsed MIG) / 80 (MIG)					○	◎	3	

Euro-Connector Type

Applicable Wire Diameter (mm)												Cable Length (m)	Remarks
0.6	0.8	0.9	1.0	1.2	1.4	1.6							
30	YT-20MF2	200	Air-cooled	30 (Pulsed MIG) / 60 (MIG)				○	◎			3	
31	YT-30MF2	300	Air-cooled	30 (Pulsed MIG) / 50 (MIG)				○	◎		○	3	
32	YT-40MFW2	400	Water-cooled	60 (Pulsed MIG) / 100 (MIG)					◎		○	3	
33	YT-50MFW2	500	Water-cooled	60 (Pulsed MIG) / 80 (MIG)					○		◎	3	

■Special Torches for 350GZ4 (CC Fitting Type with 3-Pin Connection Torch Switch Cable)

	Model No.	Rated current (A)	Cooling type	Duty cycle (%)	Applicable Wire Diameter (mm)							Cable Length (m)	Remarks
					0.6	0.8	0.9	1.0	1.2	1.4	1.6		
34	YT-20CS4TAB	200	Air-cooled	50 (CO ₂) / 25 (MAG)		○	◎	○	○			3	Lightweight type
35	YT-35CE4TAB	350	Air-cooled	20 (CO ₂) / 20 (MAG)			○	○	◎			3	
36	YT-35CS4TAB	350	Air-cooled	45 (CO ₂) / 35 (MAG)			○	○	◎	○		3	

■Optional Resin Liners for Stainless Steel Welding

Torch	Wire	0.8 mm Solid	0.9 mm Solid/FCW	1.0 mm Solid	1.2 mm Solid/FCW	1.6 mm Solid/FCW
YT-18CS4	Supplied	—	—	—	—	—
YT-18CS4	WSTDT00057	—	—	—	—	—
YT-20CS4	—	TDT00371	TDT00371	TDT00345	—	—
YT-35CE4	—	TDT00371	TDT00371	TDT00345	—	—
YT-35CS4	—	TDT00362	TDT00362	TDT00350	—	—
YT-50CE4	—	—	—	TDT00350	TDT00364	—
YT-50CS4	—	—	—	TDT00350	TDT00364	—
YT-35CSG4	—	TDT00362	TDT00362	TDT00350	—	—
YT-50CSG4	—	—	—	TDT00350	—	—

■Optional R Tips for Stainless Steel Welding



0.8 mm Solid	0.9 mm Solid/FCW	1.0 mm Solid
TET00842	TET00959	TET01068
1.2 mm Solid	1.6 mm Solid/FCW	
TET12003	TET01692	

Note: Torches are equipped with parts for the wires of "◎" diameter. Optional parts are required to use the wires of "○" diameters.

*Rated duty cycle is based on IEC 60974-7. **A special wire feeder is required to use a 6 m torch.

Consult us before using 0.6 mm mild steel wire. *Optional R tips and resin liners are recommended for higher welding performance.



●YT-18CS4 ●YT-20CS4 ●YT-35CE4 ●YT-35CEM4 (CC fitting connection type)

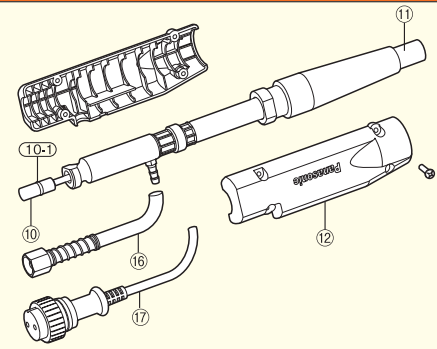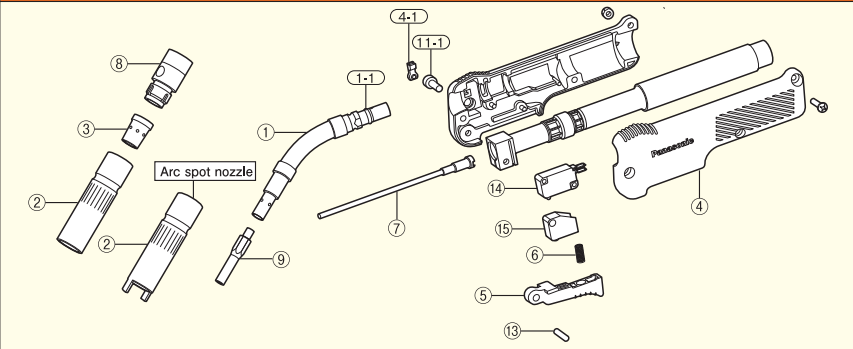

No.	Part Name	YT-18CS4	YT-20CS4	YT-35CE4	YT-35CEM4
1	Torch body	TCU20111		TCU35056	
1-1	O-ring	P8V			
2	Nozzle	TGN01208		*TGN00044 (S1)	
		—		TGN00043 (S2)	
	Arc spot nozzle	*TGN01210		*TGN01615	
3	Orifices	—			
4	Handle S	TKC00030			
4-1	Packing	TZV00002			
5	Switch lever S	THL00013			
6	Switch spring	TBN00003			
7	Inner tube	TGT00606	TGT00607	TGT00608	
8	Insulator	—		TFZ35101	
9	Contact tip	*TET00630 (0.6 mm)	TET00958 (0.9 mm)	*TET00958 (0.9 mm)	
		TET00841 (0.8 mm)		*TET01067 (1.0 mm)	
		—	*TET01296 (1.2 mm)	TET01296 (1.2 mm)	
10	Liner	TDT00260 (083)	TDT00261 (125)	TDT00261 (125)	TDT00264 (125)
10-1	O-ring	P8			
11	Power cable	TDX00240	TDX00242	TDX00243	TDX00255
11-1	Clamping bolt	TMB00503			
12	Protection tube	TFP00018			
13	Pin	XPJ4B18FJ			
14	Micro switch	YTA16 (AM59356A)			
15	Switch cover	TSK50102			
16	Gas hose assy	TWG18102			
17	Control cable assy	TWU18102			

*Optional parts


●YT-35CS4 ●YT-35CSM4 ●YT-35CSL4 ●YT-35CH4 ●YT-35CHM4 ●YT-35CHL4 (CC fitting connection type)

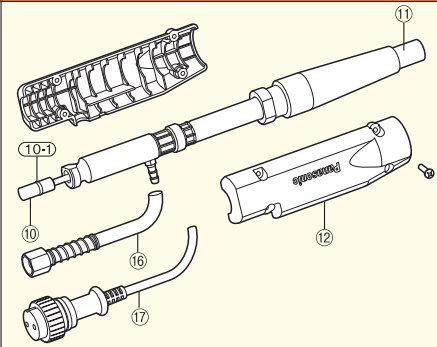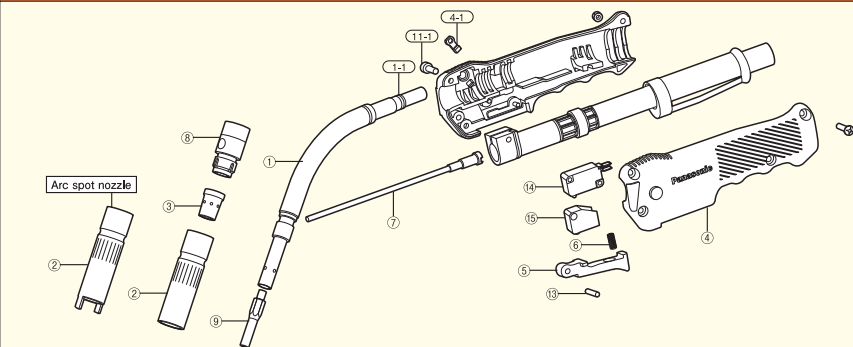

No.	Part Name	YT-35CS4	YT-35CSM4	YT-35CSL4	YT-35CH4	YT-35CHM4	YT-35CHL4
1	Torch body	TCU35022					
1-1	O-ring	P8V					
2	Nozzle	*TGN00044 (S1)					
	Arc spot nozzle	TGN00043 (S2)					
3	Orifices	*TGN01615					
4	Handle C	TGR01001					
4-1	Packing	TKC00029					
5	Switch lever C	TZV00002					
6	Switch spring	THL00002					
7	Inner tube	TBN00003					
8	Insulator	TGT00609					
9	Contact tip	*TET00958 (0.9 mm)	—	—	*TET00958 (0.9 mm)	—	—
		*TET01067 (1.0 mm)	—	—	*TET01067 (1.0 mm)	—	—
10	Liner	TET01296 (1.2 mm)					
10-1	O-ring	*TET01447 (1.4 mm)					
11	Power cable	*TDT00279 (S091)	*TDT00280 (S091)	—	*TDT00279 (S091)	*TDT00280 (S091)	—
11-1	Clamping bolt	TDT00262 (S121)	TDT00265 (S121)	TDT00266 (S121)	TDT00262 (S121)	TDT00265 (S121)	TDT00266 (S121)
12	Protection tube	P7					
13	Pin	XVE5A15					
14	Micro switch	TFP00018					
15	Switch cover	XPJ4B18FJ					
16	Gas hose assy	YTA16 (AM59356A)					
17	Control cable assy	TSK50102					
		TWG18102					
		TWU18102					

*Optional parts


●YT-50CE4 ●YT-50CEM4 ●YT-50CEL4 ●YT-50CS4 ●YT-50CSM4 ●YT-50CSL4 (CC fitting connection type)

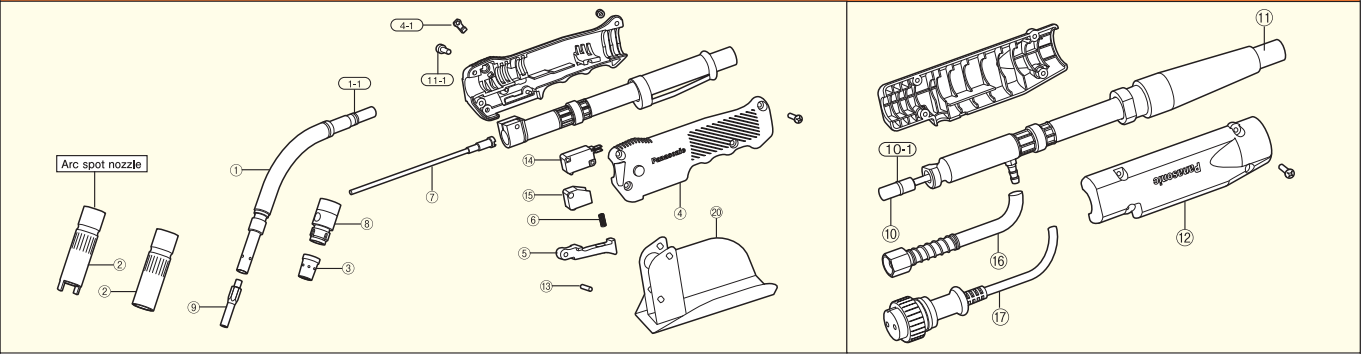

No.	Part Name	YT-50CE4	YT-50CEM4	YT-50CEL4	YT-50CS4	YT-50CSM4	YT-50CSL4
1	Torch body	TCU43112			TCX00006		
1-1	O-ring	P8V					
2	Nozzle	TGN00043 (S2)			TGN00056 (S3)		
	Arc spot nozzle	*TGN01615					
3	Orifices	TGR01001			TGR00902		
4	Handle C	TKC00029					
4-1	Packing	TZV00002					
5	Switch lever C	THL00002					
6	Switch spring	TBN00003					
7	Inner tube	TGT00035			TGT00033		
8	Insulator	TFZ35101			TFZ50107		
9	Contact tip	*TET01296 (1.2 mm)					
		TET01447 (1.4 mm)					
		*TET01691 (1.6 mm)					
10	Liner	TDT00262 (S121)	TDT00265 (S121)	TDT00266 (S121)	TDT00263 (S161)	TDT00267 (S161)	TDT00268 (S161)
		*TDT00263 (S161)	*TDT00267 (S161)	*TDT00268 (S161)	—		
10-1	O-ring	P7					
11	Power cable	TDX00267	TDX00268	TDX00269	TDX00238	TDX00251	TDX00253
11-1	Clamping bolt	XVE5A15					
12	Protection tube	TFP00018					
13	Pin	XPJ4B18FJ					
14	Micro switch	YTA16 (AM59356A)					
15	Switch cover	TSK50102					
16	Gas hose assy	TWG18102					
17	Control cable	TWU18102					
20	Arc cover	*TKA50117					

*Optional parts

●YT-18ES4 ●YT-20ES4 ●YT-35EE4 ●YT-35EEM4 ●YT-35ES4 ●YT-35ESM4 (Euro connector type)

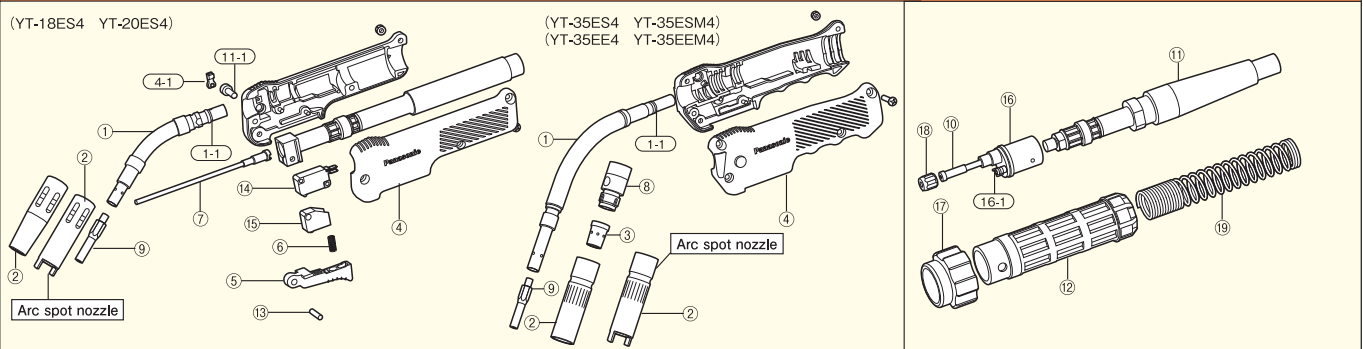

No.	Part Name	YT-18ES4	YT-20ES4	YT-35EE4	YT-35EEM4	YT-35ES4	YT-35ESM4
1	Torch body	TCU20111		TCU35056		TCU35022	
1-1	O-ring	P8V					
2	Nozzle	TGN01208		*TGN00044 (S1)			
	arc spot nozzle	*TGN01210		TGN00043 (S2)			
3	Orifices	—		*TGN01615			
4	Handle C	TKC00030				TKC00029	
4-1	Packing	TZV00002					
5	Switch lever C	THL00013				THL00002	
6	Switch spring	TBN00003					
7	Inner tube	TGT00606	TGT00607	TGT00608		TGT00609	
8	Insulator	—		TFZ35101			
9	Contact tip	*TET00630 (0.6 mm)	*TET00841 (0.8 mm)	—		*TET00958 (0.9 mm)	—
		TET00841 (0.8 mm)	TET00958 (0.9 mm)	*TET00958 (0.9 mm)	—	*TET01067 (1.0 mm)	
		—	*TET01067 (1.0 mm)		TET01296 (1.2 mm)		
		*TET01296 (1.2 mm)		TET01296 (1.2 mm)			
10	Liner	TDT00269 (081)	TDT00271 (122)		TDT00274 (123)	*TDT00281 (093)	—
		TDX00261	TDX00085	TDX00096	TDX00097	TDX00237	TDX00248
11	Power cable	TMB00503				XVE5A15	
11-1	Clamping bolt						
12	Protection tube	YTA1 (BW0195)					
13	Pin	XPJ4B18FJ					
14	Micro switch	YTA16 (AM59356A)					
15	Switch cover	TSK50102					
16	Connection body	TFM00095					
16-1	O-ring	SS4.5					
17	Adapter nut	YTA2 (BW0020)					
18	Liner nut	YTA3 (FA0026)					
19	Protection spring	YTA4 (EA0342)					

*Optional parts