


# ALFRA ROTABEST® – RB 35 SP

## SP-LINE



MADE IN GERMANY

Can be used with a permanent magnet from 3 mm material thickness

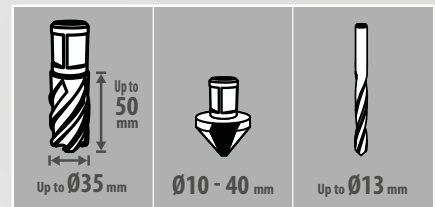

### RB 35 SP

|                                              |                                  |
|----------------------------------------------|----------------------------------|
| Core drill dimensions                        | Ø 12.0 - 35.0 mm                 |
| Cutting depth                                | 50.0 mm                          |
| Twist drill                                  | Ø 1.0 - 13.0 mm                  |
| Counterboring                                | Ø 10.0 - 40.0 mm                 |
| Arbors                                       | Quick-release chuck              |
| Stroke                                       | 105 mm                           |
| Height adjustment                            | 80 mm                            |
| Gearbox - on-load speed                      | 450 rpm                          |
| Power consumption                            | 1,100 W                          |
| Voltage                                      | 230 V 50/60 Hz<br>110 V 50/60 Hz |
| Tool Force (10 mm) / Magnetic adhesion force | 2,800 N/17,000 N                 |
| Tool force (6 mm S235)                       | 2,300 N                          |
| Magnetic base                                | 72 x 190 mm                      |
| Weight                                       | 9.9 kg                           |

| Motor                |   |
|----------------------|---|
| Smooth start         | ✓ |
| Hybrid relay         | ✓ |
| Overload protection  | ✓ |
| Motor emergency stop | ✓ |

| Slide                 |   |
|-----------------------|---|
| Infinitely adjustable | ✓ |
| Self-adjusting guide  | ✓ |

| Operation            |   |
|----------------------|---|
| Soft-touch grips     | ✓ |
| Membrane keyboard    | ✓ |
| Holder for Allen key | ✓ |
| Cable length 5 m     | ✓ |

| Magnet                              |   |
|-------------------------------------|---|
| Sensor/LED                          | ✓ |
| Metal rings                         | ✓ |
| Performance and weight optimisation | ✓ |

|                 |   |
|-----------------|---|
| Made in Germany | ✓ |
|-----------------|---|

| Scope of delivery                                                                                                                                                                                                                                              |  |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| <ul style="list-style-type: none"> <li>• Metal core drilling machine RB 35 SP with quick-release chuck</li> <li>• Carrying case</li> <li>• Seat belt</li> <li>• Coolant device</li> <li>• Operating Instructions</li> <li>• incl. 1 core drill free</li> </ul> |  |

### Prod.-No.

|                          |          |           |
|--------------------------|----------|-----------|
| ALFRA Rotabest® RB 35 SP | 230 Volt | 18801     |
| ALFRA Rotabest® RB 35 SP | 110 Volt | 18801.110 |