

Torch type selectable to fit your application!

WGIII/WGHI

TM-1400WGIII

TM series



Separate Type

Superior wire feedability and reduced cable interference



Through-Arm Type

Focused on reducing cable interference



External Type

Focused on wire feedability

TM
1100
1400
1600
1800
2000

Space saving & high payload!

TS-950

WGIII/WGHI

TS
800
950

Payload
8 kg
TS-800/950



External Type

Through-Arm Type

Long-arm & high payload!

WGIII/WGHI

TL
1800
2000

Payload
8 kg
TL-1800: 8 kg
6 kg
TL-2000: 6 kg



External Type

TL series

Manipulator Lineup (as of January 2020)

	TS series		TM series					TL series	
	800	950	1100	1400	1600	1800	2000	1800	2000
Separate	—	—	○	○	○	○	○	—	—
Through-Arm	○	○	○	○	○	○	○	—	—
External	○	○	○	○	—	—	—	○	○
Payload	8 kg		6 kg		4 kg	6 kg		8 kg	6 kg

Rated Welding Output:

WGIII: 350 A @ 80 % duty cycle (CV). 350 A @ 60 % duty cycle (pulse).

WGHI: 450 A @ 100 % duty cycle (CV/pulse)


TAWERS Technology— Various Welding Processes

- **SP-MAGII** for short-circuit mixed gas welding on thin plates
- **HD-Pulse** for high-speed and low-spatter in high-current pulsed mixed gas welding
- **MTS-CO₂** for CO₂ welding

TAWERS Welding Process Guide

MAG welding

Standard

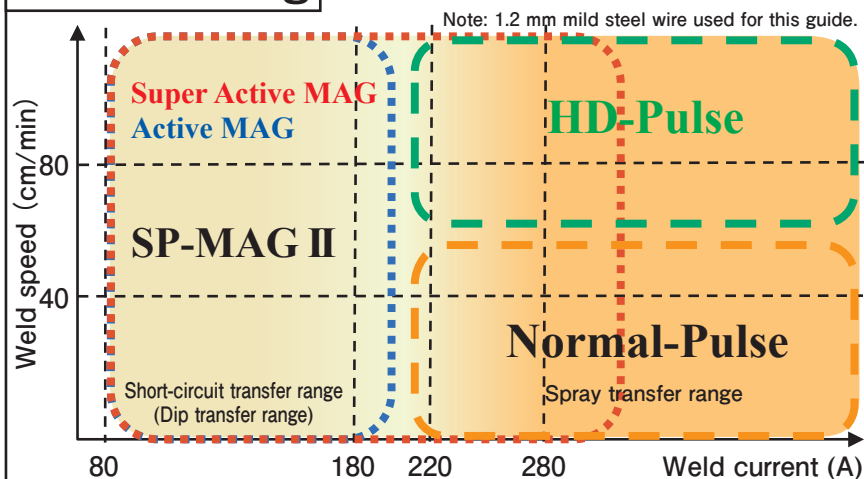

SP-MAGII

Secondary switching and SP/HS control achieve stable arc and low spatter welding.

Low spatter in low-current range

HD-Pulse

Short-circuit transfer (1 pulse-1 dip) minimizes undercuts in high speed welding.

Low spatter and high speed in high-current range


Normal-Pulse

Droplet transfer (1 pulse-1 drop) achieves low spatter.

Low spatter in high-current range

CO₂ welding

Standard

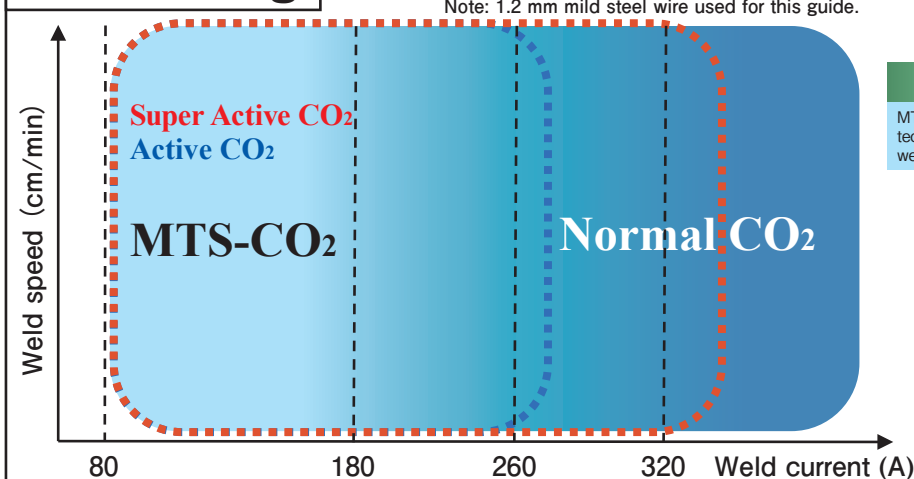

MTS-CO₂

MTS control added to SP-MAG technology reduces spatter of CO₂ welding.

Low spatter in low-current range

APPLICATION TYPE

Super Active TAWERS

Super Active Wire Feed Process

Achieves even lower spatter with high-precision control of wire feed speed.

Super Active MAG
Super Active CO₂



See the page of "Super Active TAWERS" for details.