

Water Cooling Units

Unit Keeps Cooling Water Clean.




Features


High Cooling Capacity

200 kJ/min

Easy Maintenance Without Tools

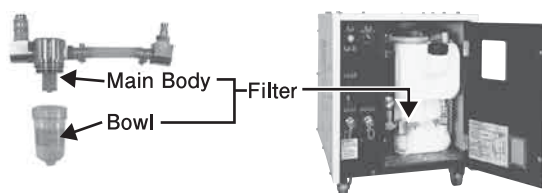


- Easy installation and removal of water tank and filter.
- Easy cleaning of water tank and filter.
- Keeps cooling water clean and reduces pump failures.

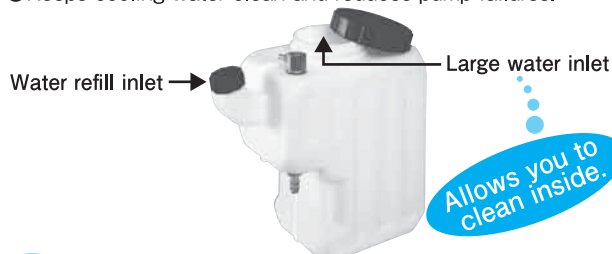

No Priming Necessary

Equipped with Flow Rate Switch

Fixed Legs Supplied

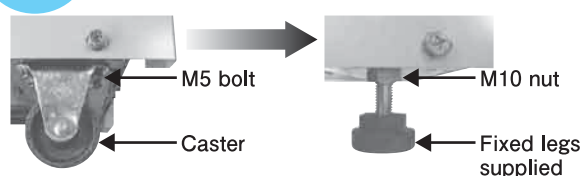

Use the fixed legs to place the unit on a welding machine.

Specifications

Unit		YX-09KGC1 (Standard Type)	YX-09KGB1 (Insulated Type)
Item			
Rated Input Voltage	VAC	380 (YGA) (±10 %) 415 (YJA) (±10 %)	200 (±10 %)
Number of Phases	—	1	
Rated Input Frequency	Hz	50/60	
Rated Input Power	W	230/330	
Coolant Capacity	L	9	
Cooling System	—	Forced Air Cooled Radiator	
Coolant Circulating System	—	Forced Circulation Pump	
Cooling Capacity	kJ/min	200	
Coolant Flow Rate*1	L/min	2.2/2.6	
Coolant Head*1	m	20/25	
Maximum Load	kg	60	
Dimensions (W×D×H)	mm	380×545*2×474	
Weight	kg	31	37

*1: Panasonic standard 300 A water-cooled TIG torch (4 m) connected.

*2: Tank refill inlet not included.

A fixing bracket is required to fix the unit on a Panasonic welding machine.

Correspondence Table for Welding Machines

Applicable Welding Machine	Water Cooling Unit	
	YX-09KGC1 (Standard Type)	YX-09KGB1 (Insulated Type)
TIG Welding Machines with High Frequency Arc Starting	Yes	Yes

Supplied Parts

- Fixed legs (with a nut) × 4
- Hose assembly × 1
- Cord assembly (for flow rate switch) × 1
- Glass tube fuse × 1