



# COPPUS Air MAX-12

Economical, high-volume tube axial blower

## MODEL/SPECIFICATIONS

### MOTOR

TE 3/4 HP with integral on/off switch, 115V/6.8 amp, Class B insulation, auto reset thermal overload protection; GFCI at plug end on 115V models.

### FREE AIR

2,200 cfm (3,740 m<sup>3</sup>/hr)

### WEIGHT

44 lbs (18.14 kg)

### HOUSING

18-gauge steel, powder-coated with carry handle and anti-vibration foot pads; rolled bead on ends for added strength and attaching flexible ducting; safety screens attached per OSHA guidelines.

#### PLEASE NOTE:

Not available for Class 1, Div. 1 (hazardous locations) applications.

## DESCRIPTION


This 12 in (305 mm), lightweight, rugged blower delivers up to 2,200 cfm (3,740 m<sup>3</sup>/hr) for confined space ventilation and fresh air supply.

## FEATURES / ADVANTAGES

- Rugged, all-steel housing construction
- Integral on/off motor switch
- Fixed guide vanes for improved performance
- Glass-reinforced, polypropylene, non-sparking fan blade
- 20 ft (6.1 m) cord with GFCI at plug end
- Anti-vibration foot pads
- Available with TE motors only; not for use in hazardous areas



## DIMENSIONS

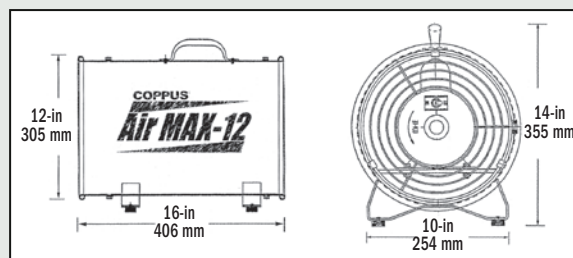

## TECHNICAL DATA

| FREE AIR DECIBEL LEVELS |        |
|-------------------------|--------|
| Air MAX 12              | 74 dBA |

| MODEL           | AIR FLOW THROUGH DUCT (STRAIGHT RUNS) |                    |                 |                    |                 |                    |                 |                    |
|-----------------|---------------------------------------|--------------------|-----------------|--------------------|-----------------|--------------------|-----------------|--------------------|
|                 | FREE AIR                              |                    | 10 ft<br>3.05 m |                    | 20 ft<br>6.10 m |                    | 30 ft<br>9.15 m |                    |
|                 | cfm                                   | m <sup>3</sup> /hr | cfm             | m <sup>3</sup> /hr | cfm             | m <sup>3</sup> /hr | cfm             | m <sup>3</sup> /hr |
| Air MAX - 50 Hz | 1,827                                 | 3,105              | 1,247           | 2,770              | 1,191           | 2,650              | 1,112           | 2,470              |
| Air MAX - 60 Hz | 2,200                                 | 3,740              | 2,120           | 3,602              | 2,025           | 3,440              | 1,890           | 3,211              |