
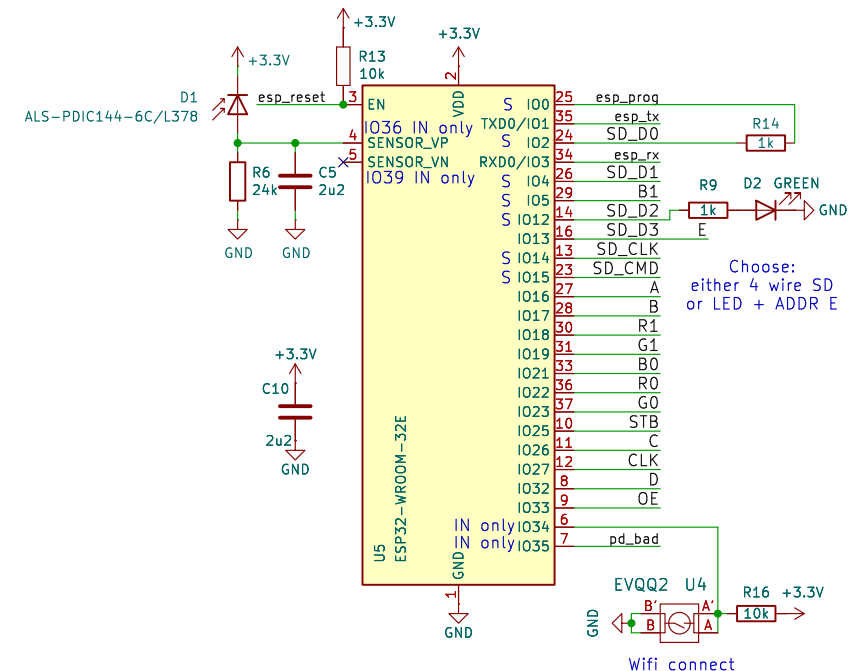



Before SD_D2 pullup is populated, 3.3 V flash efuse must be burned

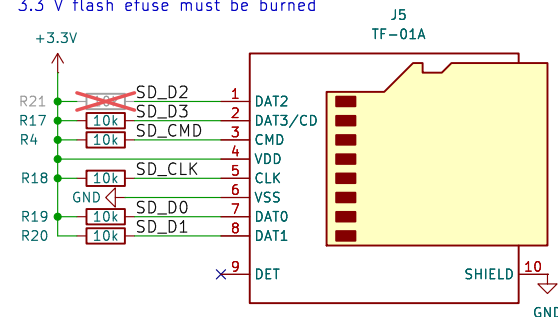

Untested features:
* USB QC support (for > 5 V over type A cables)
* SD-MMC with 4 data-lines

Sheet: /

File: rgb.kicad_sch

Title: ESP Pinball RGB Animation clock (espigbani)


Size: A4 Date: 2025-01-15

KiCad E.D.A. 8.0.7

Rev: 3

Id: 1/3



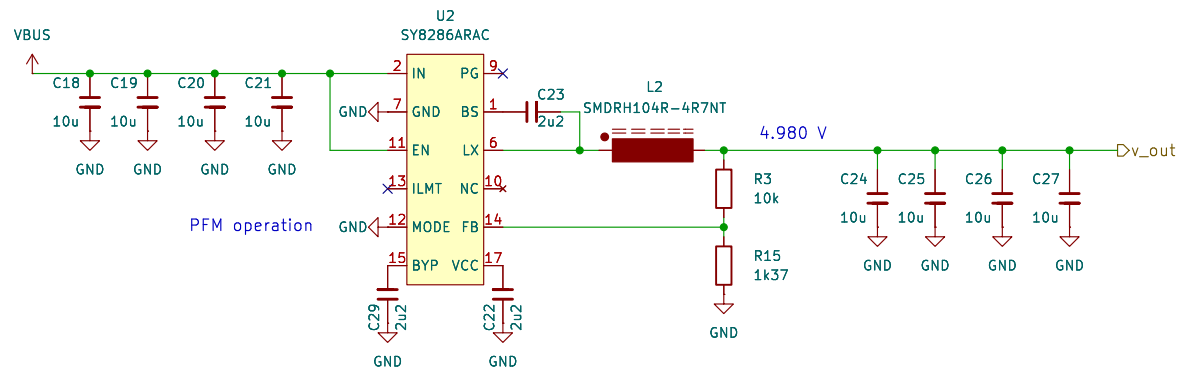

Sheet: /Stepdown_b/ File: stepdown.kicad_sch		
Title: ESP Pinball RGB Animation clock (espirgani)		
Size: A4	Date: 2025-01-15	Rev: 3
KiCad E.D.A. 8.0.7		Id: 3/3