

TABULATION	
DASH NO.	
-00	ORIGINAL RELEASE


DWG NO	21283	SH	1

REVISIONS (ALL SHEETS ARE SAME REV)					
ZONE	REV	DESCRIPTION	CHG NO	APPD	DATE
	-	ORIGINAL RELEASE	N/A	WAK	260211

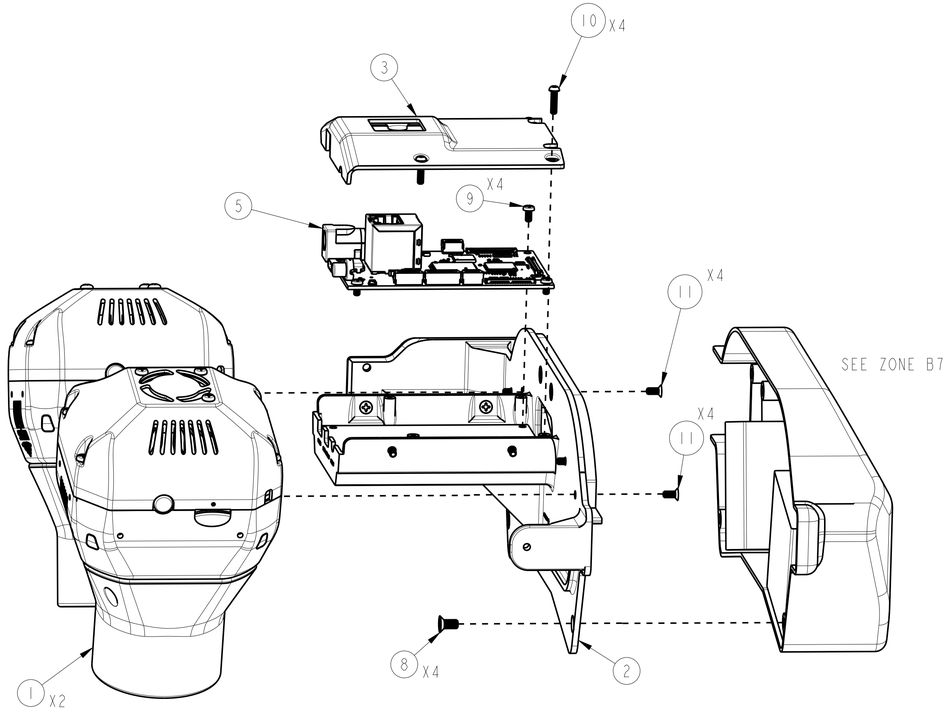

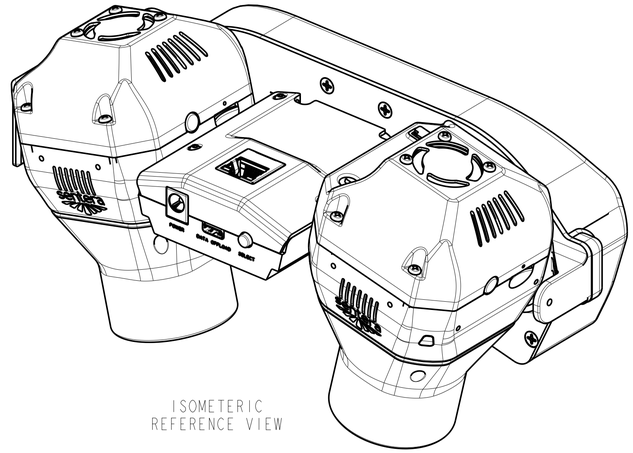

ISOMETERIC
REFERENCE VIEW

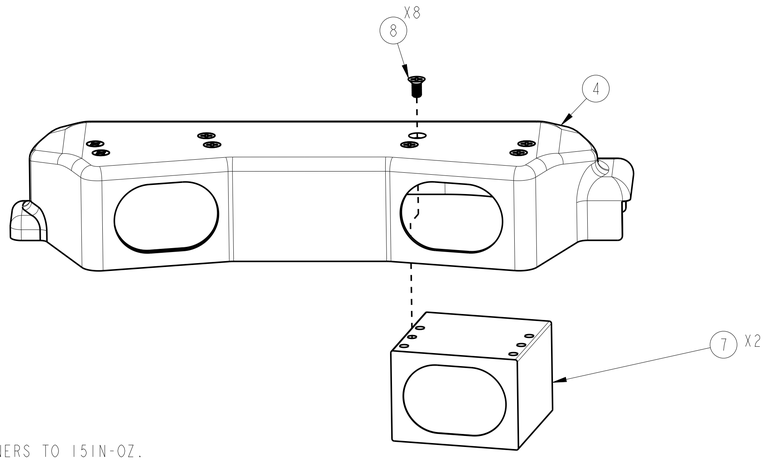

ITEM	DASH	PART NUMBER	DESCRIPTION	SUPPLIER	QTY
1	ALL	21030-04	65R SENSOR ASSEMBLY, PIXELSCOUT CONFIG		2
2	ALL	25400-02	CAMERA BRACKET, 13.25DEG OFFSET		1
3	ALL	25401-01	COVER, GIMBAL BREAKOUT, WEEDSCOUT PHASE 2, PHASE 4		1
4	ALL	25402-02	COVER, RANGEFINDER MOUNT, 13.25DEG OFFSET		1
5	ALL	23162-01	PIXELSCOUT BREAKOUT		1
6	ALL	CP.EN.00000325.01	PSDK CABLE 9 INCH		2
7	ALL	24176-01	CABLE ASSEMBLY, M300 DGR, RANGEFINDER, WEEDSCOUT PHASE 2		2
8	ALL	91698A302	SCREW, FLATHEAD, BLACK OXIDE, M3X6MM	MCMASTER	8
9	ALL	94017A101	SCREW, NARROW CHEESE HEAD, M2x4MM	MCMASTER	4
10	ALL	91239A701	SCREW, BUTTON HEAD, BLACK OXIDE, M2x5MM	MCMASTER	4
11	ALL	91771A926	SCREW, FLAT HEAD, 2-56 UNC X 3/16"	MCMASTER	8
12	ALL	222	THREAD LOCK	LOCKTITE	AR

5. TORQUE ALL 2-56 FASTENERS TO 15IN-OZ.

4. REMOVE REAR COVER ON ITEM 1. PLUG ITEM 6 INTO 40 PIN MICROCOAX ON ITEM 1.
   ROUTE ITEM 6 INSIDE REAR COVER OF ITEM 1, EXITING OUT REAR NOTCH NEAREST TO ITEM 5.
   REINSTALL COVER WITH CARE TO AVOID PINCHING ITEM 6.

3. PLUG VEHICLE RIGHT RANGEFINDER INTO RANGE 1 ON ITEM 5.
   PLUG VEHICLE LEFT RANGEFINDER INTO RANGE 2 ON ITEM 5.

2. APPLY ITEM 12 TO ALL METAL ON METAL THREADS.

1. BUILD IAW IPC-A-610 CLASS 2.

NOTES:

UNLESS OTHERWISE SPECIFIED DIMENSIONS IN INCHES REMOVE ALL BURRS AND SHARP EDGES. MACHINE SURFACE FINISH 125
-TOLERANCES-

DECIMALS	FRACTIONS
.X ± .1	± 1/32
.XX ± .02	ANGLES
.XXX ± .010	± 2°

DO NOT SCALE PRINT

CONTRACT NO

DR	W. KOSAK	260211
CHKD		
APPD		

THIRD ANGLE PROJECTION

Sentera, LLC
MINNEAPOLIS
MINNESOTA USA

TITLE
CAMERA POD ASSEMBLY,
PIXELSCOUT PHASE 4

SIZE	CAGE CODE	DRAWING NO
D		21283
SCALE:		SHEET 1 OF 1