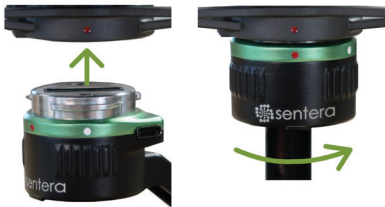# sentera

Double 4K Skyport
User Manual

Gimbal Installation

1. Match the red and white dots.
2. Insert straight up into the locking mount.
3. Twist to secure as shown in figure 1.
4. Remove by pressing the button on the side of the locking mount.

Figure 1

Note: Gimbal must be installed on port one when using two-port drones.

Fly with FieldAgent

Use Sentera's FieldAgent iOS app on an iPhone or iPad to collect photos for mapping & analytics.
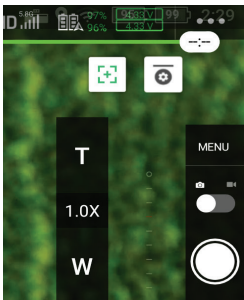
*Wait until the LED turns green before take off.

Use the DJI Pilot app to collect live video and photos during a manual flight.

⸭ Live Video Manual Flight With DJI Pilot

Live video will automatically begin streaming when sufficient GPS has been obtained (outdoors).

Access camera view settings by selecting the $\overline{\mathbf{o}}$ gimbal icon in the top right.
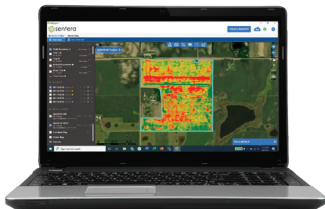
Toggle between photo and video.

Press to capture video and photo.

Use the T & W to zoom in and out.

Offloading Data

1. When you've completed your first flight, remove the SD card from the side of the sensor.

2. Insert into an SD card reader and upload to FieldAgent®.

3. **Don't forget** to reinstall the SD card after offloading data!

Questions?

Visit: Sentera.com/support
Email: support@sentera.com
Call: 844.SENTERA (844-736-8372)

Sentera Support

FieldAgent® Links

📱 SCAN ME

📱 SCAN ME

sentera