

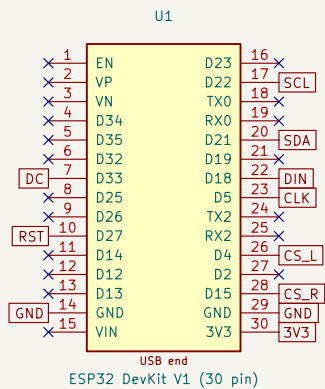




Carrier board for the creeper-eyes Frankenstein head.

Two Waveshare 1.5" OLED panels on one SPI bus, chip selects D15 (Frank's right) and D4 (his left);
an optional DS3231 on the default I2C pins. Wiring per docs/WIRING.md and docs/WIRING_RTC.md.
Both panels and the RTC are powered from the DevKit's 3V3 pin, never VIN.
Frank's right eye is the one on YOUR LEFT when you face him.

This variant: DevKit header rows 25.4 mm apart (the nominal 1.0" of the DOIT reference design).



Generated by hardware/gen_board.py -- edit that, not this

Sheet: /
File: creeper-eyes-rows-25.4mm.kicad_sch

Title: creeper-eyes carrier, rows 25.4 mm

Size: A4

Date:

KiCad E.D.A. 10.0.6

Rev: A

Id: 1/1